

INDUSTRIAL LIGHTING



Signcomplex
light and smart

+86 755 2760 8650

www.signcomplex.com


marketing@signcomplex.com

U Series Tri-proof Light

Easy installation and maintenance



Suitable for BESA
boxes connection



Plug-and-play module
Can be quickly installed

Lock-in-place side clip design



Easy installation and
maintenance

Parameters

Power	20W/ 30W/ 35W/ 40W/ 60W/ 70W
Lumens	2340lm/ 3200lm/ 3700lm/ 4500lm/ 6300lm/ 8200lm
CCT	3000K/ 4000K/ 6000K
CRI	Ra>80
Input Voltage	AC220-240V



M Series Tri-proof Light

Easier maintenance, and less CO2 emission.



Modular design



More suitable for
new ERP standard



Detachable,
Replaceable

Parameters

Power	18W/ 36W/ 50W
Lumens	2340lm/ 5200lm/ 6500lm
Efficiency	130LPW/ 160LPW
CCT	3000K/ 4000K/ 5000K/ 6000K
CRI	Ra>80
Input Voltage	AC220-240V



Venus Flood light


Reducing SKU & Storage costs hugely with lens easy to be changed as you need



Open the cover



Take out the lens



Replace the lens

Parameters

Power	50W/100W/150W/200W/300W
Efficiency	130LM/W & 150LM/W
Beam Angle	30°/60°/ 90°/ 120°/P50-8/P50/TYPE IV/P10
CCT	3000K/4000K/6000K
Input Voltage	AC120-277V



Venus II Flood light


Easy to disassemble and replace the lens



Tool-free cover opening



Easy to disassemble



Replace the lens

Parameters

Power	100W/150W/200W/300W
Efficiency	130LM/W & 160LM/W
Beam Angle	30°/60°/ 90°/ 120°/P50-8/P50/TYPE IV/P10
CCT	3000K/4000K/6000K
Input Voltage	AC120-277V




T2 Series High Bay Light

Easy installation and maintenance



- Standard version @50 C, lifetime over 50000 hours.
- Plug & play sensor, compatible with Microwave, PIR, Daylight, Bluetooth
- U-shape frame fixation angle could be adjustable, one SKU for 100W, 150W, 200W.

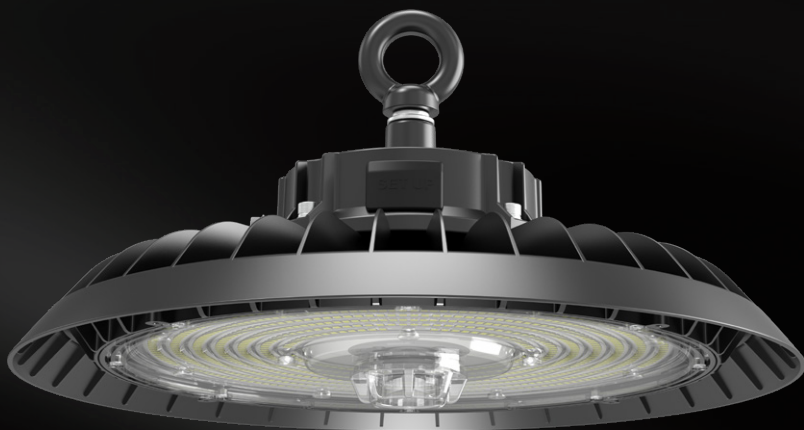

Parameters

Power	100W/150W/200W
Efficiency	140LPW/160LPW/180LPW/200LPW
Beam Angle	120°/90°/ 60°
CCT	3000K/4000K/5000K/6000K
Input Voltage	100-240VAC/277VAC




K2 Series High Bay Light

Pluggable interfaces, plug and play without wiring



- Horizontal or vertical power layout optional
- The expansion interfaces support microwave sensors, PIR sensors, Bluetooth sensors, signal converters, etc
- Two-color LEDs are equally spaced and symmetrically distributed, with uniform color mixing.

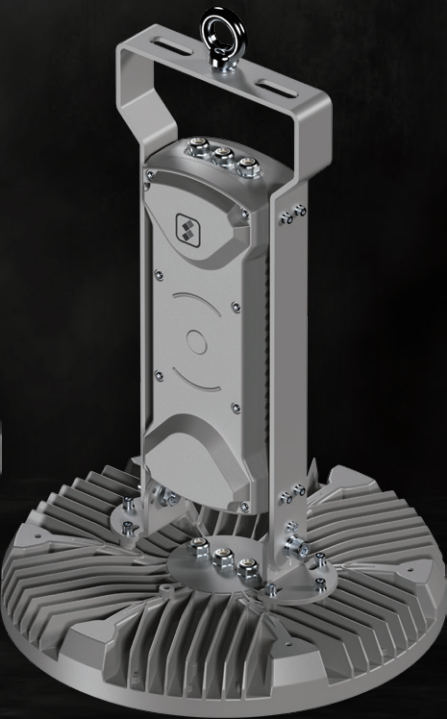

Parameters

Power	100W/150W/200W/240W/300W
Efficiency	160LPW/180LPW/200LPW
Beam Angle	90°/ 60°/120°
CCT	3200K-6500K
Input Voltage	AC120-277V




F Series High Bay Light

Not only for general lighting but also
for FOOD FACTORY



- NSF certificate
- Smooth Body Design
- IP69K protection design, suitable for more harsh environments that require dust and water resistance

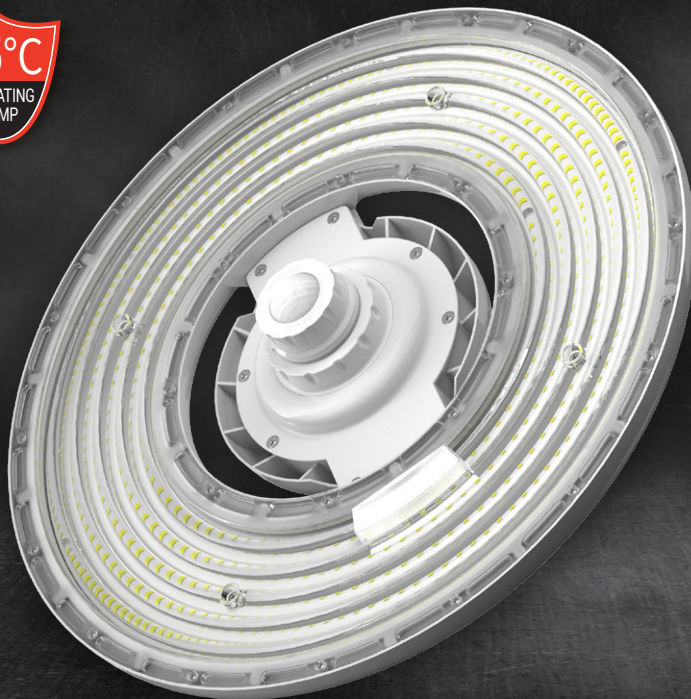

Parameters

Power	100W/150W/200W/240W
Efficiency	140LPW
Beam Angle	90°/ 60°/ 120°
CCT	3000K/3500K/4000K/5000K
Input Voltage	AC120-277V, 277-480V



H2 Series High Bay Light

Cost-effective, multifunctional



- Built in driver, super slim design
- Patented design for PC lens, IK10
- save 50% freight cost



1 SKU




9 SKU



Parameters

Power	100W/150W/200W
Efficiency	140LPW, 160LPW, 180LPW
Beam Angle	90°/ 60°/120°
CCT	3000K/4000K/6000K
Input Voltage	AC120-277V




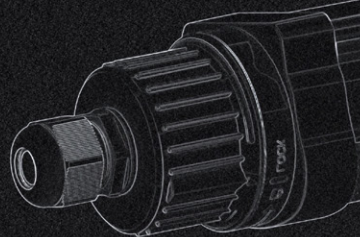

Signcomplex VR Panorama



www.signcomplex.com

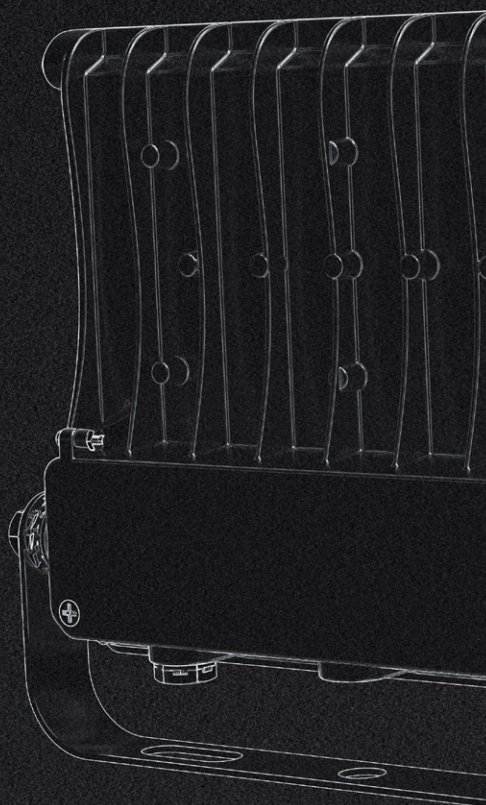

**INDUSTRIAL
LIGHTING**

