



BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Add: No. 1000, Section 2, 2nd Konggang Road,
Fax: +86-28-8148 1258 Southwest Aviation Industrial Development Zone,
Web: www.blueviewled.com Shuangliu, Chengdu, Sichuan, China.610207

BVINSPIRATION LINEAR DIVISION

Mail: support@inspiration.com Add: No. 1 TianQin St., Wusha Industrial Zone,
Web: www.bvinspiration.com Henglan Town, ZhongShan, Guangdong, China



BLUEVIEW LINEAR LIGHT



LINEAR LIGHTING

BVINSPIRATION INTRODUCE



About us

BVInspiration, born as a brand extension of Blueview in 2016, is your dedicated source for premium commercial architectural luminaires. With a steadfast commitment to excellence, we specialize in crafting high-performance LED luminaires tailored to elevate various environments, including offices, commercial spaces, educational institutions, recreational areas, and the hospitality sector.

Our mission revolves around delivering innovative solutions that not only meet but also anticipate the ever-evolving requirements of today's projects. Whether it's designing and manufacturing custom lighting solutions or staying ahead of industry trends, BVInspiration stands as the beacon of forward-thinking capabilities and innovation.

At the core of our philosophy is a close partnership with our clients. We believe in co-creating products that not only meet industry trends but also deliver functional and aesthetic advantages. Every product that bears our name is meticulously designed and engineered with the guiding principles of captivating design, ease of installation, user-friendly operation, and straightforward maintenance.

When you choose BVInspiration, you're not just selecting luminaires; you're embracing a legacy of excellence and innovation. Discover the BVInspiration difference and illuminate your spaces with brilliance.

Why BVInspiration

At BVInspiration, we offer a comprehensive approach to lighting solutions, meticulously covering every aspect from material selection to in-field installation. Our close collaboration with designers, suppliers, and assembly workers ensures realistic, superior, and flexible luminaire systems.

We provide an extensive range of optical options, including Direct, Direct & Indirect, Asymmetric, and Double Asymmetric lighting, with various lens options. Our products offer exceptional light quality with CRI95+ and 90+ options across 10 CCT settings. We also provide versatile dimming methods, from 0-10V to DALI and DMX, allowing precise control. Choose BVInspiration for lighting solutions that excel in design, functionality, and customization, setting us apart as your ideal partner.

TOP 5

Reasons to choose Blueview linear lighting

BEST-IN-CLASS SERVICES

- Customized spec support, private label service
- 24 hours response policy
- Solution offering with result-oriented
- Technical, Sales, Marketing team service

EXPERIENCE YOU CAN TURST

- Aiming to long-term partner relationship
- Focus on the advantage LED manufacturing technology
- Serving for High-end Market over since 2004, 1150 employees

CLASSIC ENGINEERING DESIGN

- Modular system offers more than million variations
- Blue light harzard less lighting source
- Min labor cost on installation & maintenance

HIGH STANDARD QUALITY CONTROL

- TÜV Rheinland authorized laboratory
- Operations accredited to ISO 9001:2015
- Acoustical Lab. in house at ISO354 for most accurate NRC tested data.
- Over than 20 process on reliability testing for one item

ODM & OEM AVAILIABLE

- 55 Engineers team
- Over than 80 R&D Patents
- Strong Supply Chain System

CONTENT

01	INTRODUCTION
05	OLA SERIES
21	HAO SERIES
29	SLIM SERIES
69	LUZ SERIES
95	ZOLI EXTERNAL DRIVER
117	GRAZER BVG SERIES
133	HONG DIRECT & INDIRECT
159	HILA DIRECT & INDIRECT
165	OLI 360DEG. ROUND

OLA

BENDABLE SYSTEM

OLA is a range of creatively designed and high-performance curved luminaires that come equipped with a host of top-quality features. Including snap-in silicone lenses, seamless housing shapes. It provides wider and more uniform illumination.

OLA is a top-quality linear lighting that offers exceptional performance, innovative features, and a stylish design.

OLA is a top-quality linear lighting that offers exceptional performance, innovative features, and a stylish design.

- Direct & Indirect 5 types width in 20mm, 30mm, 50mm, 75mm, 100mm
- The curved corners give the luminaires a more sophisticated and stylish design
- Micro-Prismatic & Rolling silicone lens
- Seam-less joining for greater flexibility in application
- Customized Bending Shape available



Ring



Square



Rectangle



Track



Star




Bending



• LED quality options



• Color temperatures

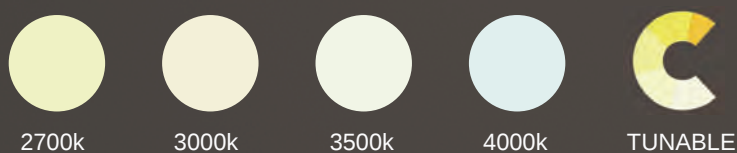

Finishes


Explore our range of standard colors, matt white, black, and silver, for a timeless and classic look. Additionally, we offer a stunning selection of 48 colors for powder coating finishes, allowing you to add a touch of personality and uniqueness to your space.



RAL 9003




RAL 9004

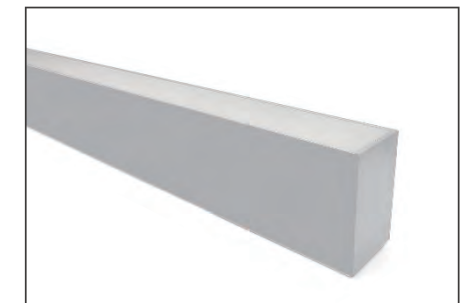

Silver Grey

Prime Color Options





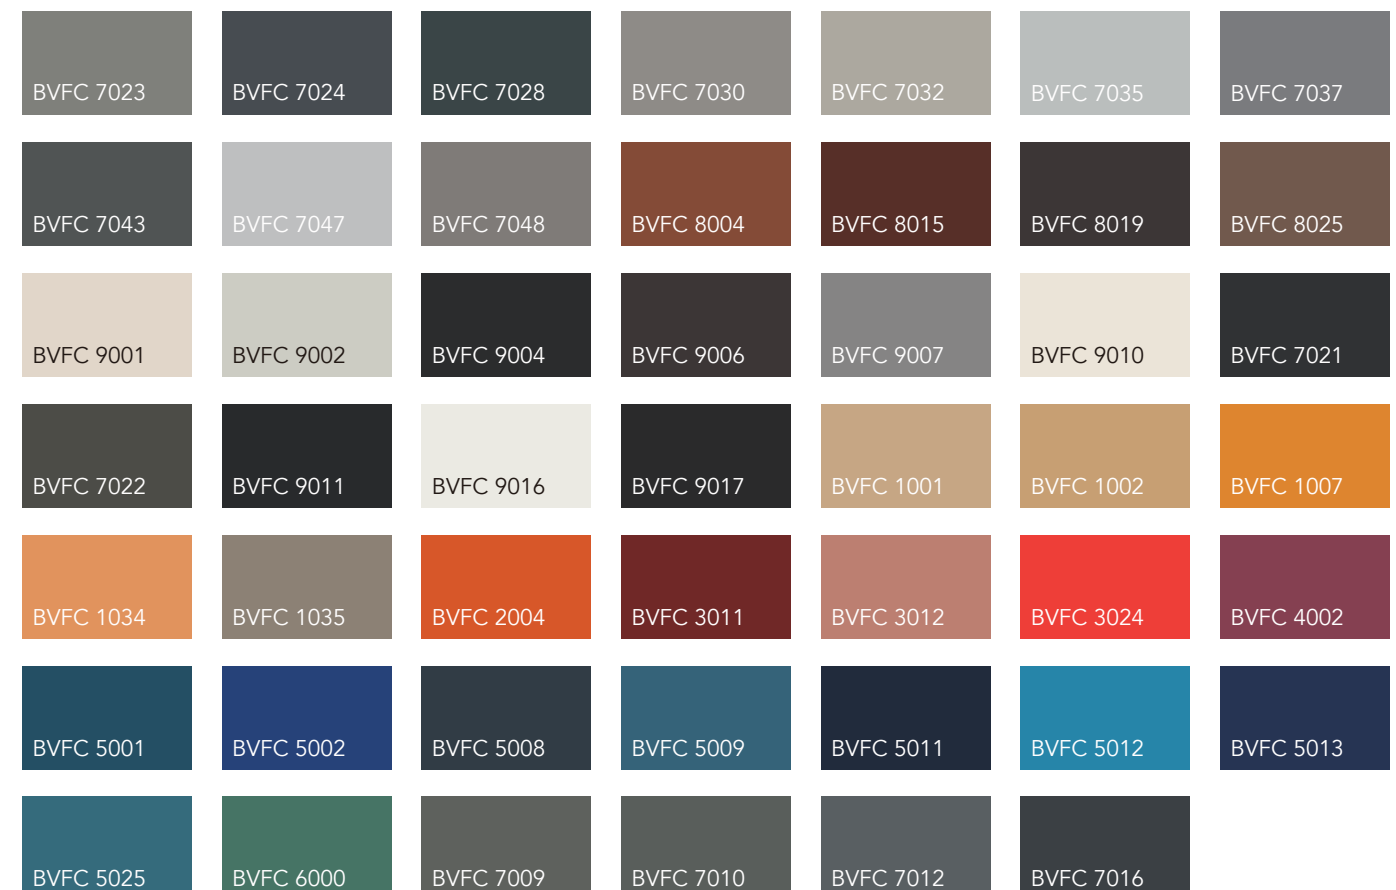


OLA

Luminaires with rounded shapes, devoid of sharp angles, blend into space in a gentle and fluid manner.
When arranged in patterns, the curves create a scenic route with playful twists and turns that are unpredictable.
OLA luminaires provide greater flexibility in lighting design.




Dimension

■ Ring

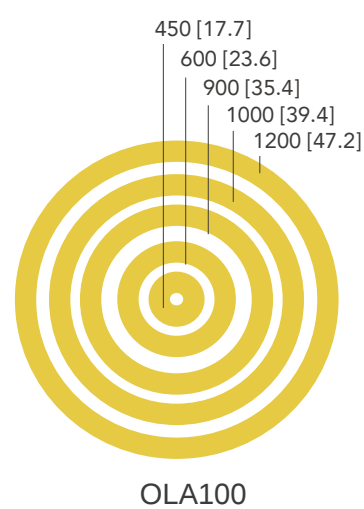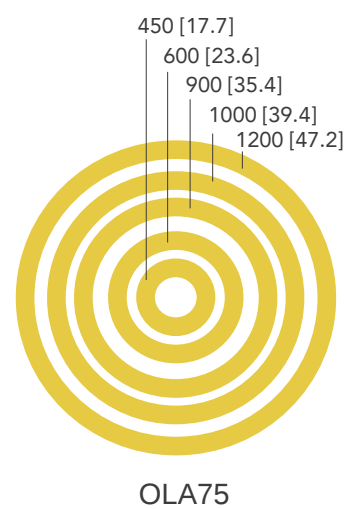
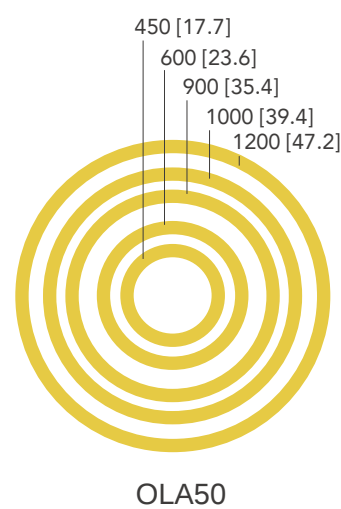
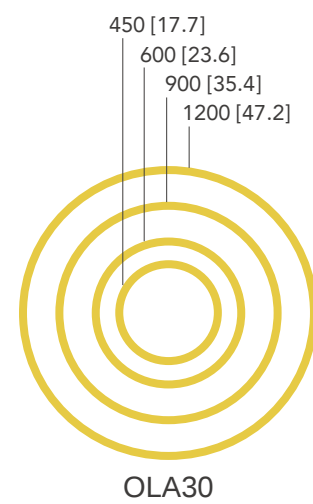
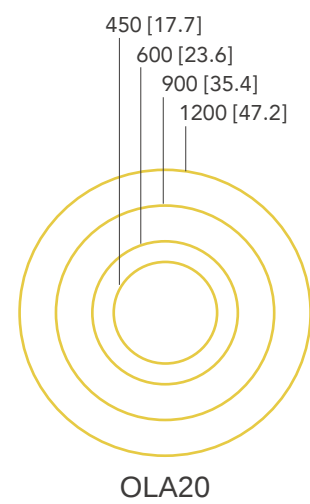


Unit:mm[in]





■ Square

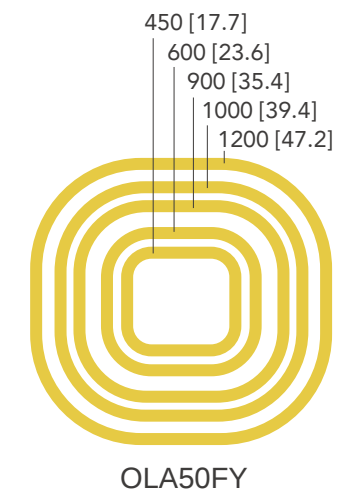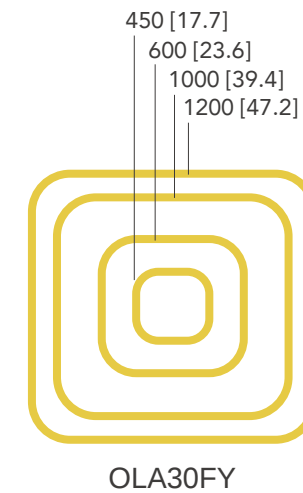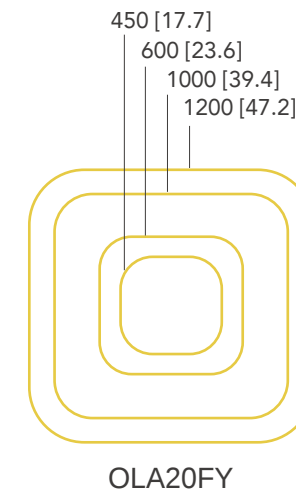

■ Rectangle OLA50CFY





■ Track OLA50PD




■ Bending OLA50R



■ Star OLA50S



OLA20
OLA-BENDABLE SYSTEM




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA20	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W20 x H20mm	1- 17.0W	3000K	40-50lm/W	1- 80+ (870lm) 1- 90+ (780lm)	Aircraft cable pendant	DALI
2- Φ 600 x W20 x H20mm	2- 25.0W	4000K		2- 80+ (1280lm) 2- 90+ (1150lm)		0-10V
3- Φ 900 x W20 x H20mm	3- 35.0W	2700~4000K		3- 80+ (1800lm) 3- 90+ (1620lm)		On/off
4- Φ 1200 x W20 x H20mm	4- 70.0W			4- 80+ (3600lm) 4- 90+ (3240lm)		

OLA30
OLA-BENDABLE SYSTEM



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA30	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W30 x H30mm	1- 21.0W	3000K	40-50lm/W	1- 80+ (1080lm) 1- 90+ (970lm)	Aircraft cable pendant	DALI
2- Φ 600 x W30 x H30mm	2- 25.0W	4000K		2- 80+ (1280lm) 2- 90+ (1150lm)		0-10V
3- Φ 900 x W30 x H30mm	3- 50.0W	2700~4000K		3- 80+ (2570lm) 3- 90+ (2310lm)		On/off
4- Φ 1200 x W30 x H30mm	4- 75.0W			4- 80+ (3860lm) 4- 90+ (3470lm)		

OLA50
OLA-BENDABLE SYSTEM



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W50 x H75mm	1- 25.0W	3000K	40-50lm/W	1- 80+ (1280lm) 1- 90+ (1150lm)	Aircraft cable pendant	DALI
2- Φ 600 x W50 x H75mm	2- 30.0W	4000K		2- 80+ (1540lm) 2- 90+ (1390lm)		0-10V
3- Φ 900 x W50 x H75mm	3- 43.0W	2700~4000K		3- 80+ (2210lm) 3- 90+ (1990lm)		On/off
4- Φ 1000 x W50 x H75mm	4- 52.0W			4- 80+ (2670lm) 4- 90+ (2410lm)		
5- Φ 1200 x W50 x H75mm	5- 60.0W			5- 80+ (3090lm) 5- 90+ (2780lm)		

OLA75
OLA-BENDABLE SYSTEM




SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA75	Textured Black Textured White Silver Grey	PC Diffuser	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W75 x H100mm	1- 28.0W	3000K	40-50lm/W	1- 80+ (1440lm) 1- 90+ (1290lm)	Aircraft cable pendant	DALI
2- Φ 600 x W75 x H100mm	2- 37.0W	4000K		2- 80+ (1900lm) 2- 90+ (1710lm)		0-10V
3- Φ 900 x W75 x H100mm	3- 56.0W	2700~4000K		3- 80+ (2880lm) 3- 90+ (2590lm)		On/off
4- Φ 1000 x W75 x H100mm	4- 65.0W			4- 80+ (3340lm) 4- 90+ (3010lm)		
5- Φ 1200 x W75 x H100mm	5- 78.0W			5- 80+ (4010lm) 5- 90+ (3610lm)		

OLA100
OLA-BENDABLE SYSTEM



OLA20FY
OLA-BENDABLE SYSTEM



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA100	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- Φ 450 x W100 x H100mm	1- 35.0W	3000K	40-50lm/W	1- 80+ (1800lm) 1- 90+ (1620lm)	Aircraft cable pendant	DALI
2- Φ 600 x W100 x H100mm	2- 48.0W	4000K		2- 80+ (2470lm) 2- 90+ (2220lm)		0-10V
3- Φ 900 x W100 x H100mm	3- 70.0W	2700~4000K		3- 80+ (3600lm) 3- 90+ (3240lm)		On/off
4- Φ 1000 x W100 x H100mm	4- 78.0W			4- 80+ (4010lm) 4- 90+ (3610lm)		
5- Φ 1200 x W100 x H100mm	5- 95.0W			5- 80+ (4890lm) 5- 90+ (4400lm)		

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA20FY	Textured Black Textured White Silver Grey	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L450 x W450mm 1- Luminaire W20 x H20mm	1- 17.6W	3000K	40-50lm/W	1- 80+ (870lm) 1- 90+ (780lm)	Aircraft cable pendant	DALI
2- L600 x W600mm 2- Luminaire W20 x H20mm	2- 34.0W 3- 51.0W	4000K 2700~4000K		2- 80+ (1750lm) 2- 90+ (1570lm)		0-10V
3- L1000 x W1000mm 3- Luminaire W20 x H20mm	4- 59.0W			3- 80+ (2620lm) 3- 90+ (2360lm)		On/off
4- L1200 x W1200mm 4- Luminaire W20 x H20mm				4- 80+ (3030lm) 4- 90+ (2730lm)		

OLA30FY
OLA-BENDABLE SYSTEM





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA30FY	Textured Black	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC
	Textured White							
	Silver Grey							

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L450 x W450mm 1- Luminaire W30 x H30mm	1- 21.0W	3000K	40-50lm/W	1- 80+ (1080lm) 1- 90+ (970lm)	Aircraft cable pendant	DALI
2- L600 x W600mm 2- Luminaire W30 x H30mm	2- 38.0W	4000K		2- 80+ (1950lm) 2- 90+ (1760lm)		0-10V
3- L1000 x W1000mm 3- Luminaire W30 x H30mm	3- 59.0W	2700~4000K		3- 80+ (3030lm) 3- 90+ (2730lm)		On/off
4- L1200 x W1200mm 4- Luminaire W30 x H30mm	4- 68.0W			4- 80+ (3500lm) 4- 90+ (2150lm)		

OLA50FY
OLA-BENDABLE SYSTEM

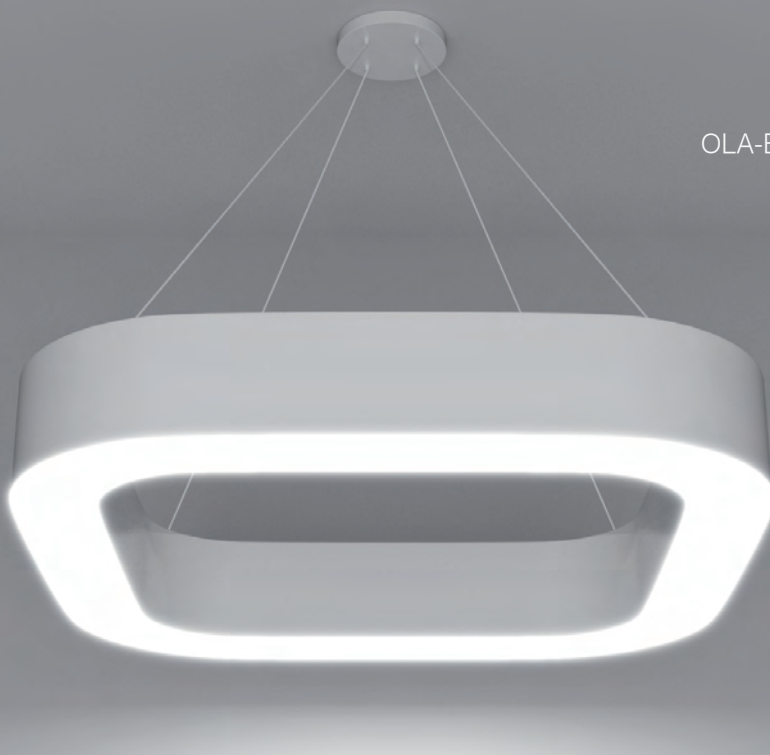

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50FY	Textured Black	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC
	Textured White							
	Silver Grey							

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L450 x W450mm 1- Luminaire W50 x H75mm	1- 25.0W	3000K	40-50lm/W	1- 80+ (1280lm) 1- 90+ (1150lm)	Aircraft cable pendant	DALI
2- L600 x W600mm 2- Luminaire W50 x H75mm	2- 42.0W	4000K		2- 80+ (2160lm) 2- 90+ (1940lm)		0-10V
3- L900 x W900mm 3- Luminaire W50 x H75mm	3- 59.0W	2700~4000K		3- 80+ (3030lm) 3- 90+ (2730lm)		On/off
4- L1000 x W1000mm 4- Luminaire W50 x H75mm	4- 68.0W			4- 80+ (3500lm) 4- 90+ (3150lm)		
5- L1200 x W1200mm 5- Luminaire W50 x H75mm	5- 76.0W			5- 80+ (3910lm) 5- 90+ (3520lm)		

OLA50CFY

OLA-BENDABLE SYSTEM





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50CFY	Textured Black	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC
	Textured White							
	Silver Grey							

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1000 x W450mm 1- Luminaire W50 x H75mm	1- 38.0W	3000K	40-50lm/W	1- 80+ (1950lm) 1- 90+ (1760lm)	Aircraft cable pendant	DALI
2- L1000 x W600mm 2- Luminaire W50 x H75mm	2- 42.0W	4000K		2- 80+ (2160lm) 2- 90+ (1940lm)		0-10V
3- L1200 x W450mm 3- Luminaire W50 x H75mm	3- 51.0W	2700~4000K		3- 80+ (2620lm) 3- 90+ (2360lm)		On/off
4- L1200 x W600mm 4- Luminaire W50 x H75mm	4- 59.0W			4- 80+ (3030lm) 4- 90+ (2730lm)		

OLA50PD



OLA-BENDABLE SYSTEM

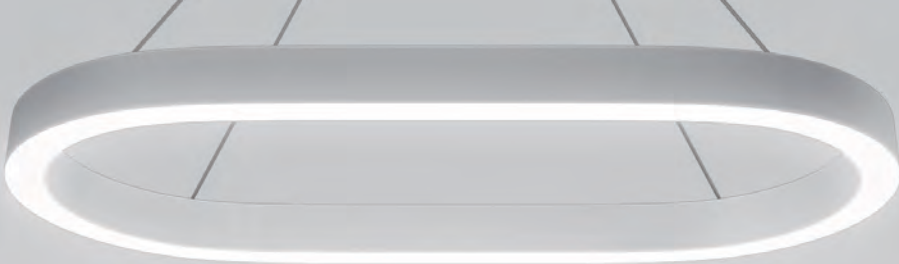

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLA50PD	Textured Black	Silicone	110Deg	<26	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC
	Textured White							
	Silver Grey							


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1000 x W450mm 1- Luminaire W50 x H75mm	1- 38.0W	3000K	40-50lm/W	1- 80+ (1950lm) 1- 90+ (1760lm)	Aircraft cable pendant	DALI
2- L1000 x W600mm 2- Luminaire W50 x H75mm	2- 42.0W	4000K		2- 80+ (2160lm) 2- 90+ (1940lm)		0-10V
3- L1200 x W450mm 3- Luminaire W50 x H75mm	3- 51.0W	2700~4000K		3- 80+ (2620lm) 3- 90+ (2360lm)		On/off
4- L1200 x W600mm 4- Luminaire W50 x H75mm	4- 59.0W			4- 80+ (3030lm) 4- 90+ (2730lm)		

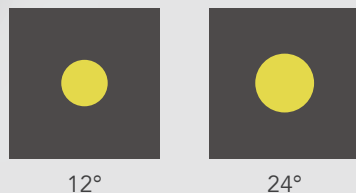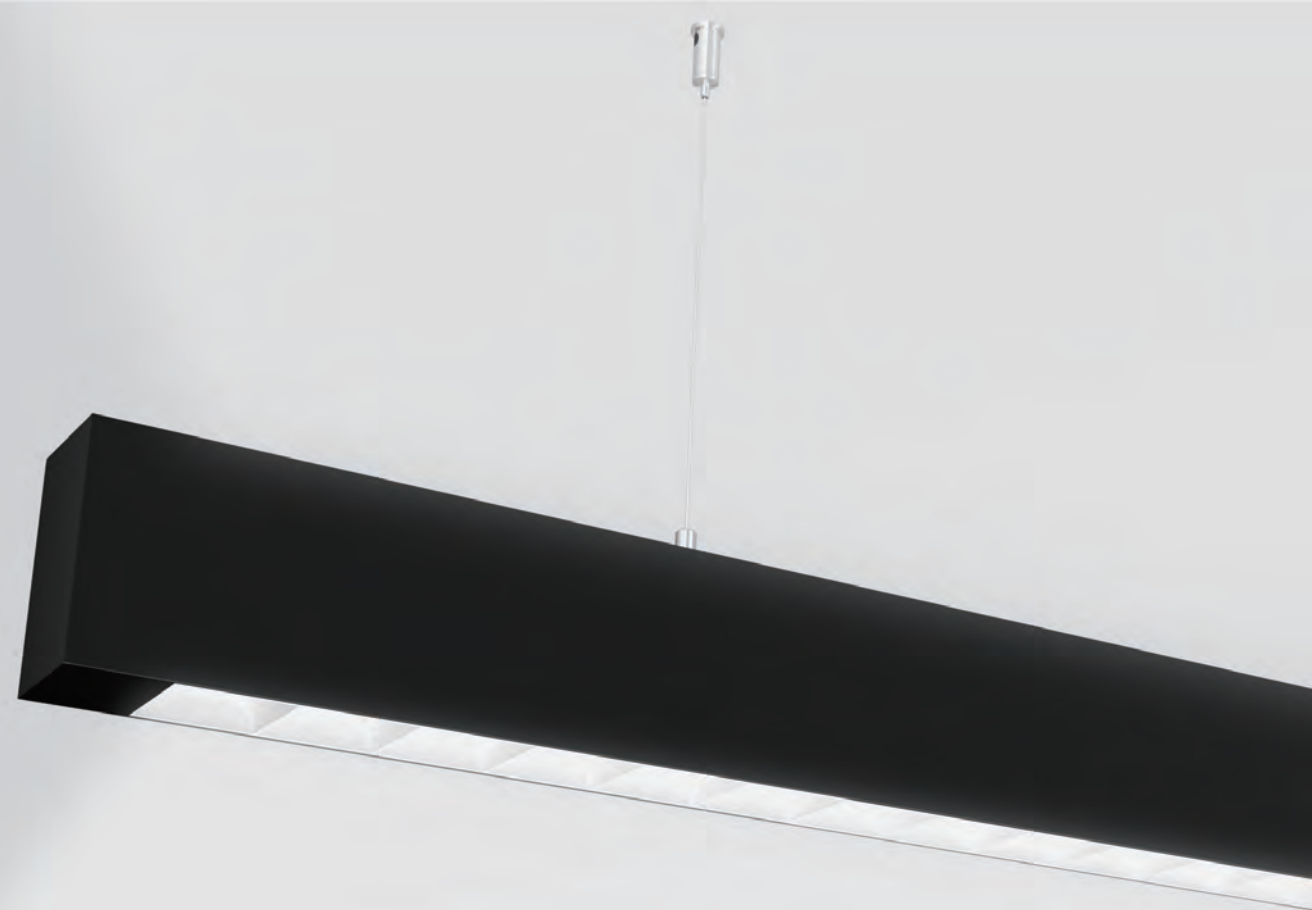



HAO Direct & Indirect Linear light

Elevate your space with the HAO Linear Light.
Immerse yourself in the seamless harmony of direct and indirect UGR<16 lighting, creating an environment that's both comfortable and free from glare.
Experience color consistency like never before, thanks to our SDCM<3 technology.
Simplify installation with our user-friendly joining kit.

INSTALLATIONS

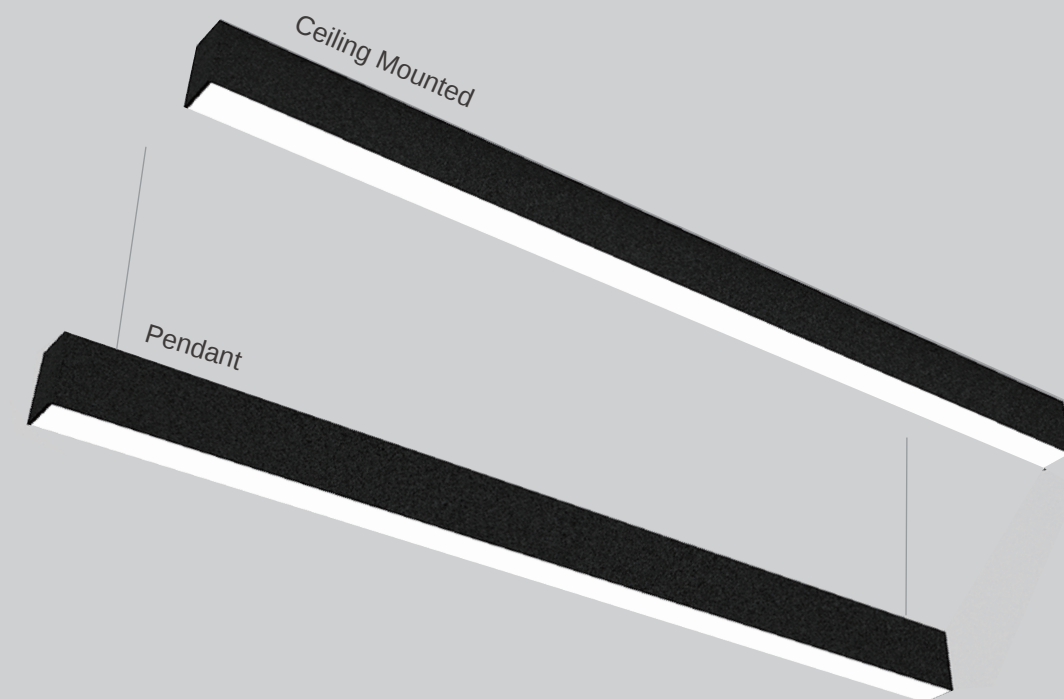

DIMENSIONS

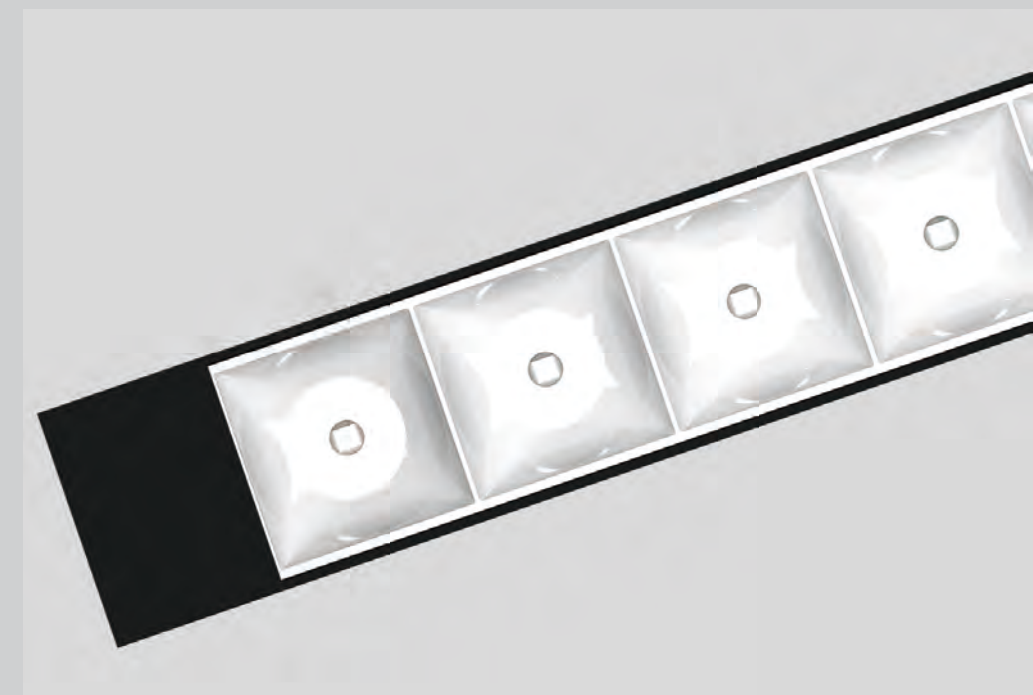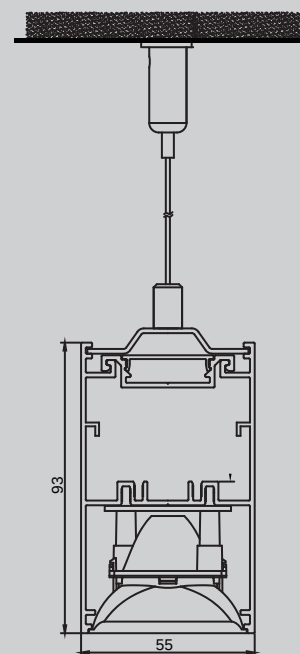

GAPLESS JOINING IN FILED

Gapless joining solution that significantly reduces field labor requirements



MORE LIGHT SOURCE & DRIVER OPTIONS



FINISHES


Explore our range of standard colors, matt white, black, and silver, for a timeless and classic look. Additionally, we offer a stunning selection of 48 colors for powder coating finishes, allowing you to add a touch of personality and uniqueness to your space.



Textured White (RAL9003)





Textured Black (RAL9004)

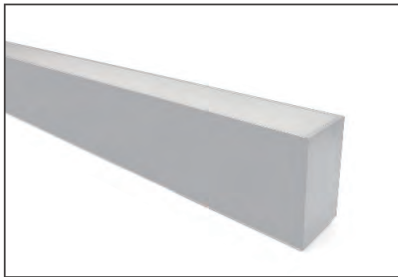

Silver Anodized

PRIME COLOR OPTIONS

BVFC 7023	BVFC 7024	BVFC 7028	BVFC 7030	BVFC 7032	BVFC 7035	BVFC 7037
BVFC 7043	BVFC 7047	BVFC 7048	BVFC 8004	BVFC 8015	BVFC 8019	BVFC 8025
BVFC 9001	BVFC 9002	BVFC 9004	BVFC 9006	BVFC 9007	BVFC 9010	BVFC 7021
BVFC 7022	BVFC 9011	BVFC 9016	BVFC 9017	BVFC 1001	BVFC 1002	BVFC 1007
BVFC 1034	BVFC 1035	BVFC 2004	BVFC 3011	BVFC 3012	BVFC 3024	BVFC 4002
BVFC 5001	BVFC 5002	BVFC 5008	BVFC 5009	BVFC 5011	BVFC 5012	BVFC 5013
BVFC 5025	BVFC 6000	BVFC 7009	BVFC 7010	BVFC 7012	BVFC 7016	

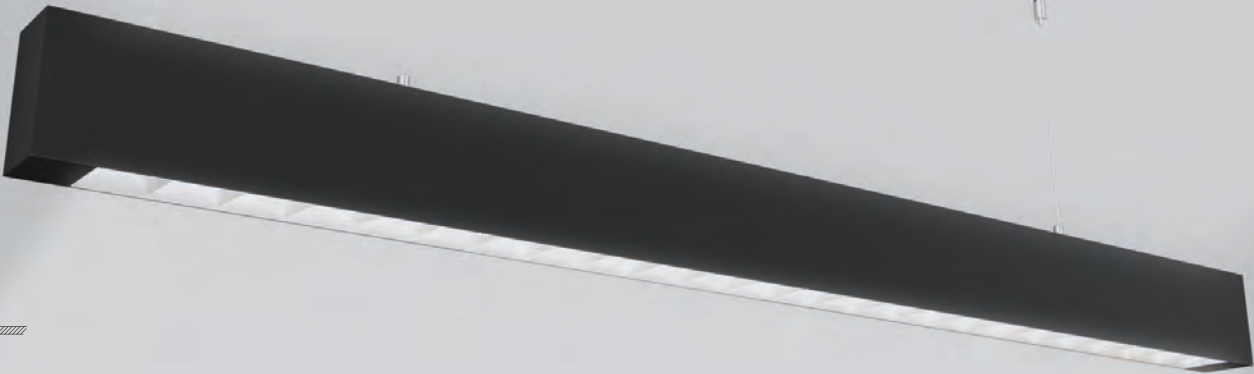


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
HAO5593	Textured Black	Louver & Reflector	12Deg	<16	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC
	Textured White	Clear Lens	24Deg					
	Silver Anodized							


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW55xH93mm 2- L 1508xW55xH93mm	Louver & Reflector	1- 30.0W	3000K	93lm/W	1- 80+ (2780lm) 1- 90+ (2500lm)	Aircraft cable pendant	DALI
		2- 38.0W	4000K		2- 80+ (3520lm) 2- 90+ (3170lm)		0-10V On/off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW55xH93mm 2- L 1508xW55xH93mm	Clear Lens	1- 10.0W	3000K	93lm/W	1- 80+ (1030lm) 1- 90+ (920lm)	Aircraft cable pendant	DALI
		2- 13.0W	4000K		2- 80+ (1330lm) 2- 90+ (1200lm)		0-10V On/off


DIMENSION

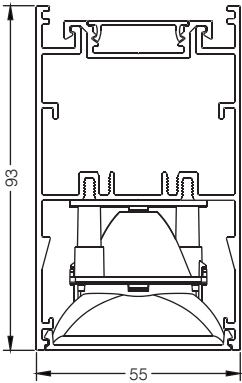

INSTALLATION

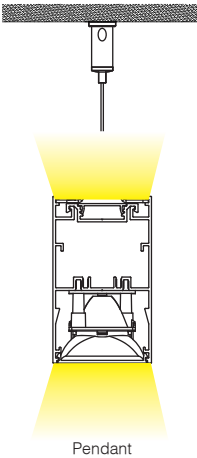

HAO
HAO DIRECT LINEAR LIGHT




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
HAO5593	Textured Black Textured White Silver Anodized	Louver & Reflector	12Deg 24Deg	<19	IP22 IK06	Bridgelux	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW55xH93mm 2- L 1508xW55xH93mm	1- 42.0W 2- 52.0W	3000K 4000K	93lm/W	1- 80+ (3890lm) 1- 90+ (3500lm) 2- 80+ (4820lm) 2- 90+ (4330lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off

HAO
HAO DIRECT LINEAR LIGHT

DIMENSION

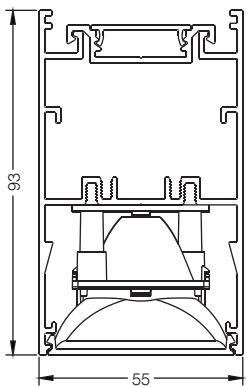


INSTALLATION

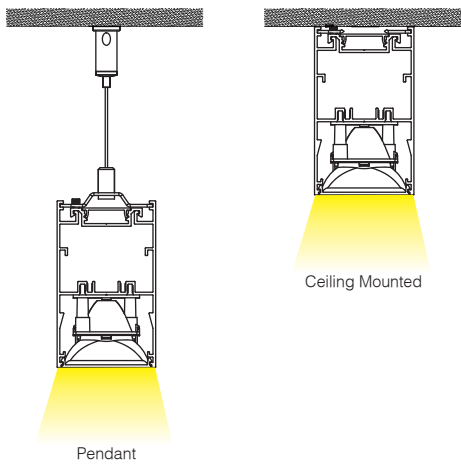

SLIM Surface & Trimmed Recessed


SLIM linear lights are the ultimate lighting solution, designed for surface or trim-recess installation. With a choice of 20 beam angles and 7 optical systems, you have the power to create the perfect lighting arrangement for your space. What's more, our lighting offers personalization with 9 finish options for the optical kit, allowing for a seamless integration with your decor. Elevate your lighting design effortlessly with SLIM linear lights, which bring together flexibility and style to enhance any environment.

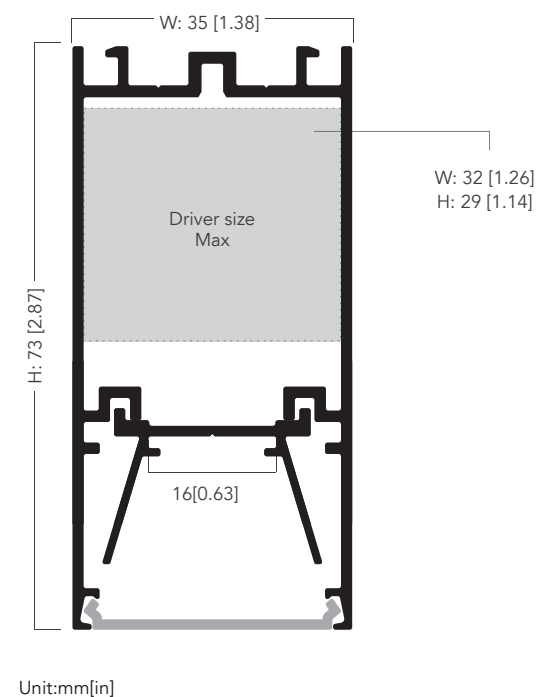

DIMENSIONS

U357216

Surface Installation
(Pendant, Surface Mounted)

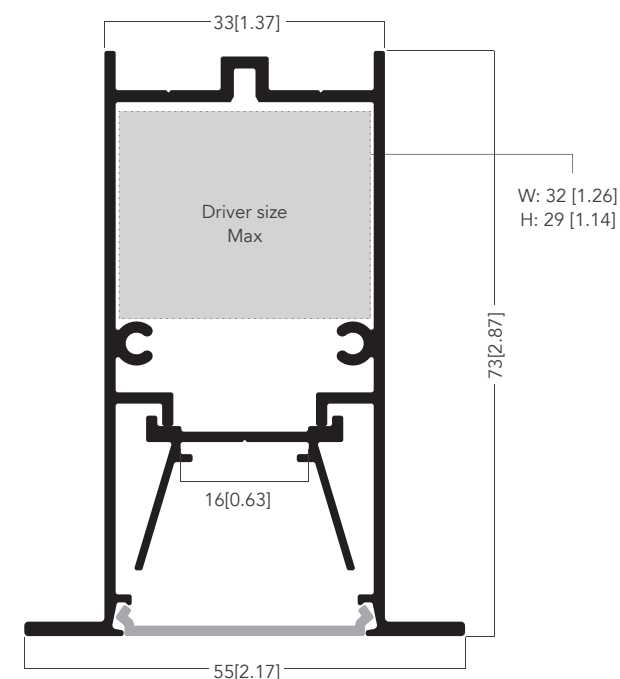


U557316

Trimmed Recessed
Installation



CRYSTAL LOUVER



5IN1 Crystal Louver creating
UGR<19 comforting light.
Available in 24°, 38° beam angles.
Tunable white dimming from
2700k~6500k.



Tunable White
2700k to 6500k



DIFFUSER & SILICONE

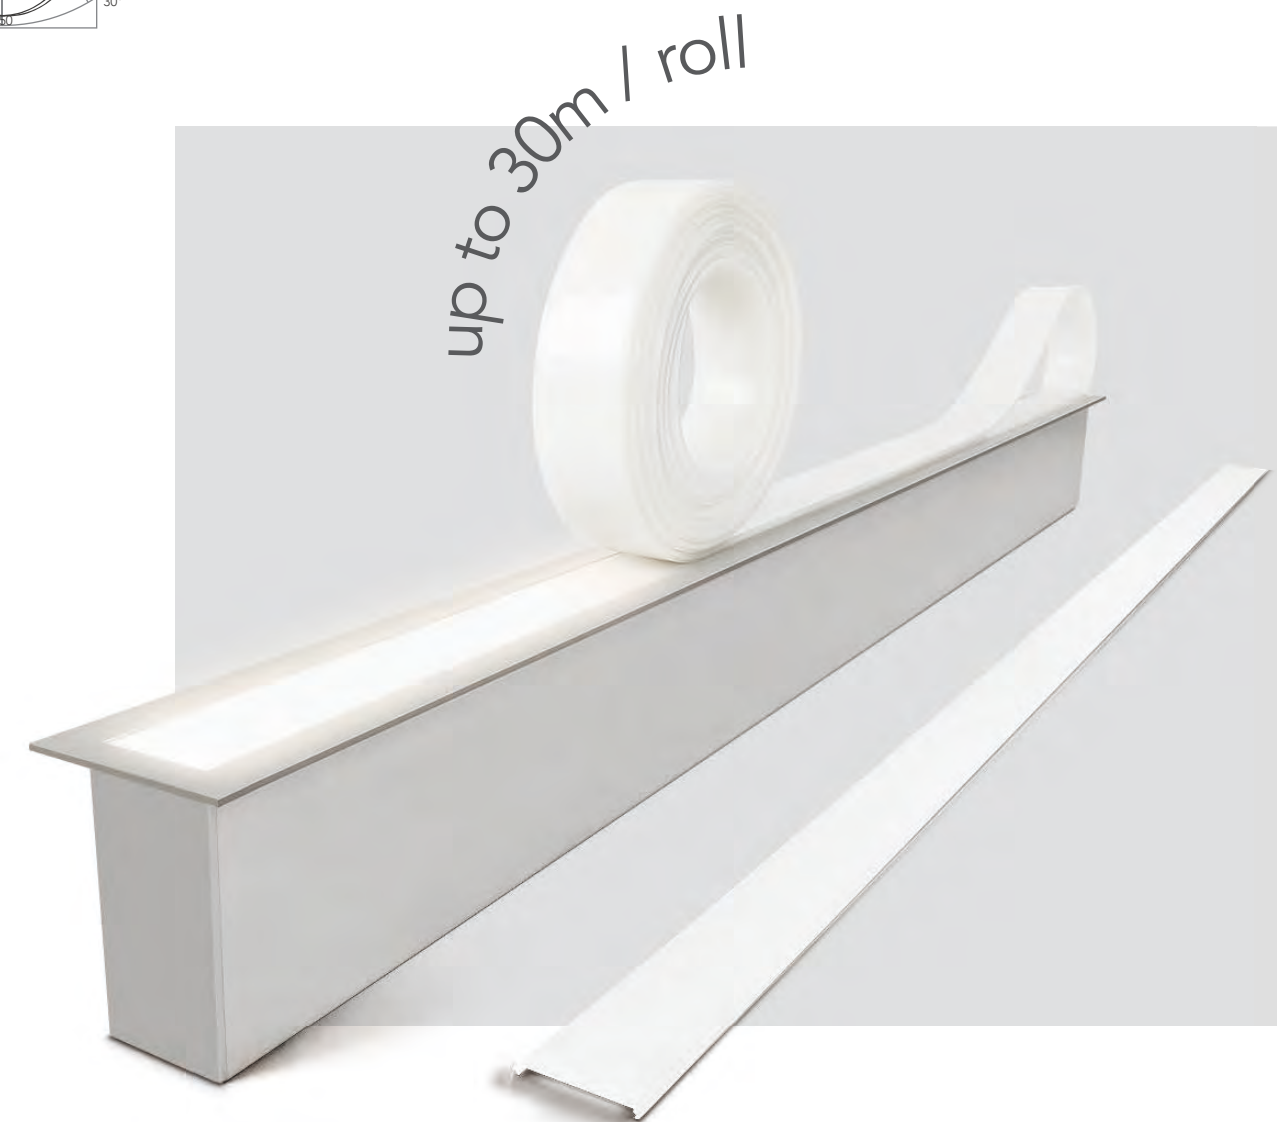

Silicone lens up to 30m/pc,
Gapless joining for any length luminaires and applications.

TIR LENS

UGR
<19

35° x 75°



Square 50°

50° x 50°

Diamond 50°

CONE LOUVER

UGR
<19

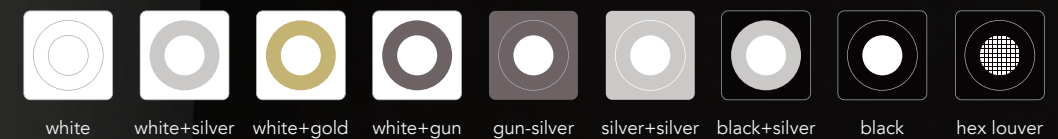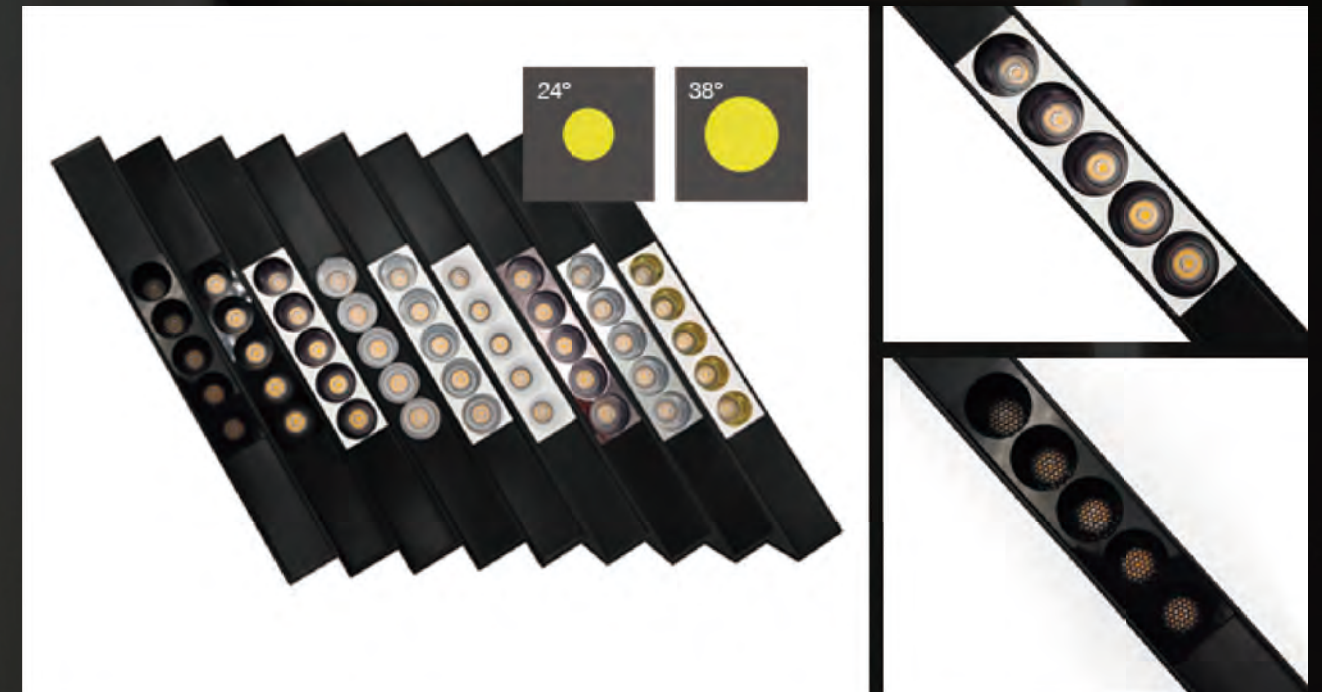

5in1 flexible Cone louver set .
Any length flexible as multiple of 132.5mm.
Available in 24°,38° beam angles.
Anti-glaring in General UGR<19, Hex louver UGR<8.
Available Cone louver color in Matt Black, Matt White,
Up to 9 Finishes
Matt White+black, Matt White+Golden,
Matt White+Chrome, Nickle, Chrome.



5in1 TIR Louver



24°



38°



50°



50×50°



35×70°

UGR
<19

Wall Washer



5in1 flexible louver set.
Any length flexible as multiple of 132.5mm.
Available in 15°, 30°, 45°, Asymmetric wall washer
beam angles. Anti-glaring in UGR<19.

Reflector Louver



15°



30°



45°

UGR
<19

GAPLESS JOINING IN FILED


A revolutionary gapless joining solution that significantly
reduces field labor requirements.



MORE LIGHT SOURCE & DRIVER OPTIONS



OSRAM **TRIDONIC** **EPISTAR**
BRIDGELUX **NICHIA** **LIFUD**

SLIM
SLIM LINEAR LIGHTING-CRYSTAL LOUVER

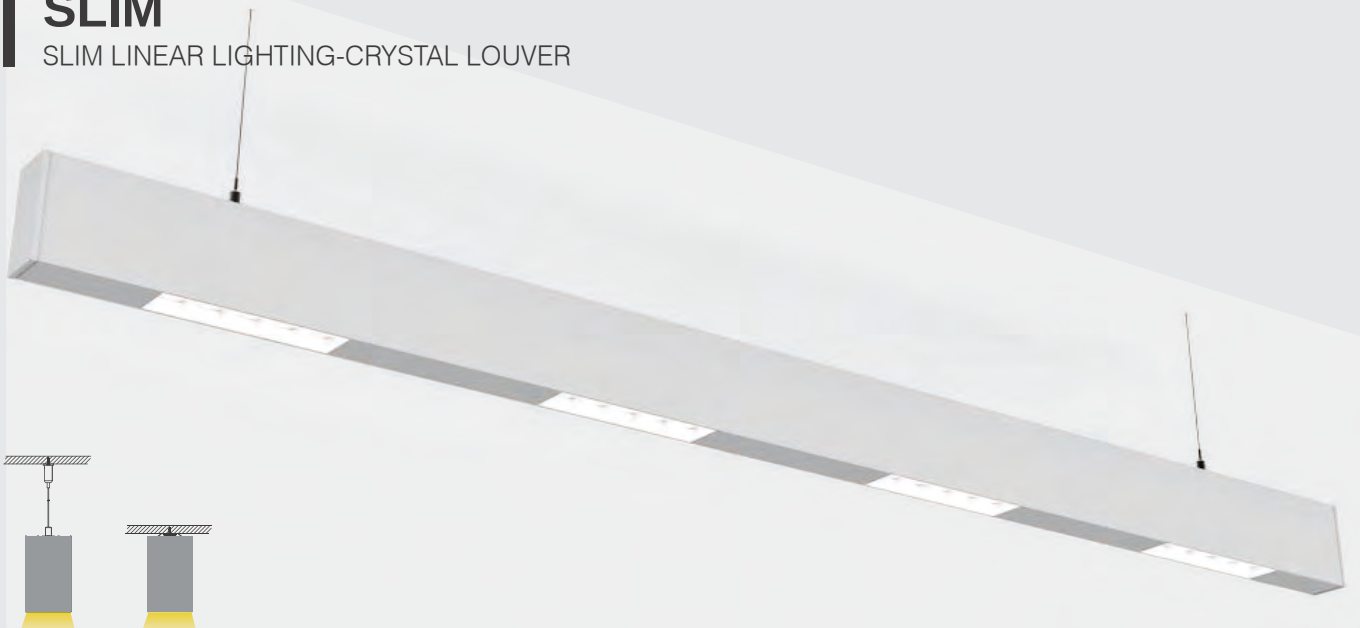

SLIM

SLIM LINEAR LIGHTING-CRYSTAL LOUVER

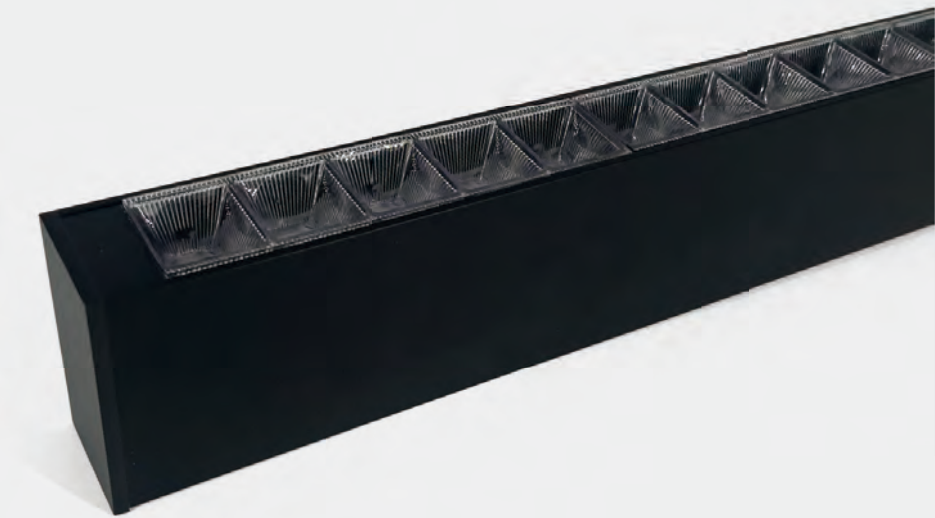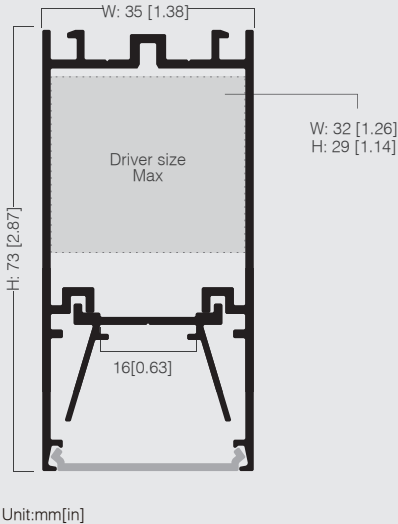


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-CL	Textured Black Textured White Silver Anodized	Crystal Louver Lens	24Deg 38Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	1- 4sets 2- 5sets 3- 8sets 4- 10sets	1- 21.0W 2- 27.0W 3- 30.0W 4- 45.0W	3000K 4000K 2700K~4000K	90lm/W	1- 80+ (1940lm) 1- 90+ (1750lm) 2- 80+ (2500lm) 2- 90+ (2250lm) 3- 80+ (2780lm) 3- 90+ (2500lm) 4- 80+ (4170lm) 4- 90+ (3750lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off

DIMENSION

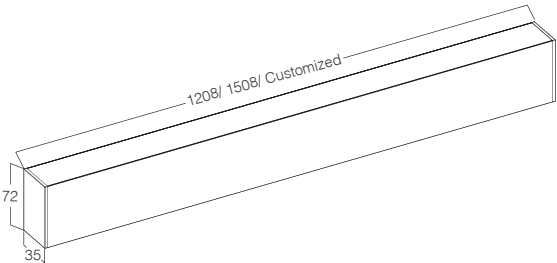

CRYSTAL LOUVER



ACCESSORIES



SLIM

SLIM LINEAR LIGHTING-SILICONE LENS




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-SC	Textured Black Textured White Silver Anodized	Silicone	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	1.1- 15.0W 1.2 & 2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	80lm/W	1.1- 80+ (1230lm) 1.1- 90+ (1110lm) 1.2 & 2.1 - 80+ (1730lm) 1.2&2.1 - 90+ (1550lm) 3- 80+ (2220lm) 3- 90+ (2000lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	1.1- 15.0W 1.2 & 2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	90lm/W	1.1- 80+ (1390lm) 1.1- 90+ (1250lm) 1.2&2.1 - 80+ (1940lm) 1.2&2.1 - 90+ (1750lm) 2.2- 80+ (2500lm) 2.2- 90+ (2250lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off

SLIM

SLIM LINEAR LIGHTING-SILICONE LENS

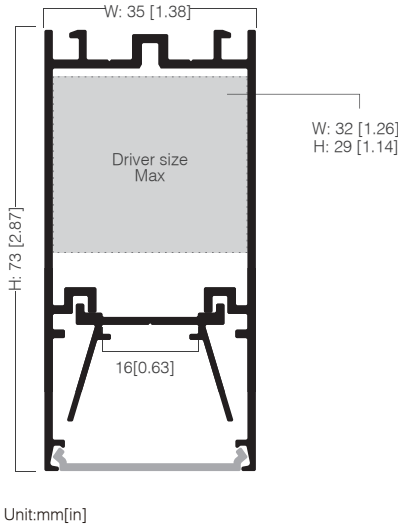

DIMENSION

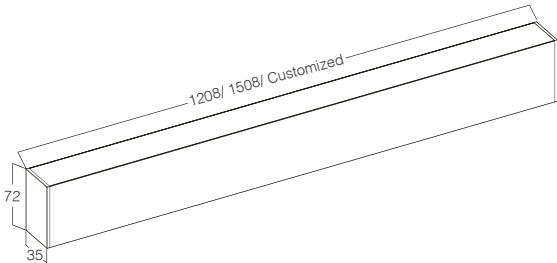

ACCESSORIES




SILICONE LENS



SLIM

SLIM LINEAR LIGHTING-PC DIFFUSER

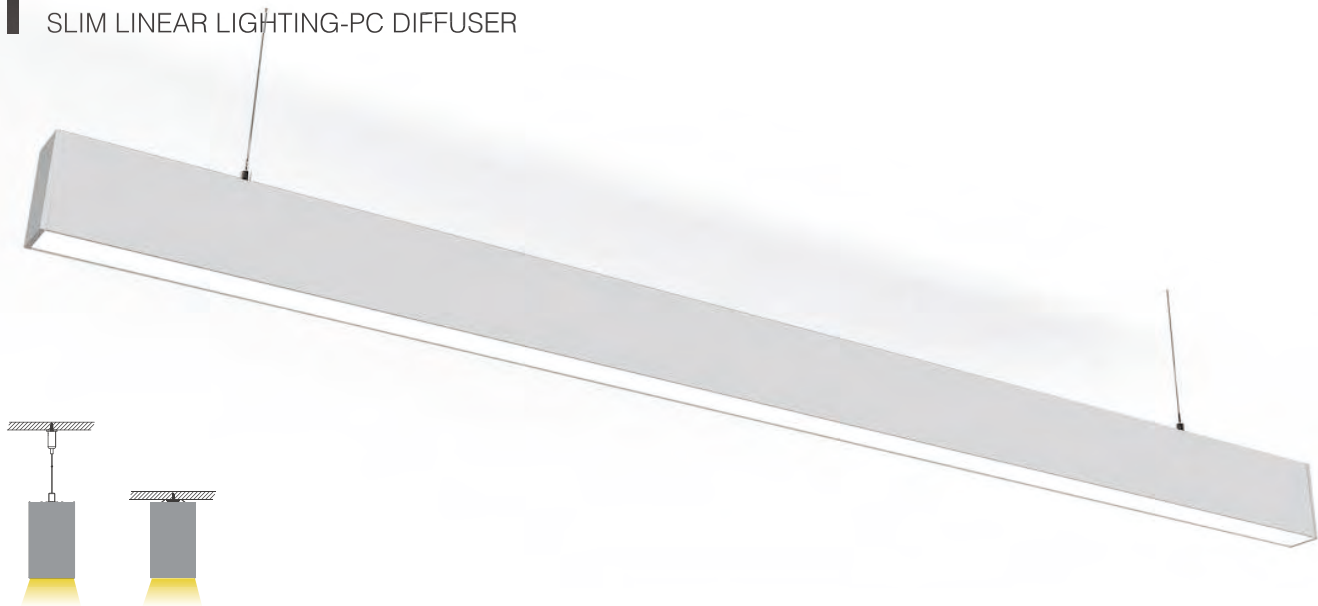


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	1.1- 15.0W 1.2&2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	90lm/W	1.1- 80+ (1390lm) 1.1- 90+ (1250lm) 1.2&2.1 - 80+ (1940lm) 1.2&2.1 - 90+ (1750lm) 2.2- 80+ (2500lm) 2.2- 90+ (2250lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
1- L 1208xW35xH72mm 2- L 1508xW35xH72mm	1.1- 15.0W 1.2&2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	100lm/W	1.1- 80+ (1540lm) 1.1- 90+ (1390lm) 1.2&2.1 - 80+ (2160lm) 1.2&2.1 - 90+ (1940lm) 2.2- 80+ (2780lm) 2.2- 90+ (2500lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off

SLIM

SLIM LINEAR LIGHTING-PC DIFFUSER

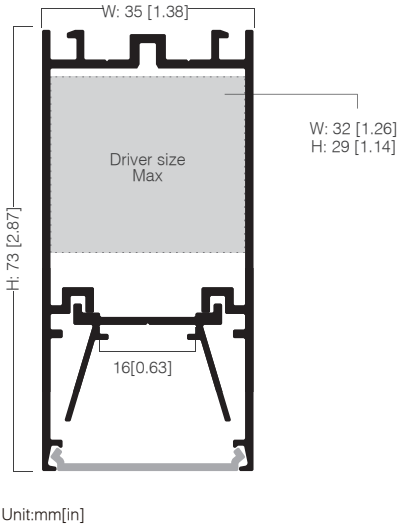


DIMENSION

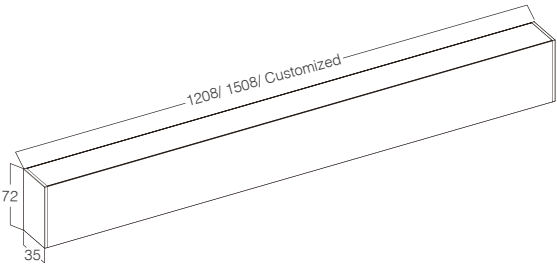

ACCESSORIES



PC DIFFUSER

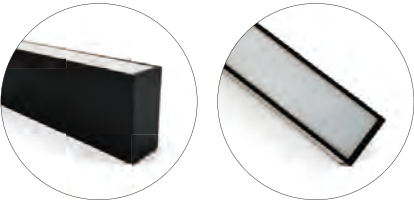

SLIM

SLIM LINEAR LIGHTING-TIR LENS




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-LLT	Textured Black Textured White Silver Anodized	Louver & Reflector	35×75° 50×50° Diamond 50° 50°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1- 21.0W 2- 30.0W	3000K 4000K	90lm/W	1- 80+ (1940lm) 1- 90+ (1750lm) 2- 80+ (2780lm) 2- 90+ (2500lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off

SLIM

SLIM LINEAR LIGHTING-TIR LENS

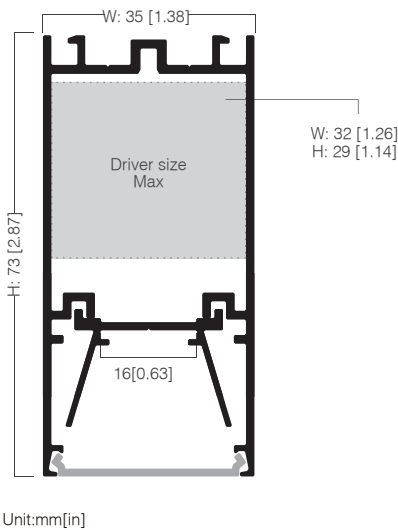


DIMENSION

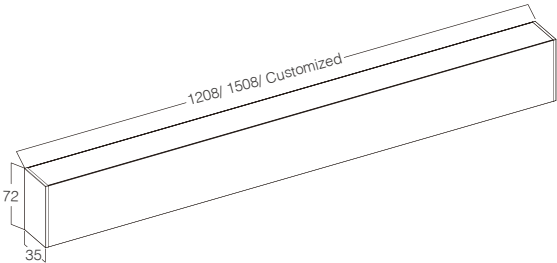

ACCESSORIES




TIR LENS

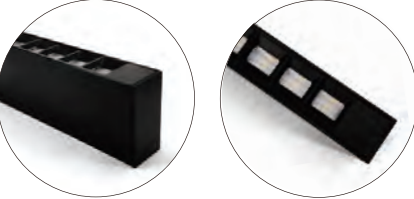

SLIM
SLIM LINEAR LIGHTING-CONE LOUVER



SLIM
SLIM LINEAR LIGHTING-CONE LOUVER

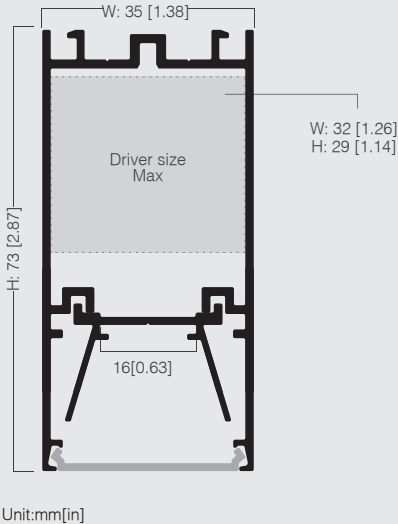


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-CN	Textured Black	Cone Louver	24Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
	Textured White		38Deg					
	Silver Anodized							

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1- 21.0W	3000K	90lm/W	1.1- 80+ (1940lm) 1.1- 90+ (1750lm)	Aircraft cable pendant	DALI
2- L 1508xW35xH72mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2500lm) 1.2- 90+ (2250lm)	Ceiling Mounted	0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (2780lm) 2.1- 90+ (2500lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		

DIMENSION

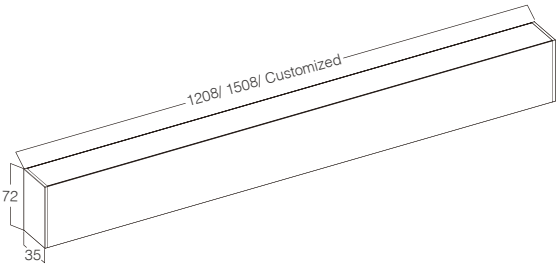

CONE LOUVER FINISH & BEAM ANGLE



With Hex Louver

ACCESSORIES



Aircraft Cable Pendant Kit




Ceiling Mounted Kit

SLIM
SLIM LINEAR LIGHTING-NICKLE LOUVER LENS



SLIM
SLIM LINEAR LIGHTING-NICKLE LOUVER LENS


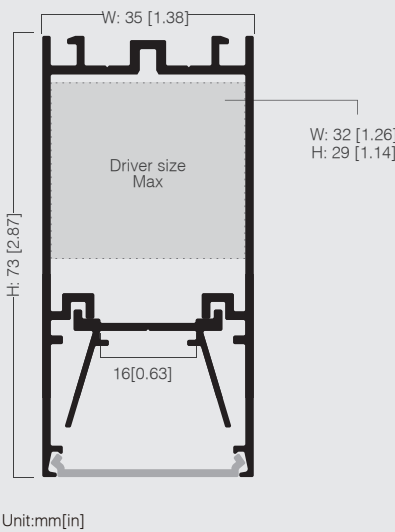


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-LT	Textured Black Textured White Silver Anodized	Nickle Louver	24° 38° 50° 35×75° 50×50°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1- 21.0W	3000K	90lm/W	1.1- 80+ (1940lm) 1.1- 90+ (1750lm)	Aircraft cable pendant	DALI
2- L 1508xW35xH72mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2500lm) 1.2- 90+ (2250lm)	Ceiling Mounted	0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (2780lm) 2.1- 90+ (2500lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		


DIMENSION

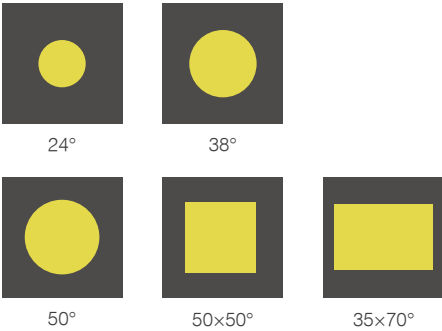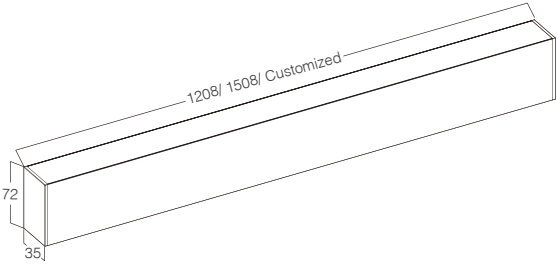

ACCESSORIES




5IN1 Nickle Louver

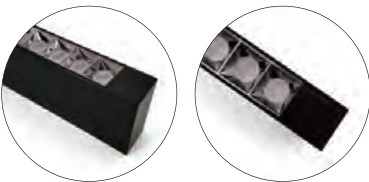

SLIM
SLIM LINEAR LIGHTING-WALL WASHER



SLIM
SLIM LINEAR LIGHTING-WALL WASHER

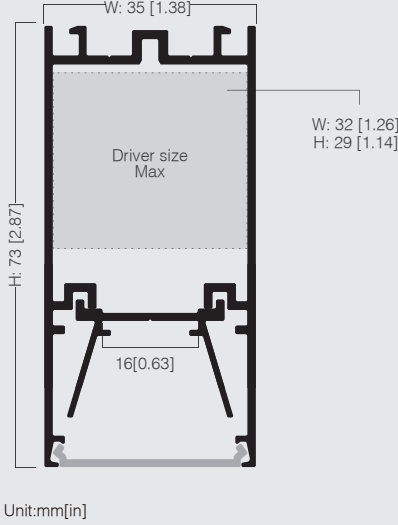


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-WW	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	Wall Washer	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1- 21.0W	3000K	55lm/W	1.1- 80+ (1190lm) 1.1- 90+ (1070lm)	Aircraft cable pendant	DALI
2- L 1508xW35xH72mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (1530lm) 1.2- 90+ (1370lm)	Ceiling Mounted	0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (1700lm) 2.1- 90+ (1530lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (2540lm) 2.2- 90+ (2290lm)		

DIMENSION

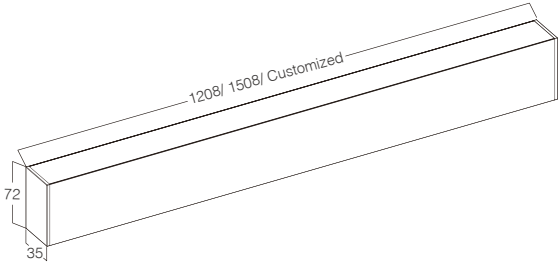

ACCESSORIES



Aircraft Cable Pendant Kit



Ceiling Mounted Kit



SLIM

SLIM LINEAR LIGHTING-REFLECTOR LOUVER




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-LV	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	15Deg 30Deg 45Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC


DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH72mm	1.1- 4sets	1.1- 21.0W	3000K	90lm/W	1.1- 80+ (1900lm) 1.1- 90+ (1710lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
	1.2- 8sets	1.2- 30.0W	4000K		1.1- 80+ (1940lm) 1.1- 90+ (1750lm) 1.2- 80+ (2710lm) 1.2- 90+ (2440lm) 1.2- 80+ (2780lm) 1.2- 90+ (2500lm)		
2- L 1508xW35xH72mm	2.1- 5sets	2.1- 27.0W	3000K	90lm/W	2.1- 80+ (2440lm) 2.1- 90+ (2200lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
	2.2- 10sets	2.2- 45.0W	4000K		2.1- 80+ (2500lm) 2.1- 90+ (2250lm) 2.2- 80+ (4070lm) 2.2- 90+ (3670lm) 2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		

SLIM

SLIM LINEAR LIGHTING-REFLECTOR LOUVER

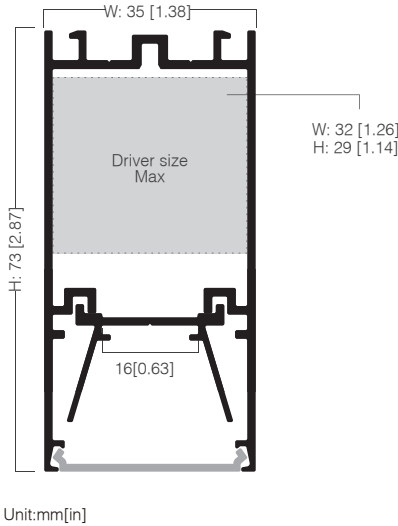


DIMENSION

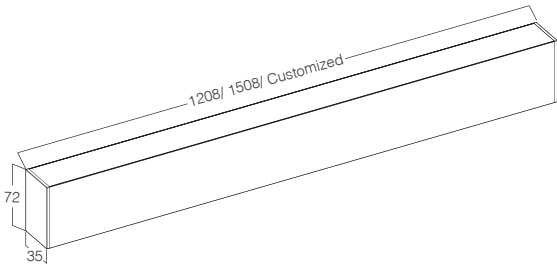


ACCESSORIES



BEAM ANGLE

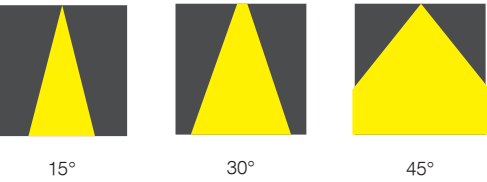


REFLECTOR LOUVER

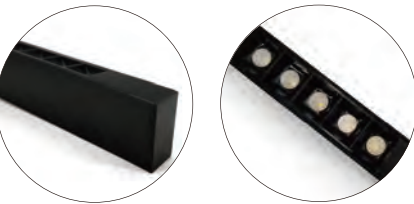


SLIM

SLIM RECESSED LINEAR LIGHTING-CRYSTAL LOUVER

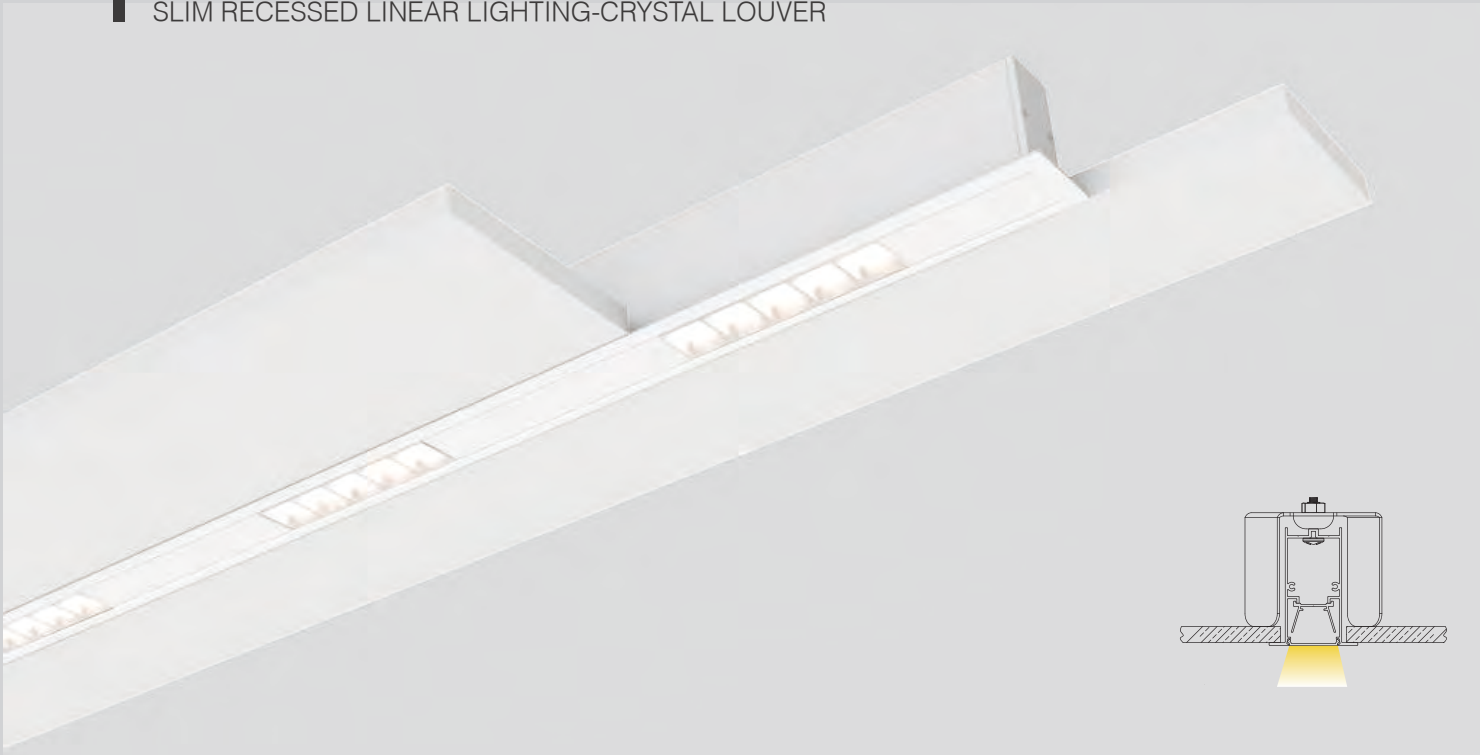

SLIM

SLIM RECESSED LINEAR LIGHTING-CRYSTAL LOUVER

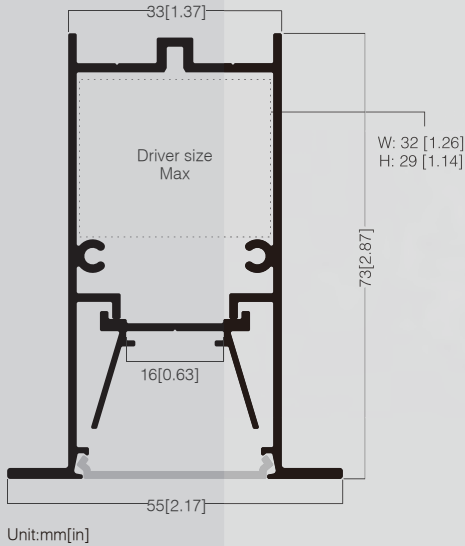


SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RHCL	Textured Black Textured White Silver Anodized	Crystal Louver	24Deg 38Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	90lm/W	1.1- 80+ (1940lm) 1.1- 90+ (1750lm)	Trimed Recessed	DALI
2- L 1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2500lm) 1.2- 90+ (2250lm)		0-10V
	2.1- 8sets	3- 30.0W	2700~4000K		2.1- 80+ (2780lm) 2.1- 90+ (2500lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		

DIMENSION

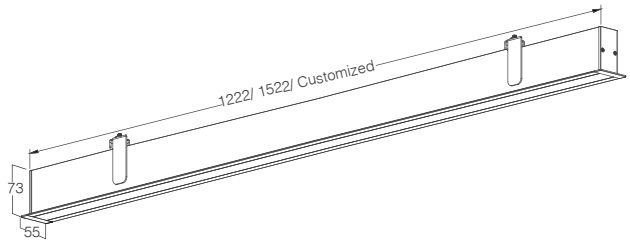

BEAM ANGLE



ACCESSORIES



Aircraft Cable Pendant Kit


SLIM

SLIM RECESSED LINEAR LIGHTING-SILICONE LENS



SLIM

SLIM RECESSED LINEAR LIGHTING-SILICONE LENS

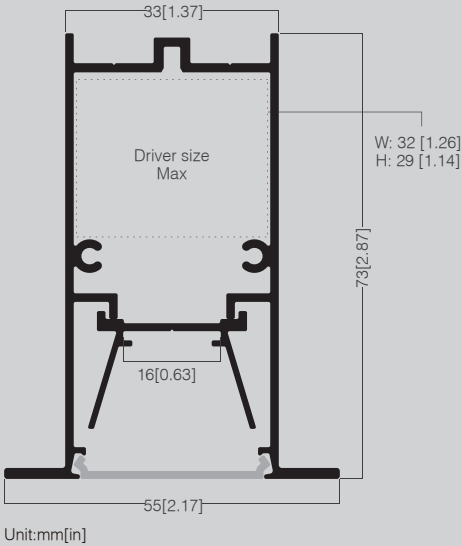


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RSC	Textured Black Textured White Silver Anodized	Silicone	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	1.1- 15.0W 1.2 & 2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	80lm/W	1.1- 80+ (1230lm) 1.1- 90+ (1110lm) 1.2 & 2.1 - 80+ (1730lm) 1.2&2.1 - 90+ (1550lm) 3- 80+ (2220lm) 3- 90+ (2000lm)	Trimed Recessed	DALI 0-10V On/off
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	1.1- 15.0W 1.2 & 2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	90lm/W	1.1- 80+ (1390lm) 1.1- 90+ (1250lm) 1.2&2.1 - 80+ (1940lm) 1.2&2.1 - 90+ (1750lm) 2.2- 80+ (2500lm) 2.2- 90+ (2250lm)	Trimed Recessed	DALI 0-10V On/off

DIMENSION

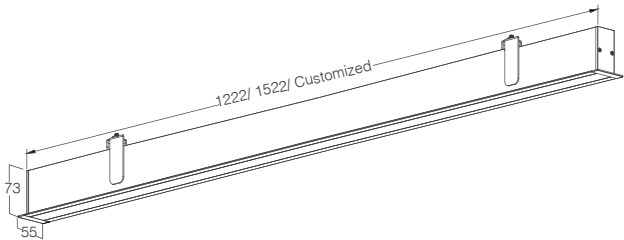

SILICONE LENS



ACCESSORIES



Aircraft Cable Pendant Kit


SLIM

SLIM RECESSED LINEAR LIGHTING-PC DIFFUSER



SLIM

SLIM RECESSED LINEAR LIGHTING-PC DIFFUSER

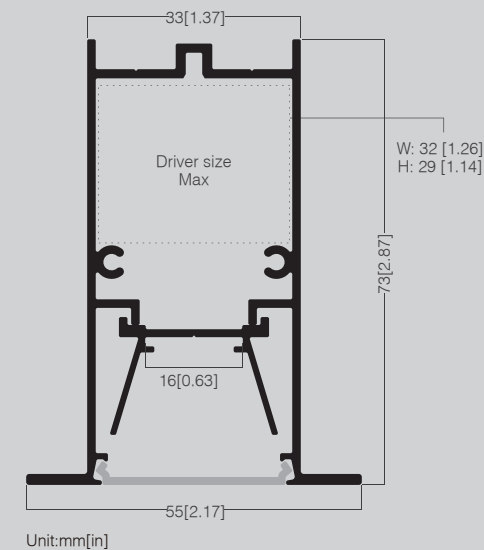


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RPC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	1.1- 15.0W 1.2&2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	90lm/W	1.1- 80+ (1390lm) 1.1- 90+ (1250lm) 1.2&2.1 - 80+ (1940lm) 1.2&2.1 - 90+ (1750lm) 2.2- 80+ (2500lm) 2.2- 90+ (2250lm)	Trimed Recessed	DALI 0-10V On/off

1- L 1222xW55xH73mm 2- L 1522xW55xH73mm	1.1- 15.0W 1.2&2.1- 21.0W 2.2- 27.0W	3000K 4000K 2700~4000K	100lm/W	1.1- 80+ (1540lm) 1.1- 90+ (1390lm) 1.2&2.1 - 80+ (2160lm) 1.2&2.1 - 90+ (1940lm) 2.2- 80+ (2780lm) 2.2- 90+ (2500lm)	Trimed Recessed	DALI 0-10V On/off
--	--	------------------------------	---------	--	-----------------	-------------------------

DIMENSION

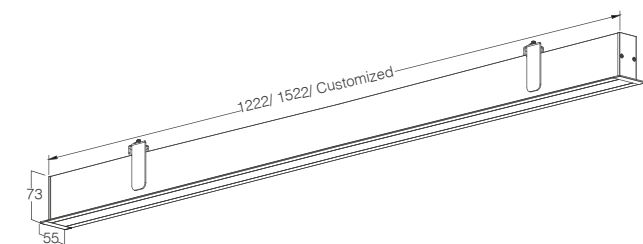

PC DIFFUSER

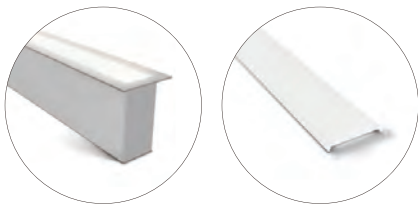


ACCESSORIES



Aircraft Cable Pendant Kit


SLIM

SLIM RECESSED LINEAR LIGHTING-TIR LENS

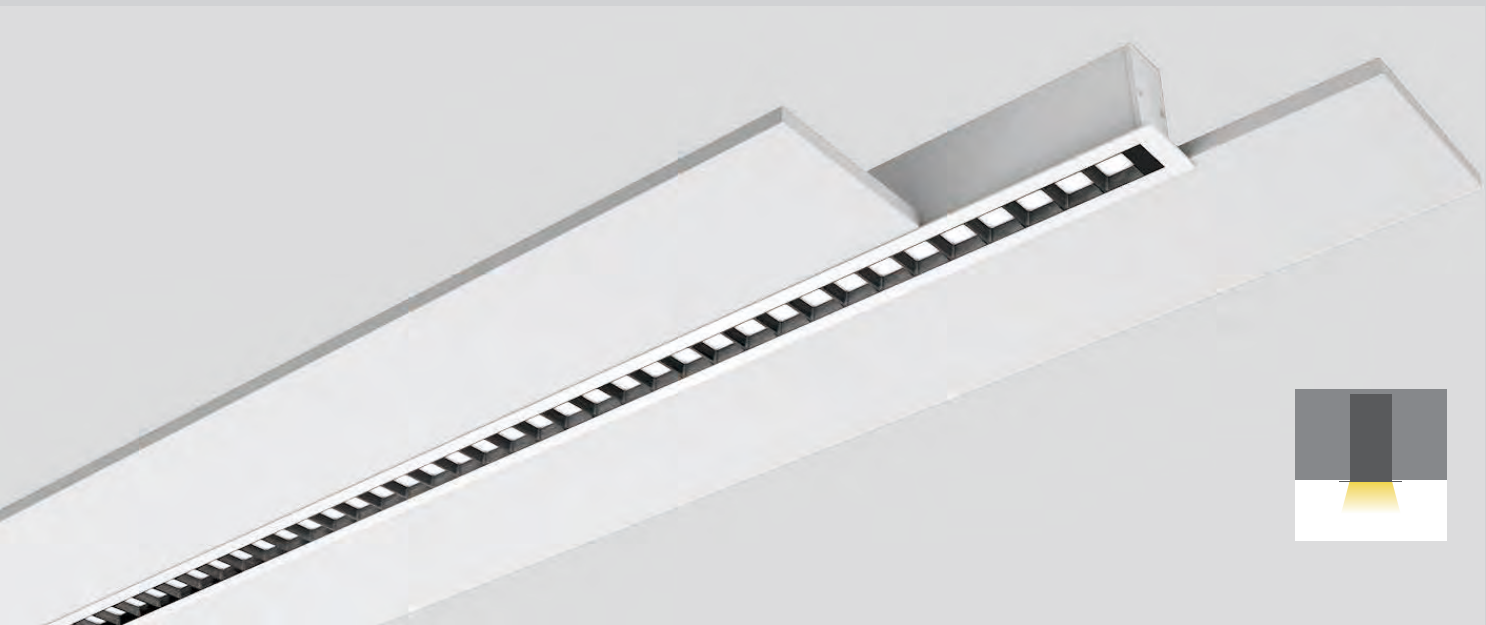

SLIM

SLIM RECESSED LINEAR LIGHTING-TIR LENS

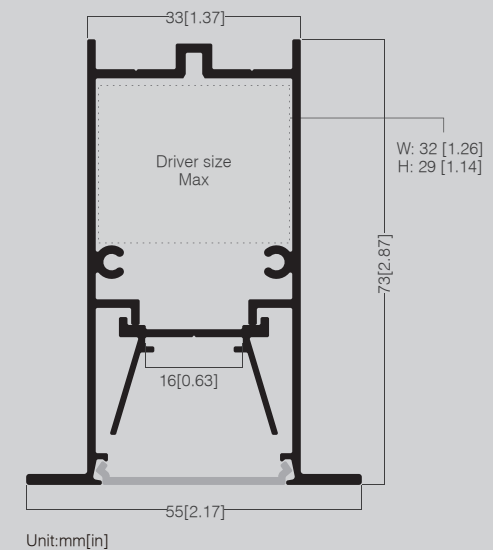


SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RLLT	Textured Black Textured White Silver Anodized	Louver & Reflector	35×75° 50×50° Diamond 50° 50°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1- 21.0W 2- 30.0W	3000K 4000K	90lm/W	1- 80+ (1940lm) 1- 90+ (1750lm) 2- 80+ (2780lm) 2- 90+ (2500lm)	Trimed Recessed	DALI 0-10V On/off

DIMENSION

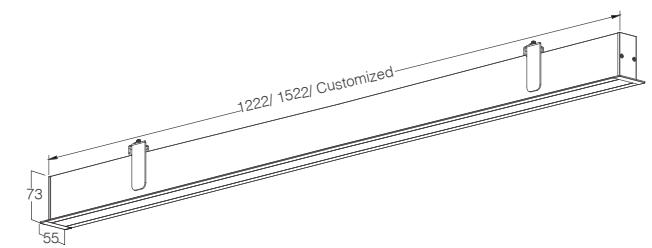

BEAM ANGLE

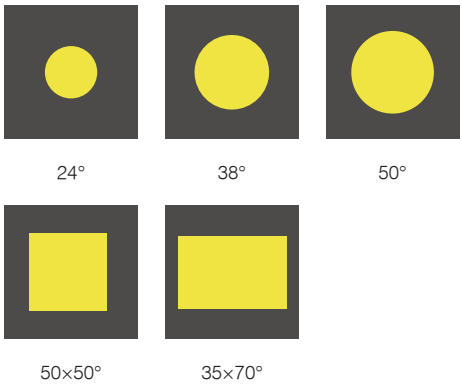


ACCESSORIES



Aircraft Cable Pendant Kit

SLIM

SLIM RECESSED LINEAR LIGHTING-CONE LOUVER

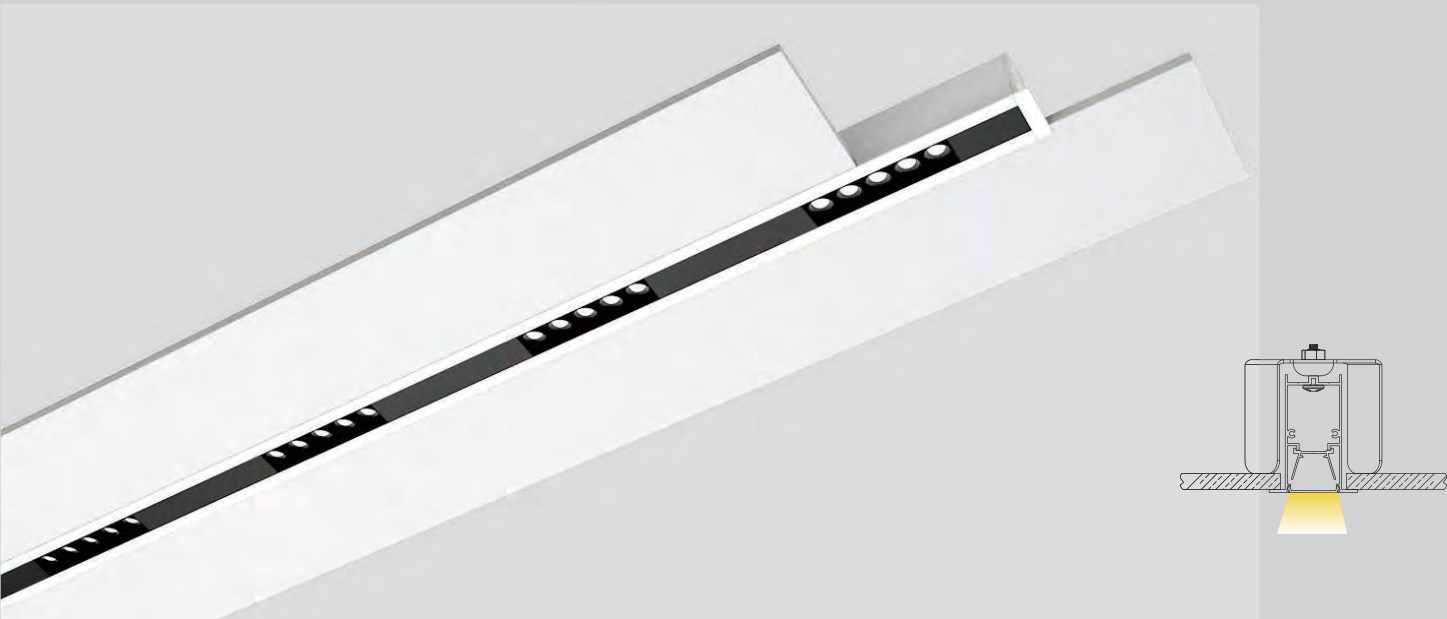


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RCN	Textured Black Textured White Silver Anodized	Cone Louver	24Deg 38Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	90lm/W	1.1- 80+ (1940lm) 1.1- 90+ (1750lm)	Trimed Recessed	DALI
2- L1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2500lm) 1.2- 90+ (2250lm)		0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (2780lm) 2.1- 90+ (2500lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		

SLIM


SLIM RECESSED LINEAR LIGHTING-CONE LOUVER

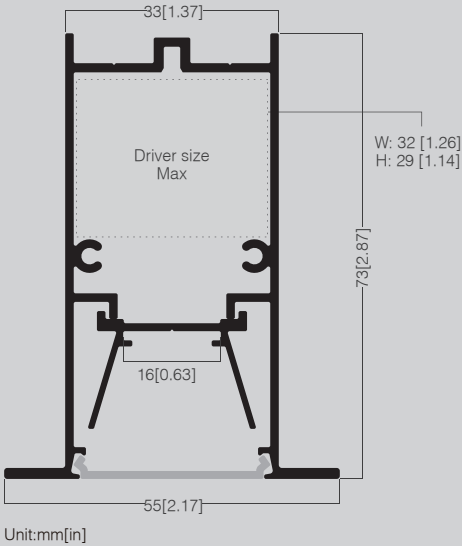


CONE LOUVER FINISH



DIMENSION

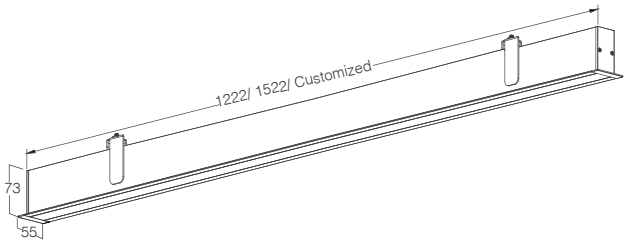

BEAM ANGLE




ACCESSORIES



Aircraft Cable Pendant Kit


SLIM

SLIM RECESSED LINEAR LIGHTING-NICKLE LOUVER LENS

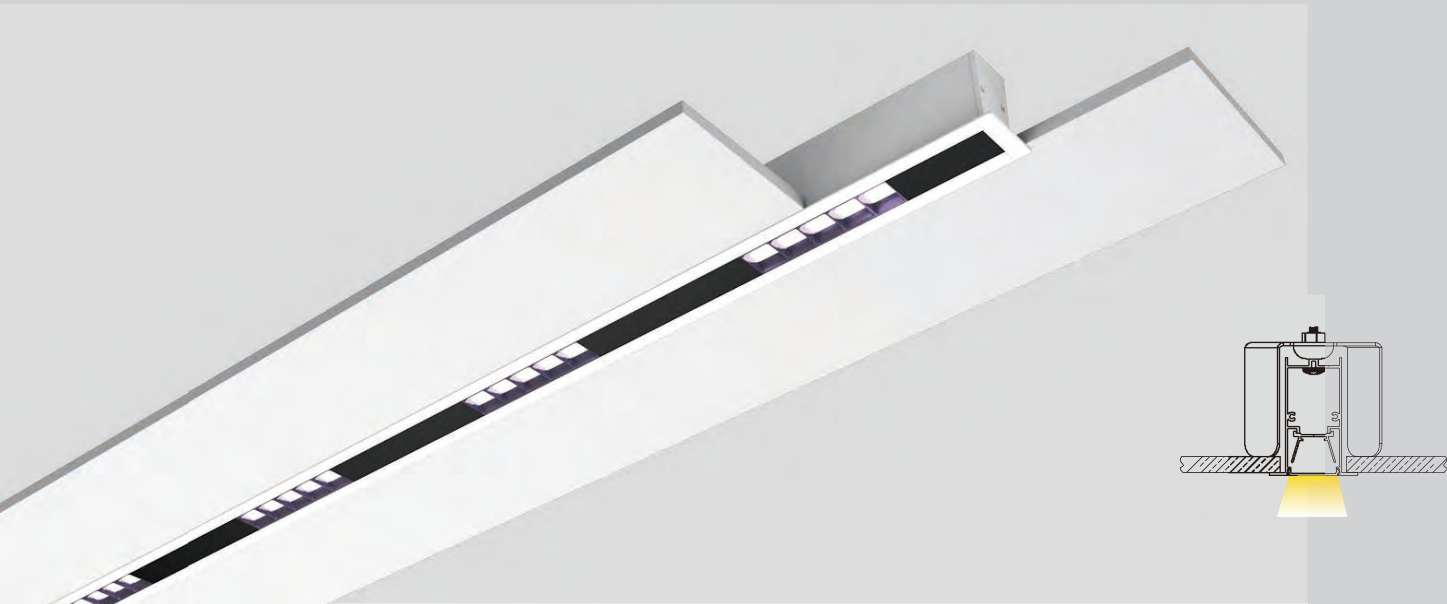

SLIM

SLIM RECESSED LINEAR LIGHTING-NICKLE LOUVER LENS

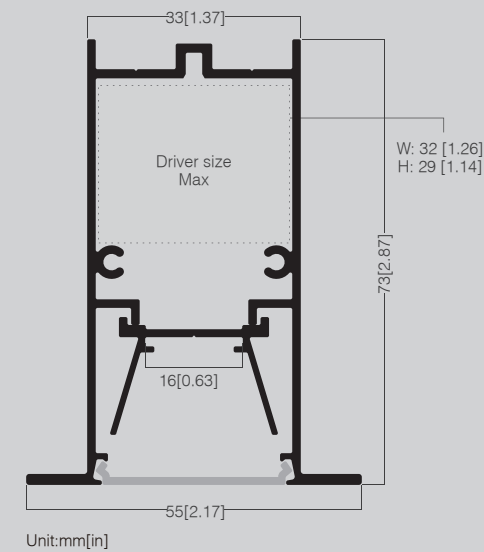


SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RLT	Textured Black Textured White Silver Anodized	Nickle Louver	24° 38° 50° 35×75° 50×50°	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	90lm/W	1.1- 80+ (1940lm) 1.1- 90+ (1750lm)	Trimed Recessed	DALI
2- L 1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (2500lm) 1.2- 90+ (2250lm)		0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (2780lm) 2.1- 90+ (2500lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		

DIMENSION

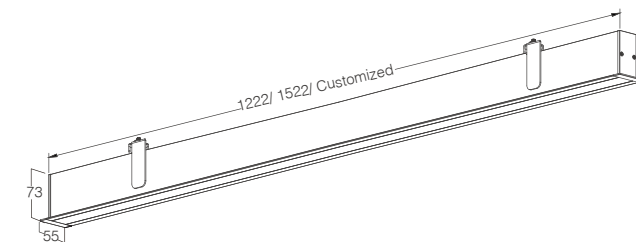

BEAM ANGLE

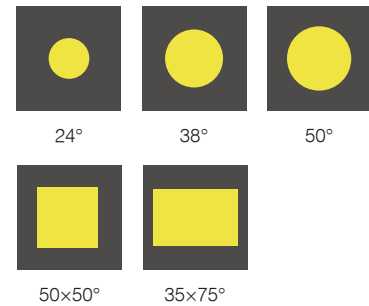

ACCESSORIES



Aircraft Cable Pendant Kit

SLIM

SLIM RECESSED LINEAR LIGHTING-WALL WASHER




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RWW	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	Wall Washer	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC


DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	55lm/W	1.1- 80+ (1190lm) 1.1- 90+ (1070lm)	Trimed Recessed	DALI
2- L 1522xW55xH73mm	1.2- 5sets	2- 27.0W	4000K		1.2- 80+ (1530lm) 1.2- 90+ (1370lm)		0-10V
	2.1- 8sets	3- 30.0W			2.1- 80+ (1700lm) 2.1- 90+ (1530lm)		On/off
	2.2- 10sets	4- 45.0W			2.2- 80+ (2540lm) 2.2- 90+ (2290lm)		

SLIM

SLIM RECESSED LINEAR LIGHTING-WALL WASHER

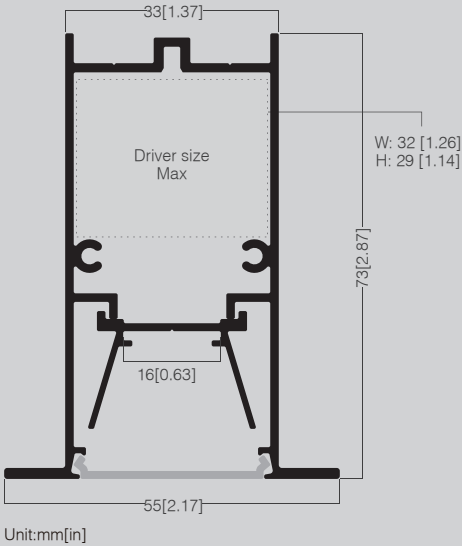

DIMENSION

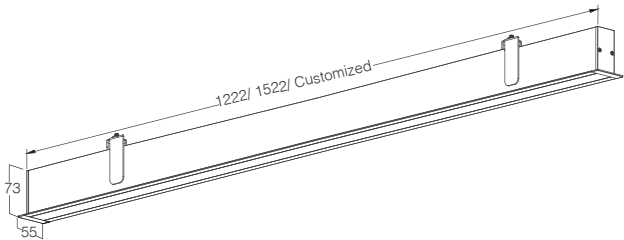

WALL WASHER




ACCESSORIES



Aircraft Cable Pendant Kit

SLIM

SLIM RECESSED LINEAR LIGHTING-REFLECTOR LOUVER

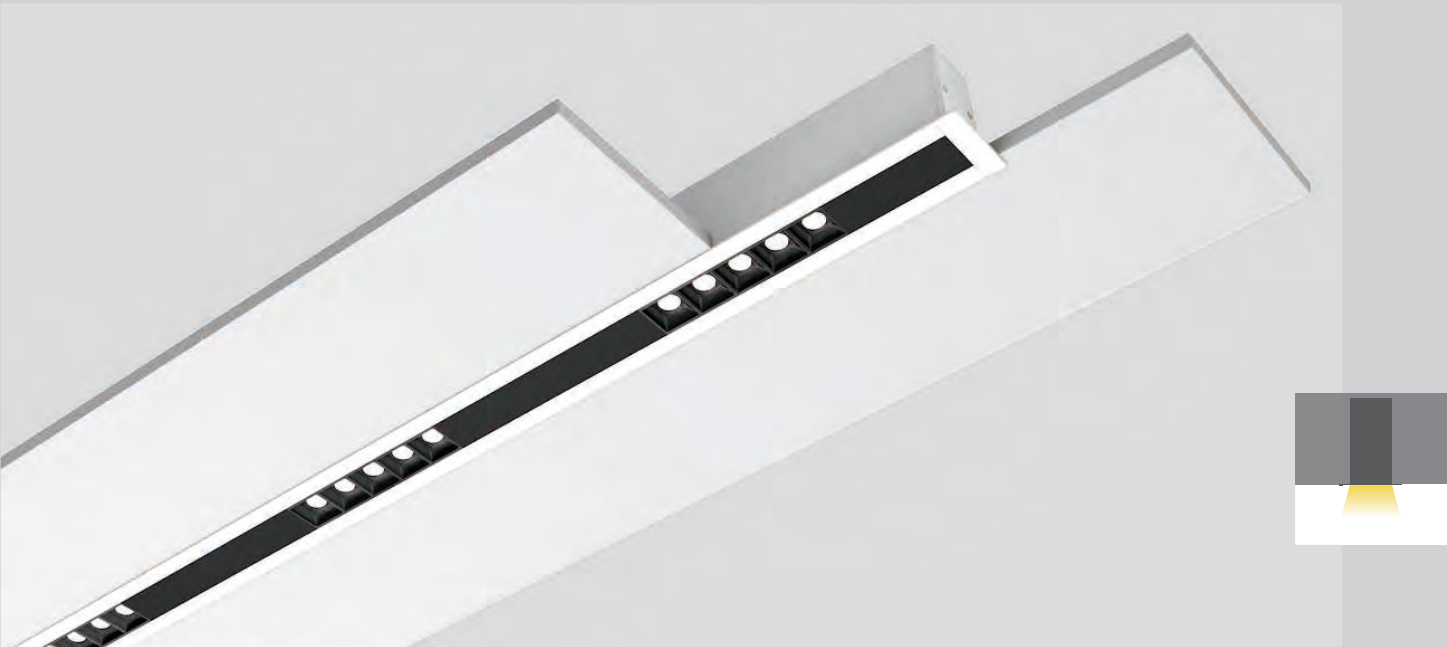


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
SLIM-RLV	Textured Black Textured White Silver Anodized	5in1 Louver & Reflector	15Deg 30Deg 45Deg	<19	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC


DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW55xH73mm	1.1- 4sets	1- 21.0W	3000K	90lm/W	1.1- 80+ (1900lm) 1.1- 90+ (1710lm)	Trimed Recessed	DALI
	1.2- 8sets	2- 30.0W	4000K		1.1- 80+ (1940lm) 1.1- 90+ (1750lm) 1.2- 80+ (2710lm) 1.2- 90+ (2440lm) 1.2- 80+ (2780lm) 1.2- 90+ (2500lm)		0-10V On/off
2- L 1522xW55xH73mm	2.1- 5sets	1- 27.0W	3000K	90lm/W	2.1- 80+ (2440lm) 2.1- 90+ (2200lm)	Trimed Recessed	DALI
	2.2- 10sets	2- 45.0W	4000K		2.1- 80+ (2500lm) 2.1- 90+ (2250lm) 2.2- 80+ (4070lm) 2.2- 90+ (3670lm) 2.2- 80+ (4170lm) 2.2- 90+ (3750lm)		0-10V On/off

SLIM

SLIM RECESSED LINEAR LIGHTING-REFLECTOR LOUVER

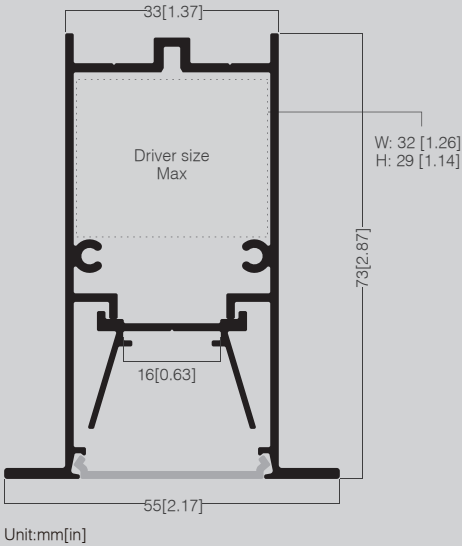

DIMENSION

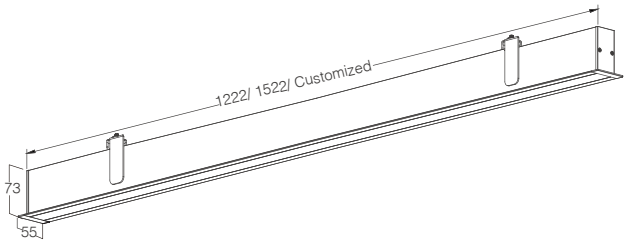

REFLECTOR LOUVER




ACCESSORIES



Aircraft Cable Pendant Kit


BEAM ANGLE

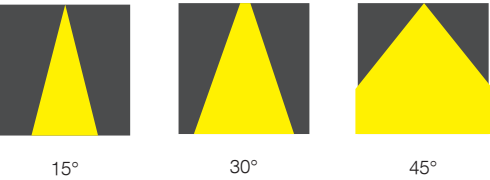

LUZ Surface & Recessed Linear Light

Aesthetically pleasing design.
Versatile Optical solutions, including anti-glare design, creating a more suitable lighting environment.
Ideal for various open space settings, enhancing both ambiance and functionality.

DIMENSIONS

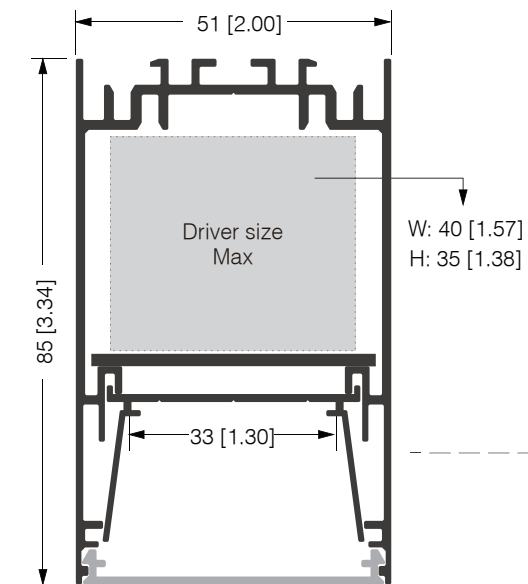


Unit:mm[in]

508533

Surface Installation
(Pendant, Surface Mounted,
Wall Mounted)

708533

Trimed Recessed Installation

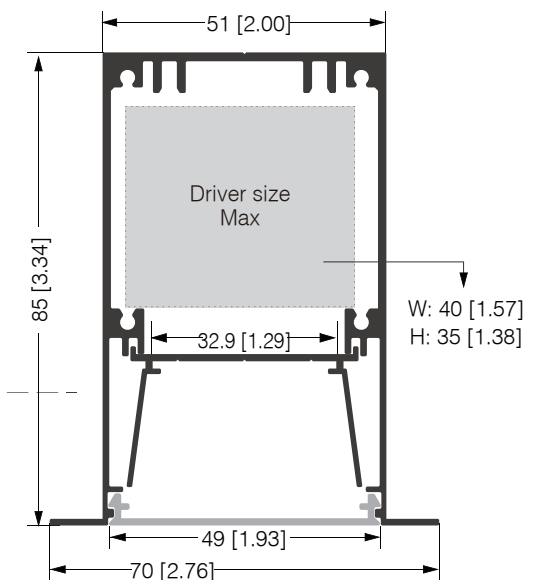

Diffuser



Flush Optical Kit
Creating the most
human friendly lighting.



UGR
<19

Prismatic Lens available for
anti-glaring lighting requirements.




General PC lens
with high transmission.

5IN1 louver optical kit is flexible in any
multiple lengths as W30=132.5mm, W38=L189.8mm.
Available in various beam angles which is most satisfying
for lighting environments. The anti-glaring performance
is up to UGR<16.



Reflector Louver-W38mm




UGR
<16

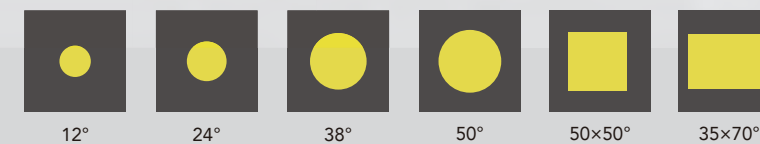

Reflector Louver-W30mm

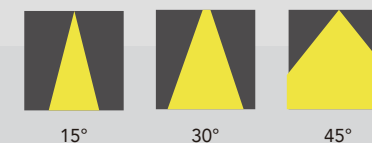


Wall Washer

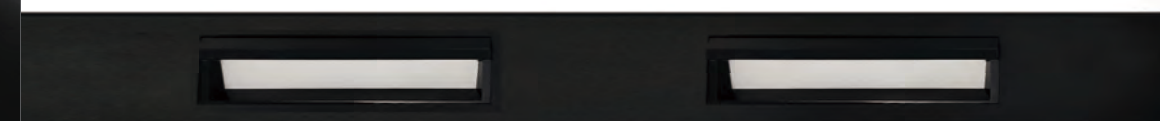


Accurate Injected Lens

Beam angle in Asymmetric,
Batwing, 60°, 90°.

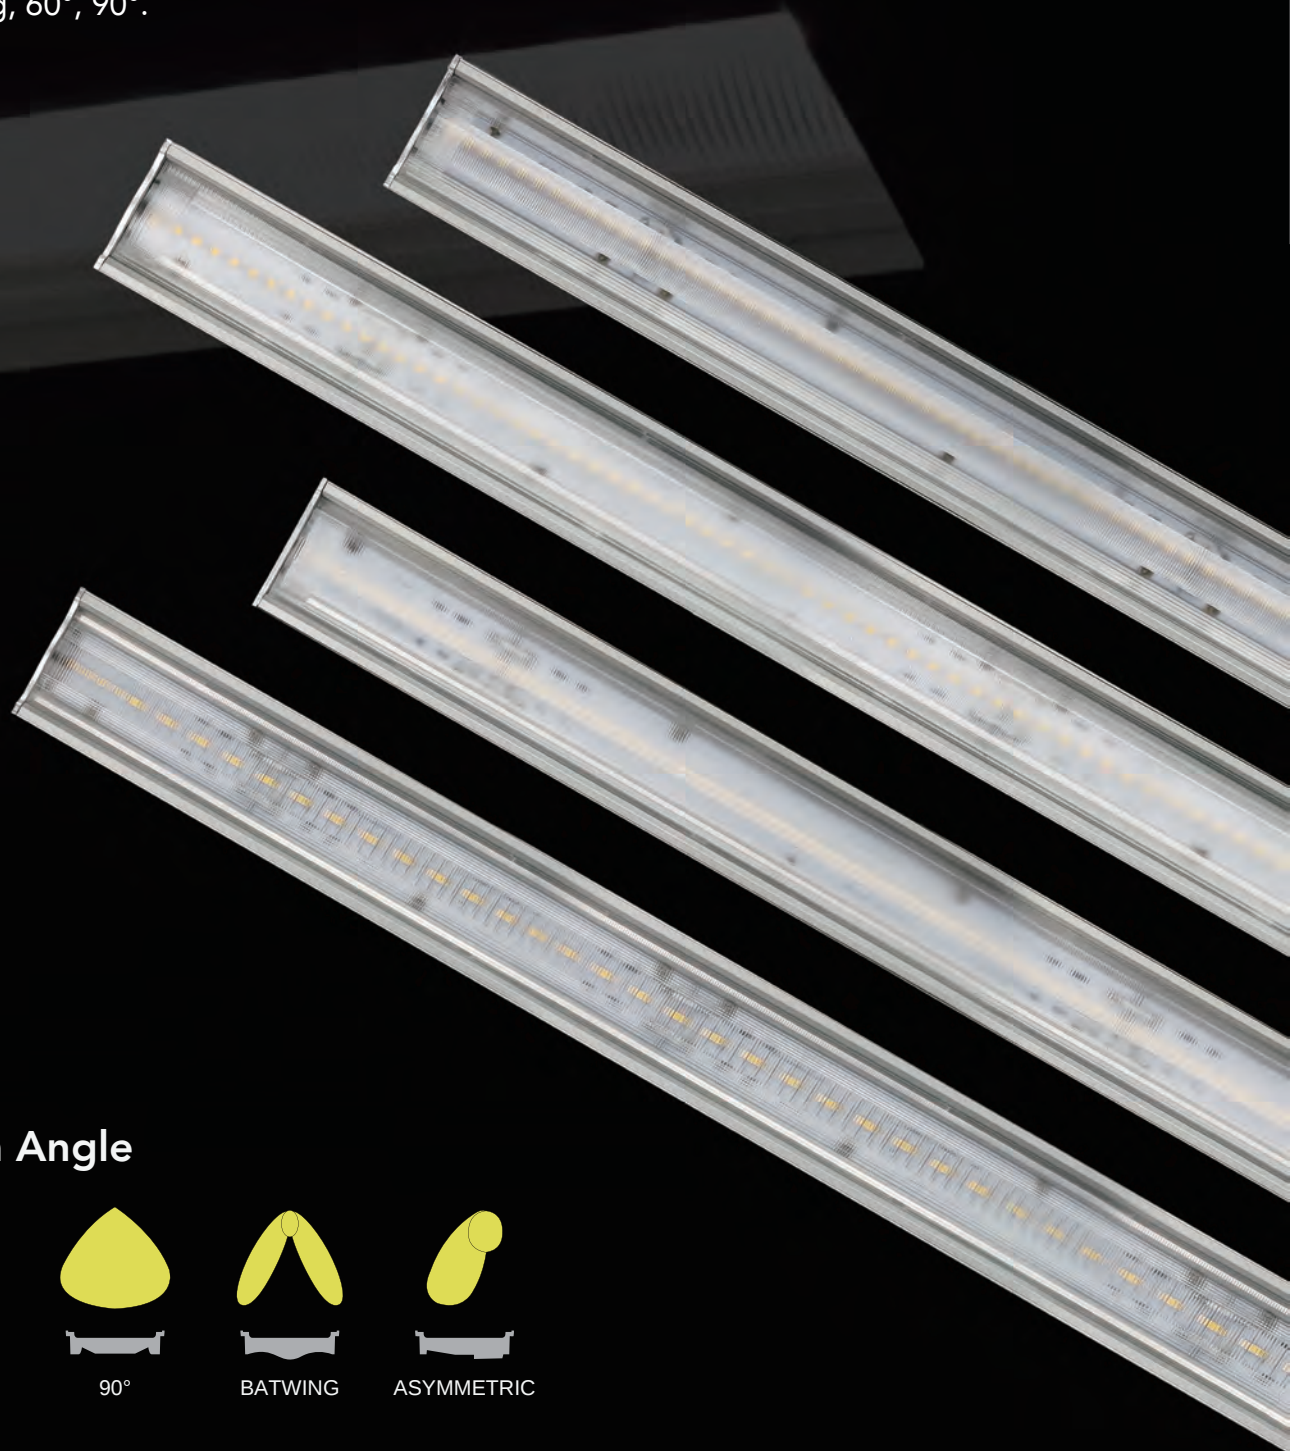

Beam Angle

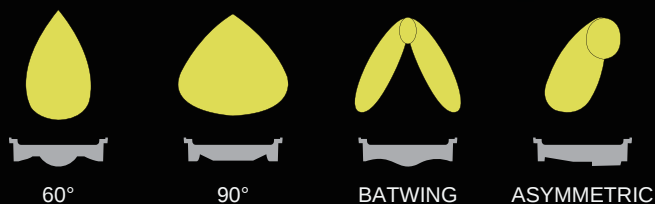

GAPLESS JOINING IN FILED

Luz is offering the gapless joining solution
in filed with less labor operations.



MORE LIGHT SOURCE & DRIVER OPTIONS

OSRAM **TRIDONIC** **EPISTAR**


BRIDGELUX **NICHIA** **LIFUD**

Light source lumen efficiency from 100lm/w ~ 180lm/w.


Luminaire efficiency from 130lm/W ~ 90lm/W

Color Temperature options up to 19 categories from 2200K ~ 6500K.


Lighting color quality in MacAdam 2-step, 3-step, 5-step.

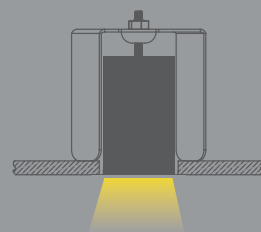

Trimmed Recessed



Ceiling Mounted

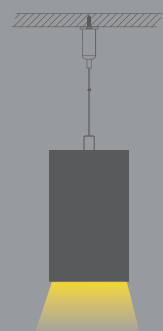


Pendant



Wall Mounted

INSTALLSTIONS

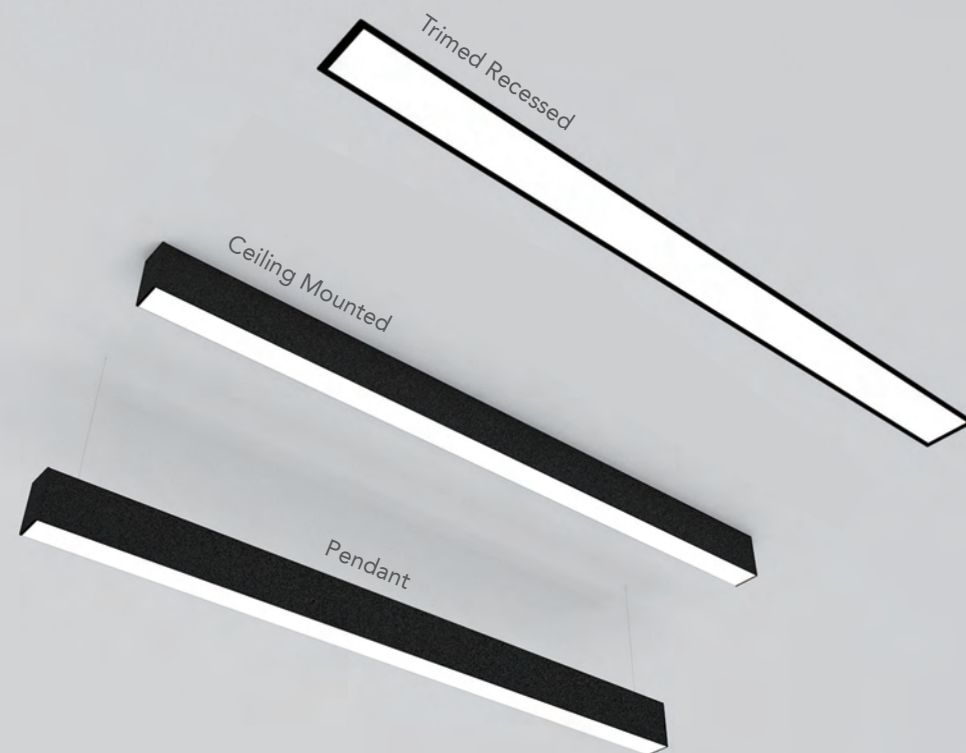

FINISHES


Standard in Matt White textured, Matt Black textured powder coating and Silver anodized. More Customized colors up 48 options available in customized service.



Textured White (RAL9003)



Textured Black (RAL9004)

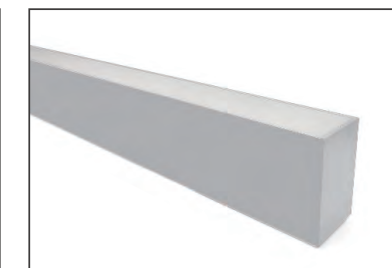

Silver Anodized

Color Options

BVFC 7023	BVFC 7024	BVFC 7028	BVFC 7030	BVFC 7032	BVFC 7035	BVFC 7037
BVFC 7043	BVFC 7047	BVFC 7048	BVFC 8004	BVFC 8015	BVFC 8019	BVFC 8025
BVFC 9001	BVFC 9002	BVFC 9004	BVFC 9006	BVFC 9007	BVFC 9010	BVFC 7021
BVFC 7022	BVFC 9011	BVFC 9016	BVFC 9017	BVFC 1001	BVFC 1002	BVFC 1007
BVFC 1034	BVFC 1035	BVFC 2004	BVFC 3011	BVFC 3012	BVFC 3024	BVFC 4002
BVFC 5001	BVFC 5002	BVFC 5008	BVFC 5009	BVFC 5011	BVFC 5012	BVFC 5013
BVFC 5025	BVFC 6000	BVFC 7009	BVFC 7010	BVFC 7012	BVFC 7016	





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-AGF	Textured Black Textured White Silver Anodized	Anti-Glare Lens Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW50xH85mm	1- 15.0W	3000K	85lm/W	1- 80+ (1310lm) 1- 90+ (1180lm)	Aircraft cable pendant	DALI
	2- 27.0W	4000K		2- 80+ (2360lm) 2- 90+ (2120lm)	Ceiling Mounted	0-10V
	3- 35.0W	2700~4000K		3- 80+ (3060lm) 3- 90+ (2750lm)	Wall Mounted	On/off
			105lm/W	1- 80+ (1620lm) 1- 90+ (1460lm)		
				2- 80+ (2920lm) 2- 90+ (2620lm)		
				3- 80+ (3780lm) 3- 90+ (3400lm)		
			123lm/W	1- 80+ (1900lm) 1- 90+ (1710lm)		
				2- 80+ (3420lm) 2- 90+ (3070lm)		
				3- 80+ (4430lm) 3- 90+ (3990lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW50xH85mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Aircraft cable pendant	DALI
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)	Wall Mounted	On/off
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)		
				2- 80+ (3890lm) 2- 90+ (3500lm)		
				3- 80+ (4860lm) 3- 90+ (4480lm)		
			123lm/W	1- 80+ (3420lm) 1- 90+ (3070lm)		
				2- 80+ (4560lm) 2- 90+ (4100lm)		
				3- 80+ (5700lm) 3- 90+ (5130lm)		


DIMENSION

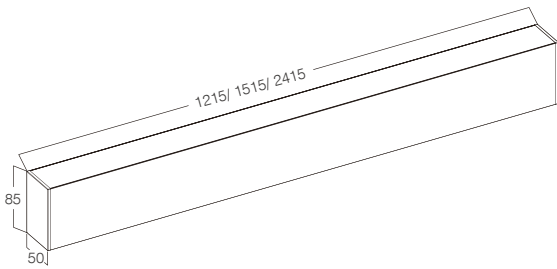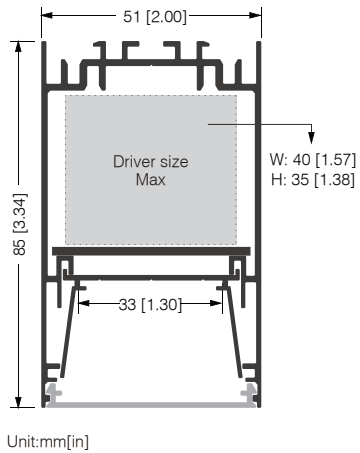

ACCESSORIES



ANTI-GLARE FILM

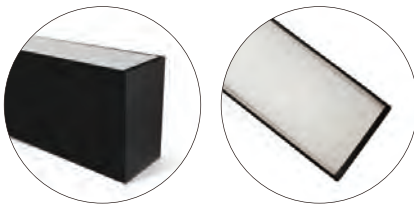





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW50xH85mm	1- 15.0W	3000K	90lm/W	1- 80+ (1390lm) 1- 90+ (1250lm)	Aircraft cable pendant	DALI
	2- 27.0W	4000K		2- 80+ (2500lm) 2- 90+ (2250lm)	Ceiling Mounted	0-10V
	3- 35.0W	2700~4000K		3- 80+ (3240lm) 3- 90+ (2920lm)	Wall Mounted	On/off
			110lm/W	1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
			130lm/W	1- 80+ (2000lm) 1- 90+ (1800lm)		
				2- 80+ (3610lm) 2- 90+ (3250lm)		
				3- 80+ (4680lm) 3- 90+ (4210lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW50xH85mm	1- 27.0W	3000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Aircraft cable pendant	DALI
	2- 36.0W	4000K		2- 80+ (3330lm) 2- 90+ (3000lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (4170lm) 3- 90+ (3750lm)	Wall Mounted	On/off
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		

DIMENSION

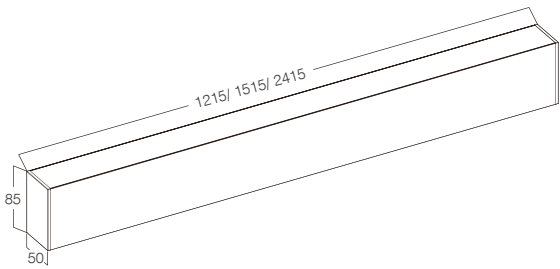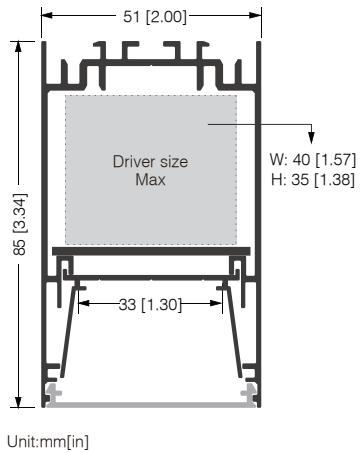

ACCESSORIES



Aircraft Cable Pendant Kit



Ceiling Mounted Kit




Wall Mounted Kit

PC DIFFUSER LENS



LUZ

LUZ LINEAR LIGHTING-LOUVER LENS

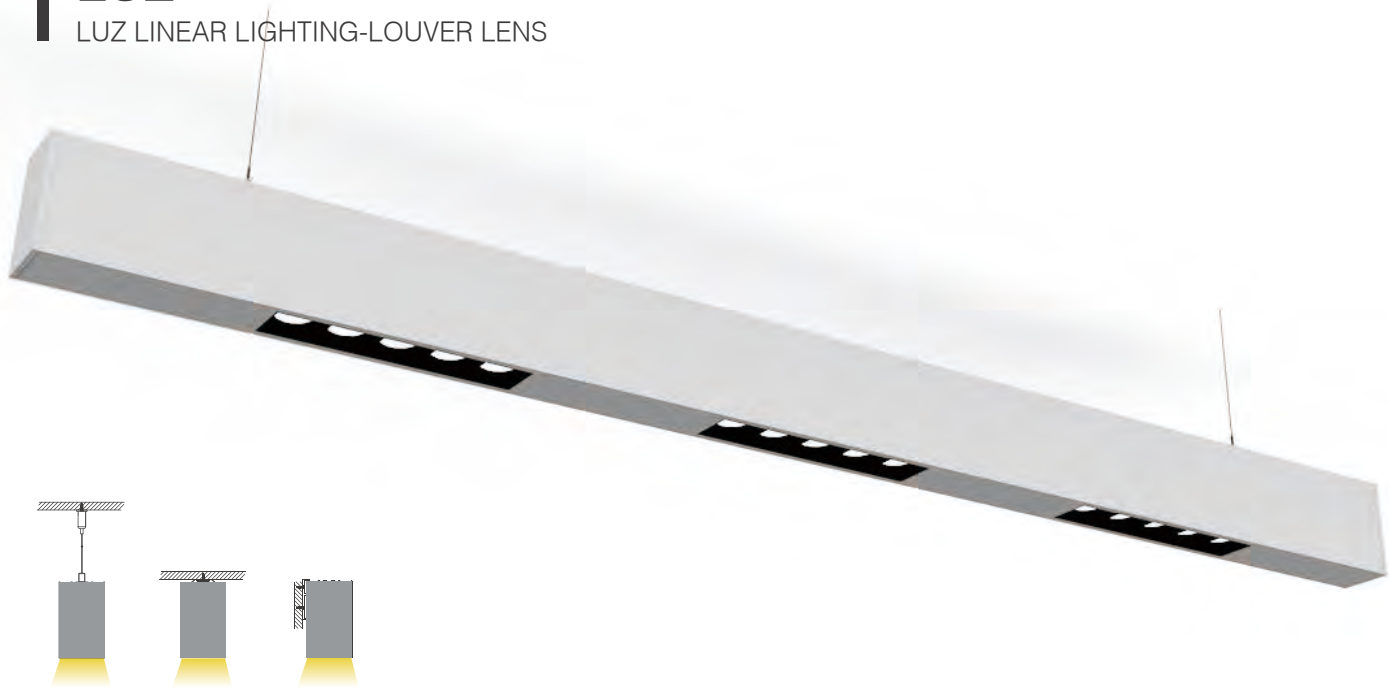

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-LT	Textured Black Textured White Silver Anodized	Nickle Louver lens	12° 24° 38° 50° 35×70° 50×50°	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC


DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW50xH85mm	1.1- 3sets	1.1- 25.0W	3000K	1.1- 92lm/W	1.1- 80+ (2360lm) 1.1- 90+ (2130lm)	Aircraft cable pendant	DALI
	1.2- 6sets	1.2- 36.0W	4000K	1.1- 95lm/W 1.2- 101lm/W 1.2- 105lm/W	1.1- 80+ (2440lm) 1.1- 90+ (2200lm) 1.2- 80+ (3740lm) 1.2- 90+ (3370lm) 1.2- 80+ (3890lm) 1.2- 90+ (3500lm)	Ceiling Mounted Wall Mounted	0-10V On/off
2- L 1508xW50xH85mm	2.1- 4sets	2.1- 31.0W	3000K	1.1- 92lm/W	1.1- 80+ (2930lm) 1.1- 90+ (2640lm)	Aircraft cable pendant	DALI
	2.2- 8sets	2.2- 45.0W	4000K	1.1- 95lm/W 1.2- 101lm/W 1.2- 105lm/W	1.1- 80+ (3030lm) 1.1- 90+ (2730lm) 1.2- 80+ (4680lm) 1.2- 90+ (4210lm) 1.2- 80+ (4860lm) 1.2- 90+ (4380lm)	Ceiling Mounted Wall Mounted	0-10V On/off

LUZ


LUZ LINEAR LIGHTING-LOUVER LENS



DIMENSION

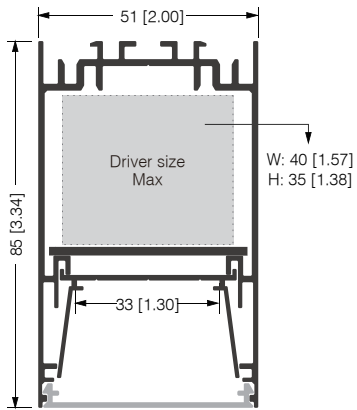

Unit:mm[in]

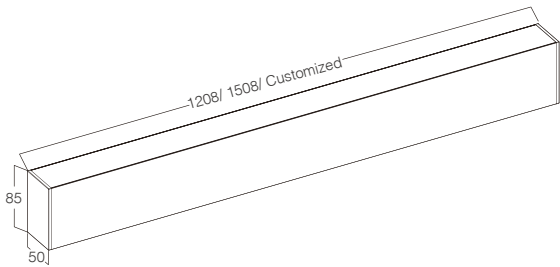

ACCESSORIES



LOUVER LENS





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-WW	Textured Black Textured White Silver Anodized	Louver lens	Wall Washer	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC


DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW50xH85mm	1.1- 3sets	1.1- 25.0W	3000K	1.1- 60lm/W	1.1- 80+ (1540lm) 1.1- 90+ (1390lm)	Aircraft cable pendant	DALI
	1.2- 6sets	1.2- 36.0W	4000K	1.1- 66lm/W	1.2- 80+ (2440lm) 1.2- 90+ (2200lm)	Ceiling Mounted Wall Mounted	0-10V On/off
2- L 1508xW50xH85mm	2.1- 4sets	2.1- 31.0W	3000K	2.1- 60lm/W	2.1- 80+ (1910lm) 2.1- 90+ (1720lm)	Aircraft cable pendant	DALI
	2.2- 8sets	2.2- 45.0W	4000K	2.2- 66lm/W	2.2- 80+ (3050lm) 2.2- 90+ (2750lm)	Ceiling Mounted Wall Mounted	0-10V On/off




WALL WASHER



DIMENSION

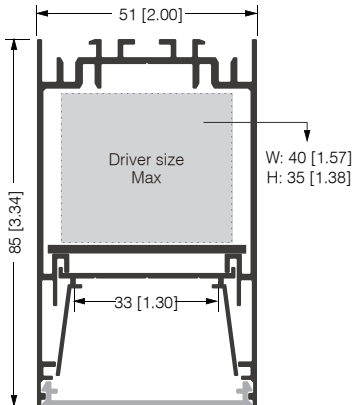

Unit:mm[in]

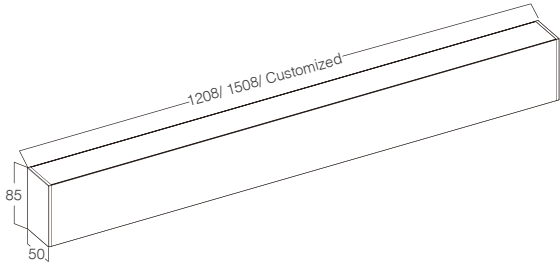

ACCESSORIES



Aircraft Cable Pendant Kit

Ceiling Mounted Kit

Wall Mounted Kit

LOUVER LENS



LUZ
LUZ LINEAR LIGHTING-TIR LENS



SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
LUZ-TR	Textured Black Textured White Silver Anodized	TIR injected lens	60° 90° Assymetric Batwing	<19 to <26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1182xW50xH85mm	1- 21.0W 2- 30.0W	3000K 4000K	100lm/W	1- 80+ (2160lm) 1- 90+ (1940lm) 2- 80+ (3090lm) 2- 90+ (2780lm)	Aircraft cable pendant Ceiling Mounted Wall Mounted	DALI 0-10V On/off


LUZ
LUZ LINEAR LIGHTING-TIR LENS



DIMENSION

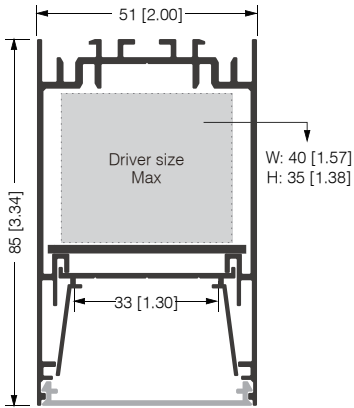


Unit:mm[in]

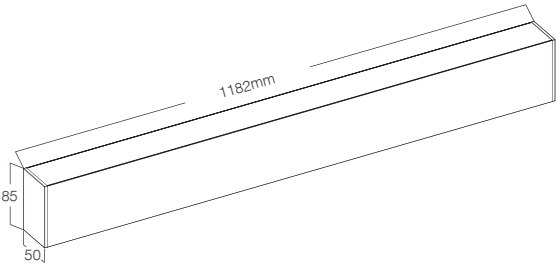


ACCESSORIES



TIR LENS

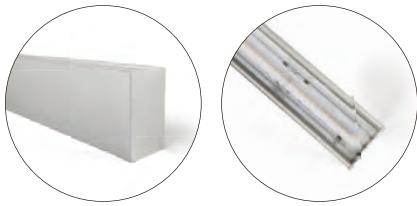

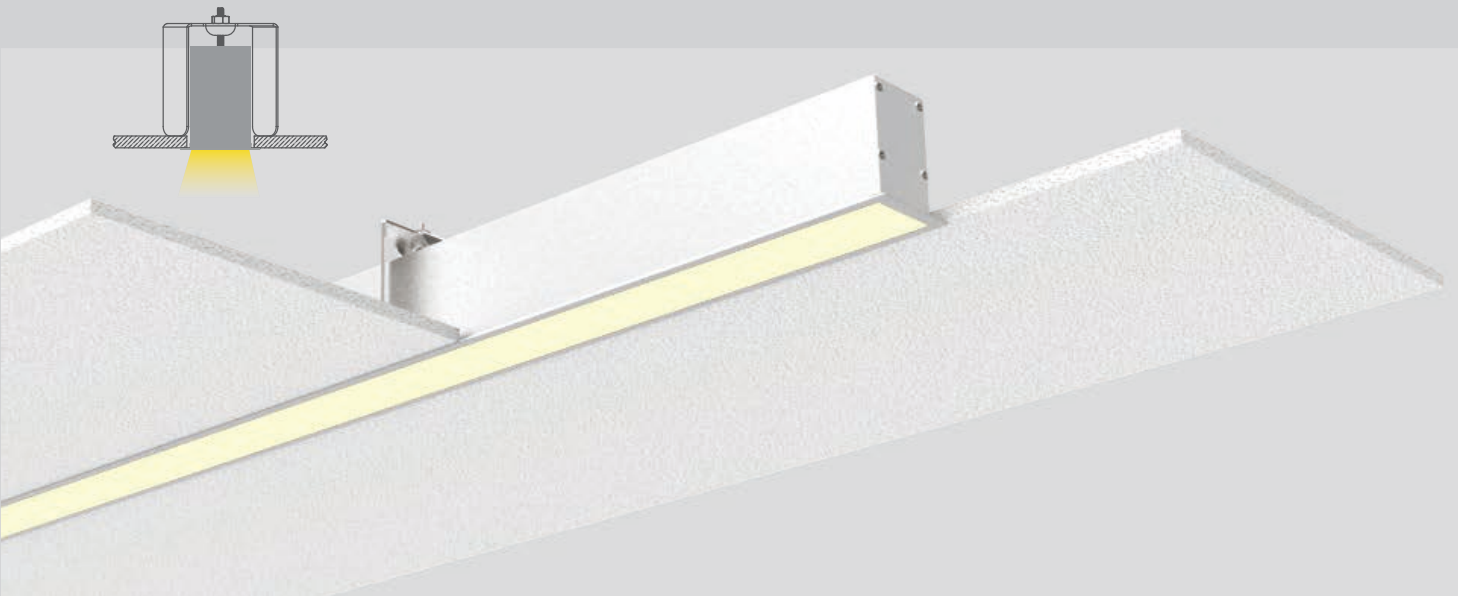


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-AGF	Textured Black Textured White Silver Anodized	Anti-Glare Lens Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1- 15.0W	3000K	85lm/W	1- 80+ (1310lm) 1- 90+ (1180lm)	Trimed Recessed	DALI 0-10V On/off
	2- 27.0W	4000K		2- 80+ (2360lm) 2- 90+ (2120lm)		
	3- 35.0W	2700~4000K		3- 80+ (3060lm) 3- 90+ (2750lm)		
			105lm/W	1- 80+ (1620lm) 1- 90+ (1460lm)		
				2- 80+ (2920lm) 2- 90+ (2620lm)		
				3- 80+ (3780lm) 3- 90+ (3400lm)		
			123lm/W	1- 80+ (1900lm) 1- 90+ (1710lm)		
				2- 80+ (3420lm) 2- 90+ (3070lm)		
				3- 80+ (4430lm) 3- 90+ (3990lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1529xW70xH85mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Trimed Recessed	DALI 0-10V On/off
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)		
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)		
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)		
				2- 80+ (3890lm) 2- 90+ (3500lm)		
				3- 80+ (4860lm) 3- 90+ (4480lm)		
			123lm/W	1- 80+ (3420lm) 1- 90+ (3070lm)		
				2- 80+ (4560lm) 2- 90+ (4100lm)		
				3- 80+ (5700lm) 3- 90+ (5130lm)		


DIMENSION

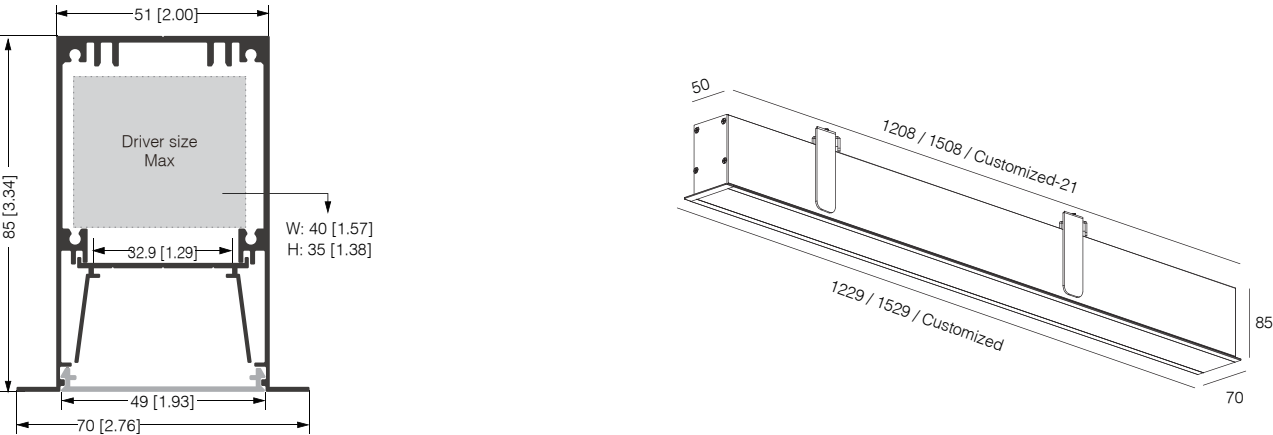


ACCESSORIES



LENS

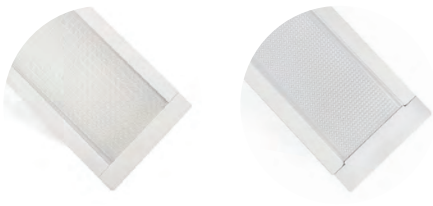

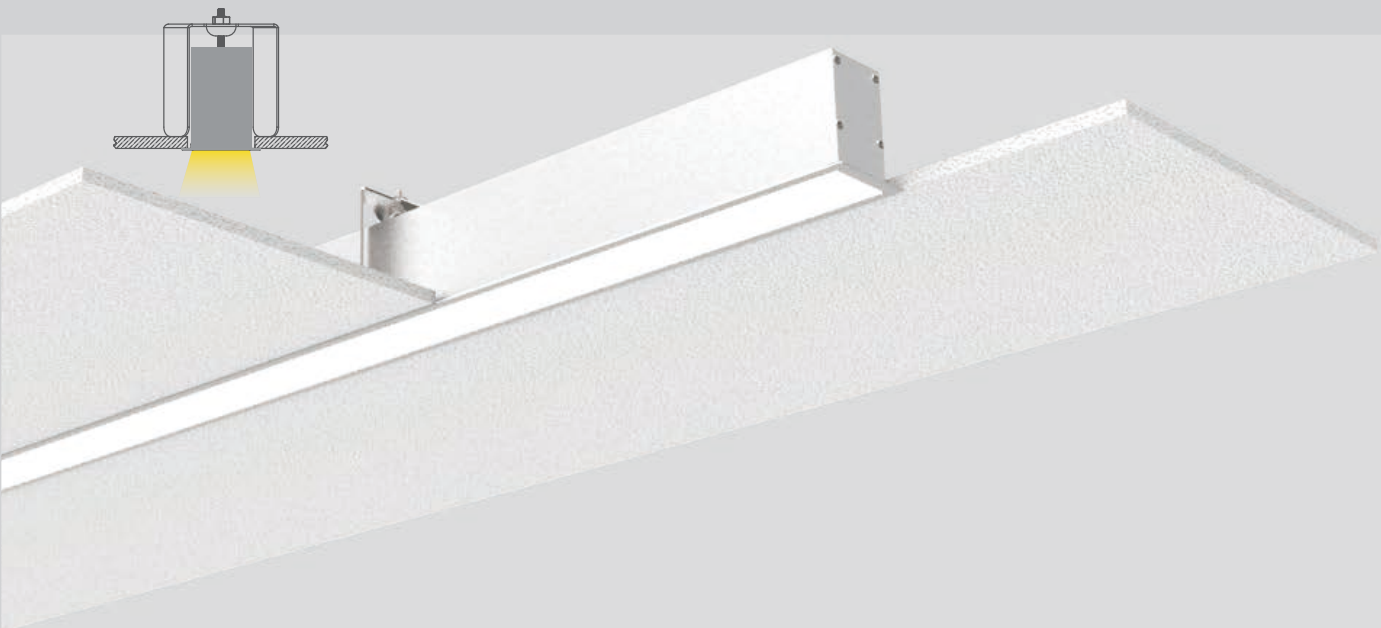



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1- 15.0W	3000K	90lm/W	1- 80+ (1390lm) 1- 90+ (1250lm)	Trimed Recessed	DALI 0-10V On/off
	2- 27.0W	4000K		2- 80+ (2500lm) 2- 90+ (2250lm)		
	3- 35.0W	2700~4000K		3- 80+ (3240lm) 3- 90+ (2920lm)		
				1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
			110lm/W	1- 80+ (2000lm) 1- 90+ (1800lm)		
				2- 80+ (3610lm) 2- 90+ (3250lm)		
				3- 80+ (4680lm) 3- 90+ (4210lm)		
			130lm/W			

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1- 27.0W	3000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Trimed Recessed	DALI 0-10V On/off
	2- 36.0W	4000K		2- 80+ (3330lm) 2- 90+ (3000lm)		
	3- 45.0W	2700~4000K		3- 80+ (4170lm) 3- 90+ (3750lm)		
				1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			110lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		

DIMENSION

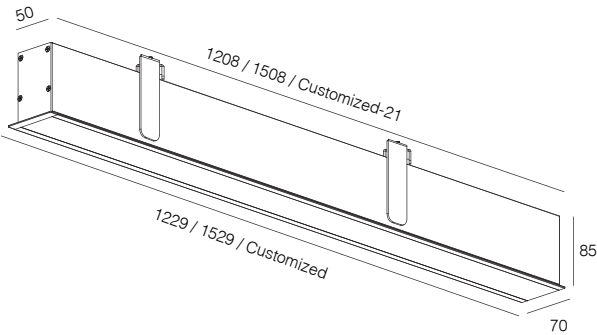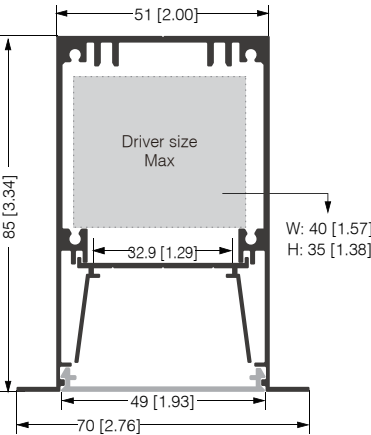

ACCESSORIES



LENS








SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-LT	Textured Black Textured White Silver Anodized	Nickle Louver lens	12° 24° 38° 50° 35×70° 50×50°	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW70xH85mm	1.1- 3sets	1- 25.0W	3000K	1.1- 92lm/W	1.1- 80+ (2360lm) 1.1- 90+ (2130lm)	Trimed Recessed	DALI
	1.2- 6sets	2- 36.0W	4000K	1.1- 95lm/W 1.2- 101lm/W 1.2- 105lm/W	1.1- 80+ (2440lm) 1.1- 90+ (2200lm) 1.2- 80+ (3740lm) 1.2- 90+ (3370lm) 1.2- 80+ (3890lm) 1.2- 90+ (3500lm)		0-10V On/off
2- L 1529xW70xH85mm	2.1- 4sets	1- 31.0W	3000K	1.1- 92lm/W	1.1- 80+ (2930lm) 1.1- 90+ (2640lm)	Trimed Recessed	DALI
	2.2- 8sets	2- 45.0W	4000K	1.1- 95lm/W 1.2- 101lm/W 1.2- 105lm/W	1.1- 80+ (3030lm) 1.1- 90+ (2730lm) 1.2- 80+ (4680lm) 1.2- 90+ (4210lm) 1.2- 80+ (4860lm) 1.2- 90+ (4380lm)		0-10V On/off

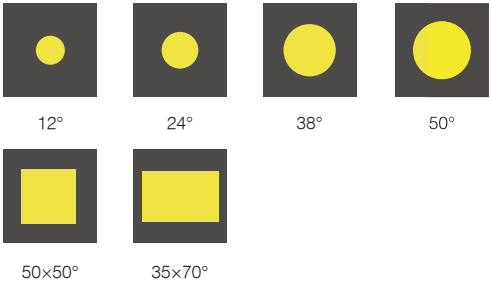

DIMENSION

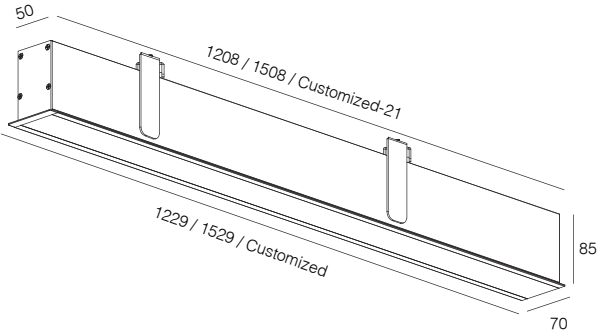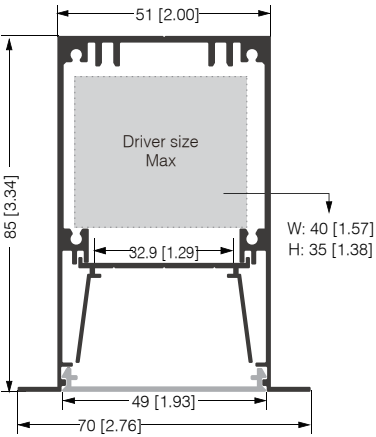

ACCESSORIES





Aircraft Cable Pendant Kit



Ceiling Mounted Kit



Wall Mounted Kit

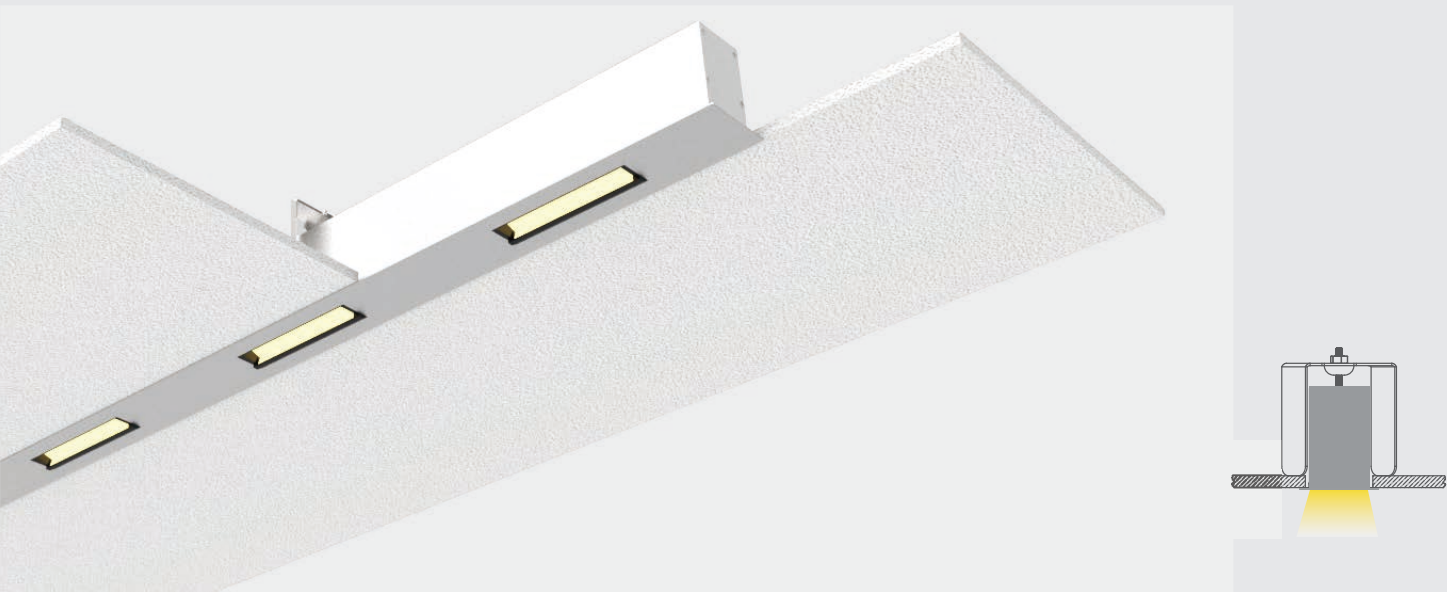



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7085-WW	Textured Black Textured White Silver Anodized	Louver lens	Wall Washer	<19	IP22 IK06	CREE	3-Step MacAdam	220V-240VAC

DIMENSION	MODUAL	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW50xH85mm	1.1- 3sets	1.1- 25.0W	3000K	1- 60lm/W	1.1- 80+ (1540lm) 1.1- 90+ (1390lm)	Trimed Recessed	DALI
	1.2- 6sets	1.2- 36.0W	4000K	2- 66lm/W	1.2- 80+ (2440lm) 1.2- 90+ (2200lm)		0-10V On/off
2- L 1529xW50xH85mm	2.1- 4sets	2.1- 31.0W	3000K	2.1- 60lm/W	2.1- 80+ (1910lm) 2.1- 90+ (1720lm)	Trimed Recessed	DALI
	2.2- 8sets	2.2- 45.0W	4000K	2.2- 66lm/W	2.2- 80+ (3050lm) 2.2- 90+ (2750lm)		0-10V On/off




DIMENSION

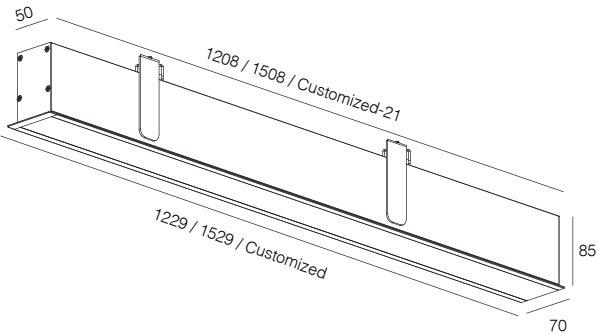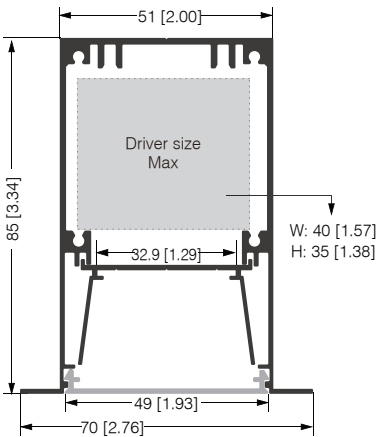


ACCESSORIES



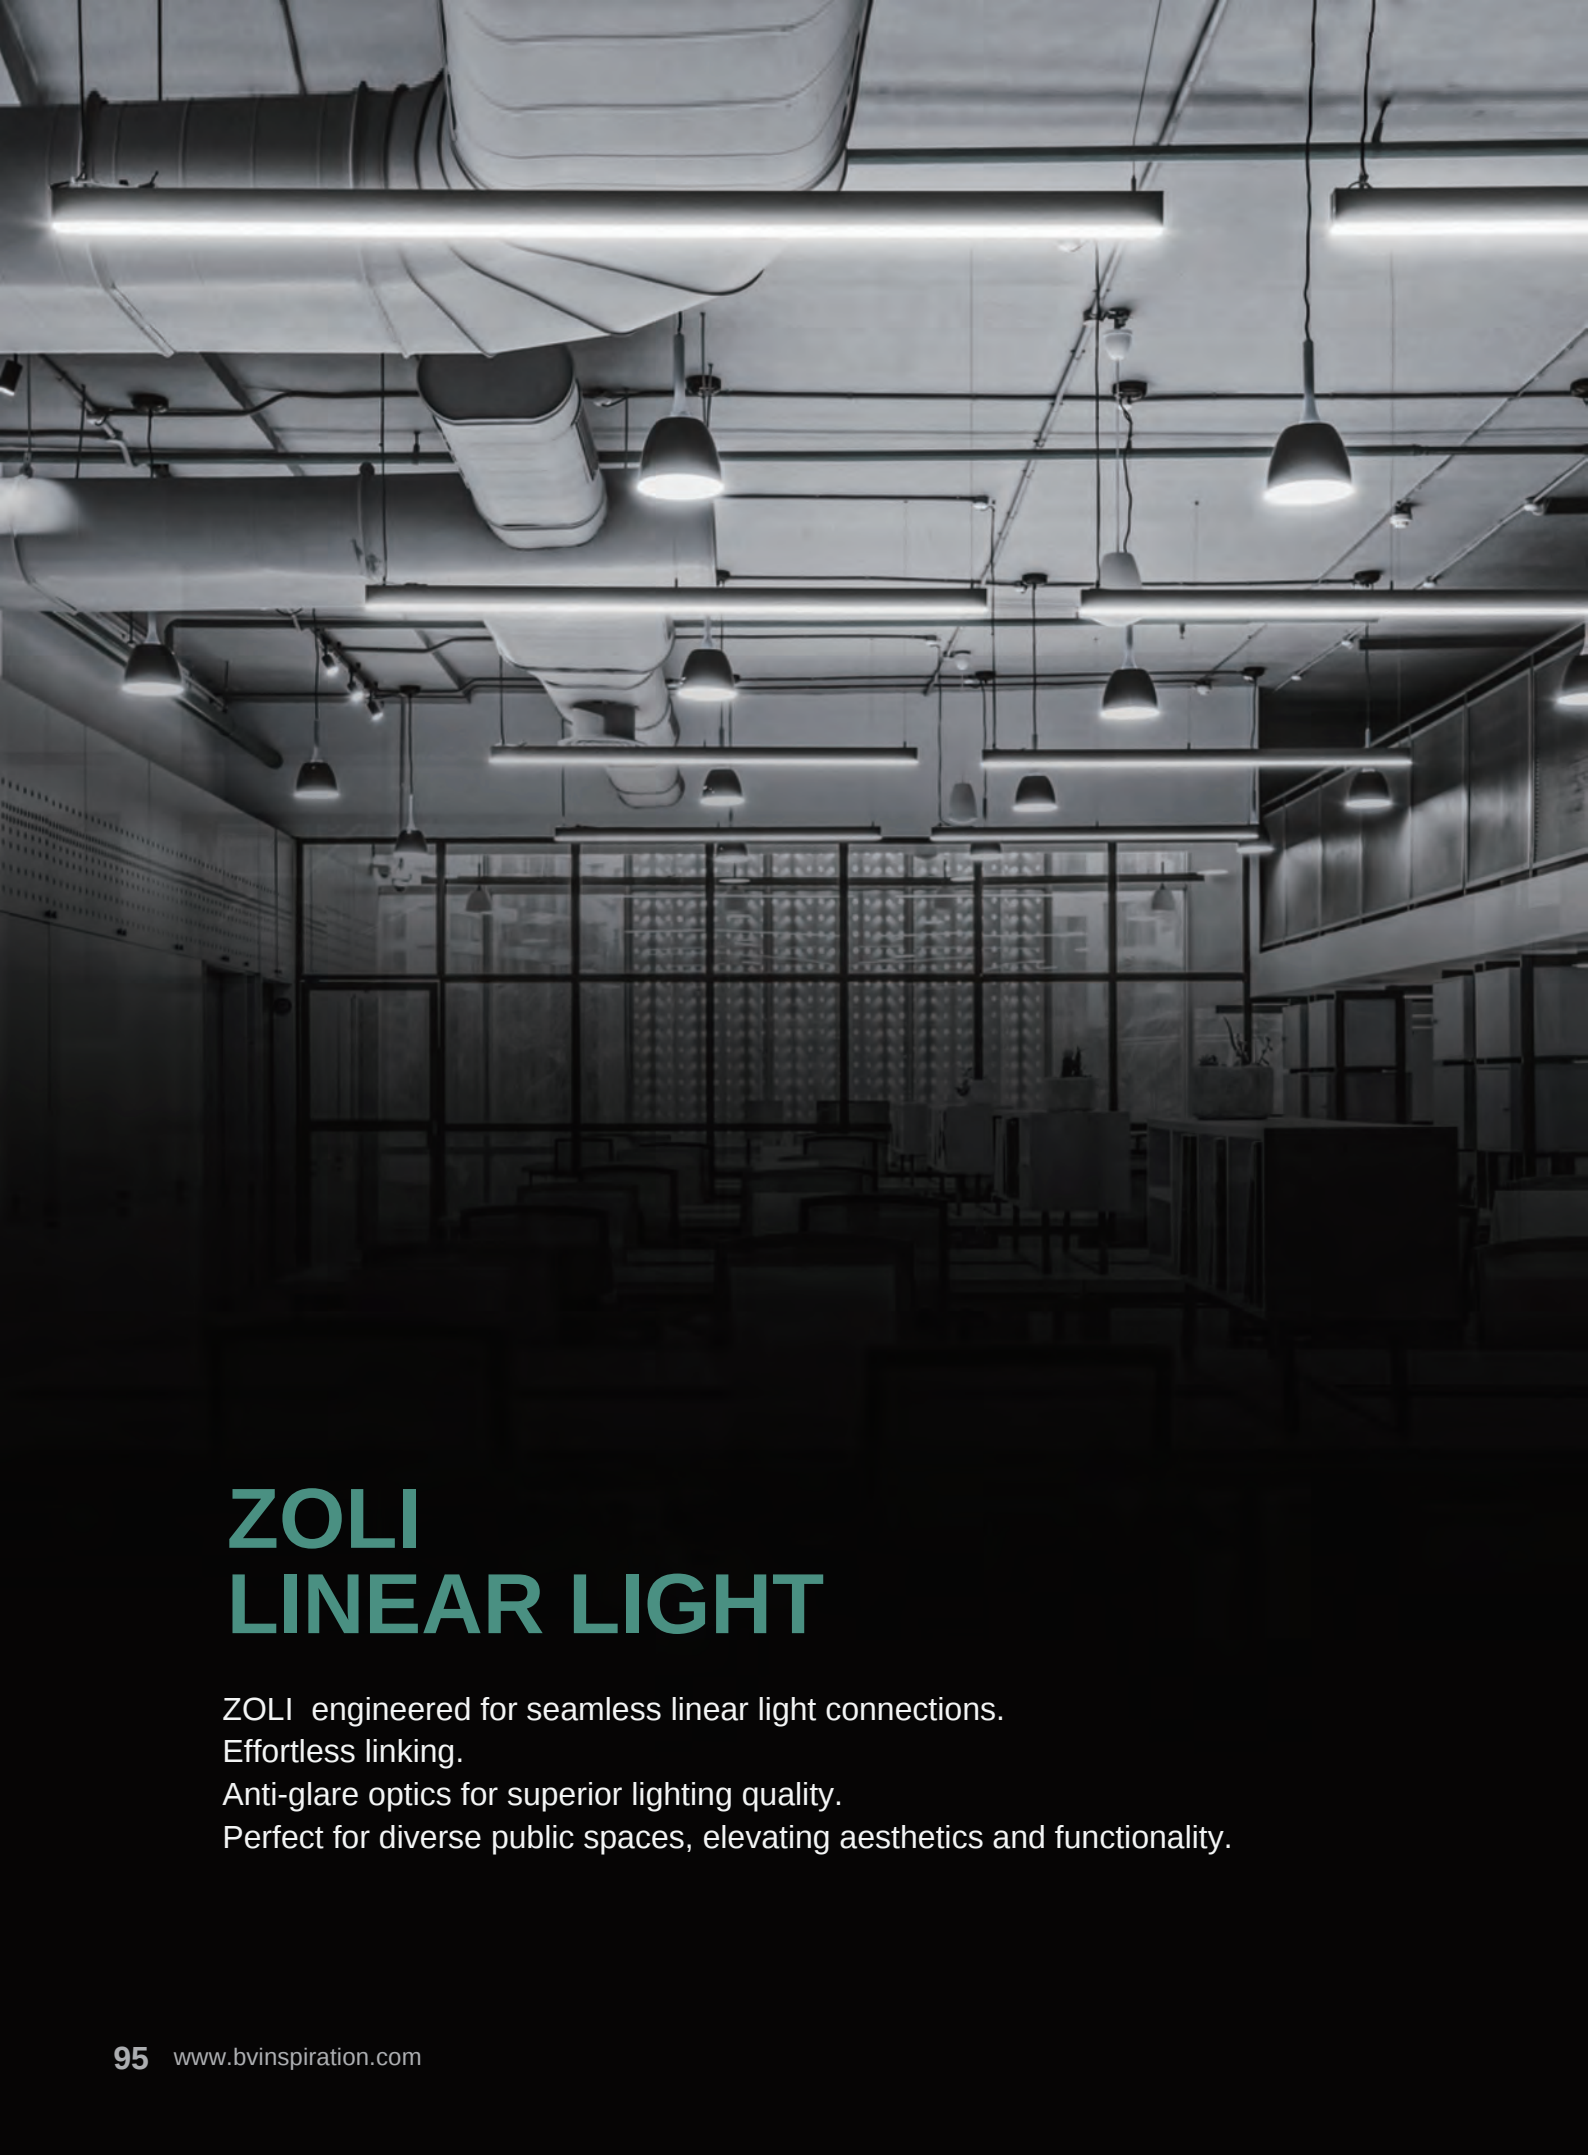

ZOLI LINEAR LIGHT

ZOLI engineered for seamless linear light connections.
Effortless linking.
Anti-glare optics for superior lighting quality.
Perfect for diverse public spaces, elevating aesthetics and functionality.

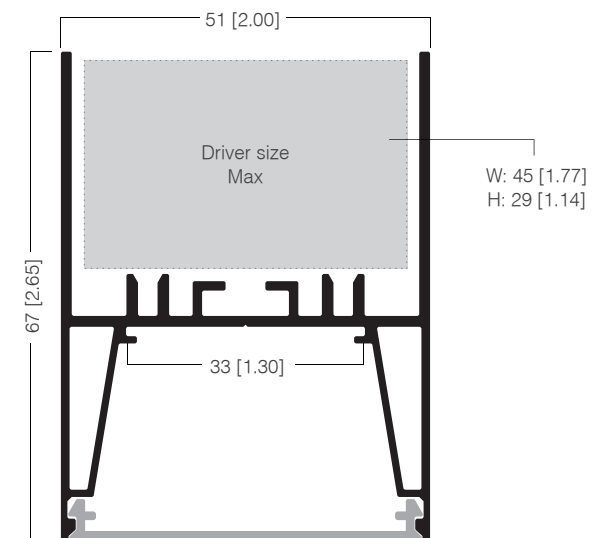


Unit:mm[in]

DIMENSIONS




U516833


Pendant Installation

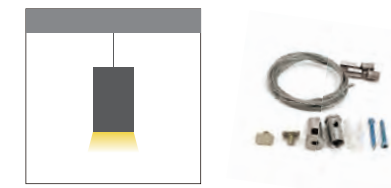

ANGULAR MODULE

U5168 provides versatile angular module choices and a field-friendly, labor-efficient joining solution.

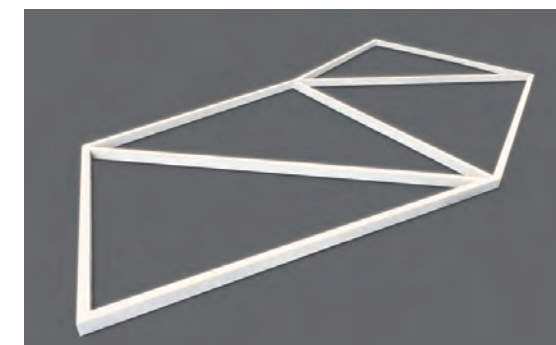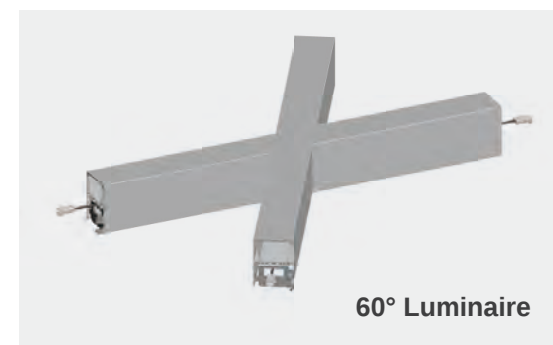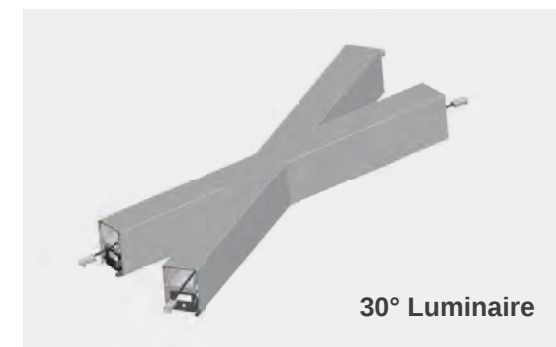

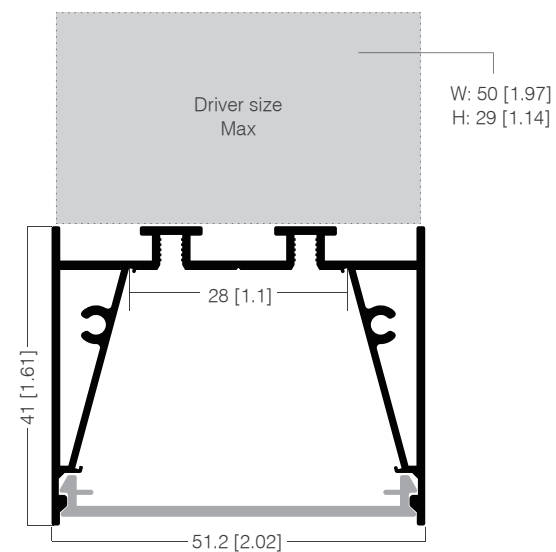

U514128

Surface Installation
(Pendant, Surface Mounted)




Flush Lens



Prismatic lens available for
anti-glaring lighting requirements.



General PC lens
with high transmission.

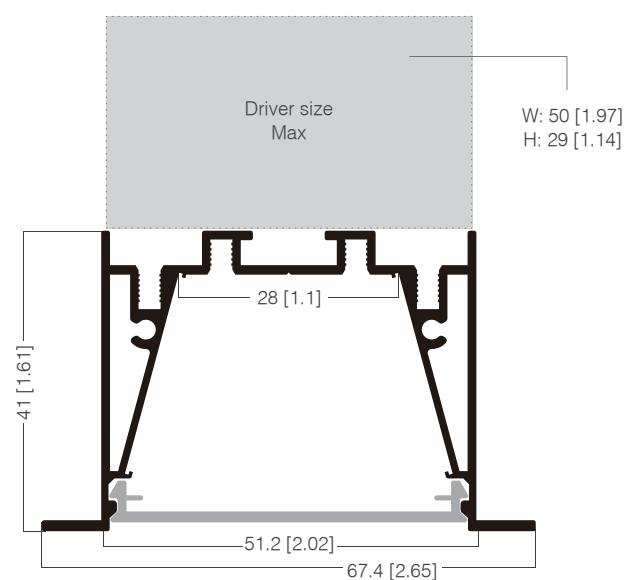

U674128

Trimmed Recessed
Installation



Unit:mm[in]




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5168-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH68mm	1- 15.0W	3000K	85lm/W	1- 80+ (1310lm) 1- 90+ (1180lm)	Aircraft cable pendant	DALI 0-10V On/off
	2- 27.0W	4000K		2- 80+ (2360lm) 2- 90+ (2120lm)		
	3- 35.0W	2700~4000K		3- 80+ (3060lm) 3- 90+ (2750lm)		
			105lm/W	1- 80+ (1620lm) 1- 90+ (1460lm)		
				2- 80+ (2920lm) 2- 90+ (2620lm)		
				3- 80+ (3780lm) 3- 90+ (3400lm)		
			123lm/W	1- 80+ (1900lm) 1- 90+ (1710lm)		
				2- 80+ (3420lm) 2- 90+ (3070lm)		
				3- 80+ (4430lm) 3- 90+ (3990lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Aircraft cable pendant	DALI 0-10V On/off
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)		
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)		
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)		
				2- 80+ (3890lm) 2- 90+ (3500lm)		
				3- 80+ (4860lm) 3- 90+ (4480lm)		
			123lm/W	1- 80+ (3420lm) 1- 90+ (3070lm)		
				2- 80+ (4560lm) 2- 90+ (4100lm)		
				3- 80+ (5700lm) 3- 90+ (5130lm)		


DIMENSION

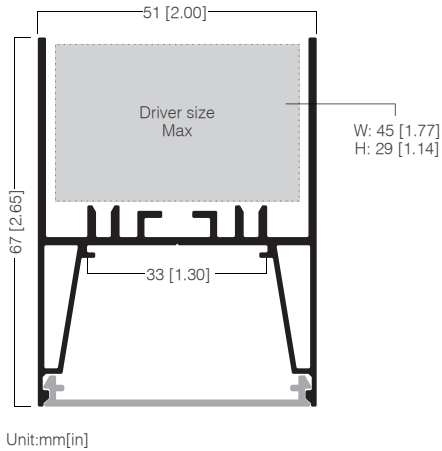


ACCESSORIES




Aircraft Cable Pendant Kit

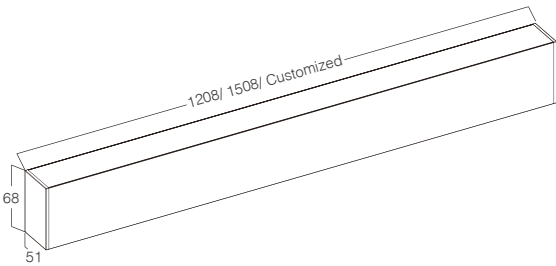

PRISMATIC LENS






SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5168-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH68mm	1- 15.0W 2- 27.0W 3- 35.0W	3000K 4000K 2700~4000K	90lm/W	1- 80+ (1390lm) 1- 90+ (1250lm)	Aircraft cable pendant	DALI 0-10V On/off
				2- 80+ (2500lm) 2- 90+ (2250lm)		
				3- 80+ (3240lm) 3- 90+ (2920lm)		
			110lm/W	1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
			130lm/W	1- 80+ (2000lm) 1- 90+ (1800lm)		
				2- 80+ (3610lm) 2- 90+ (3250lm)		
				3- 80+ (4680lm) 3- 90+ (4210lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Aircraft cable pendant	DALI 0-10V On/off
				2- 80+ (3330lm) 2- 90+ (3000lm)		
				3- 80+ (4170lm) 3- 90+ (3750lm)		
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		

DIMENSION

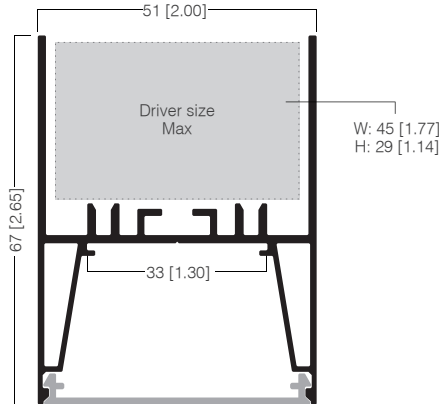

Unit:mm[in]

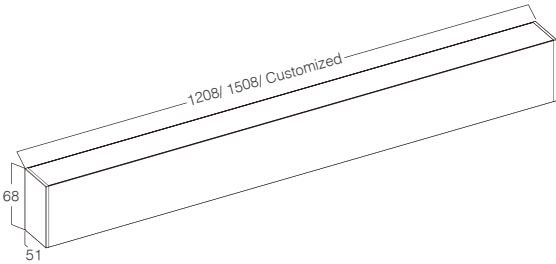



ACCESSORIES



Aircraft Cable Pendant Kit

PC DIFFUSER LENS

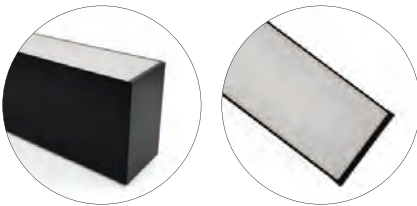





SPECIFICATION

Table with 9 columns: LUMINAIRE, FIXTURE FINISH, LENS, BEAM ANGLE, UGR, IP/IK GRADE, LED, COLOR QUALITY, VOLTAGE. It lists specifications for the U5141-PM model, including finish options (Textured Black, Textured White, Silver Anodized), beam angle (85Deg), UGR (<22), IP22 IK06 rating, 2835 SMD LEDs, 3-Step MacAdam color quality, and 220V-240VAC voltage.

Table with 7 columns: DIMENSION, POWER, COLOR TEMP, EFFICIENCY, CRI+LUMEN, INSTALL ACCS., CONTROL OPTOINS. It provides detailed specifications for the 1- L 1208xW51xH41mm model, including power options (15.0W to 35.0W), color temperatures (3000K, 4000K, 2700~4000K), efficiencies (85lm/W, 105lm/W, 123lm/W), and various installation and control options.

Table with 7 columns: DIMENSION, POWER, COLOR TEMP, EFFICIENCY, CRI+LUMEN, INSTALL ACCS., CONTROL OPTOINS. This table provides comprehensive specifications for the 1- L 1508xW51xH68mm model, detailing power ranges, color temperature options, efficiency levels, and installation/control configurations.


DIMENSION

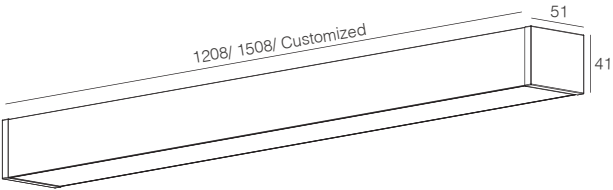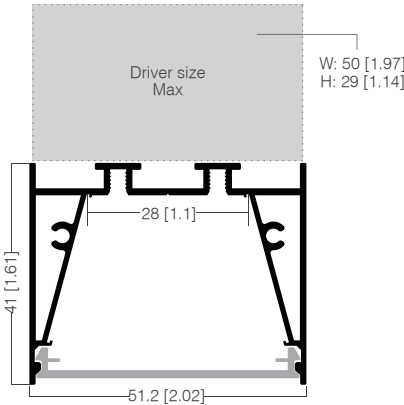


ACCESSORIES



PRISMATIC LENS

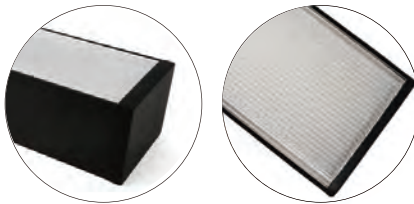

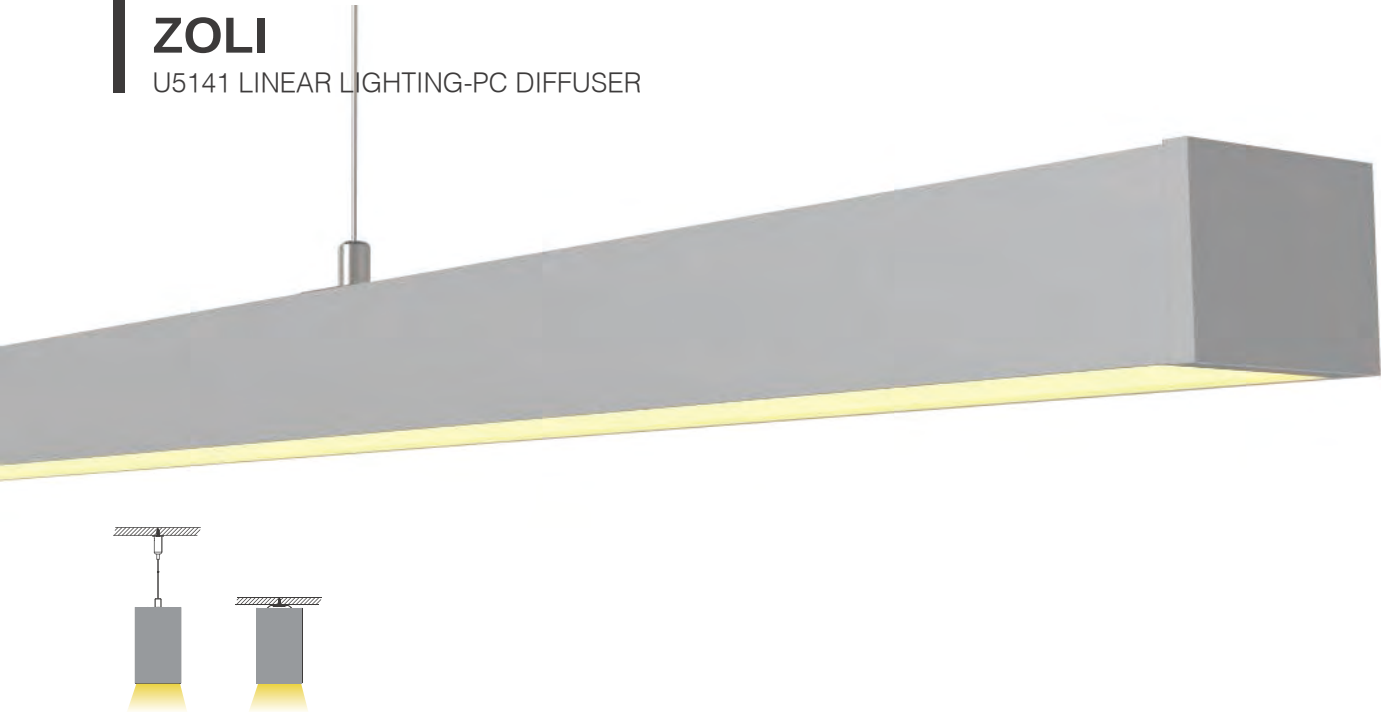



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U5141-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW51xH68mm	1- 15.0W 2- 27.0W 3- 35.0W	3000K 4000K 2700~4000K	90lm/W	1- 80+ (1390lm) 1- 90+ (1250lm)	Aircraft cable pendant	DALI
				2- 80+ (2500lm) 2- 90+ (2250lm)	Ceiling Mounted	0-10V
				3- 80+ (3240lm) 3- 90+ (2920lm)		On/off
			110lm/W	1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
			130lm/W	1- 80+ (2000lm) 1- 90+ (1800lm)		
				2- 80+ (3610lm) 2- 90+ (3250lm)		
				3- 80+ (4680lm) 3- 90+ (4210lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1508xW51xH68mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K 4000K 2700~4000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
				2- 80+ (3330lm) 2- 90+ (3000lm)		
				3- 80+ (4170lm) 3- 90+ (3750lm)		
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		


DIMENSION

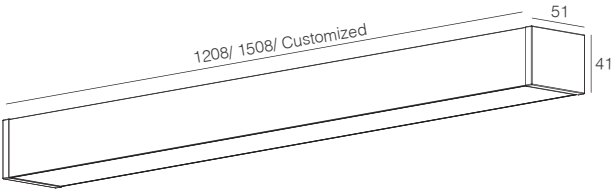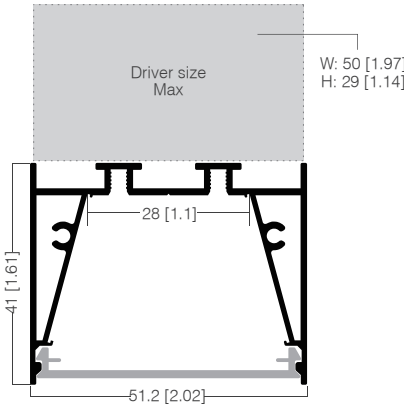


ACCESSORIES



PC DIFFUSER LENS

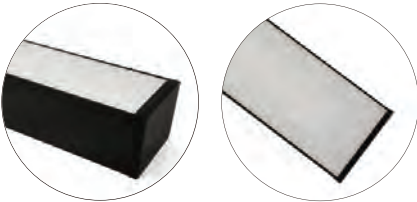

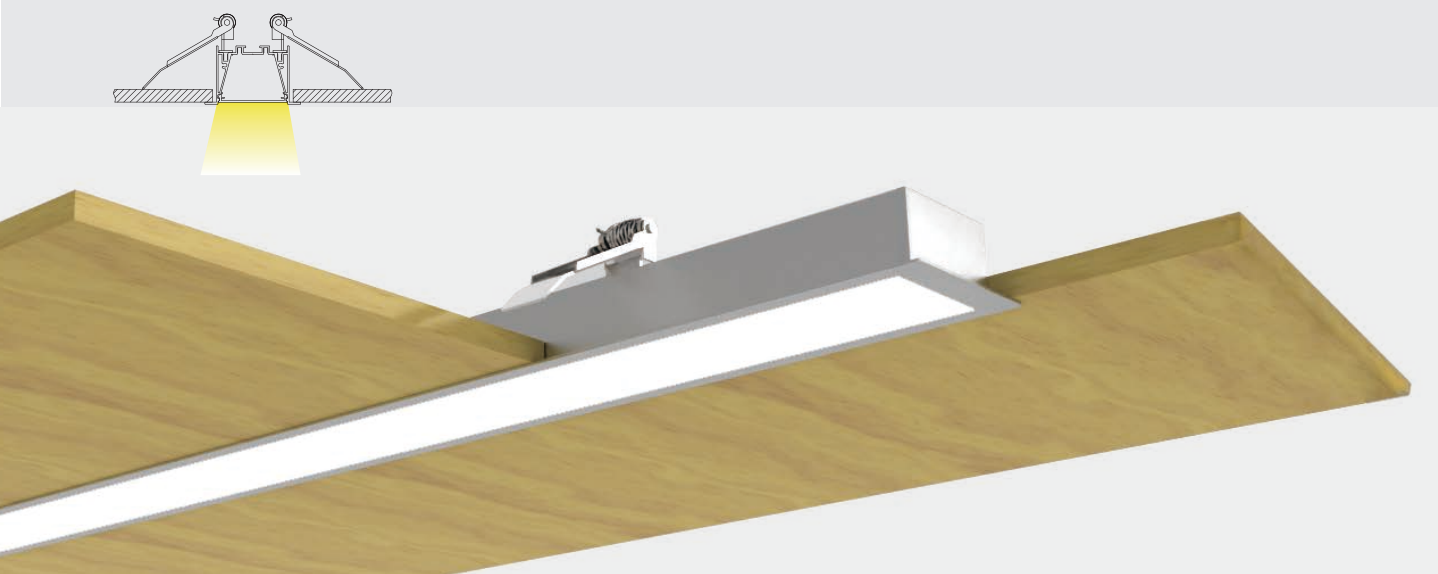


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U6741-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW67xH41mm	1- 15.0W	3000K	85lm/W	1- 80+ (1310lm) 1- 90+ (1180lm)	Trimed Recessed	DALI 0-10V On/off
	2- 27.0W	4000K		2- 80+ (2360lm) 2- 90+ (2120lm)		
	3- 35.0W	2700~4000K		3- 80+ (3060lm) 3- 90+ (2750lm)		
			105lm/W	1- 80+ (1620lm) 1- 90+ (1460lm)		
				2- 80+ (2920lm) 2- 90+ (2620lm)		
				3- 80+ (3780lm) 3- 90+ (3400lm)		
			123lm/W	1- 80+ (1900lm) 1- 90+ (1710lm)		
				2- 80+ (3420lm) 2- 90+ (3070lm)		
				3- 80+ (4430lm) 3- 90+ (3990lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1522xW67xH41mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Trimed Recessed	DALI 0-10V On/off
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)		
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)		
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)		
				2- 80+ (3890lm) 2- 90+ (3500lm)		
				3- 80+ (4860lm) 3- 90+ (4480lm)		
			123lm/W	1- 80+ (3420lm) 1- 90+ (3070lm)		
				2- 80+ (4560lm) 2- 90+ (4100lm)		
				3- 80+ (5700lm) 3- 90+ (5130lm)		

DIMENSION

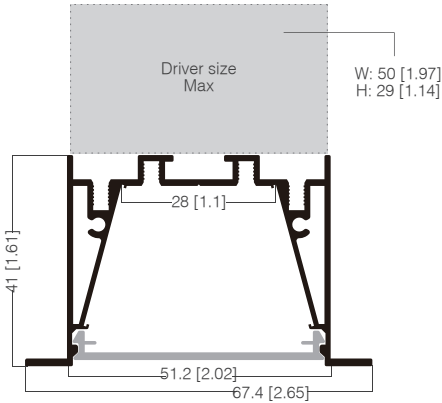

Unit:mm[in]

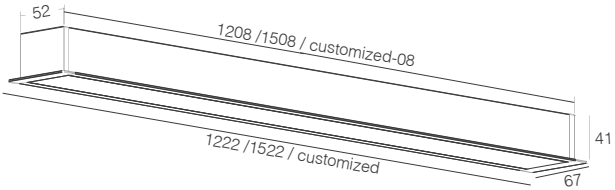




ACCESSORIES



Trimed Recessed Kit

PRISMATIC LENS

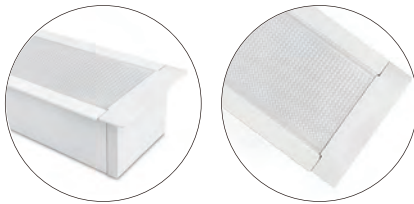

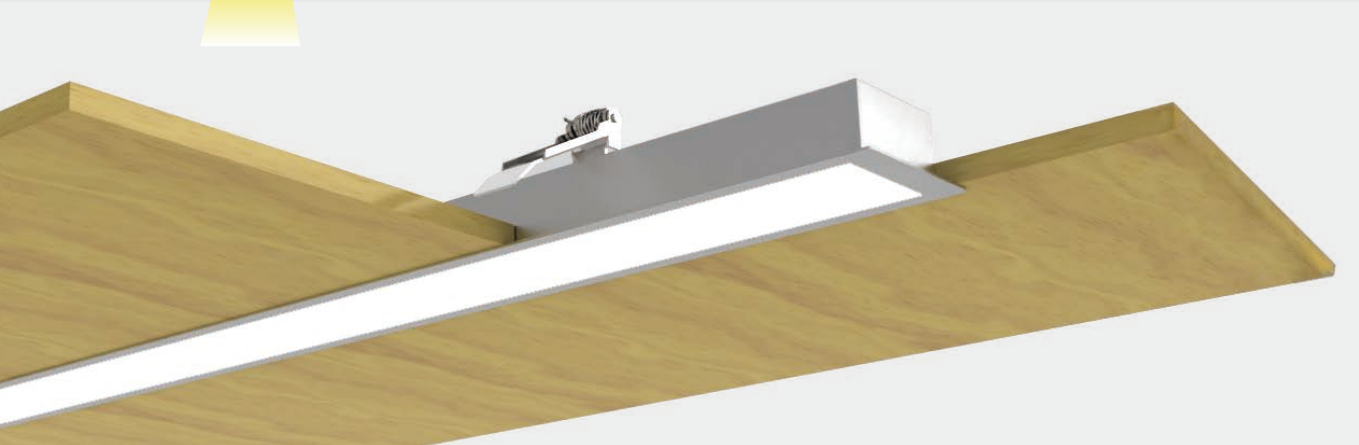


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U6741-PC	Textured Black Textured White Silver Anodized	PC Diffuser Lens	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1222xW67xH41mm	1- 15.0W 2- 27.0W 3- 35.0W	3000K	90lm/W	1- 80+ (1390lm) 1- 90+ (1250lm)	Trimed Recessed	DALI 0-10V On/off
		4000K		2- 80+ (2500lm) 2- 90+ (2250lm)		
		2700~4000K		3- 80+ (3240lm) 3- 90+ (2920lm)		
				1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
			110lm/W	1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
				1- 80+ (1700lm) 1- 90+ (1530lm)		
				2- 80+ (3050lm) 2- 90+ (2750lm)		
				3- 80+ (3960lm) 3- 90+ (3560lm)		
			130lm/W	1- 80+ (2000lm) 1- 90+ (1800lm)		
				2- 80+ (3610lm) 2- 90+ (3250lm)		
				3- 80+ (4680lm) 3- 90+ (4210lm)		
				1- 80+ (2000lm) 1- 90+ (1800lm)		
				2- 80+ (3610lm) 2- 90+ (3250lm)		
				3- 80+ (4680lm) 3- 90+ (4210lm)		

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1522xW67xH41mm	1- 27.0W 2- 36.0W 3- 45.0W	3000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Trimed Recessed	DALI 0-10V On/off
		4000K		2- 80+ (3330lm) 2- 90+ (3000lm)		
		2700~4000K		3- 80+ (4170lm) 3- 90+ (3750lm)		
				1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
				1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		
				1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		

DIMENSION

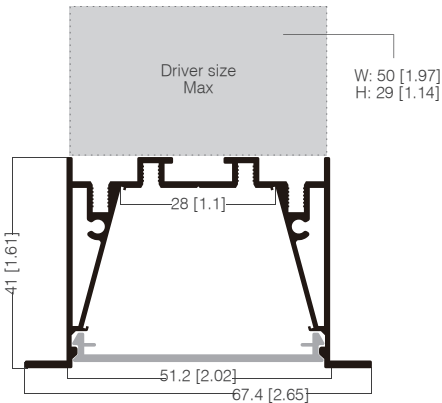

Unit:mm[in]

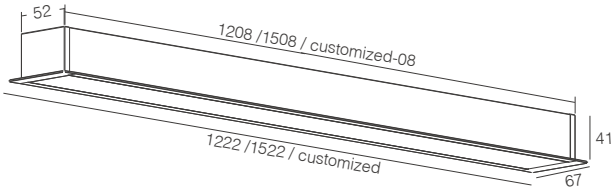



ACCESSORIES



Trimed Recessed Kit


PC DIFFUSER LENS

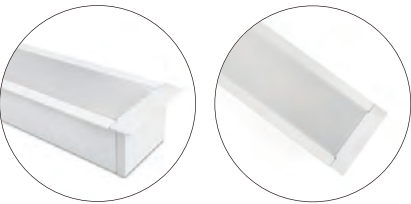



U353728

Pendant Installation

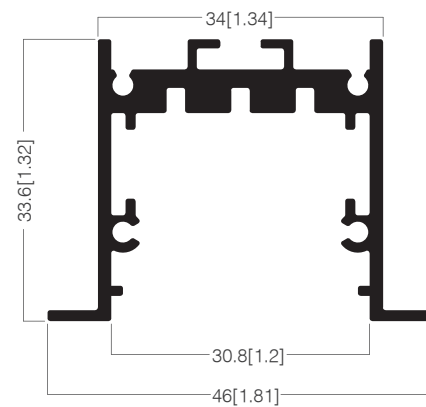

Unit:mm[in]



U463328

Trimmed Recessed Installation



MULTIPLE OPTIC OPTIONS


Crystal Louver




Cone Louver



TIR Lens

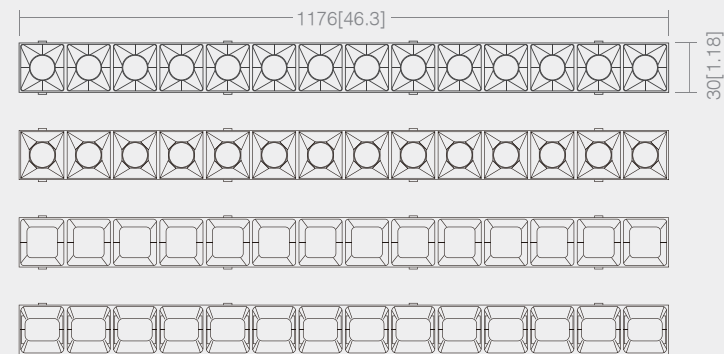

Wall Washer

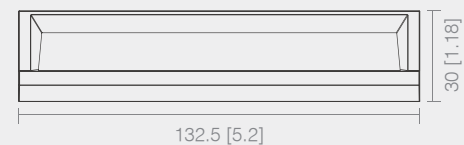



SPECIFICATIONS

Finish 	Lens Multiple OPTIC options	Installations Aircraft cable pendant , Trimed recessed
Width / Hight 35mm×37mm , 46mm×33mm		Length 1208mm , 1508mm Customized
Efficacy 90lm/W		Power 25W/pc , 33W/pc , 50W/pc
Color Quality 3-step MacAdam , 5-step MacAdam		CRI 80+ , 90+
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC
		Control DALI , 0-10V , On/off
LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD		IP / IK Grade IP22 / IK06

1. Blueview's standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U3536	Textured Black Textured White Silver Anodized	Crystal Louver Cone Louver TIR Lens Wall Washer	24° 38° 50° 35x75° 50x50°	<16	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	OPTICAL	ANGLE	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1208xW35xH37mm 2- L 1508xW35xH37mm	Crystal Louver	24° 38°	1- 25.0W 2- 31.0W	3000K 4000K	90lm/W	1- 80+ / 90+ (2025-2250lm) 2- 80+ / 90+ (2511-2790lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off

1- L 1208xW35xH36mm 2- L 1508xW35xH36mm	Cone Louver	24° 38°	1- 25.0W 2- 31.0W	3000K 4000K	90lm/W	1- 80+ / 90+ (2025-2250lm) 2- 80+ / 90+ (2511-2790lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
--	-------------	------------	----------------------	----------------	--------	--	---	-------------------------

1- L 1208xW35xH36mm	TIR Lenss	35x75° 50x50° Dimond 50° 50°	1- 25.0W 4000K	3000K 4000K	90lm/W	1- 80+ / 90+ (2025-2250lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
---------------------	-----------	---------------------------------------	-------------------	----------------	--------	----------------------------	---	-------------------------

1- L 1208xW35xH36mm 2- L 1508xW35xH36mm	Wall Washer	Wall Washer	1- 25.0W 2- 31.0W	3000K 4000K	90lm/W	1- 80+ / 90+ (2025-2250lm) 2- 80+ / 90+ (2511-2790lm)	Aircraft cable pendant Ceiling Mounted	DALI 0-10V On/off
--	-------------	-------------	----------------------	----------------	--------	--	---	-------------------------

SPECIFICATION



LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U4633	Textured Black	Crystal Louver	24°	<16	IP22 IK06	Osram	3-Step MacAdam	220V-240VAC
	Textured White	Cone Louver	38°					
	Silver Anodized	TIR Lens	50°					
		Wall Washer	35x75° 50x50°					

DIMENSION	OPTICAL	ANGLE	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1220xW46xH33mm 2- L 1520xW46xH33mm	Crystal Louver	24°	1- 25.0W	3000K	90lm/W	1- 80+ / 90+ (2025-2250lm)	Trimmed Recessed	DALI
		38°	2- 31.0W	4000K		2- 80+ / 90+ (2511-2790lm)		0-10V On/off


1- L 1220xW46xH33mm 2- L 1520xW46xH33mm	Cone Louver	24°	1- 25.0W	3000K	90lm/W	1- 80+ / 90+ (2025-2250lm)	Trimmed Recessed	DALI
		38°	2- 31.0W	4000K		2- 80+ / 90+ (2511-2790lm)		0-10V On/off

1- L 1220xW46xH33mm	TIR Lenss	35x75°	1- 25.0W	3000K	90lm/W	1- 80+ / 90+ (2025-2250lm)	Trimmed Recessed	DALI
		50x50°		4000K				0-10V
		Dimond 50°						On/off
		50°						

1- L 1220xW46xH33mm 2- L 1520xW46xH33mm	Wall Washer	Wall Washer	1- 25.0W	3000K	90lm/W	1- 80+ / 90+ (2025-2250lm)	Trimmed Recessed	DALI
			2- 31.0W	4000K		2- 80+ / 90+ (2511-2790lm)		0-10V On/off

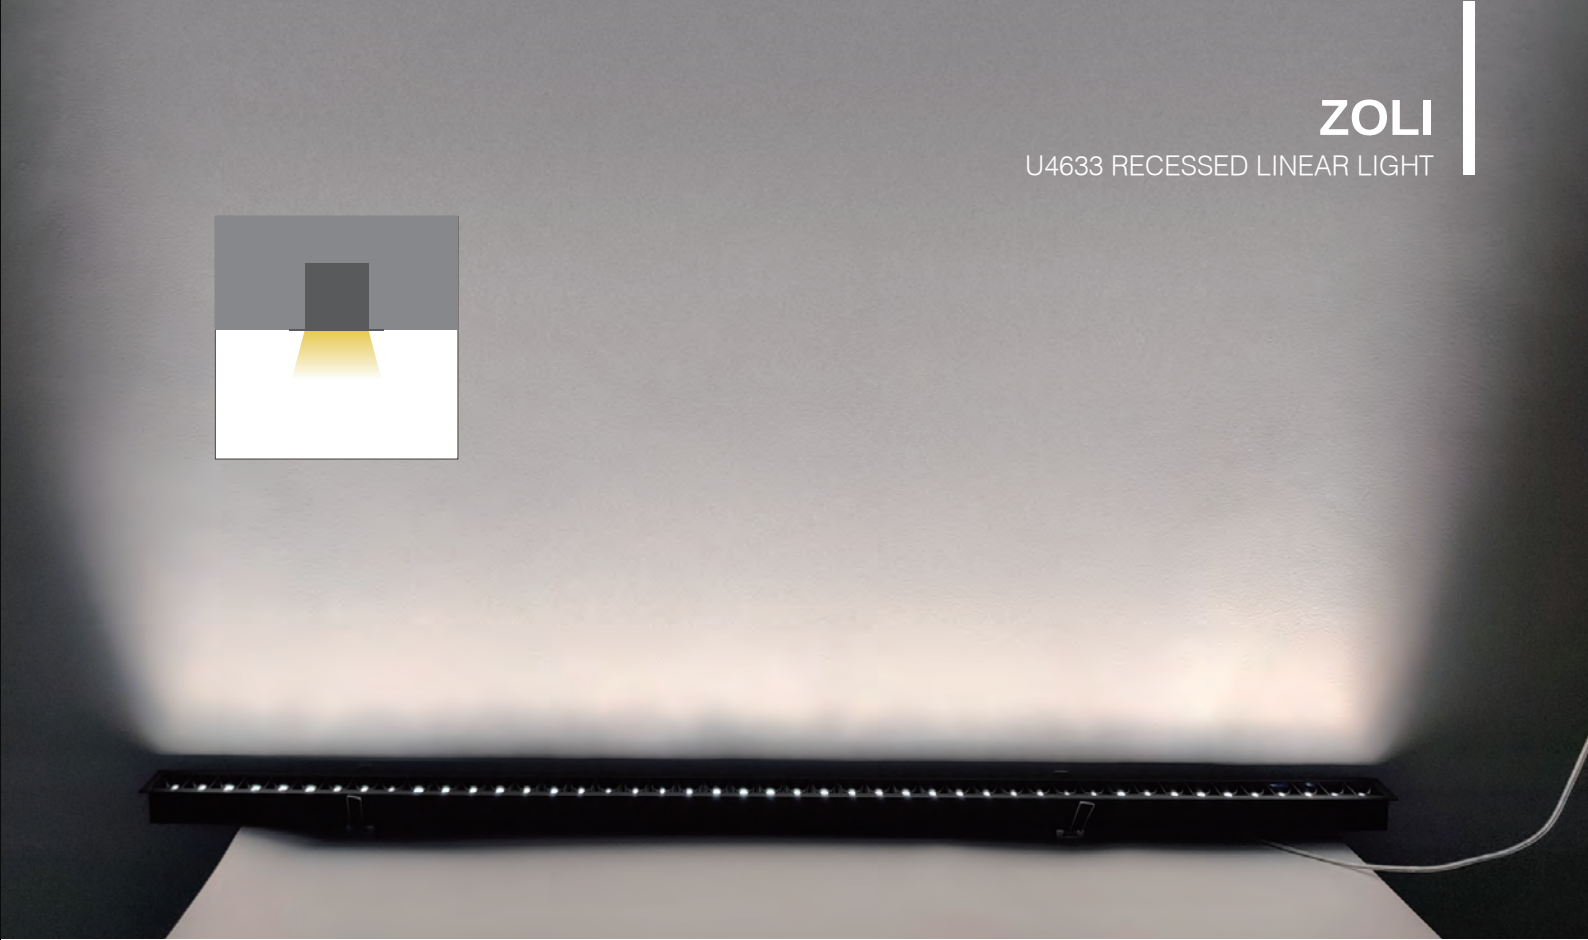


DIMENSION

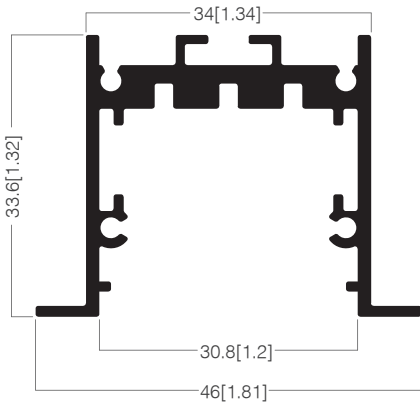

ACCESSORIES



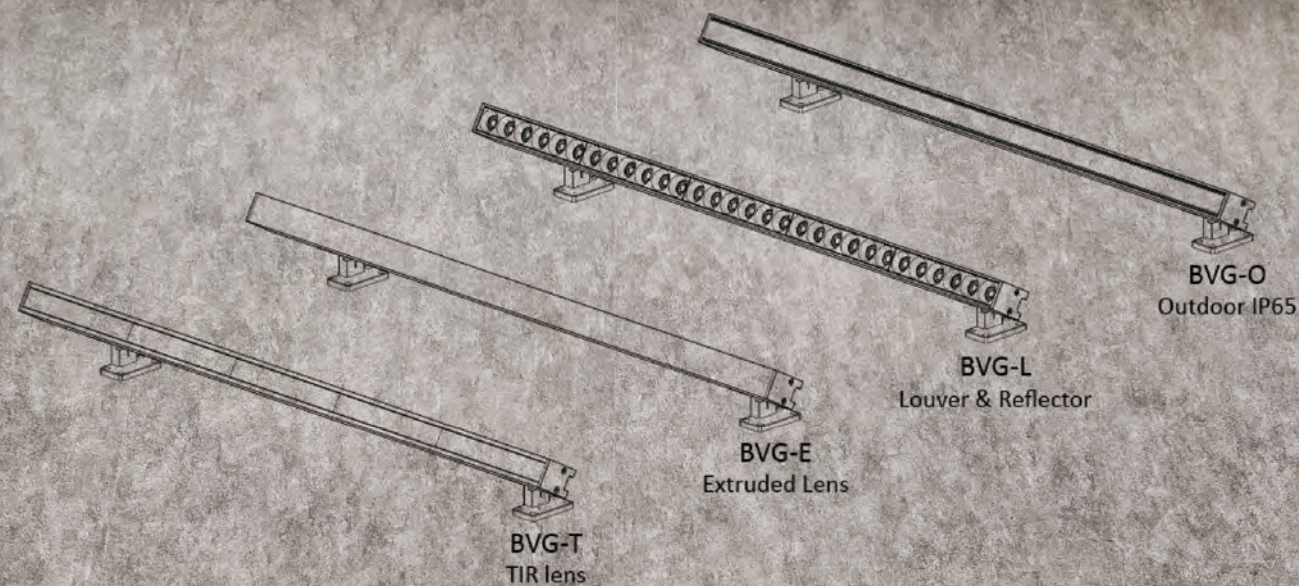

BVG Grazer Indoor / Outdoor

This versatile family is crafted to accentuate textures, from the most delicate to the boldest, making it an excellent tool for crafting captivating walls within any space.

BVG-O: Outdoor IP65-rated.

BVG-T: Interior grazer with TIR lens.


BVG-L: Featuring a louver lens.

BVG-E: Designed with an extruded lens.



GRAZER-BVG

BVG offers versatile installation options through its surface-mounted swivel bracket, catering to various applications. It features an intuitive alignment with marked angles for easy operation, allowing for swiving from -80° to 80° for precise adjustment.

Installations

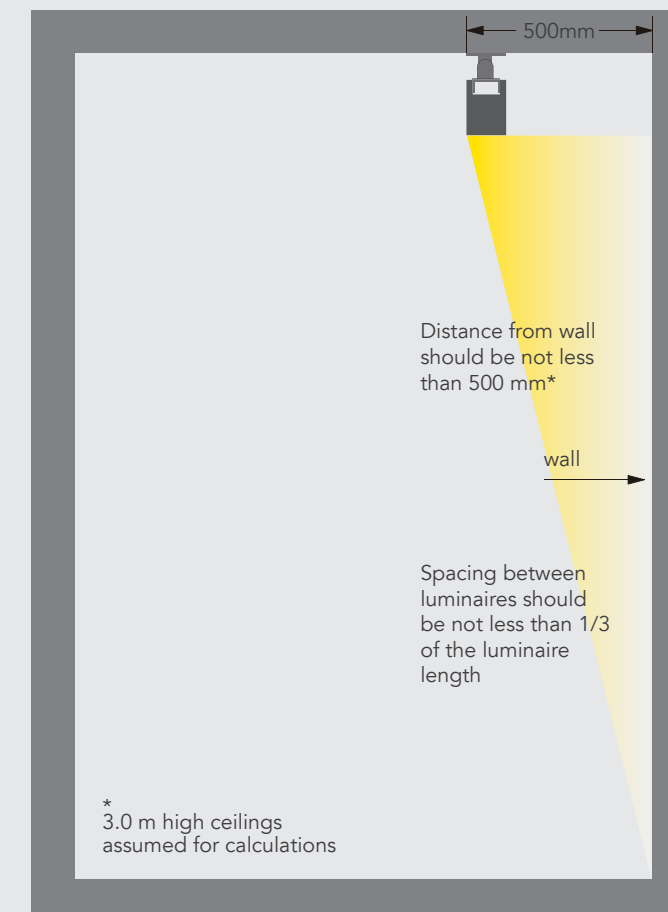

Ceiling mounted



Swivel bracket



$-80^{\circ} \sim +80^{\circ}$ adjustable

BVG-L

Reflector Louver

BVG-L is ingeniously designed for interior grazing, equipped with louver and reflector optical kits. It achieves an impressive UGR value of less than 12, ensuring reduced glare. With a variety of color options, including matte black, matte white, silver, golden, and chrome-plated louvers, it effortlessly blends aesthetics and functionality



Beam angle



Spot 25°



Flood 50°



BVG-E

Extruded Lens

BVG-E boasts an interior grazer engineering design featuring an extruded PMMA lens. Its flexibility allows for easy customization to any desired length, making it compatible with a wide range of light sources available in the market. Versatile and adaptable to your unique lighting needs

Beam angle



Double Asymmetric 25°



Asymmetric 18°




Flood 60°x110°



Flood 90°x110°




Extremely Flood 130°x110°

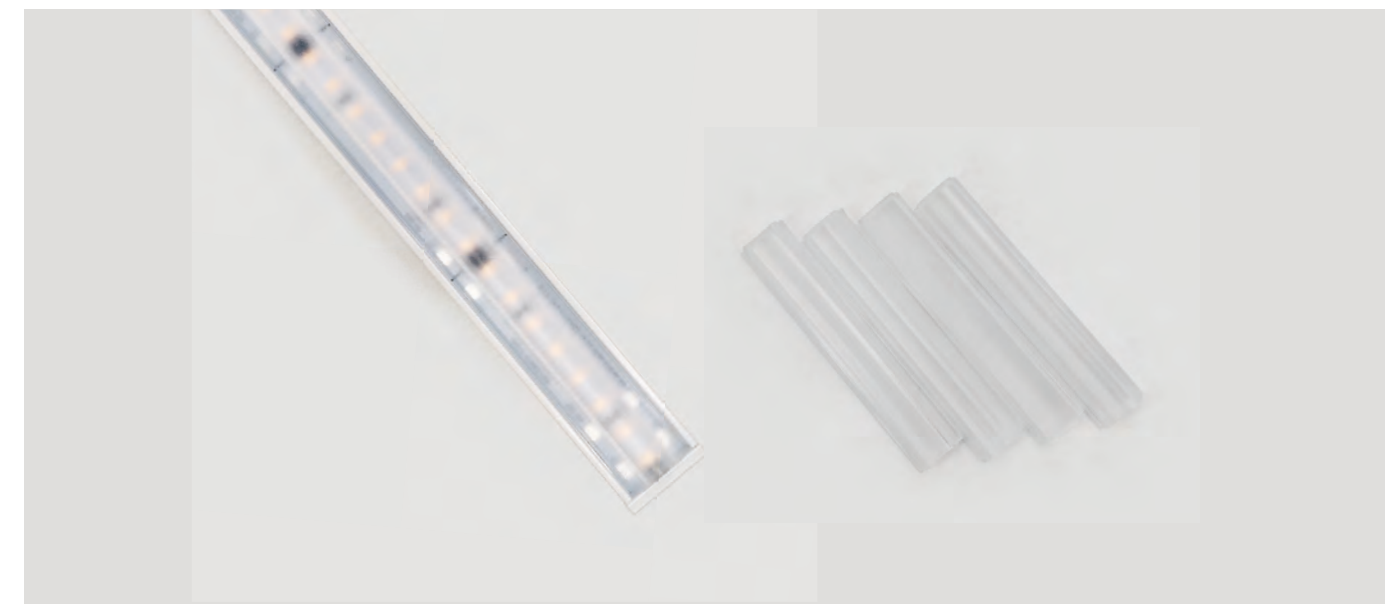


BVG-T

Precision TIR Lens

BVG-T showcases precision engineering with a selection of 12 lens options, ranging from a narrow 9° to a flood 35°x48° configuration. It delivers a precise and uniform light beam, ideal for accentuating wall textures without creating shadows or hotspots. Equipped with high-efficiency acrylic precision TIR (Total Internal Reflection) lenses, BVG-T elegantly enhances wall textures from ceiling to floor.

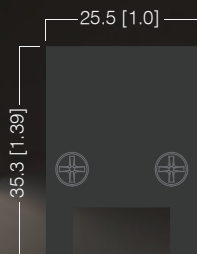


Beam angle

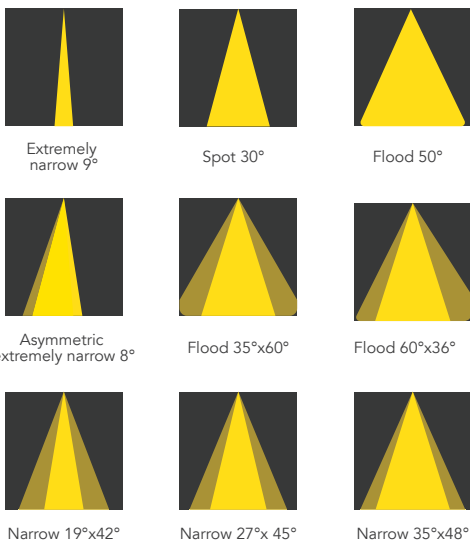


BVG-O 「Outdoor IP65」

Precision TIR Lens

BVG-O, featuring 12 optical lens options ranging from 9° to 35°x48°, offers precise, shadow-free lighting to accentuate wall textures. With high-efficiency acrylic TIR lenses, it elevates wall aesthetics from floor to ceiling.

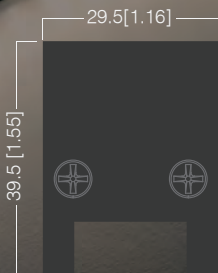

Beam angle

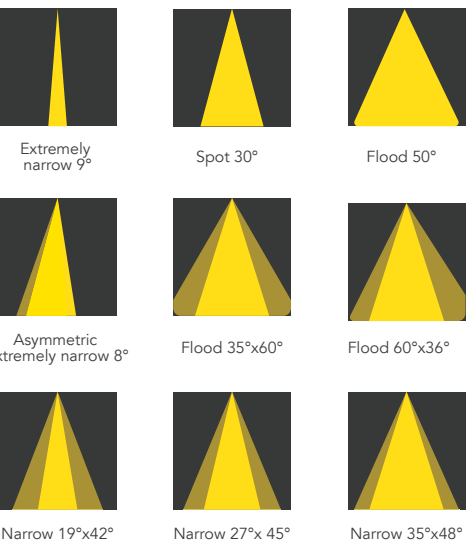



MORE LIGHT SOURCE &
DRIVER OPTIONS



Light source lumen efficiency from 100lm/w ~ 180lm/w.
Color Temperature options up to 19 categories from 2200K ~6500K.
Lighting color quality in MacAdam 3-step, 5-step.

FINISHES

Standard in matt white textured, matt black textured powder coating and silver anodized. More customized colors up 48 options available in customized service.



Textured White (RAL9003)



Textured Black (RAL9004)



Silver Anodized

COLOR OPTIONS

BVFC 7023	BVFC 7024	BVFC 7028	BVFC 7030	BVFC 7032	BVFC 7035	BVFC 7037
BVFC 7043	BVFC 7047	BVFC 7048	BVFC 8004	BVFC 8015	BVFC 8019	BVFC 8025
BVFC 9001	BVFC 9002	BVFC 9004	BVFC 9006	BVFC 9007	BVFC 9010	BVFC 7021
BVFC 7022	BVFC 9011	BVFC 9016	BVFC 9017	BVFC 1001	BVFC 1002	BVFC 1007
BVFC 1034	BVFC 1035	BVFC 2004	BVFC 3011	BVFC 3012	BVFC 3024	BVFC 4002
BVFC 5001	BVFC 5002	BVFC 5008	BVFC 5009	BVFC 5011	BVFC 5012	BVFC 5013
BVFC 5025	BVFC 6000	BVFC 7009	BVFC 7010	BVFC 7012	BVFC 7016	




SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-T	Textured Black Textured White Silver Anodized	Precision TIR Lens	9° 30° 50° Asy8° 35x60° 60x36° 19x42° 27x45° 35x48°	<19	IP22 IK08	Osram	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW25.5xH35.3mm	21.0W	3000K 4000K	112lm/W	80+ (2420lm) 90+ (2180lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/off


BEAM ANGLE

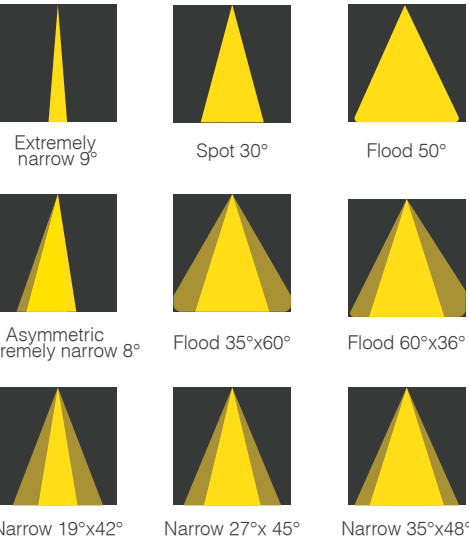


DIMENSION

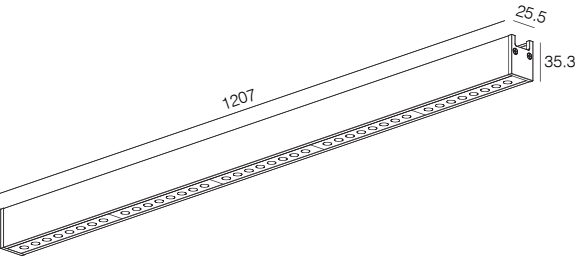

PRECISION TIR LENS

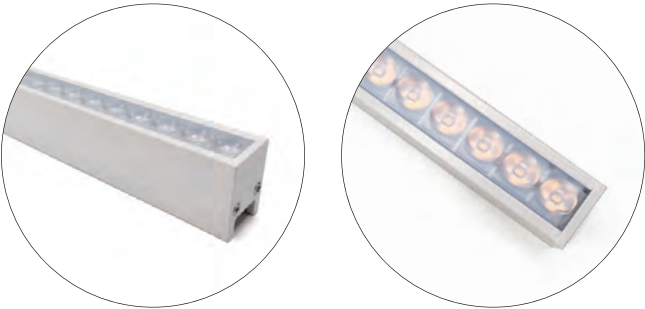

ACCESSORIES

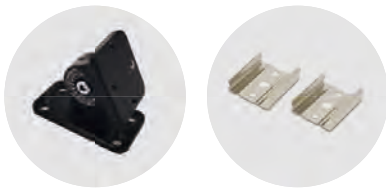

BVG

BVG-O IP65 WALL GRAZER-TIR LENS



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-O	Textured Black Textured White Silver Anodized	Precision TIR Lens	9° 30° 50° Asy8° 35x60° 60x36° 19x42° 27x45° 35x48°	<19	IP65 IK08	Osram	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW29.5xH39.5mm	21.0W	3000K 4000K	112lm/W	80+ (2420lm) 90+ (2180lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/off

BVG


BVG-O IP65 WALL GRAZER-TIR LENS




DIMENSION

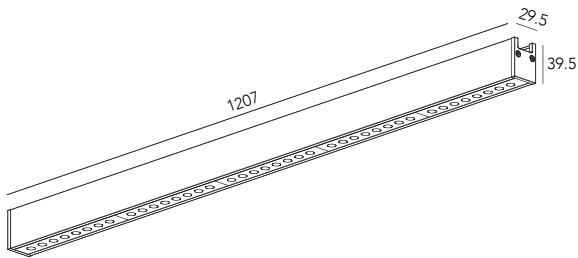

ACCESSORIES


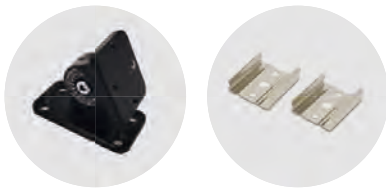


BEAM ANGLE

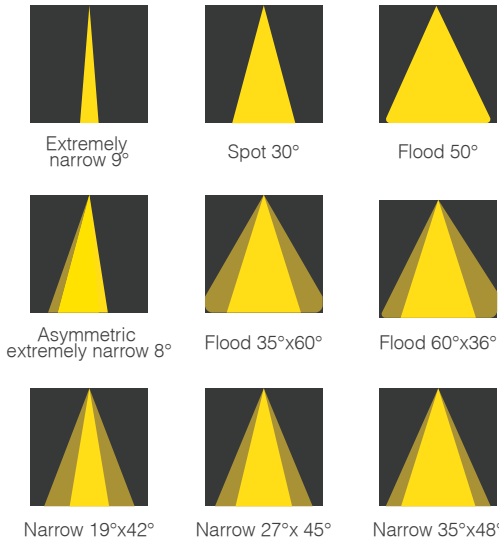

BVG

BVG-L WALL GRAZER-LOUVER REFLECTOR

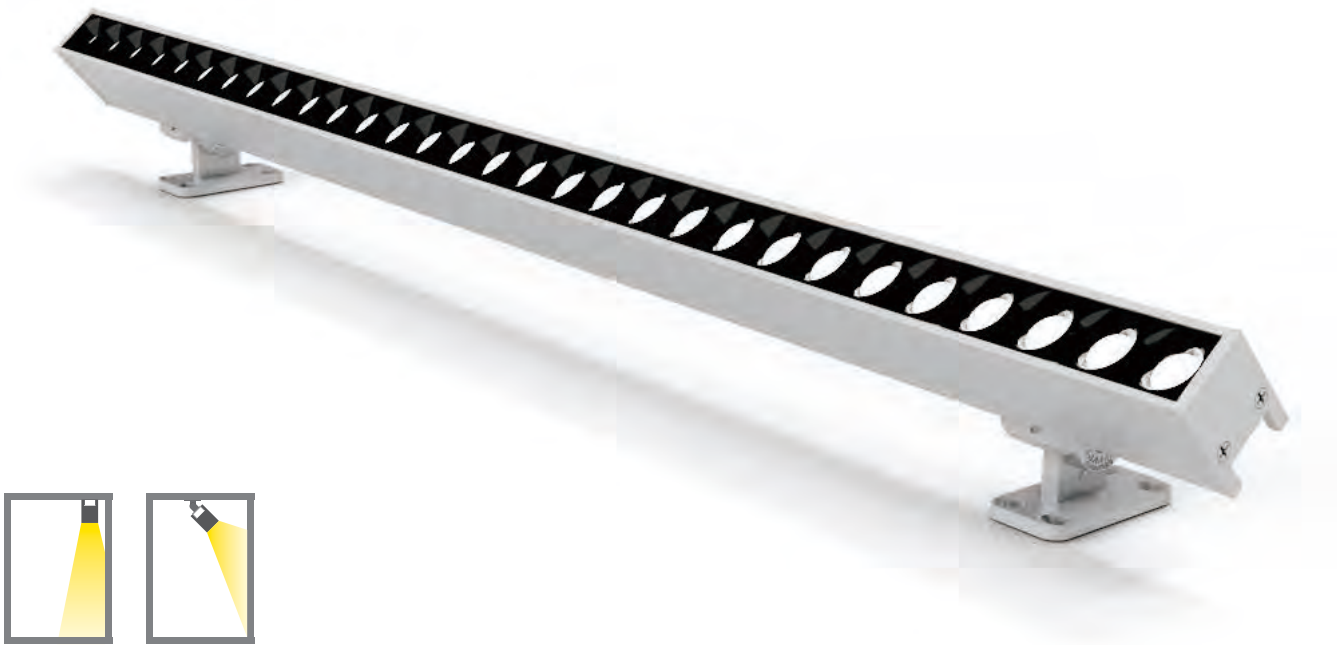

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-L	Textured Black	Louver Reflector	25°	<19	IP22 IK08	Osram	3-Step MacAdam	220V-240VAC
	Textured White		50°					
	Silver Anodized							


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW25.5xH35.3mm	18.0W	3000K 4000K	90lm/W	80+ (1660lm) 90+ (1500lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/off

BVG


BVG-L WALL GRAZER-LOUVER REFLECTOR




DIMENSION

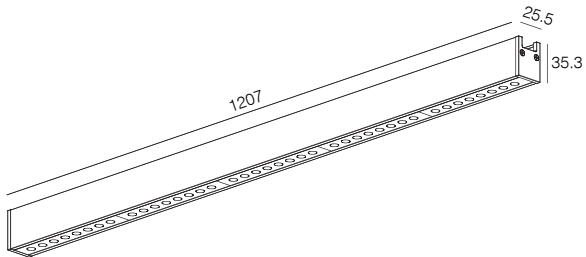

BEAM ANGLE



ACCESSORIES

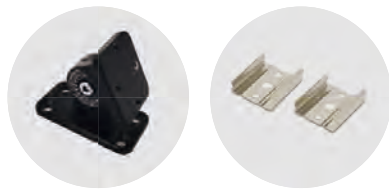




SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
BVG-E	Textured Black Textured White Silver Anodized	Extruded Lens	BAT25° ASY18° 60x110° 90x110° 130x110°	<19	IP22 IK08	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1207xW25.5xH35.3mm	17.0W	3000K 4000K	90lm/W	80+ (1750lm) 90+ (1570lm)	Ceiling Mounted Swivel Bracket	DALI 0-10V On/off




DIMENSION

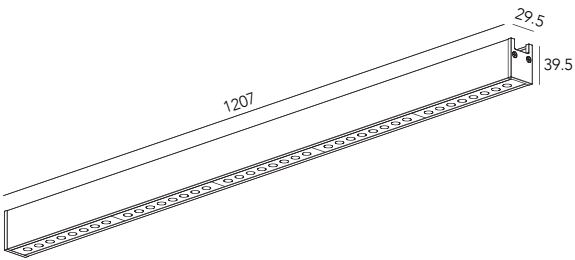

BEAM ANGLE

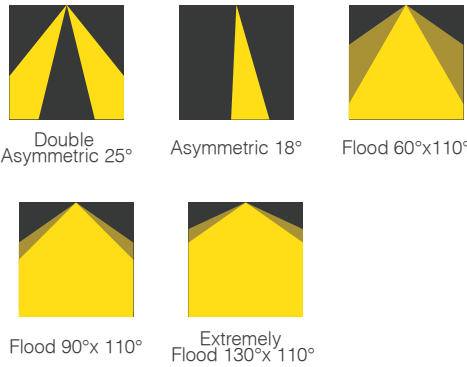

ACCESSORIES

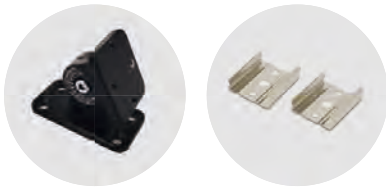




Hong Direct & Indirect Linear Light

Direct and Indirect lighting distribution.
More optical options in PC lens, UGR < 19 Anti-glaring optical kit.

DIMENSIONS


759057

Surface Installation
(Pendant, Surface Mounted,
Wall Mounted)

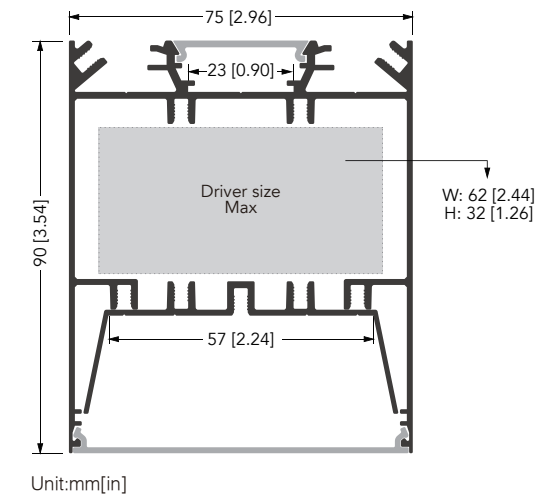


919057

Trimmed Recessed Installation

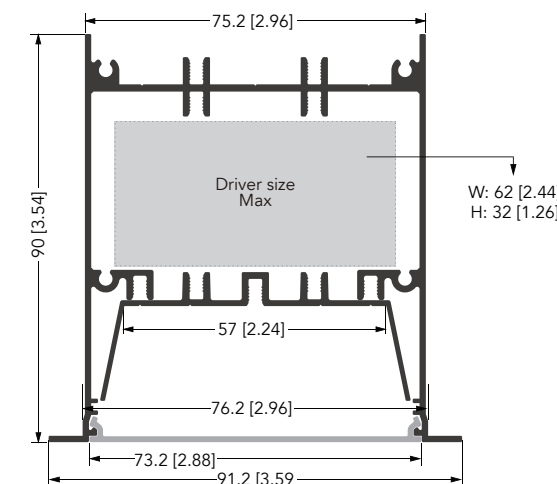

1259057

Trimless Recessed Installation

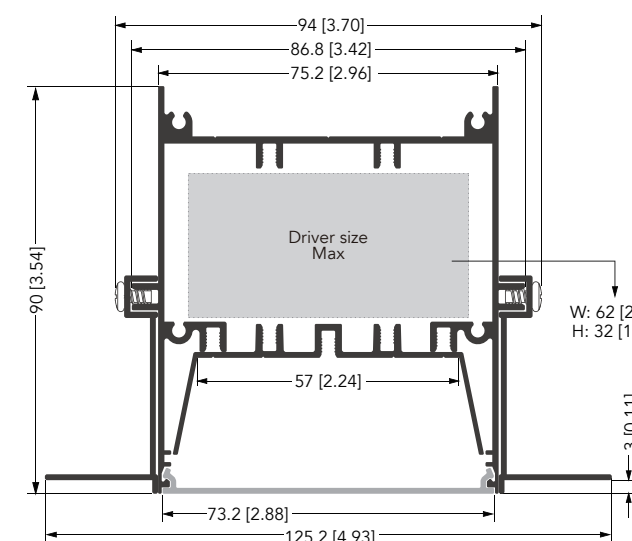

APPLICATIONS

759057 Surface



919057 Trimed Recessed



1259057 Trimed Recessed



Diffuser

INDIRECT

PC Diffuser with
high transmission



DIRECT

Prismatic Lens
Creating the most human friendly
lighting or General PC lens with
high transmission



GAPLESS JOINING IN FILED

a revolutionary gapless joining solution that significantly reduces field labor requirements

MORE LIGHT SOURCE & DRIVER OPTIONS

OSRAM **TRIDONIC** **EPISTAR**

BRIDGELUX **NICHIA** **LIFUD**

Luminaire lumen efficiency up to 130lm/W, 5800lm/m.
Light source lumen efficiency from 100lm/w ~ 180lm/w.
Color Temperature options up to 19 categories from 2200K ~6500K.
Lighting color quality in MacAdam 3-step, 5-step.

FINISHES

Explore our range of standard colors, matt white, black, and silver, for a timeless and classic look. Additionally, we offer a stunning selection of 48 colors for powder coating finishes, allowing you to add a touch of personality and uniqueness to your space.



Textured White (RAL9003)




Textured Black (RAL9004)



Silver Anodized

Prime Color Options

BVFC 7023	BVFC 7024	BVFC 7028	BVFC 7030	BVFC 7032	BVFC 7035	BVFC 7037
BVFC 7043	BVFC 7047	BVFC 7048	BVFC 8004	BVFC 8015	BVFC 8019	BVFC 8025
BVFC 9001	BVFC 9002	BVFC 9004	BVFC 9006	BVFC 9007	BVFC 9010	BVFC 7021
BVFC 7022	BVFC 9011	BVFC 9016	BVFC 9017	BVFC 1001	BVFC 1002	BVFC 1007
BVFC 1034	BVFC 1035	BVFC 2004	BVFC 3011	BVFC 3012	BVFC 3024	BVFC 4002
BVFC 5001	BVFC 5002	BVFC 5008	BVFC 5009	BVFC 5011	BVFC 5012	BVFC 5013
BVFC 5025	BVFC 6000	BVFC 7009	BVFC 7010	BVFC 7012	BVFC 7016	

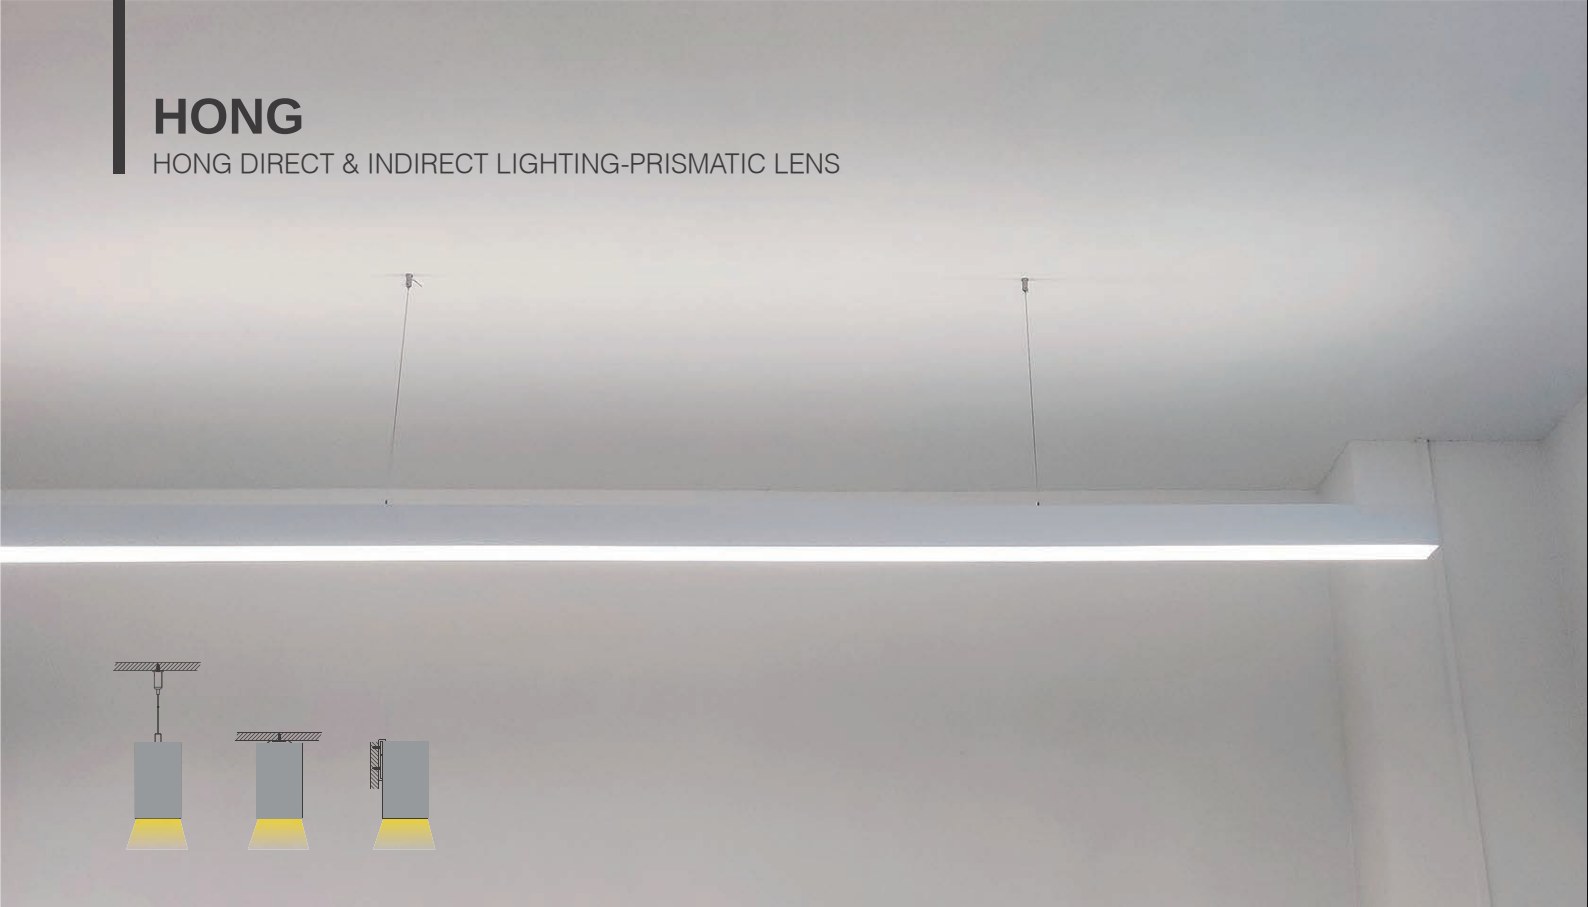

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PM	Textured Black	Direct: Prismatic	85Deg	38.0W	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								

DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	Prismatic lensr	25.0W	3000K	1- 86lm/W	1- 80+ (2180lm) 1- 90+ (1970lm)	Aircraft cable pendant Ceiling Mounted Wall Mounted	DALI
			4000K	2- 106lm/W	2- 80+ (2700lm) 2- 90+ (2430lm)		0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (3210lm) 3- 90+ (2890lm)		On/off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	13.0W	3000K	1- 86lm/W	1- 80+ (1200lm) 1- 90+ (1080lm)	Aircraft cable pendant Ceiling Mounted Wall Mounted	DALI
			4000K	2- 106lm/W	2- 80+ (1470lm) 2- 90+ (1320lm)		0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (1740lm) 3- 90+ (1560lm)		On/off


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PM	Textured Black	Direct: Prismatic	85Deg	54.0W	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	Prismatic lensr	36.0W	3000K	1- 86lm/W	1- 80+ (3150lm) 1- 90+ (2830lm)	Aircraft cable pendant Ceiling Mounted Wall Mounted	DALI
			4000K	2- 106lm/W	2- 80+ (3890lm) 2- 90+ (3500lm)		0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (6950lm) 3- 90+ (6250lm)		On/off


DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	18.0W	3000K	1- 86lm/W	1- 80+ (1660lm) 1- 90+ (1500lm)	Aircraft cable pendant Ceiling Mounted Wall Mounted	DALI
			4000K	2- 106lm/W	2- 80+ (2090lm) 2- 90+ (1830lm)		0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (2410lm) 3- 90+ (2160lm)		On/off

DIMENSION

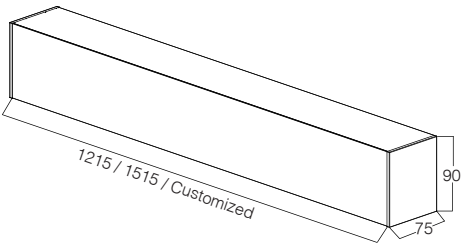

PRISMATIC LENS

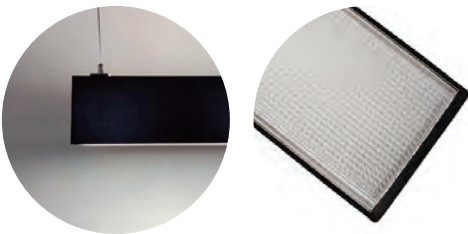

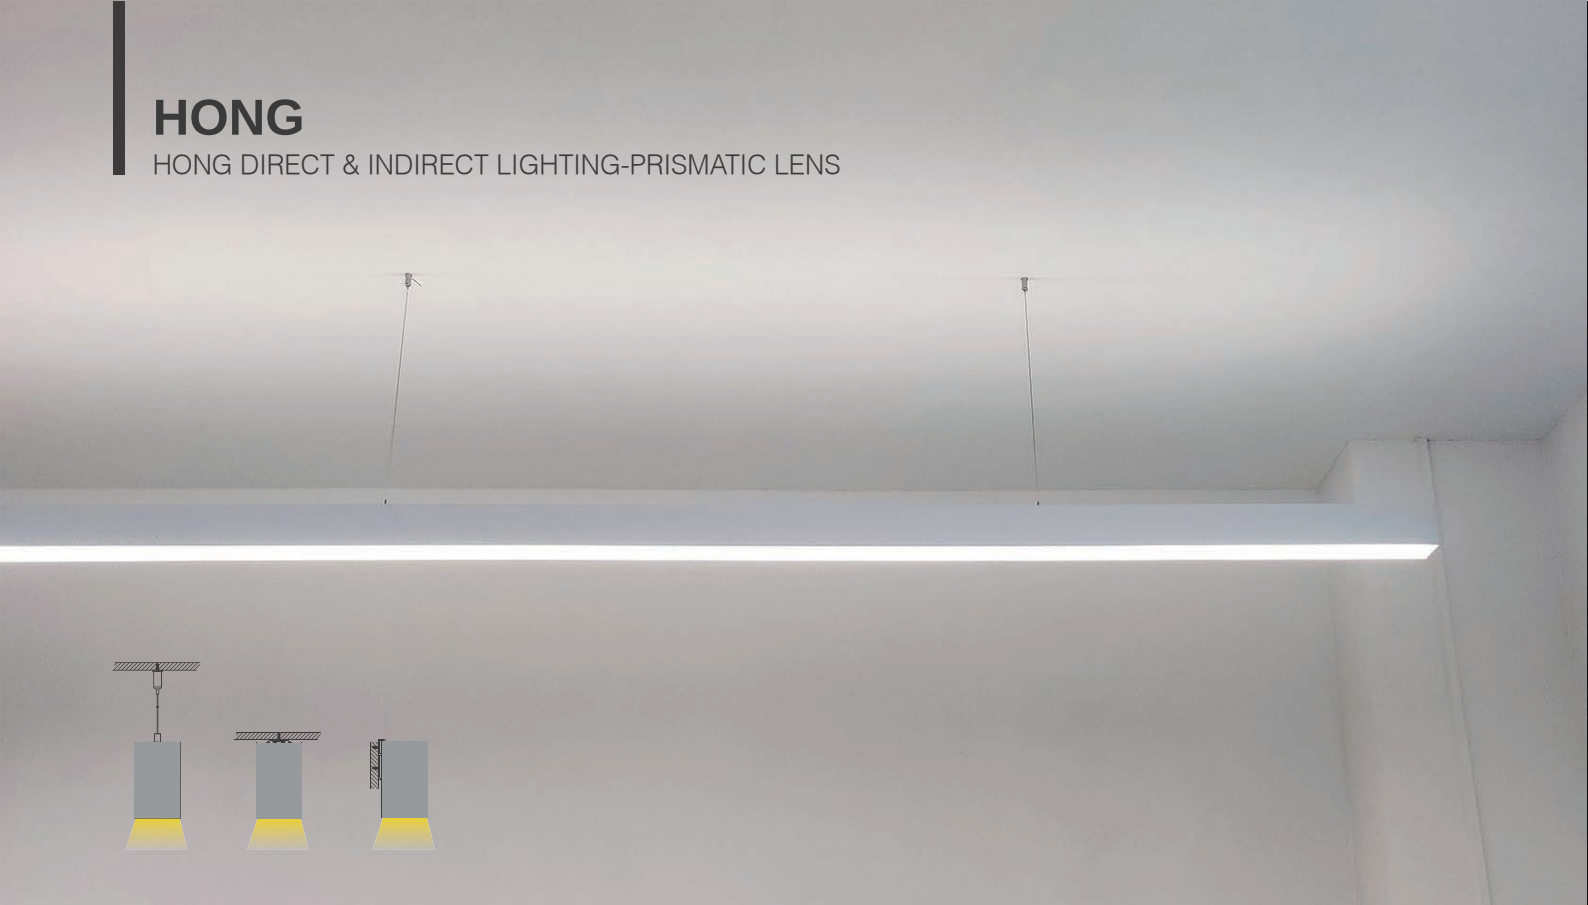

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PM	Textured Black	Direct: Prismatic	85Deg	47.0W	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								

DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1515xW75xH90mm	Prismatic lensr	31.0W	3000K	1- 86lm/W	1- 80+ (2710lm) 1- 90+ (2440lm)	Aircraft cable pendant	DALI
			4000K	2- 106lm/W	2- 80+ (3350lm) 2- 90+ (3010lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (3990lm) 3- 90+ (3590lm)	Wall Mounted	On/off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1515xW75xH90mm	PC Diffuser	16.0W	3000K	1- 86lm/W	1- 80+ (1480lm) 1- 90+ (1330lm)	Aircraft cable pendant	DALI
			4000K	2- 106lm/W	2- 80+ (1810lm) 2- 90+ (1630lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (2140lm) 3- 90+ (1920lm)	Wall Mounted	On/off


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PM	Textured Black	Direct: Prismatic	85Deg	68.0W	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1515xW75xH90mm	Prismatic lensr	45.0W	3000K	1- 86lm/W	1- 80+ (3940lm) 1- 90+ (3540lm)	Aircraft cable pendant	DALI
			4000K	2- 106lm/W	2- 80+ (4860lm) 2- 90+ (4380lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (5790lm) 3- 90+ (5210lm)	Wall Mounted	On/off


DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L1515xW75xH90mm	PC Diffuser	23.0W	3000K	1- 86lm/W	1- 80+ (2130lm) 1- 90+ (1910lm)	Aircraft cable pendant	DALI
			4000K	2- 106lm/W	2- 80+ (2600lm) 2- 90+ (2340lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 126lm/W	3- 80+ (3080lm) 3- 90+ (2770lm)	Wall Mounted	On/off

DIMENSION

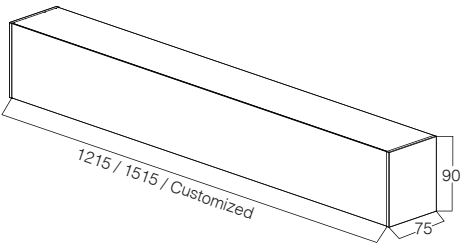

PRISMATIC LENS

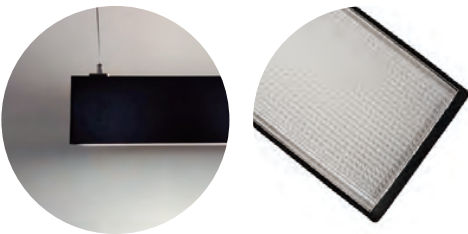

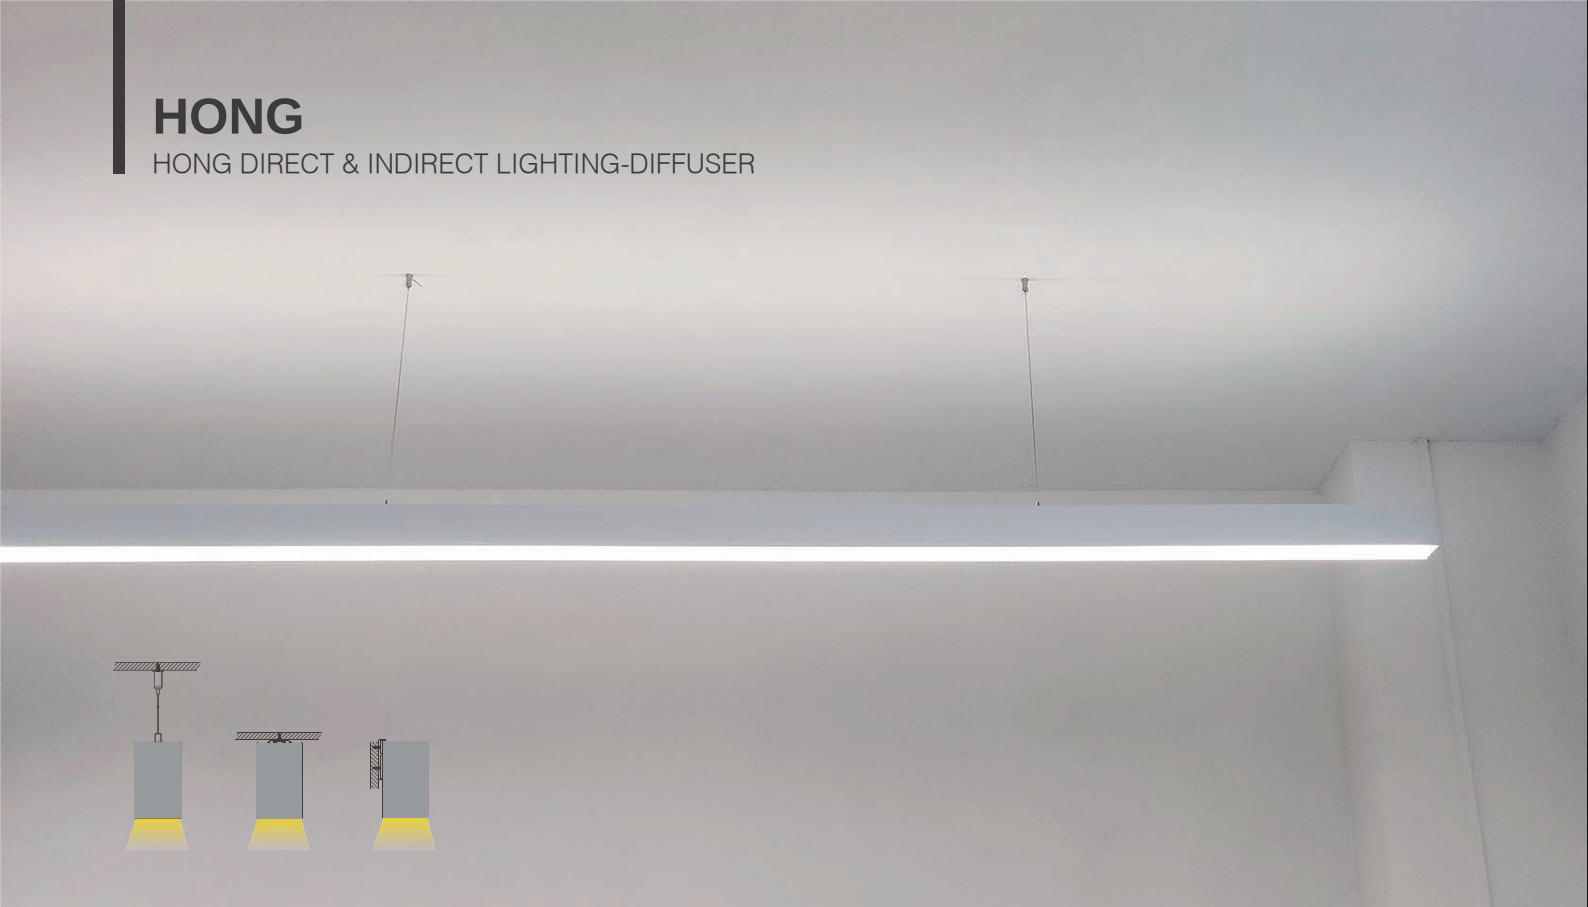

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PC	Textured Black	Direct: Diffuser	105Deg	38.0W	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								

DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	25.0W	3000K	1- 90lm/W	1- 80+ (2180lm) 1- 90+ (2080lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (2830lm) 2- 90+ (2540lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (3340lm) 3- 90+ (3010lm)	Wall Mounted	On/off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	13.0W	3000K	1- 90lm/W	1- 80+ (1200lm) 1- 90+ (1080lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (1470lm) 2- 90+ (1320lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (1740lm) 3- 90+ (1560lm)	Wall Mounted	On/off


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PC	Textured Black	Direct: Diffuser	105Deg	54.0W	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	36.0W	3000K	1- 90lm/W	1- 80+ (3330lm) 1- 90+ (3000lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (4070lm) 2- 90+ (3670lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (7230lm) 3- 90+ (6500lm)	Wall Mounted	On/off


DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1215xW75xH90mm	PC Diffuser	18.0W	3000K	1- 90lm/W	1- 80+ (1660lm) 1- 90+ (1500lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (2030lm) 2- 90+ (1830lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (2410lm) 3- 90+ (2160lm)	Wall Mounted	On/off

DIMENSION

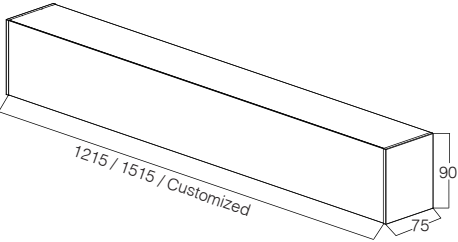

DIFFUSER LENS

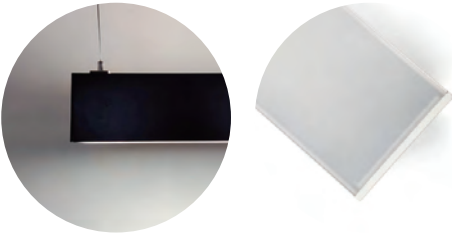

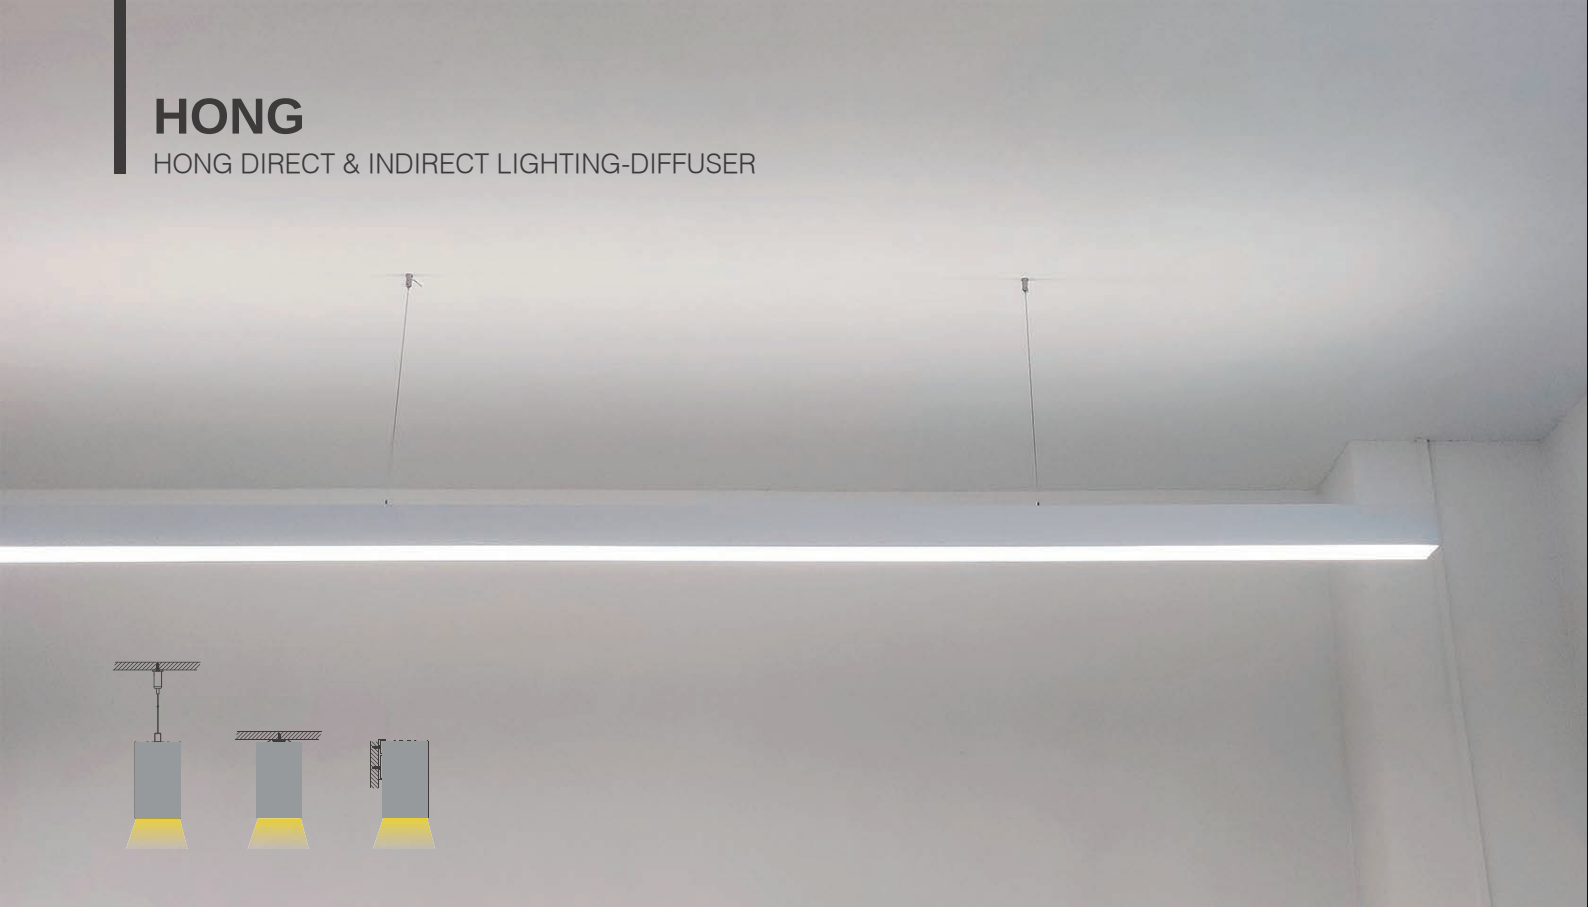

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PC	Textured Black	Direct: Diffuser	105Deg	47.0W	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								

DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1515xW75xH90mm	PC Diffuser	31.0W	3000K	1- 90lm/W	1- 80+ (2870lm) 1- 90+ (2580lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (3510lm) 2- 90+ (3160lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (4150lm) 3- 90+ (3760lm)	Wall Mounted	On/off

DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1515xW75xH90mm	PC Diffuser	16.0W	3000K	1- 90lm/W	1- 80+ (1480lm) 1- 90+ (1330lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (1810lm) 2- 90+ (1630lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (2140lm) 3- 90+ (1920lm)	Wall Mounted	On/off


SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	POWER	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
H7590-PC	Textured Black	Direct: Diffuser	105Deg	68.0W	<24	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC
	Textured White	Indirect: Diffuser							
	Silver Anodized								


DIMENSION	DIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1515xW75xH90mm	PC Diffuser	45.0W	3000K	1- 90lm/W	1- 80+ (4170lm) 1- 90+ (3750lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (5090lm) 2- 90+ (4580lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (6020lm) 3- 90+ (5420lm)	Wall Mounted	On/off


DIMENSION	INDIRECT	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
L 1515xW75xH90mm	PC Diffuser	23.0W	3000K	1- 90lm/W	1- 80+ (2130lm) 1- 90+ (1910lm)	Aircraft cable pendant	DALI
			4000K	2- 110lm/W	2- 80+ (2600lm) 2- 90+ (2340lm)	Ceiling Mounted	0-10V
			2700K-4000K	3- 130lm/W	3- 80+ (3080lm) 3- 90+ (2770lm)	Wall Mounted	On/off

DIMENSION

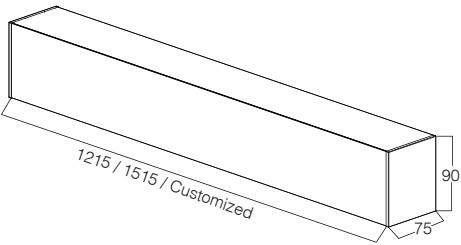

DIFFUSER LENS

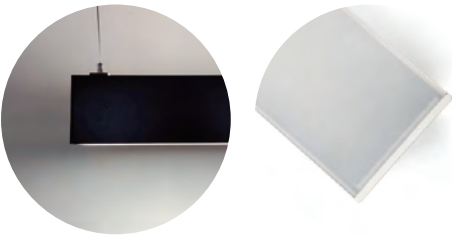

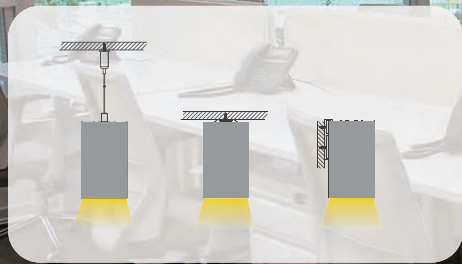

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW75xH90mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Aircraft cable pendant	DALI
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)	Wall Mounted	On/off
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)		
				2- 80+ (3890lm) 2- 90+ (3500lm)		
				3- 80+ (4860lm) 3- 90+ (4380lm)		
			125lm/W	1- 80+ (3470lm) 1- 90+ (3120lm)		
				2- 80+ (4630lm) 2- 90+ (4170lm)		
				3- 80+ (5790lm) 3- 90+ (5210lm)		

SPECIFICATION


LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW75xH90mm	1- 36.0W	3000K	85lm/W	1- 80+ (3150lm) 1- 90+ (2830lm)	Aircraft cable pendant	DALI
	2- 45.0W	4000K		2- 80+ (3940lm) 2- 90+ (3540lm)	Ceiling Mounted	0-10V
	3- 60.0W	2700~4000K		3- 80+ (5250lm) 3- 90+ (4720lm)	Wall Mounted	On/off
			105lm/W	1- 80+ (3890lm) 1- 90+ (3500lm)		
				2- 80+ (4860lm) 2- 90+ (4380lm)		
				3- 80+ (6480lm) 3- 90+ (5840lm)		
			125lm/W	1- 80+ (4630lm) 1- 90+ (4170lm)		
				2- 80+ (5790lm) 2- 90+ (5210lm)		
				3- 80+ (7720lm) 3- 90+ (6950lm)		

DIMENSION

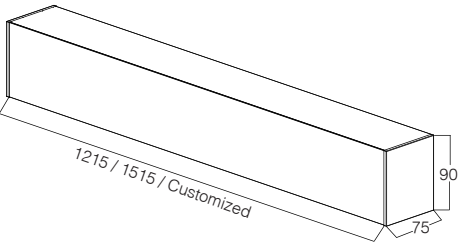

Prismatic Lens

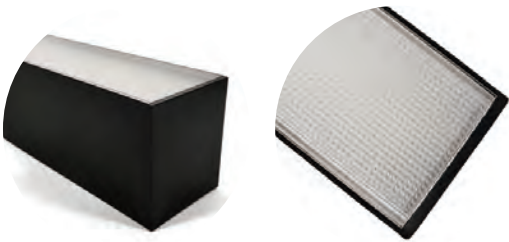

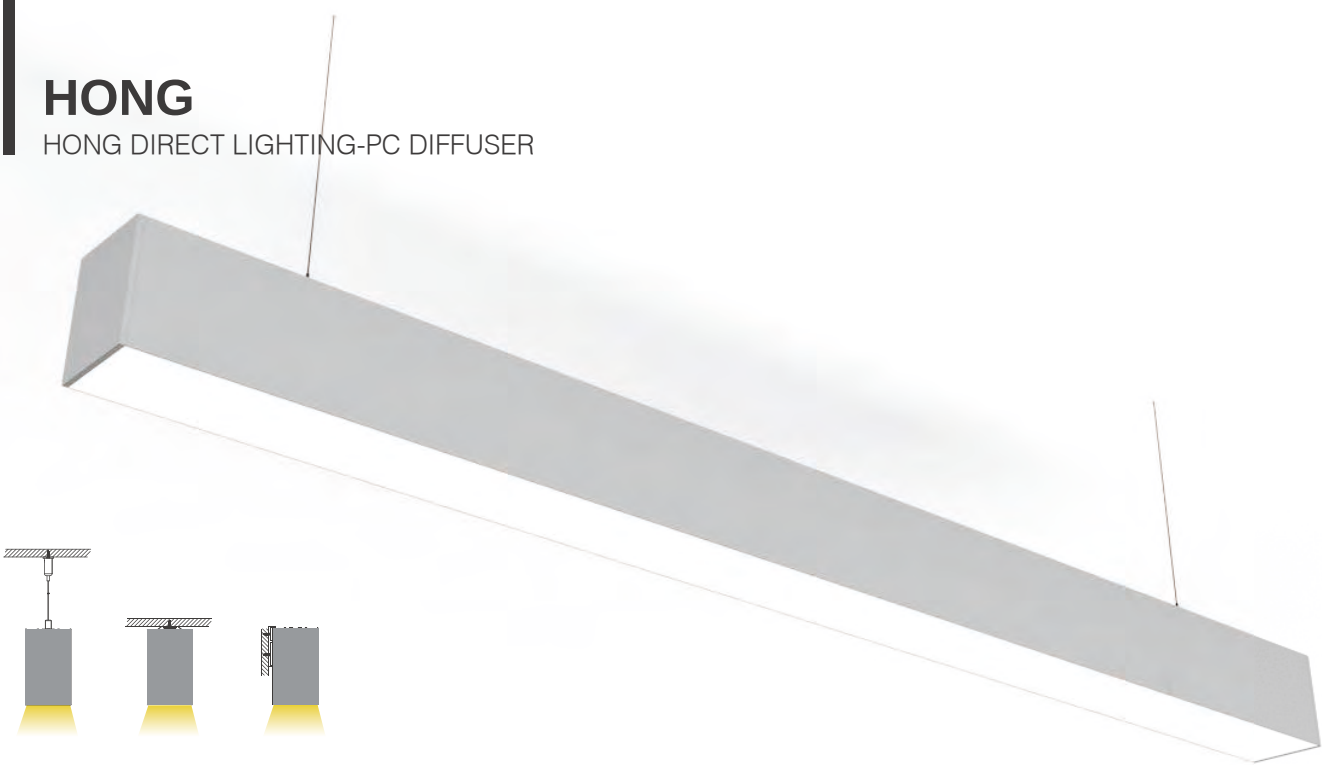

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1215xW75xH90mm	1- 27.0W	3000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Aircraft cable pendant	DALI
	2- 36.0W	4000K		2- 80+ (3330lm) 2- 90+ (3000lm)	Ceiling Mounted	0-10V
	3- 45.0W	2700~4000K		3- 80+ (4170lm) 3- 90+ (3750lm)	Wall Mounted	On/off
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U7590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1515xW75xH90mm	1- 36.0W	3000K	90lm/W	1- 80+ (3330lm) 1- 90+ (3000lm)	Aircraft cable pendant	DALI
	2- 45.0W	4000K		2- 80+ (4170lm) 2- 90+ (3750lm)	Ceiling Mounted	0-10V
	3- 60.0W	2700~4000K		3- 80+ (5560lm) 3- 90+ (5000lm)	Wall Mounted	On/off
			110lm/W	1- 80+ (4070lm) 1- 90+ (3670lm)		
				2- 80+ (5090lm) 2- 90+ (4580lm)		
				3- 80+ (6790lm) 3- 90+ (6110lm)		
			130lm/W	1- 80+ (4820lm) 1- 90+ (4330lm)		
				2- 80+ (6020lm) 2- 90+ (5420lm)		
				3- 80+ (8030lm) 3- 90+ (7230lm)		

DIMENSION

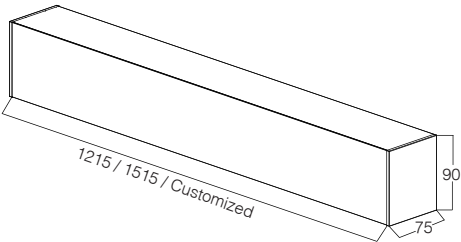

PC DIFFUSER



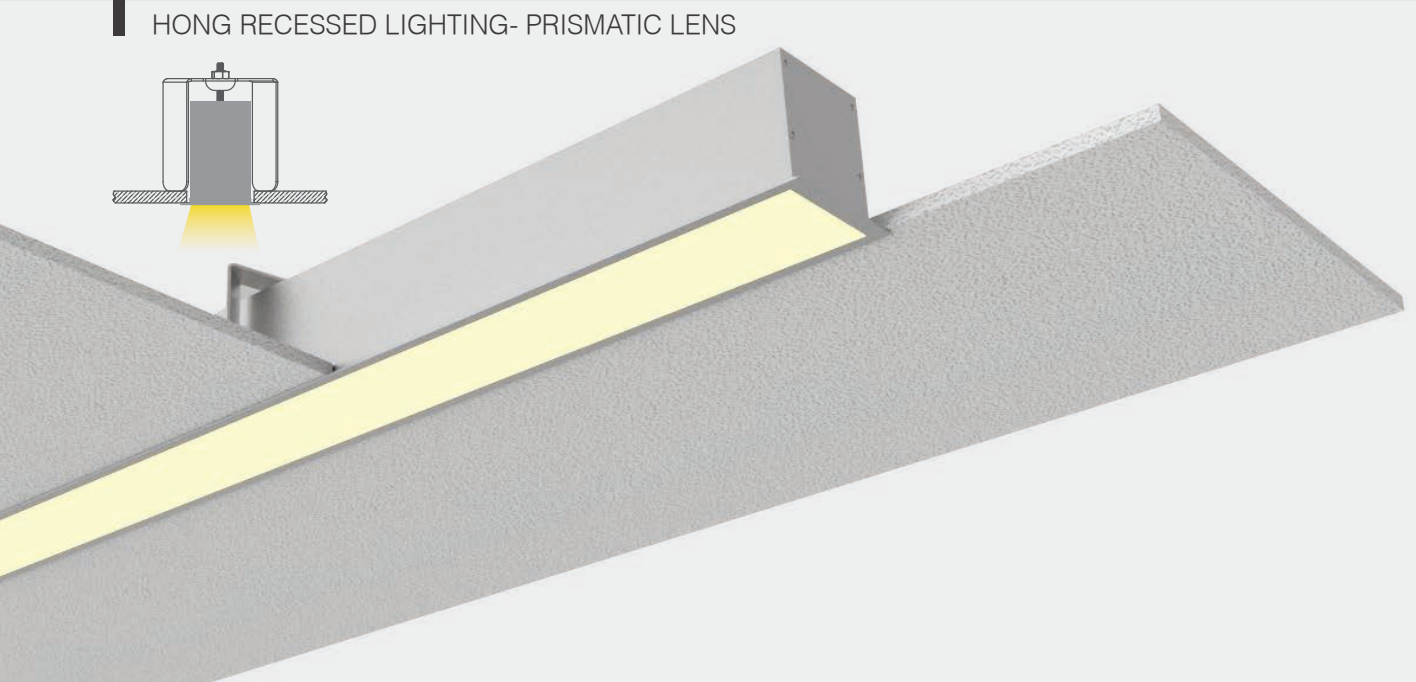

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1229xW91xH90mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Trimed Recessed	DALI 0-10V On/off
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)		
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)		
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)		
				2- 80+ (3890lm) 2- 90+ (3500lm)		
				3- 80+ (4860lm) 3- 90+ (4380lm)		
			125lm/W	1- 80+ (3470lm) 1- 90+ (3120lm)		
				2- 80+ (4630lm) 2- 90+ (4170lm)		
				3- 80+ (5790lm) 3- 90+ (5210lm)		

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1529xW91xH90mm	1- 36.0W	3000K	85lm/W	1- 80+ (3150lm) 1- 90+ (2830lm)	Trimed Recessed	DALI 0-10V On/off
	2- 45.0W	4000K		2- 80+ (3940lm) 2- 90+ (3540lm)		
	3- 60.0W	2700~4000K		3- 80+ (5250lm) 3- 90+ (4720lm)		
			105lm/W	1- 80+ (3890lm) 1- 90+ (3500lm)		
				2- 80+ (4860lm) 2- 90+ (4380lm)		
				3- 80+ (6480lm) 3- 90+ (5840lm)		
			125lm/W	1- 80+ (4630lm) 1- 90+ (4170lm)		
				2- 80+ (5790lm) 2- 90+ (5210lm)		
				3- 80+ (7720lm) 3- 90+ (6950lm)		

DIMENSION

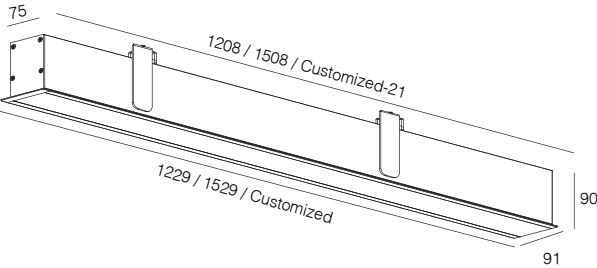

Prismatic Lens





SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS	
1- L 1229xW91xH90mm	1- 27.0W	3000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Trimed Recessed	DALI 0-10V On/off	
	2- 36.0W	4000K		2- 80+ (3330lm) 2- 90+ (3000lm)			
	3- 45.0W	2700~4000K		3- 80+ (4170lm) 3- 90+ (3750lm)			
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)			
				2- 80+ (4070lm) 2- 90+ (3670lm)			
				3- 80+ (5090lm) 3- 90+ (4580lm)			
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)			
				2- 80+ (4820lm) 2- 90+ (4330lm)			
				3- 80+ (6020lm) 3- 90+ (5420lm)			

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U9190-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS	
1- L1529xW91xH90mm	1- 36.0W	3000K	90lm/W	1- 80+ (3330lm) 1- 90+ (3000lm)	Trimed Recessed	DALI 0-10V On/off	
	2- 45.0W	4000K		2- 80+ (4170lm) 2- 90+ (3750lm)			
	3- 60.0W	2700~4000K		3- 80+ (5560lm) 3- 90+ (5000lm)			
				1- 80+ (4070lm) 1- 90+ (3670lm)			
			110lm/W	2- 80+ (5090lm) 2- 90+ (4580lm)			
				3- 80+ (6790lm) 3- 90+ (6110lm)			
				130lm/W			1- 80+ (4820lm) 1- 90+ (4330lm)
							2- 80+ (6020lm) 2- 90+ (5420lm)
			3- 80+ (8030lm) 3- 90+ (7230lm)				

DIMENSION

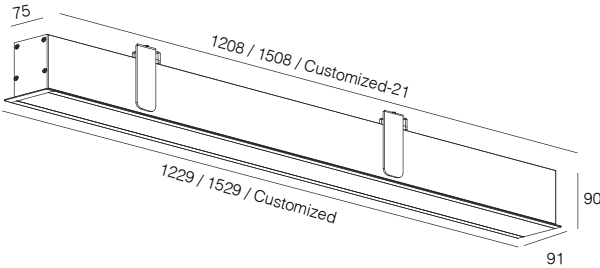

PC DIFFUSER



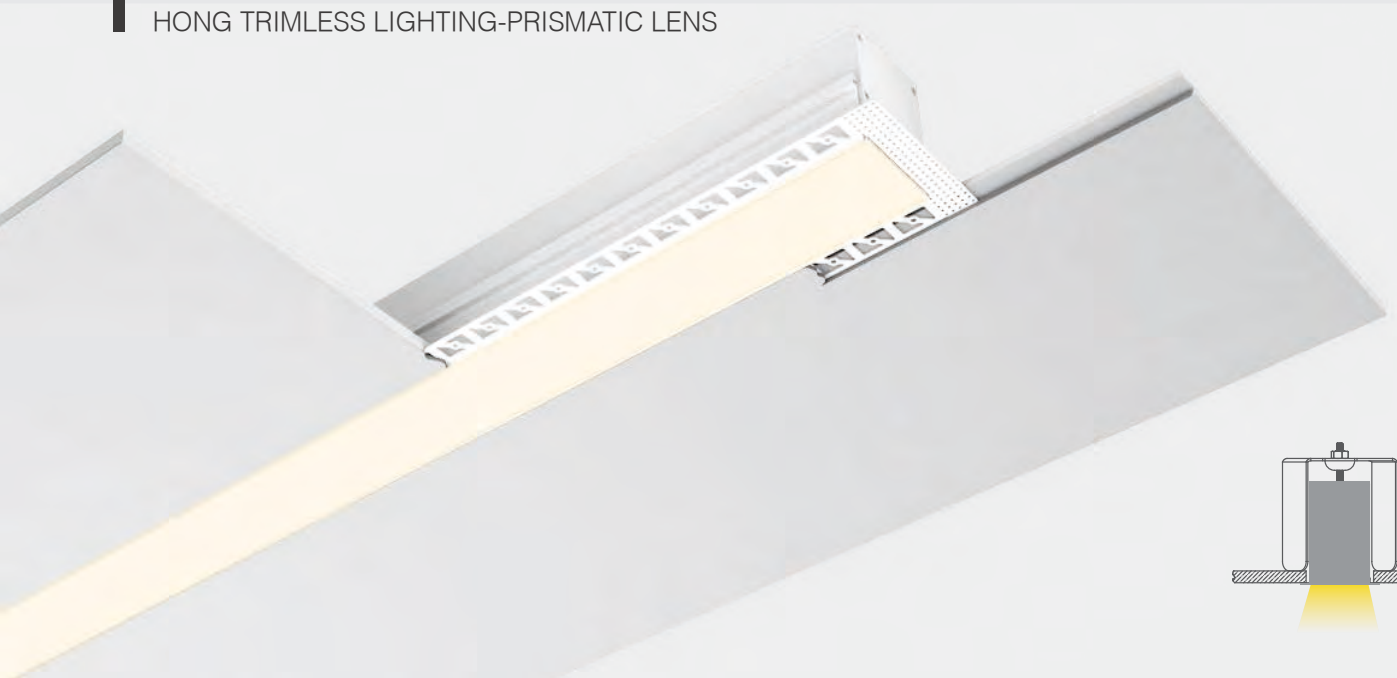

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS	
1- L1248xW125xH90mm	1- 27.0W	3000K	85lm/W	1- 80+ (2360lm) 1- 90+ (2120lm)	Trimed Recessed	DALI 0-10V On/off	
	2- 36.0W	4000K		2- 80+ (3150lm) 2- 90+ (2830lm)			
	3- 45.0W	2700~4000K		3- 80+ (3940lm) 3- 90+ (3540lm)			
			105lm/W	1- 80+ (2920lm) 1- 90+ (2620lm)			
				2- 80+ (3890lm) 2- 90+ (3500lm)			
				3- 80+ (4860lm) 3- 90+ (4380lm)			
				125lm/W			1- 80+ (3470lm) 1- 90+ (3120lm)
			2- 80+ (4630lm) 2- 90+ (4170lm)				
			3- 80+ (5790lm) 3- 90+ (5210lm)				

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PM	Textured Black Textured White Silver Anodized	Prismatic Lens	85Deg	<22	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS	
1- L 1548xW125xH90mm	1- 36.0W	3000K	85lm/W	1- 80+ (3150lm) 1- 90+ (2830lm)	Trimed Recessed	DALI 0-10V On/off	
	2- 45.0W	4000K		2- 80+ (3940lm) 2- 90+ (3540lm)			
	3- 60.0W	2700~4000K		3- 80+ (5250lm) 3- 90+ (4720lm)			
				1- 80+ (3890lm) 1- 90+ (3500lm)			
			105lm/W	2- 80+ (4860lm) 2- 90+ (4380lm)			
				3- 80+ (6480lm) 3- 90+ (5840lm)			
				125lm/W			1- 80+ (4630lm) 1- 90+ (4170lm)
							2- 80+ (5790lm) 2- 90+ (5210lm)
			3- 80+ (7720lm) 3- 90+ (6950lm)				

DIMENSION

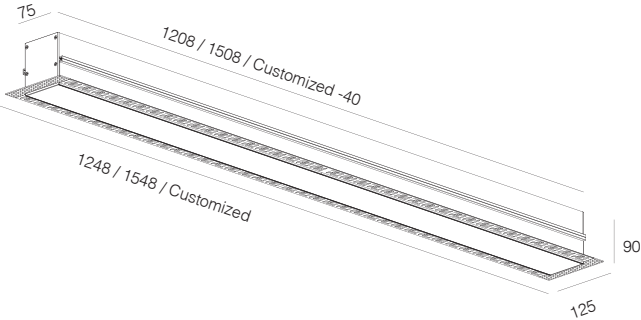

Prismatic Lens



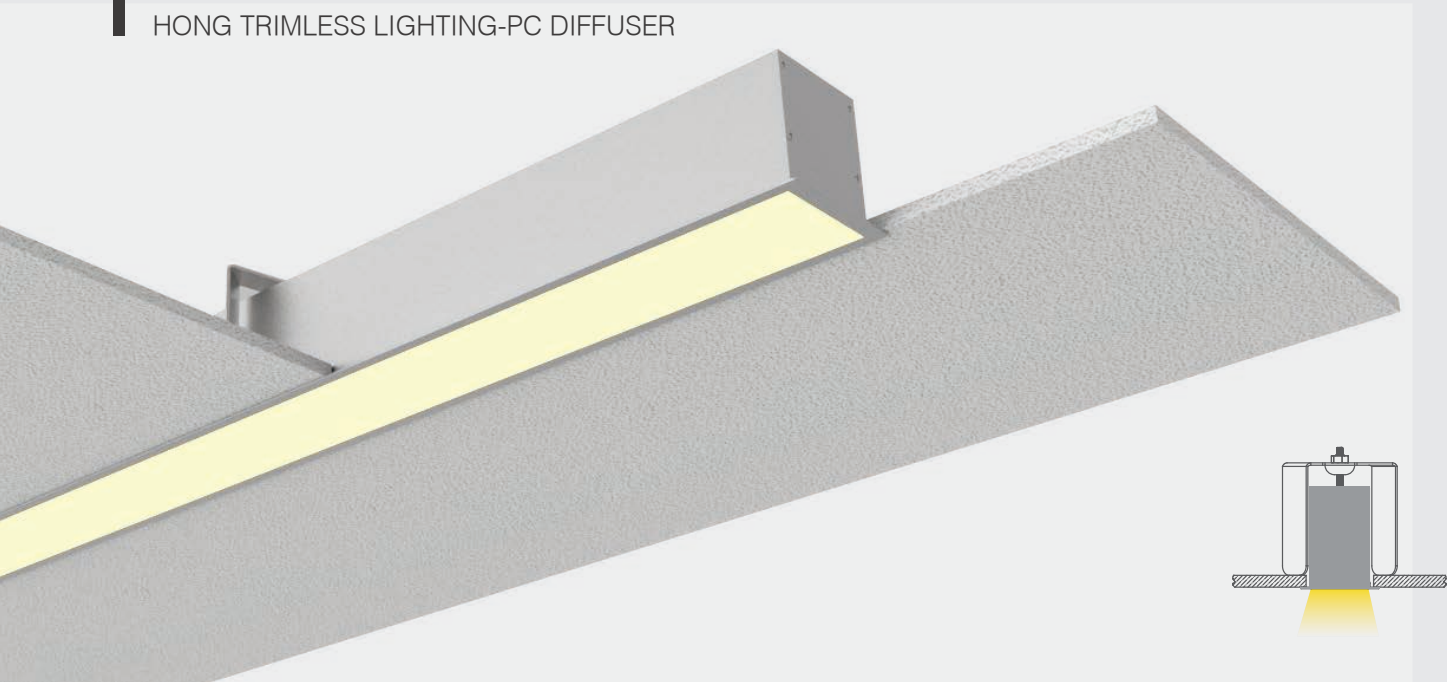

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC


DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1248xW125xH90mm	1- 27.0W	3000K	90lm/W	1- 80+ (2500lm) 1- 90+ (2250lm)	Trimed Recessed	DALI
	2- 36.0W	4000K		2- 80+ (3330lm) 2- 90+ (3000lm)		0-10V
	3- 45.0W	2700~4000K		3- 80+ (4170lm) 3- 90+ (3750lm)		On/off
			110lm/W	1- 80+ (3050lm) 1- 90+ (2750lm)		
				2- 80+ (4070lm) 2- 90+ (3670lm)		
				3- 80+ (5090lm) 3- 90+ (4580lm)		
			130lm/W	1- 80+ (3610lm) 1- 90+ (3250lm)		
				2- 80+ (4820lm) 2- 90+ (4330lm)		
				3- 80+ (6020lm) 3- 90+ (5420lm)		

SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	UGR	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
U12590-PC	Textured Black Textured White Silver Anodized	PC Diffuser	105Deg	<26	IP22 IK06	2835 SMD	3-Step MacAdam	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L 1548xW125xH90mm	1- 36.0W	3000K	90lm/W	1- 80+ (3330lm) 1- 90+ (3000lm)	Trimed Recessed	DALI
	2- 45.0W	4000K		2- 80+ (4170lm) 2- 90+ (3750lm)		0-10V
	3- 60.0W	2700~4000K		3- 80+ (5560lm) 3- 90+ (5000lm)		On/off
			110lm/W	1- 80+ (4070lm) 1- 90+ (3670lm)		
				2- 80+ (5090lm) 2- 90+ (4580lm)		
				3- 80+ (6790lm) 3- 90+ (6110lm)		
			130lm/W	1- 80+ (4820lm) 1- 90+ (4330lm)		
				2- 80+ (6020lm) 2- 90+ (5420lm)		
				3- 80+ (8030lm) 3- 90+ (7230lm)		

DIMENSION

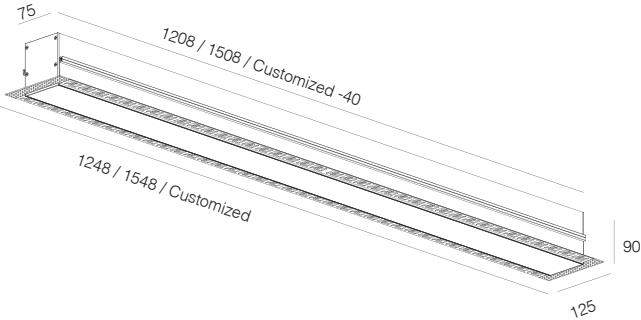


PC DIFFUSER





HILA Direct & Indirect Linear Light

HILA is engineered for the rising trend of direct and indirect lighting in commercial architecture and office spaces. In indirect lighting, the light source remains concealed, distributing illumination through reflections off ceilings, walls, and floors, effectively eliminating glare and shadows. This approach creates a comfortable lighting ambiance, enabling room framing with soft light, resulting in a shadow-free, spacious feel.

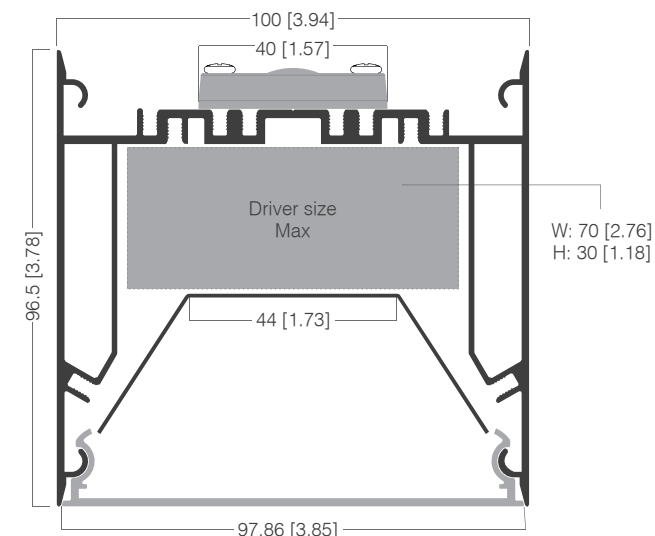

Unit:mm[in]


H1009744 U1009744

Surface Installation
(Pendant, Ceiling Mounted)




INDIRECT

Optical TIR Lens or
General PC lens with
high transmission

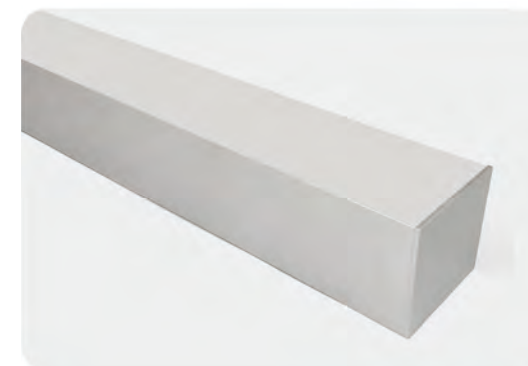

DIRECT

General PC lens with
high transmission

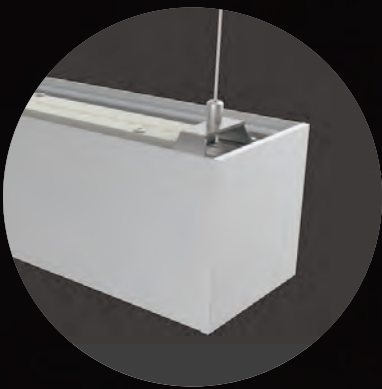

Beam angle



Diffuser & Diffuser



Diffuser & 30° TIR



Diffuser & 45° TIR



Diffuser & 60° TIR



Diffuser & 90° TIR



SPECIFICATIONS

Finish 	Lens Diffuser , TRI Lens [30°/45°/60°/90°]	Installations Pendant , Ceiling mounted
Width / Hight 100mm × 97mm	Length 1200mm , 1500mm , 2400mm , Customized	
Efficacy up to 100lm/W	Power 62W/pc , 64W/pc , 124W/pc	
Color Quality 3-step MacAdam , 5-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K	Voltage 220-240 VAC , 100-277 VAC	
	Control DALI , 0-10V , On/off	
Indirect Angle TRI 40 [1.57]	IP / IK Grade IP22 / IK06	
Direct Diffuser 97.86 [3.85]	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	

1. Blueview’s standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.



ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP / IK GRADE	CONTROL OPTOINS
H10096 Direct & Indirect Linear Light	White	Diffuser	1208mm	3-Step MacAdam Ellipse	2700K	80+	Aircraft cable pendant	22-IP22	DALI
U10096 Direct Linear Light	Black	Optical TIR Lens on top lighting	1508mm	5-Step MacAdam Ellips	3000K	90+			0-10V
	Silver				3500K		Ceiling Mounted	06 IK06	On/off
					4000K				
					5000K				
					6000K				
					6500K				


SPECIFICATION

Voltage	220-240 VAC	
Width / Height	100mm x 96mm	
Length	1208mm	1508mm
Power (W/m /ft)	62 W/pc	64 W/pc
Efficacy Up to	100lm/w	100lm/w
Control	Dali , 0-10V, on/off	


SPECIFICATIONS

COLOUR TEMPERATURE			LUMEN / LENGTH	
U10096 RA 80	2700K	down	5890lm / 1200m	6080lm / 1500mm
	3000K	down	5890lm / 1200m	6080lm / 1500mm
	4000K	down	6200lm / 1200m	6400lm / 1500mm
	5000K	down	6200lm / 1200m	6400lm / 1500mm
	6500K	down	6200lm / 1200m	6400lm / 1500mm
H10096 RA 80 Indirect: Diffuser Direct: Diffuser	2700K	up	2945lm / 1200m	3040lm / 1500mm
		down	2945lm / 1200m	3040lm / 1500mm
	3000K	up	2945lm / 1200m	3040lm / 1500mm
		down	2945lm / 1200m	3040lm / 1500mm
	4000K	up	3100lm / 1200m	3200lm / 1500mm
		down	3100lm / 1200m	3200lm / 1500mm
	5000K	up	3100lm / 1200m	3200lm / 1500mm
		down	3100lm / 1200m	3200lm / 1500mm
	6500K	up	3100lm / 1200m	3200lm / 1500mm
		down	3100lm / 1200m	3200lm / 1500mm
H10096 RA 80 Indirect: TIR Lens Direct: Diffuser	2700K	up	1705lm / 1200m	2053lm / 1500mm
		down	3390lm / 1200m	4265lm / 1500mm
	3000K	up	1895lm / 1200m	2282lm / 1500mm
		down	3767lm / 1200m	4739lm / 1500mm
	4000K	up	2105lm / 1200m	2535lm / 1500mm
		down	4185lm / 1200m	5265lm / 1500mm
	5000K	up	2105lm / 1200m	2535lm / 1500mm
		down	4185lm / 1200m	5265lm / 1500mm
	6500K	up	2105lm / 1200m	2535lm / 1500mm
		down	4185lm / 1200m	5265lm / 1500mm

BEAM ANGLE

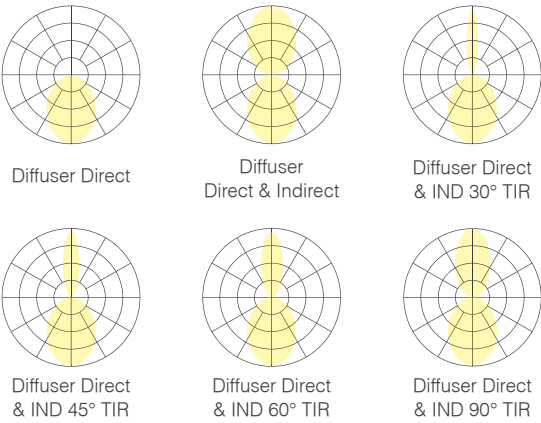

INSTALLATION

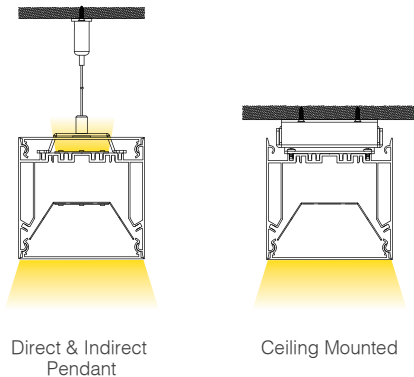



OLI SERIES

360DEG. LINEAR LIGHT

DIMENSION

O600610P

Horizontal Pendant , Vertical Cylinder

φ 60 [2.36]

φ 63.4 [2.49]

Unit:mm[in]

OLI 360Deg. Round Linear Light

OLI is cutting-edge 360Degree luminaire.
Elevate your space with the sleek vertical and horizontal pendant options.
High lumen output, up to an impressive 2275lm/m.
Embrace modern lighting design and transform your environment today.

Decorative RGB

165 www.bvinspiration.com

www.blueviewled.com 166



SPECIFICATION

LUMINAIRE	FIXTURE FINISH	LENS	BEAM ANGLE	IP/IK GRADE	LED	COLOR QUALITY	VOLTAGE
OLI6-PC	Textured Black Textured White Silver Anodized	PC Diffuser	360Deg	IP22 IK06	2835 SMD	3-Step MacAdam Ellipse	220V-240VAC

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
1- L630 x Φ63mm	1- 13.0W	3000K 4000K	1- 95lm/W 2- 105lm/W	1- 80+ (1270lm) 1- 90+ (1140lm) 2- 80+ (1400lm) 2- 90+ (1260lm)	Aircraft cable pendant	DALI 0-10V On/off

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
2- L1230 x Φ63mm	2- 27.0W	3000K 4000K	1- 95lm/W 2- 105lm/W	1- 80+ (2640lm) 1- 90+ (2370lm) 2- 80+ (2920lm) 2- 90+ (2620lm)	Aircraft cable pendant	DALI 0-10V On/off

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
3- L1530 x Φ63mm	3- 33.5W	3000K 4000K	1- 95lm/W 2- 105lm/W	1- 80+ (3270lm) 1- 90+ (2950lm) 2- 80+ (3620lm) 2- 90+ (3260lm)	Aircraft cable pendant	DALI 0-10V On/off

DIMENSION	POWER	COLOR TEMP	EFFICIENCY	CRI+LUMEN	INSTALL ACCS.	CONTROL OPTOINS
4- L1830 x Φ63mm	4- 40.0W	3000K 4000K	1- 95lm/W 2- 105lm/W	1- 80+ (3910lm) 1- 90+ (3520lm) 2- 80+ (4320lm) 2- 90+ (3890lm)	Aircraft cable pendant	DALI 0-10V On/off