




Features

- Polycarbonate construction
- Non-isolated No flicker
- Microwave sensor (option)
- Multiple mounting options
- High light transmittance
- CCT 3000K,4000K,6500K
- No mercury and no UV safer enviroment
- 30000h litetime, 3years warranty

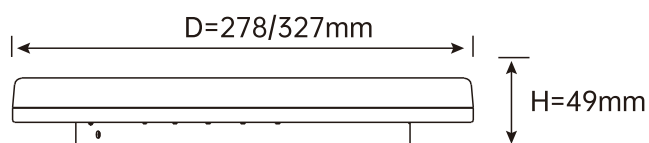


Code	QC-C280C-ND	QC-C280C-MR	QC-C330C-ND	QC-C330C-MR
Product Size(mm)	278x49mm	278x49mm	327x49mm	327x49mm
Power(W)	18W	18W	24W	24W
lumen(lm)	1620 (lm)	1620 (lm)	2160 (lm)	2160 (lm)
Sensor		●		●
PF	> 0.5	> 0.5	> 0.5	> 0.5
Input	220-240V~AC , 50Hz			





Features

- Polycarbonate construction
- Non-isolated No flicker
- Microwave sensor (option)
- Multiple mounting options
- High light transmittance
- CCT 3000K,4000K,6500K
- No mercury and no UV safer enviroment
- 30000h lifetime, 3years warranty

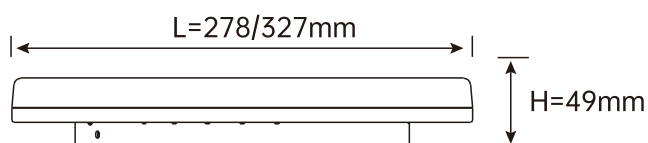

Code	QC-C280S-ND	QC-C280S-MR	QC-C330S-ND	QC-C330S-MR
Product Size(mm)	278x278x49mm	278x278x49mm	327x327x49mm	327x327x49mm
Power(W)	18W	18W	24W	24W
lumen(lm)	1620 (lm)	1620 (lm)	2160 (lm)	2160 (lm)
Sensor		●		●
PF	> 0.5	> 0.5	> 0.5	> 0.5
Input	220-240V~AC , 50Hz			

