




Tri-Proof Light





Features

- Polycarbonate Construction
- Power 18W/36W/45W
- Designed for surface mount applications in industrial environments
- Opal Diffuser for improved appearance and uniformity
- CCT 3000K, 4000K, 6500K
- Stainless steel clips or multi-angle clips
- 3years warranty

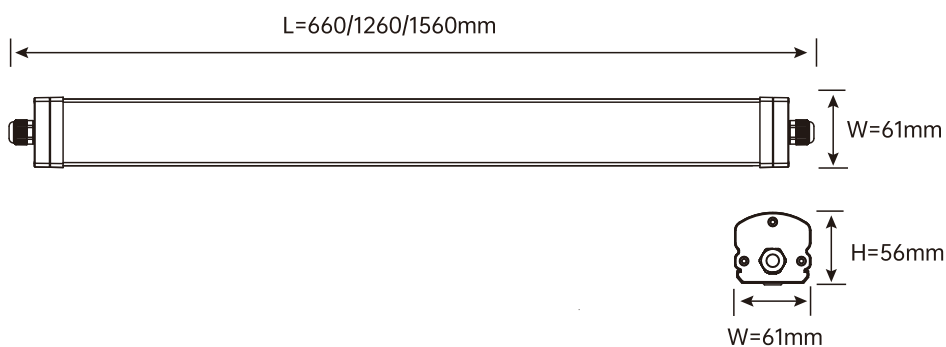


Code	JR0460B	JR04120B	JR04150B	JR0460A-MR	JR04120A-MR
Product Size(mm)	660x63x56mm	1260x63x56mm	1560x63x56mm	620x63x56mm	1140x63x56mm
Power(W)	18W	36W	45W	18W	24W
Lumen(lm)	1620 (lm)	3240 (lm)	4050 (lm)	1800 (lm)	2400 (lm)
Sensor				●	●
PF	> 0.5	> 0.9	> 0.9	> 0.5	> 0.5
Input	220-240V~AC , 50Hz				






Features

- Polycarbonate Construction
- Power 15W/30W/40W
- Designed for surface mount applications in industrial environments
- Opal Diffuser for improved appearance and uniformity
- CCT 3000K,4000K,6500K
- Stainless steel clips or multi-angle clips
- 3years warranty

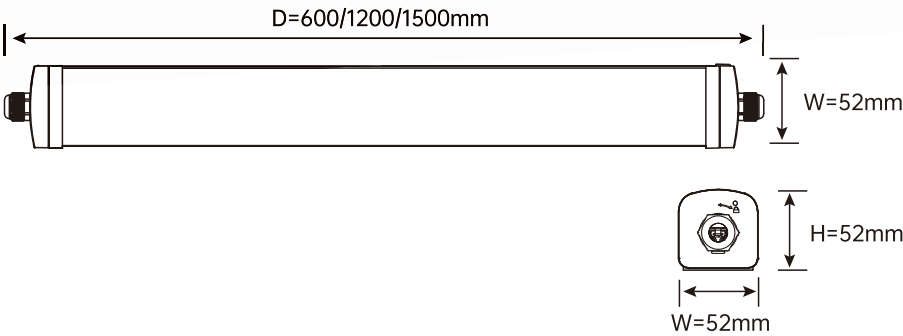



Code	QC-S1060B-ND	QC-S1120B-ND	QC-S1150B-ND	QC-S1060A-MR	QC-S1120A-MR	QC-S1150A-MR
Product Size(mm)	600x52x52mm	1200x52x52mm	1500x52x52mm	600x52x52mm	1200x52x52mm	1500x52x52mm
Power(W)	15W	30W	40W	15W	30W	40W
lumen(lm)	1800 (lm)	3600 (lm)	4800 (lm)	1800 (lm)	3600 (lm)	4800 (lm)
Sensor				●	●	●
PF	> 0.5	> 0.9	> 0.9	> 0.5	> 0.9	> 0.9
Input	220-240V~AC , 50Hz					

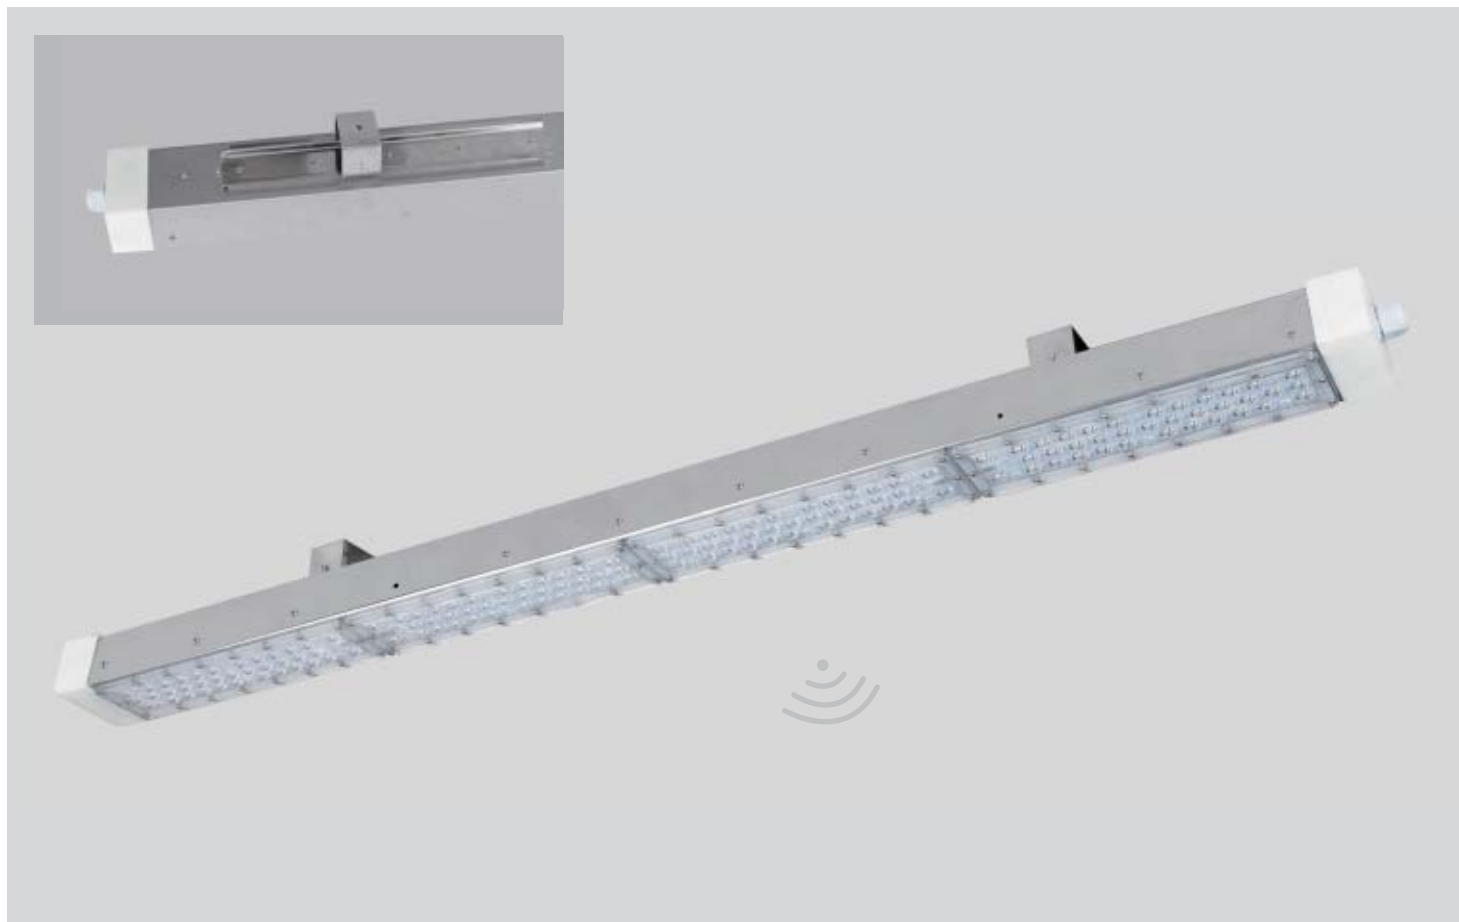

Features

- Polycarbonate Construction
- Stainless steel material, fast heat dissipation
- Designed for surface mount applications in industrial environments
- Stainless steel clips or multi-angle clips
- 5years warranty

C plane light distribution curve

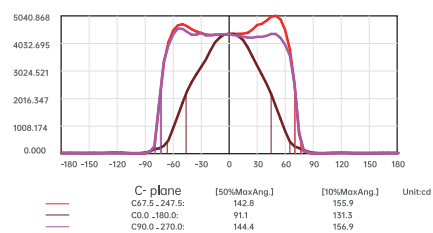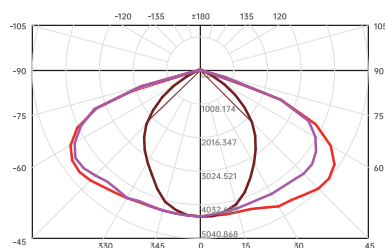

Code	S1-100-ND	S1-100-MR
Product Size(mm)	84x58x1158mm	84x58x1158mm
Power(W)	100W	100W
lumen(lm)	13000(lm)	13000(lm)
Sensor		●
PF	> 0.9	> 0.9
Input	220-240VAC , 50/60Hz	





宁波奇驰照明灯具有限公司

NINGBO QICHI ILLUMINATION LAMP CO.,LTD

E-M: Sales@qichtech.com WEB: www.qichtech.com

TEL: (+86)-574-63299938 FAX: (+86)-574-63074838

ADD: No. 385, Wei'er West Road, Chongshou Town,
Ningbo Cixi City, China 315334

地址：浙江省慈溪市崇寿镇纬二西路385号