


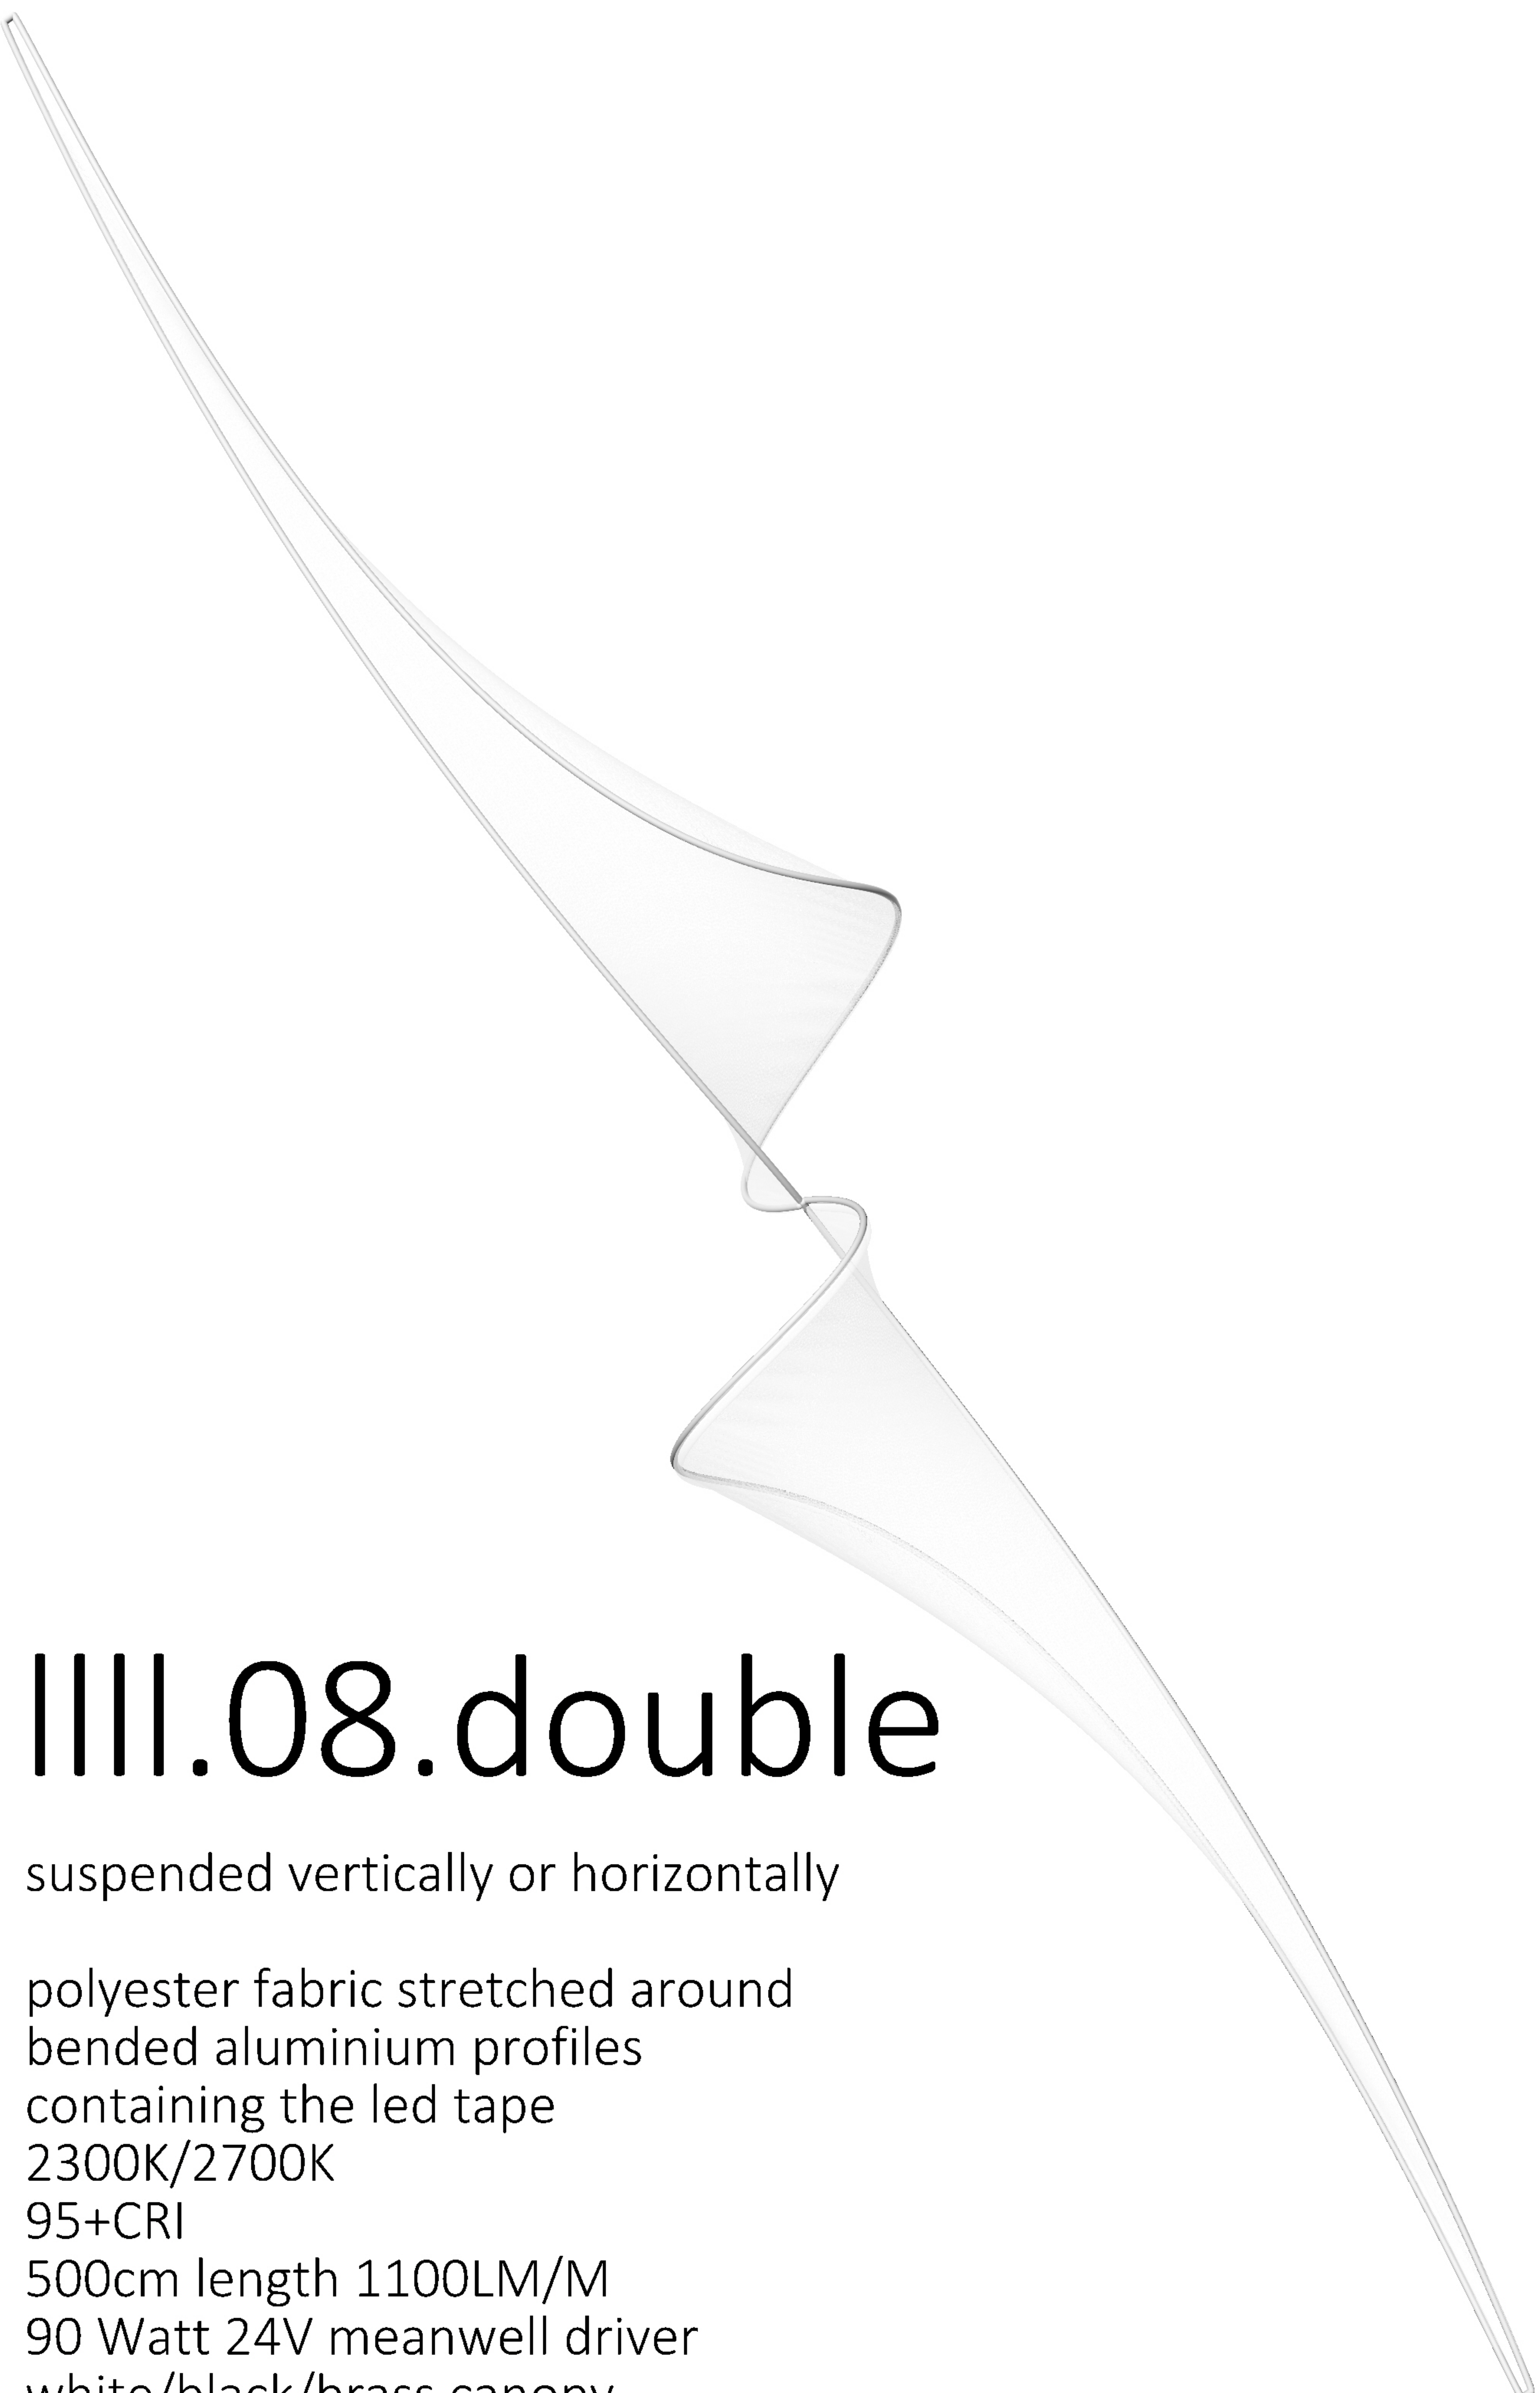

III.08.double

suspended vertically or horizontally

polyester fabric stretched around
bended aluminium profiles
containing the led tape

2300K/2700K


95+CRI

500cm length 1100LM/M

90 Watt 24V meanwell driver


white/black/brass canopy

clear PA coated current carrying steel cable
adjustable drop length.

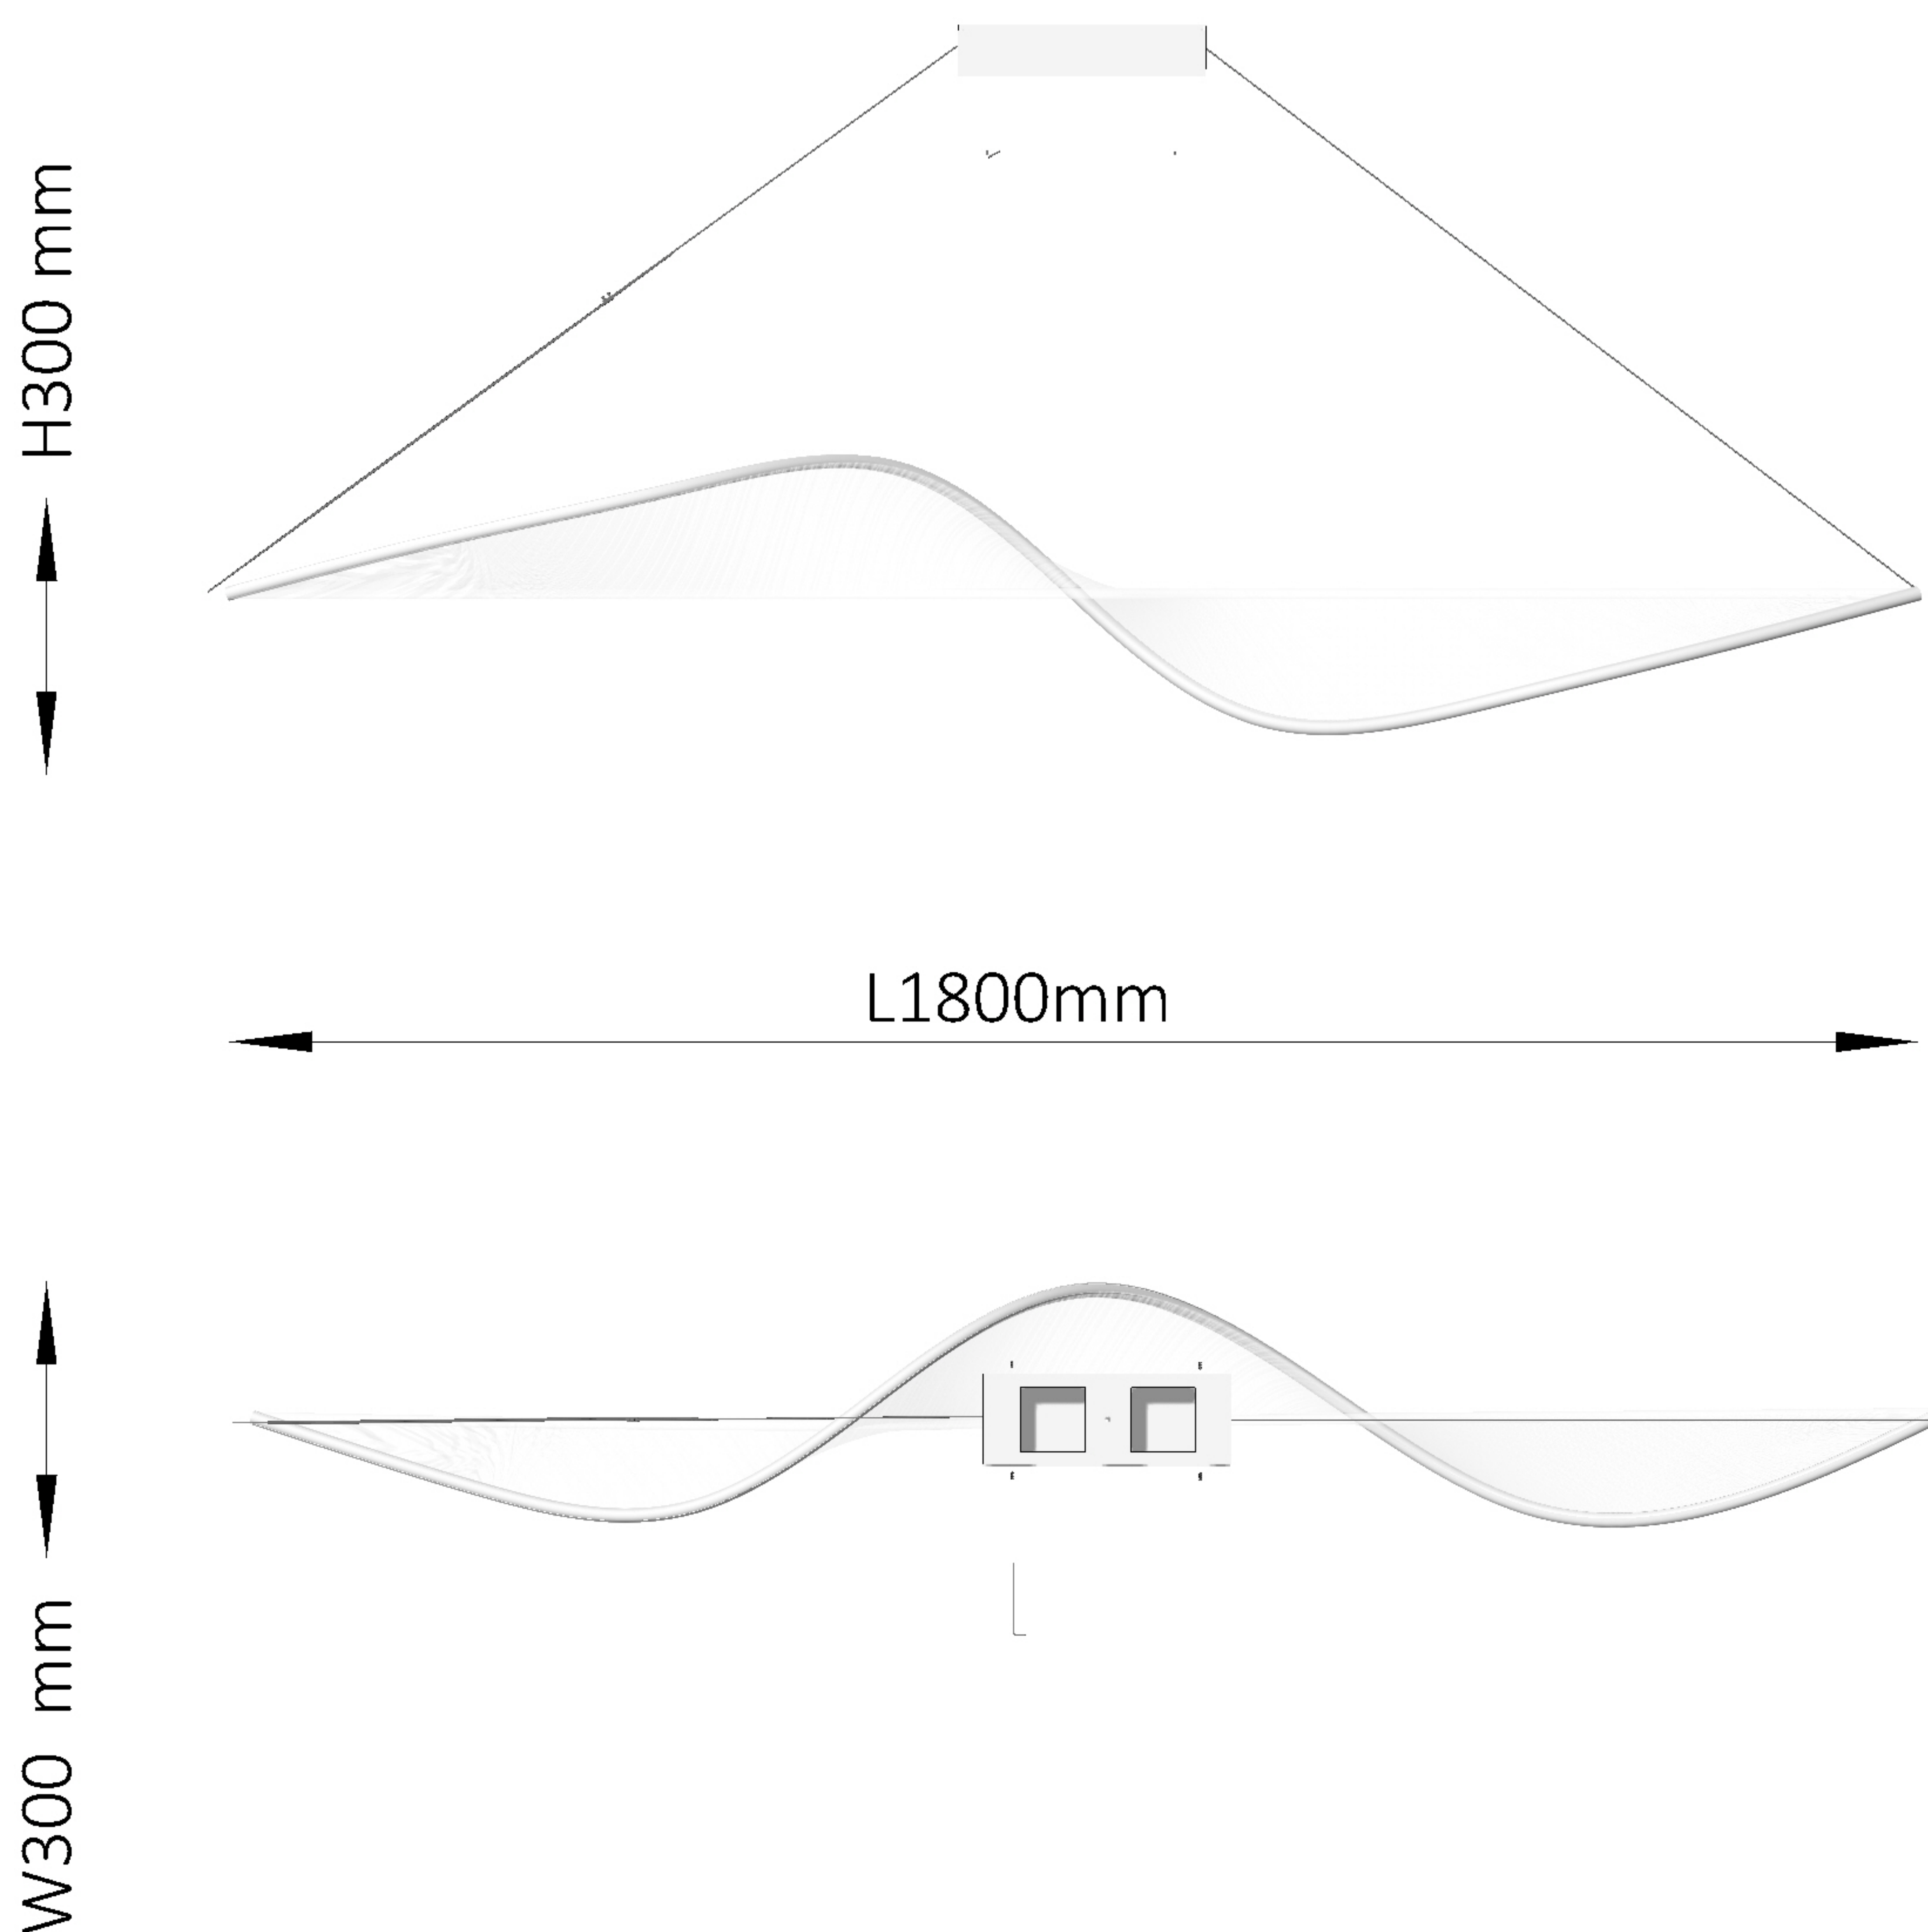

III.08.31


polyester fabric stretched around
bended aluminium profiles
containing the led tape
2700K
95+CRI
210cm length 1100LM/M
40 Watt 24V meanwell driver
white aluminium canopy
clear PA coated current carrying steel cable
adjustable drop length
2kg

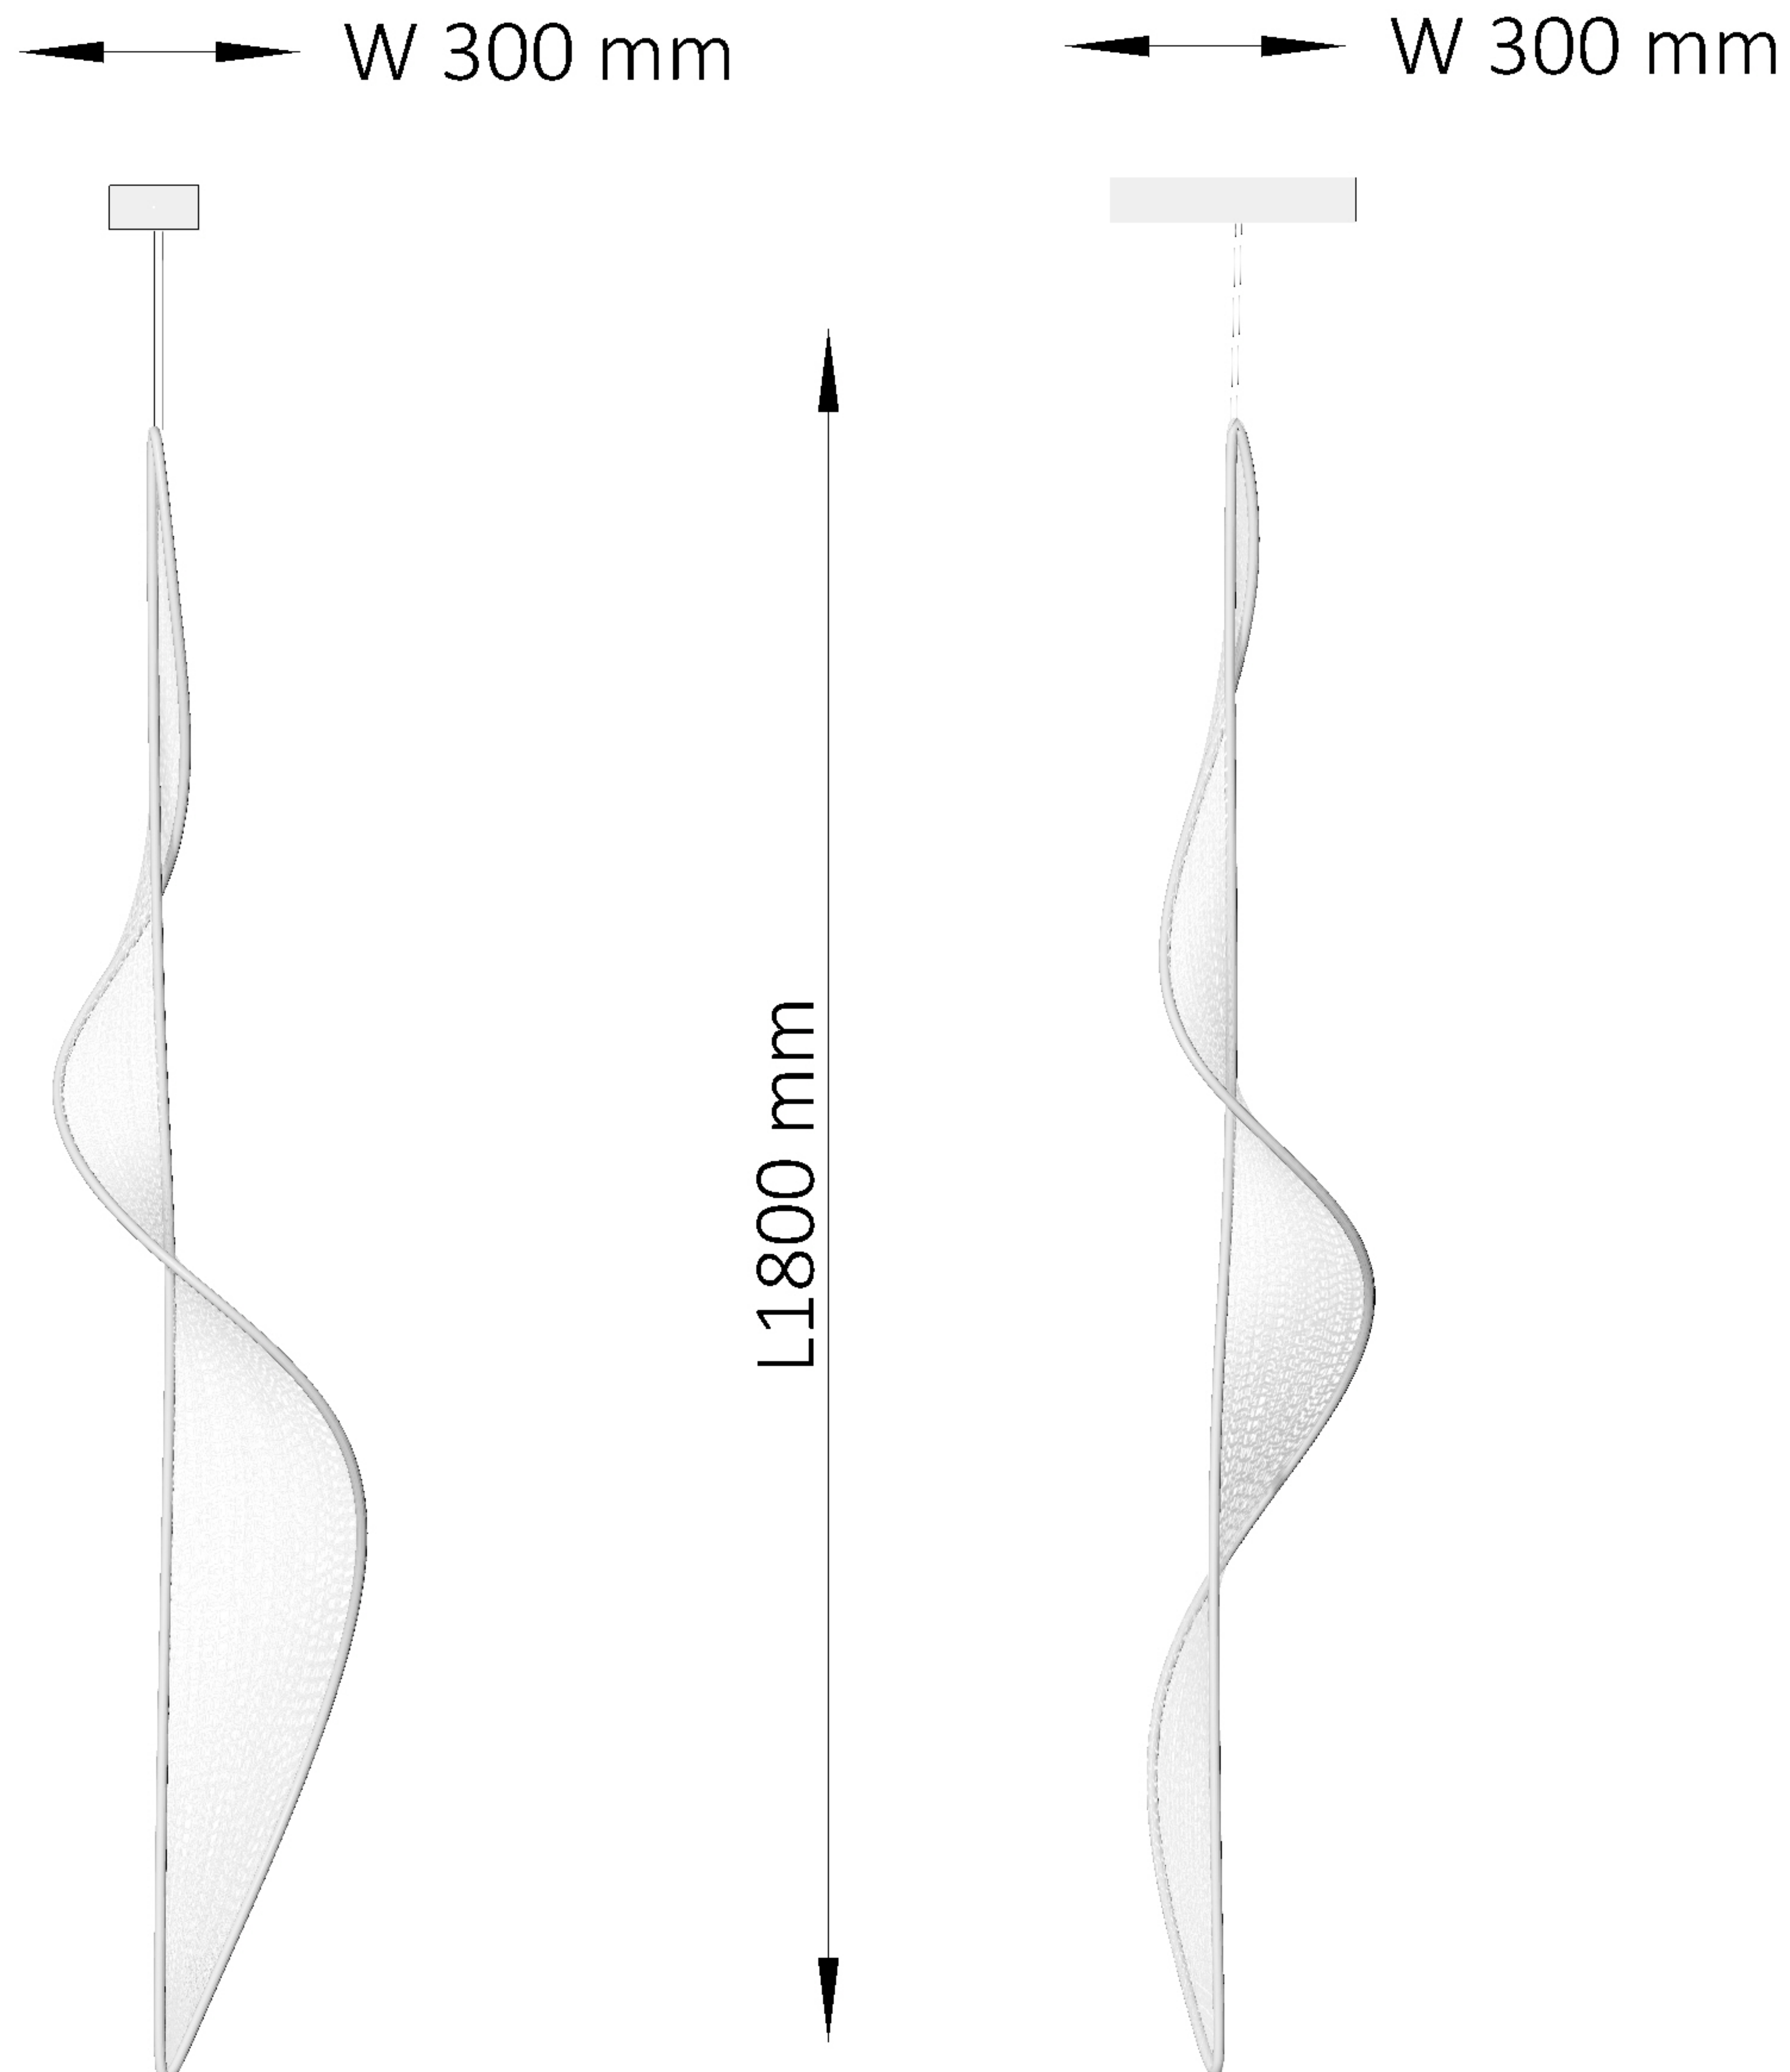

III.08.21/22

polyester fabric stretched around
bended aluminium profiles
containing the led tape
2700K
95+CRI
210cm length 1100LM/M
40 Watt 24V meanwell driver in the
white canopy
200 cm clear PA coated current carrying suspension cable
3kg


W 300 mm

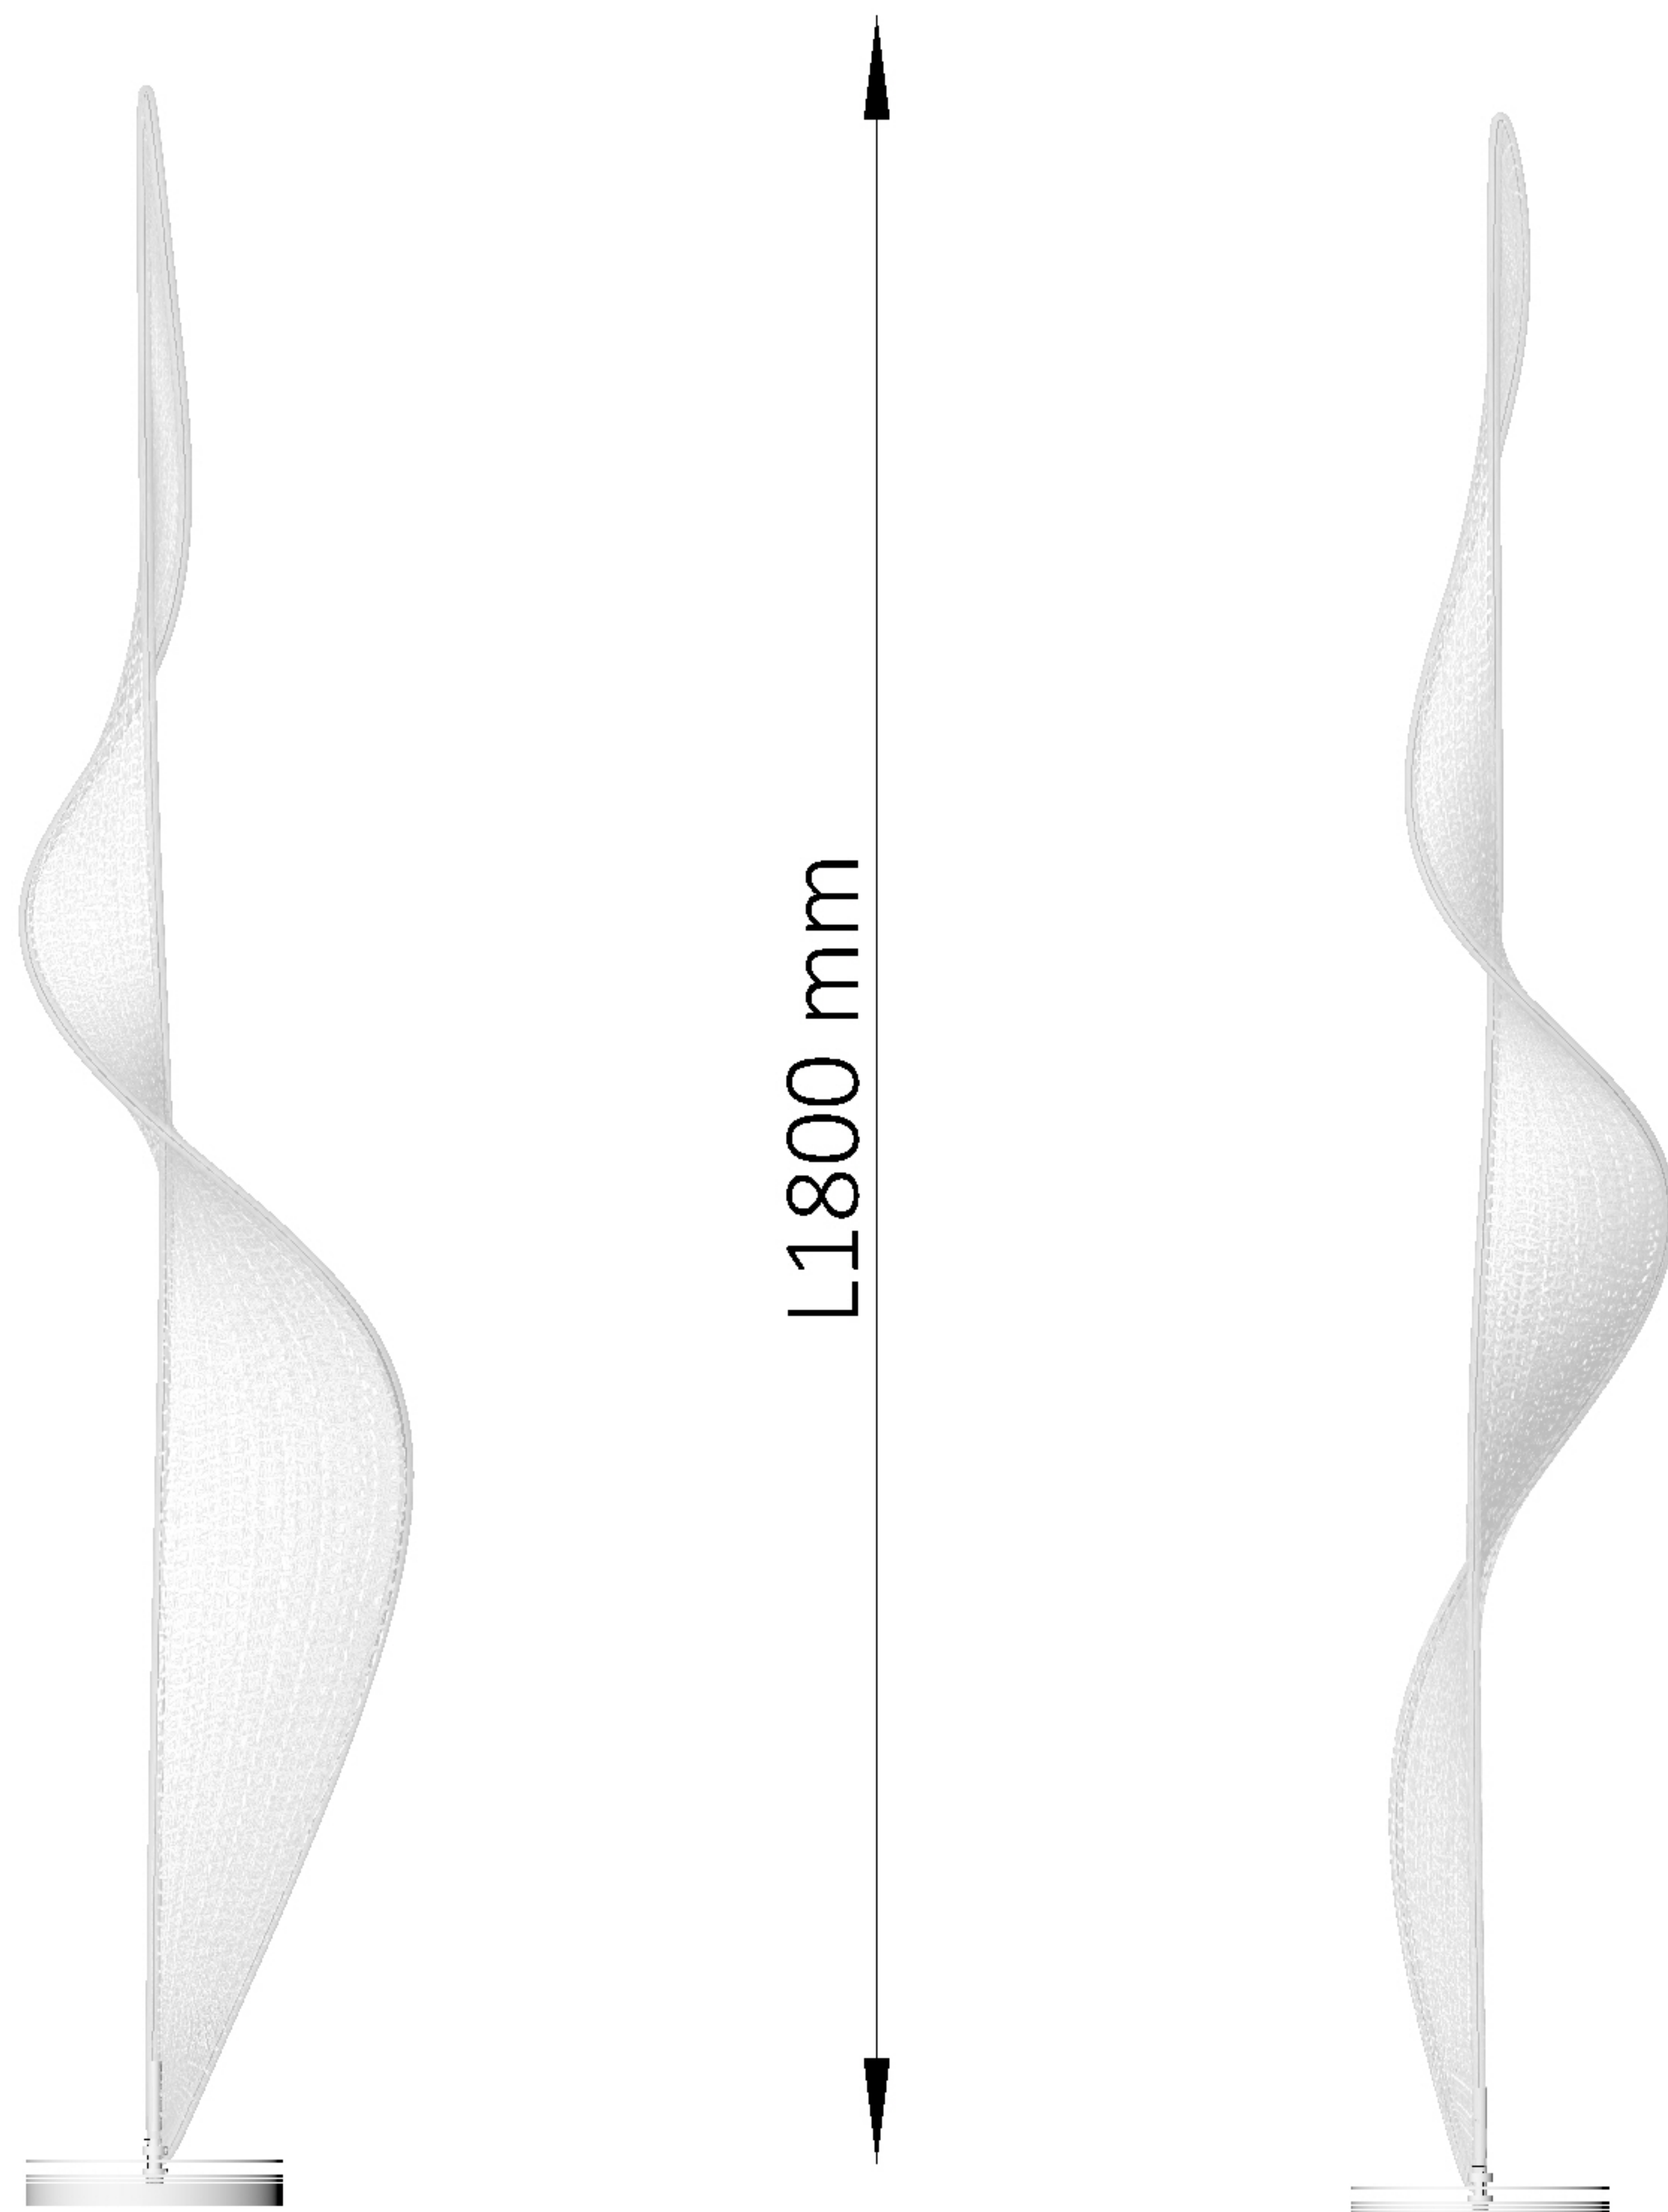

III.08.51

polyester fabric stretched around
bended aluminium profiles
containing the led tape
2700K
95+CRI
240cm length 1100LM/M
40 Watt 24V meanwell driver in the
black metal base
200 cm clear PA coated cable
3kg


H600 mm

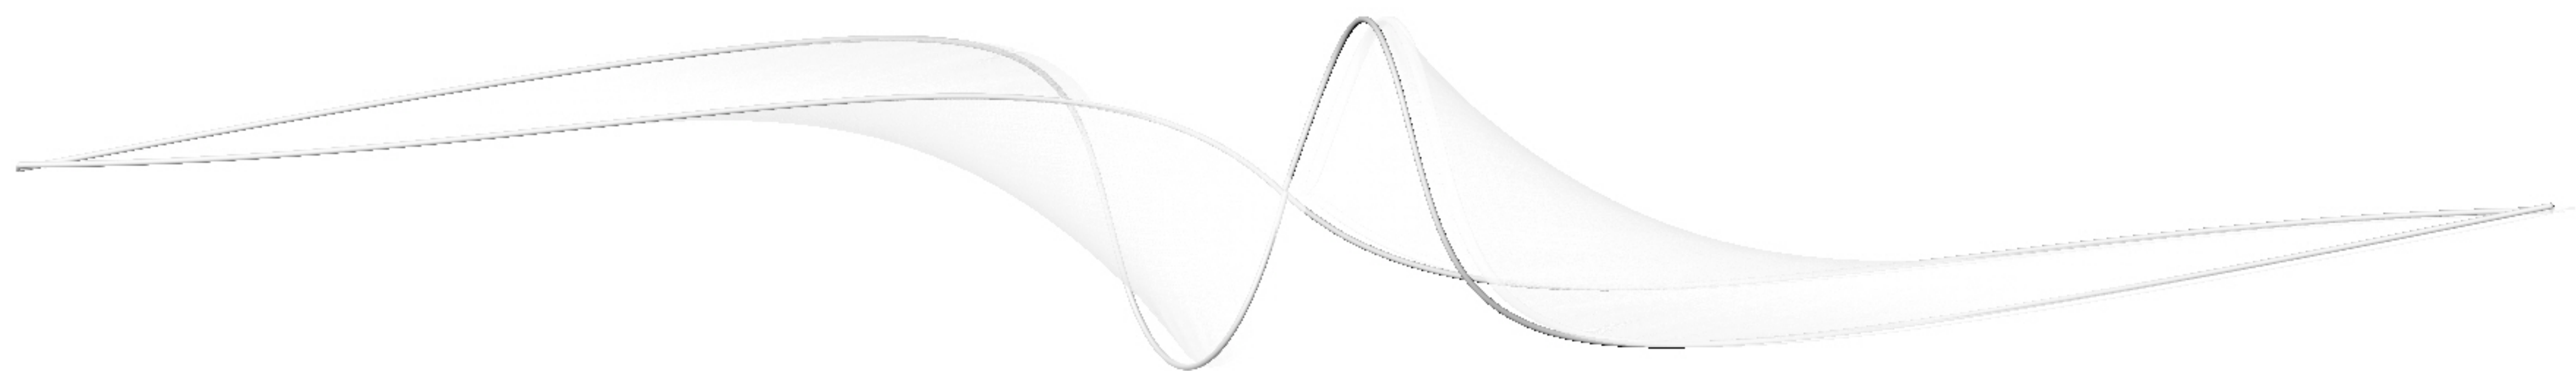

L3600mm



W800 mm

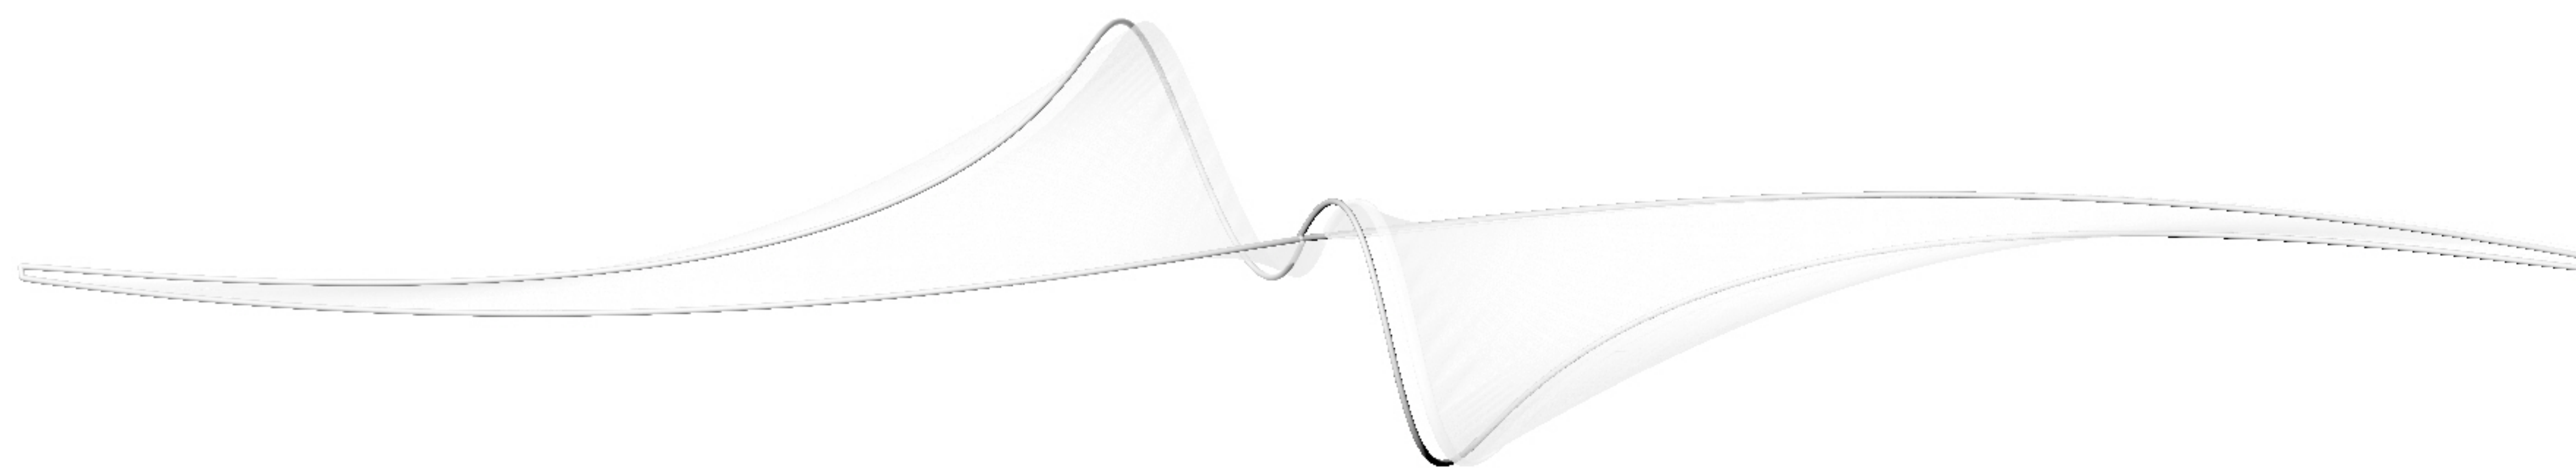

III.08.double

polyester fabric stretched around
bended aluminium profiles
containing the led tape
2300K/2700K
95+CRI
500cm length 1100LM/M
90 Watt 24V meanwell driver
white/black/brass canopy
clear PA coated current carrying steel cable
adjustable drop length
5kg

