



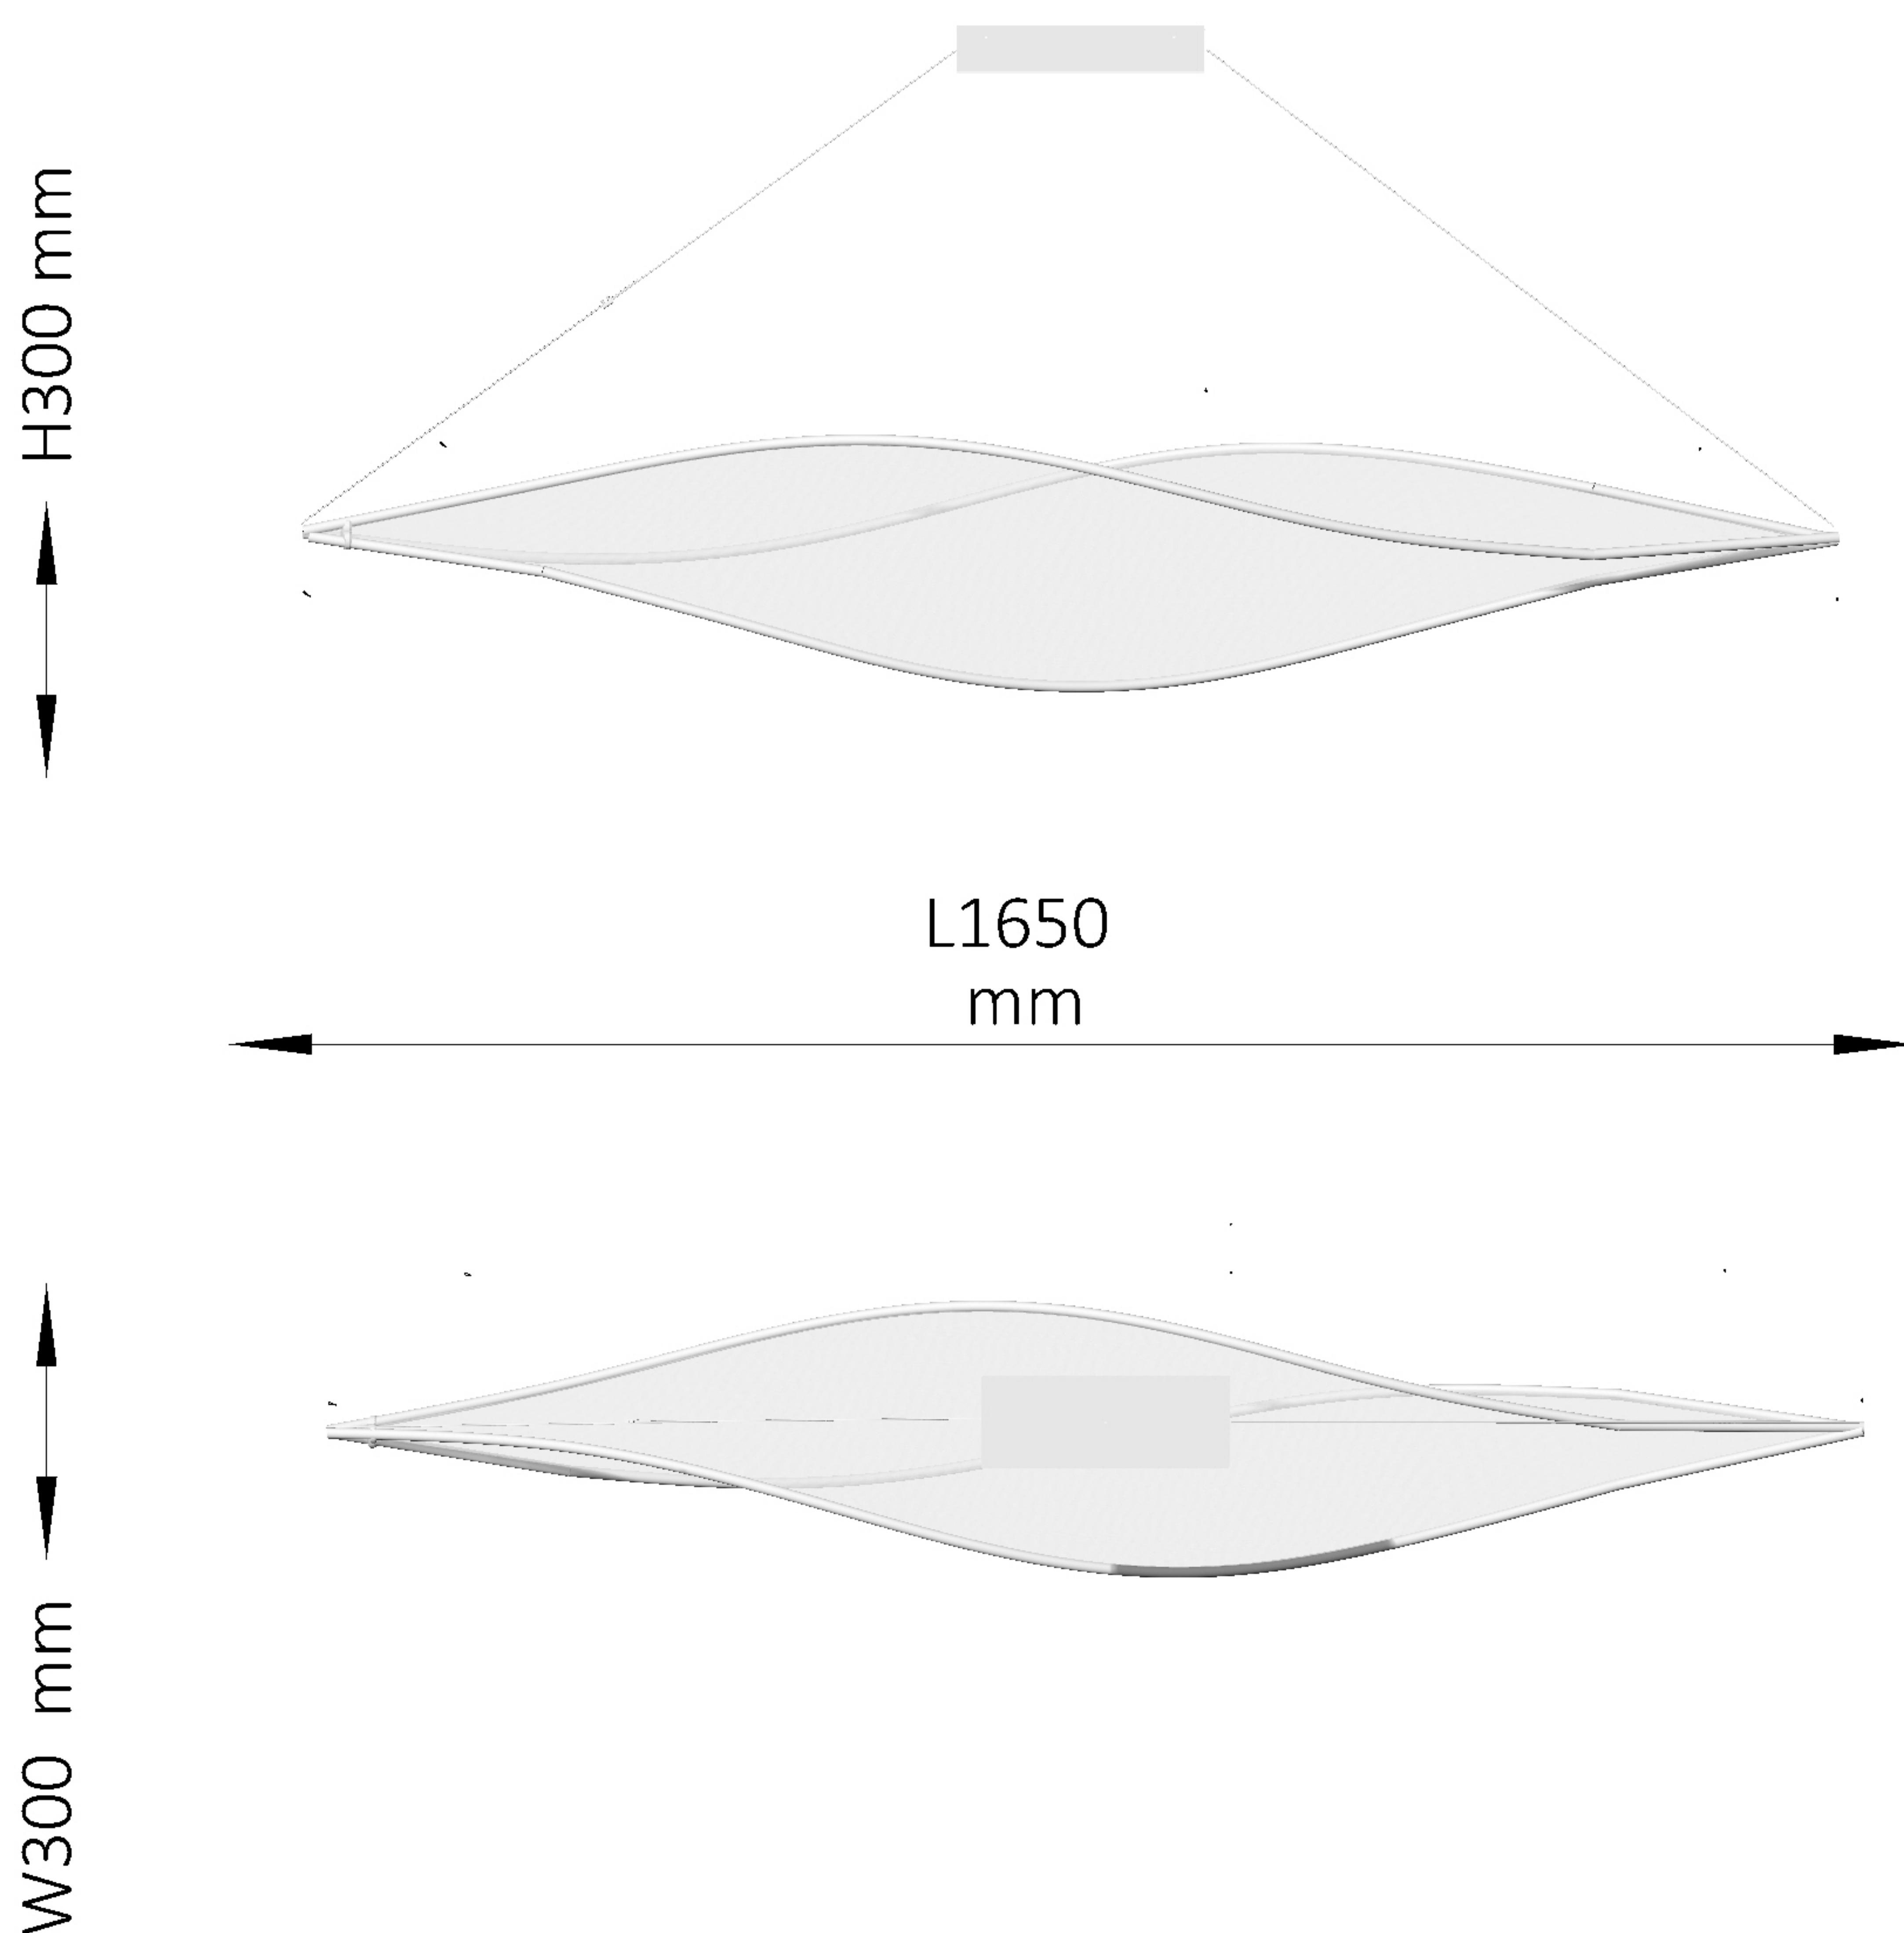

III.04.5/6


polyester fabric stretched around
banded aluminium profiles
containing the led tape
2300K/2700K
95+CRI
530cm length 1100LM/M
90 Watt 24V meanwell driver
black anodised aluminium canopy
clear PA coated current carrying steel cable
adjustable drop length
3kg

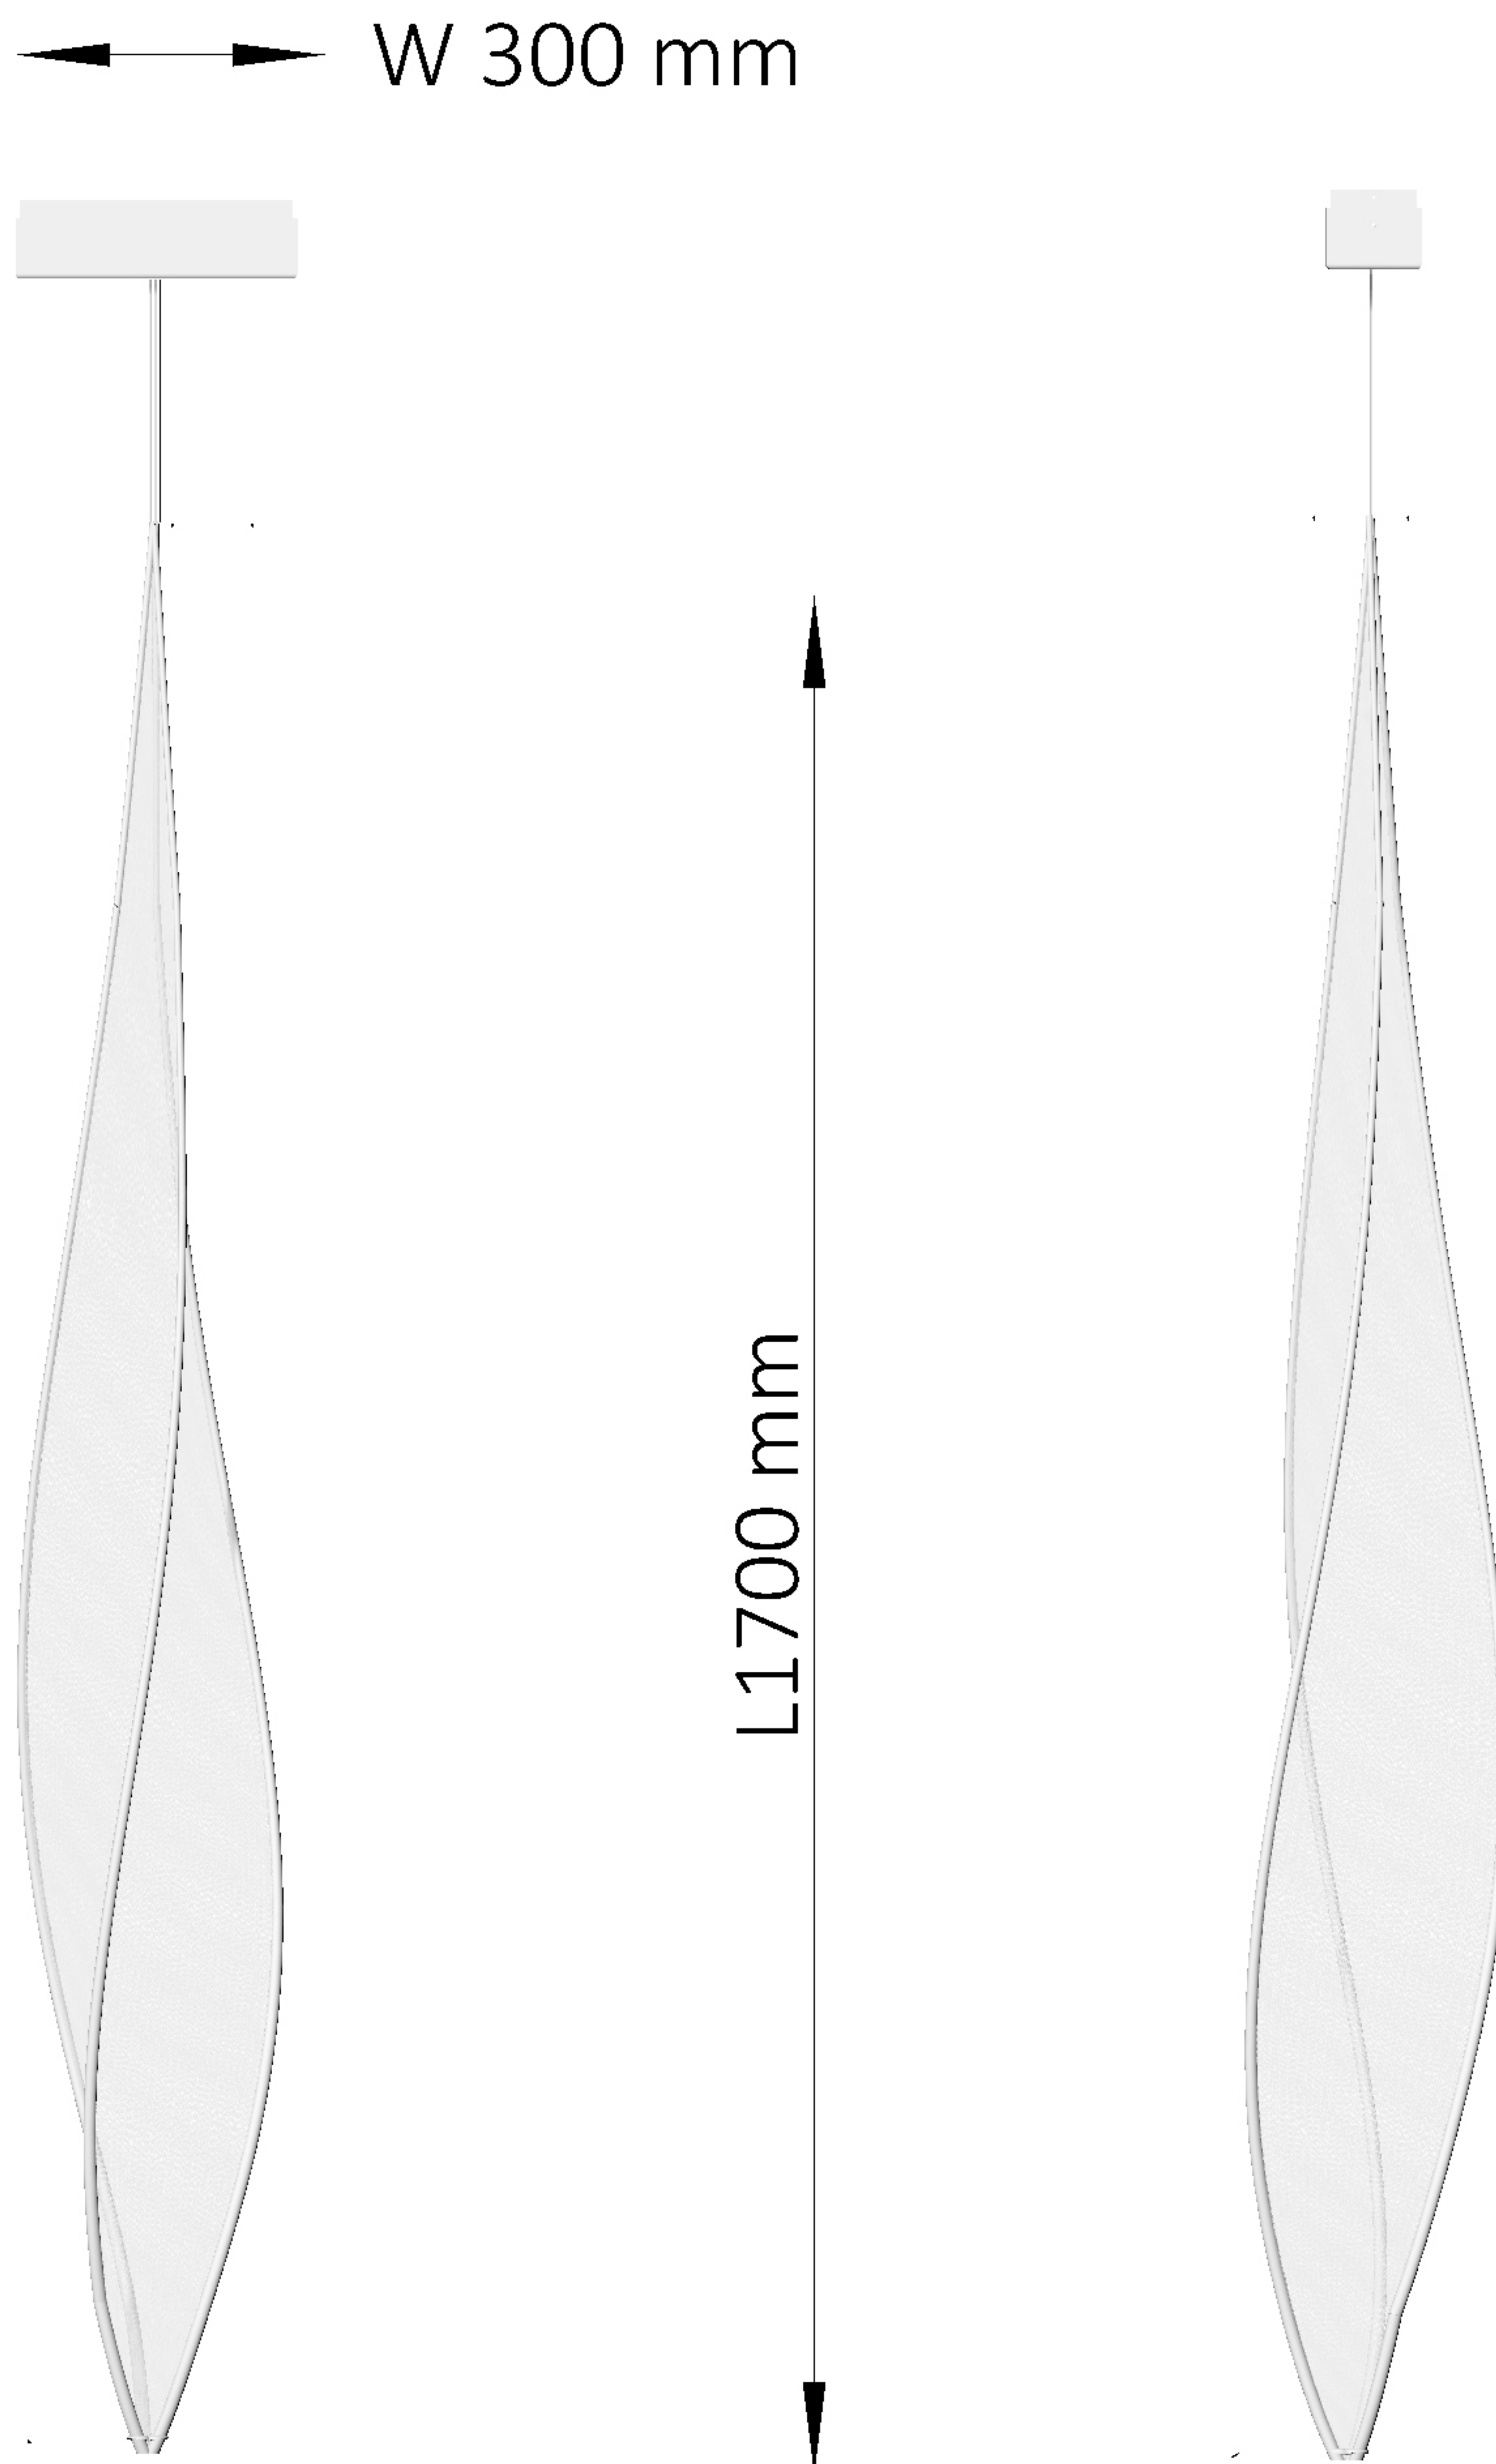


III.04.09/10

polyester fabric stretched around
bended aluminium profiles
containing the led tape
2300K/2700K
95+CRI
490 cm length 1100LM/M
90 Watt 24V meanwell driver in the
white canopy
200 cm clear PA coated cable
3kg

W 300 mm

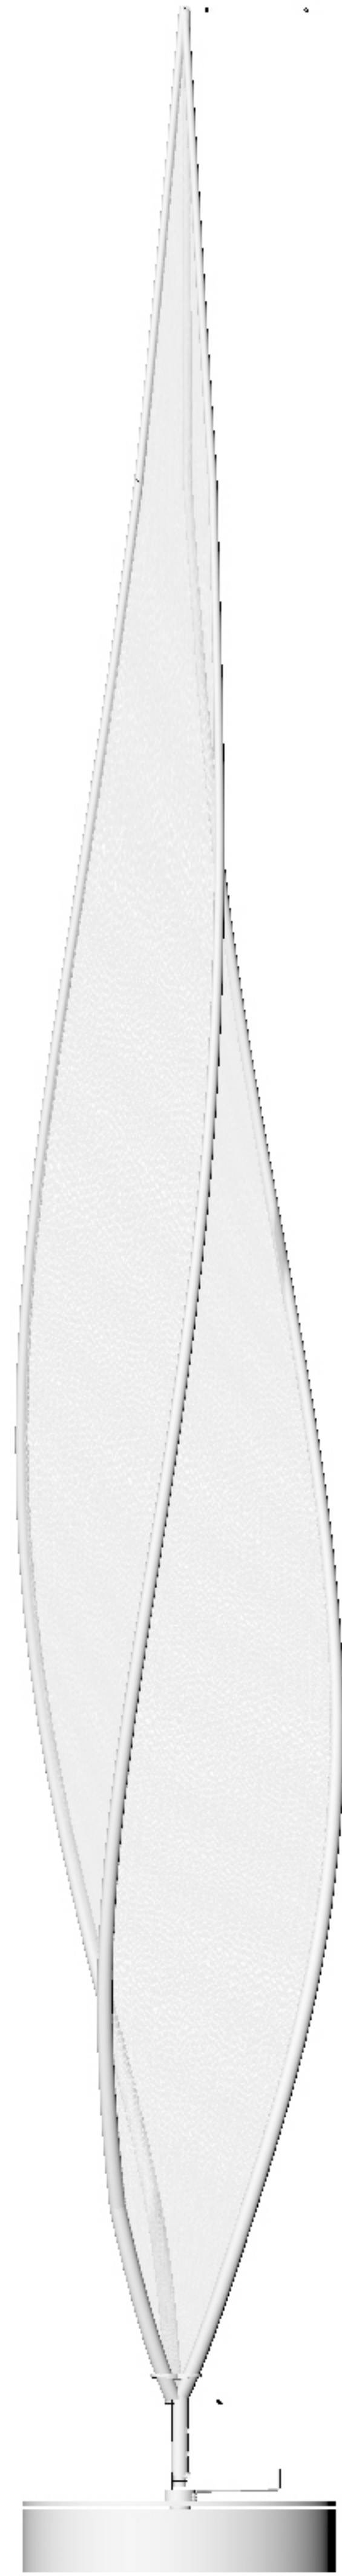

L1700 mm

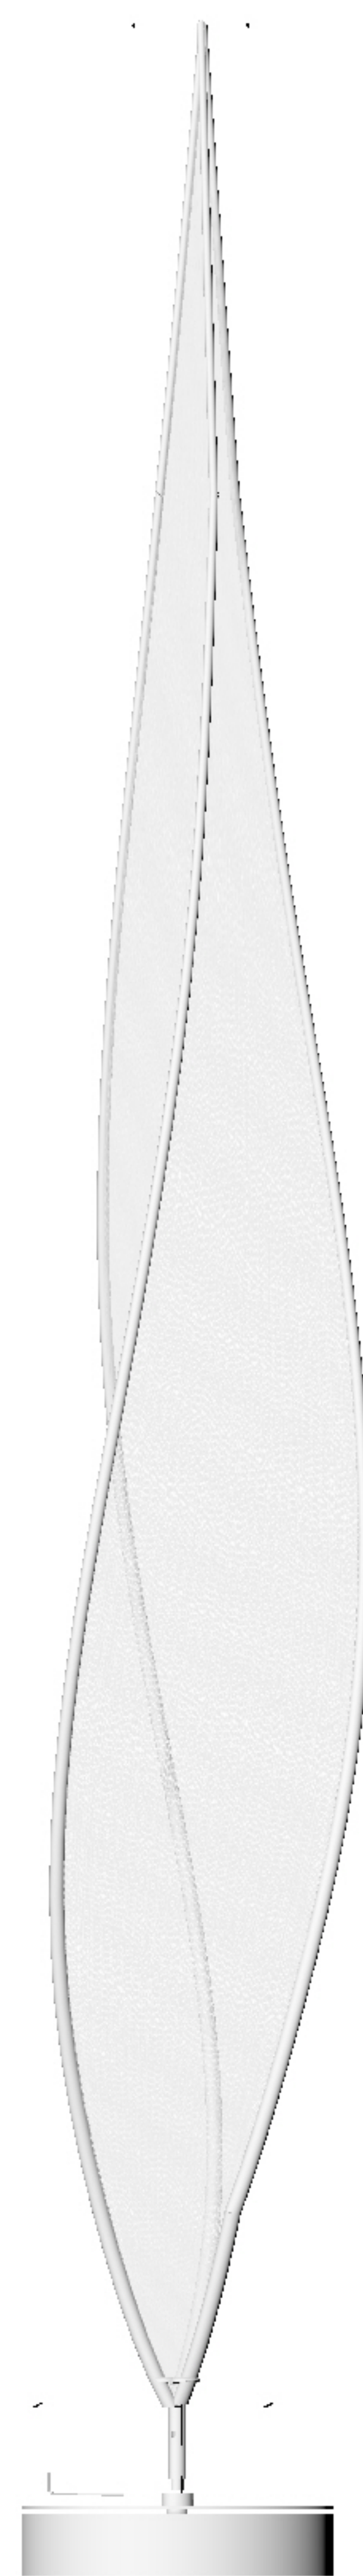

III.04.01

polyester fabric stretched around
bended aluminium profiles
containing the led tape
2700K
95+CRI
490 cm length 1100LM/M
90 Watt 24V meanwell driver in the
black metal base
200 cm clear PA coated cable
3kg

