


Beauty Shadow

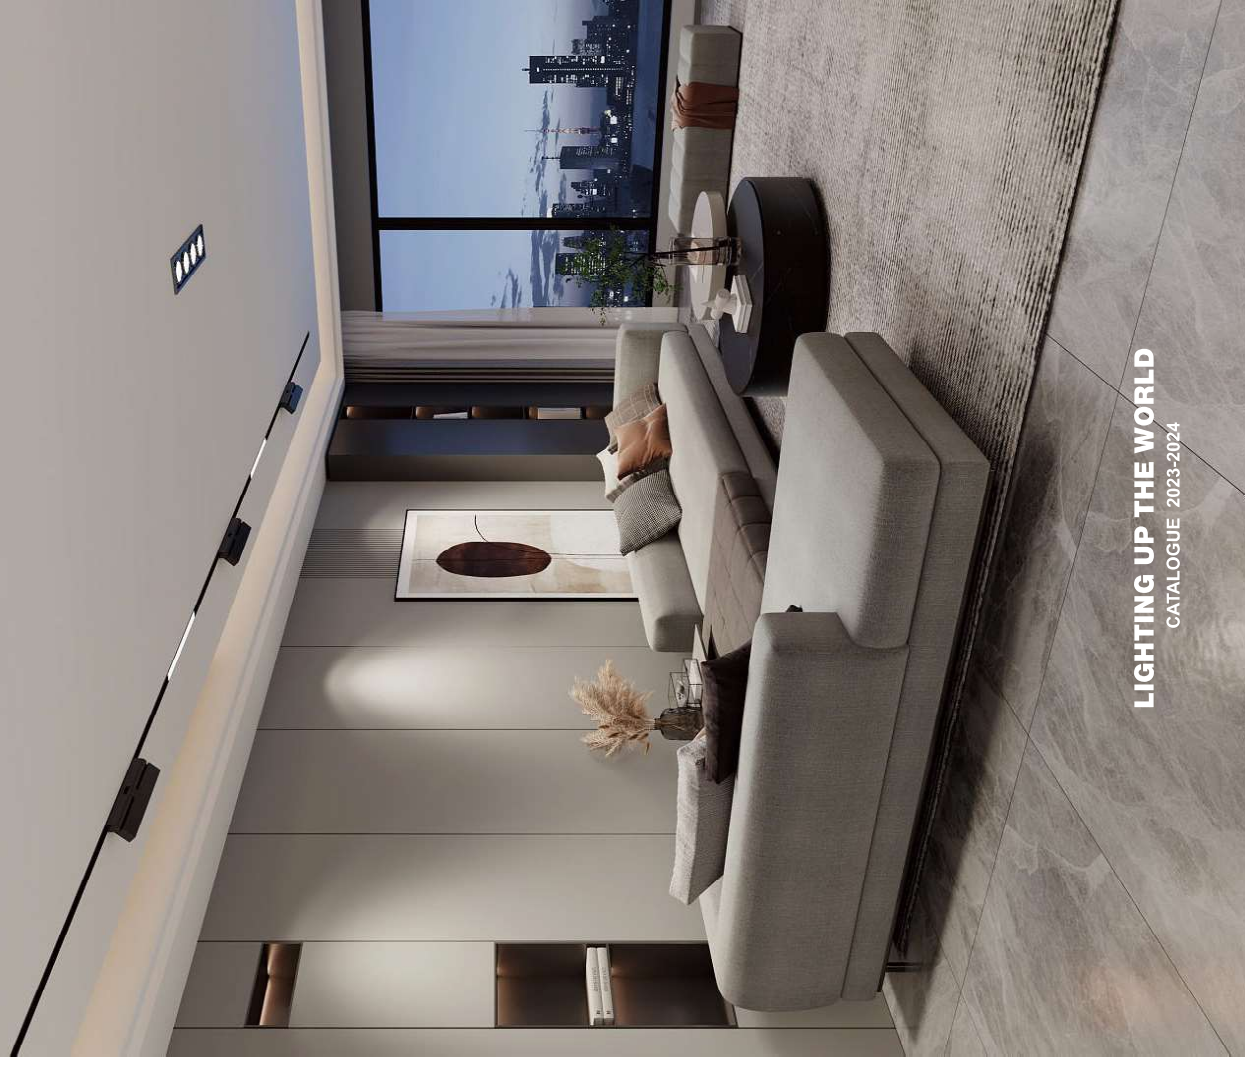

LIGHTING UP THE WORLD
CATALOGUE 2023-2024

Factory:

Tai Yang Ao Industrial Zone, Bai Hua Town, Hui Dong,
Hui Zhou, Guang Dong Province 516369, P.R.China

 www.beautyshadow.com

Head Office:

Suite 11, 29/F, Cable TV Tower, 9 Hoi Shing Road,
Tsuen Wan Hong Kong
Tel: (852)2402 1920
Fax: (852)2116 9065



CONTACT US



WEBSITE



We **Light Up** The World
www.beautysshadow.com



ABOUT **Beauty Shadow**

Beauty Shadow has put its main focus on the manufacturing of Energy Saving Lamp since 1993. With its strong financial position and technical expertise, the company has contributed to the development of green technology worldwide, already got 800+ LED lighting products now. Located in Huizhou, Guangdong Province, Beauty Shadow is able to produce 6 million lamps a month and can house up to 2000 workers. With marketing office in Hong Kong and a plant in mainland, Beauty Shadow is able to combine advanced style management with cost-effective running. Our R & D department is staffed by a team of experts each with over 10 years of experience in LED lighting design in the areas of optics, mechanical design, power supply design and reliability engineering. All products are in compliance with CE, RoHS, ERP and Energy Star standards. Beauty Shadow also offers customized service to help clients from all around the world to develop different kinds of products needed.

CONTENTS

1 SMART LIGHT		P01-04	2 GLOBE		P06-P08	3 CANDLE		P09	4 GU10		P10
WIFI SMART LIGHTING SERIES	SMART CEILING LAMP SERIES		GLOBE SERIES	CANDLE SERIES					GU10 SERIES		

20 CEILING FAN	P33-36		21 LED TUBE	P37-38		22 TRACK LIGHT	P39-40		23 FLOOD LIGHT	P41-42		24 READING LIGHT	P43-44		
CEILING FAN			LED TUBE SERIES			TRACK LIGHT			FLOOD LIGHT			LED READING LIGHT SERIES			

5 MR16		P11	6 PIN LAMP		P12	7 HIGH POWER		P13	8 UFO		P14	9 REFLECTOR		P15
MR16 SERIES			PIN LAMP SERIES			HIGH POWER SERIES			UFO LAMP SERIES			REFLECTOR SERIES		

25 ENERGY SAVING LAMP		P45-48	26 MAGNETIC TRACK		P49-58	27 PROJECT DOWNLIGHT		P59-63
ENERGY SAVING LAMP SERIES			MAGNETIC TRACK			PROJECT DOWN LIGHT		

10 PAR LIGHT		P16	11 FILAMENT		P17	12 G4 & G9 Series		P18	13 COLORED BULB		P19	14 LED SPECIALTY		P20
PAR LIGHT SERIES	FILAMENT SERIES			G4 & G9 SERIES			COLORED BULB SERIES					LED SPECIALTY SERIES		

15 REMOTE CONTROL		P21	16 DOWNLIGHT		P24-25	17 WATERPROOF LAMP		P26	18 CEILING LAMP		P28-30	19 TRI-PROOF CEILING LIGHT		P31-32
REMOTE CONTROL BULBS			DOWNLIGHT SERIES			WATERPROOF LAMP SERIES			LED CEILING LAMP SERIES			TRI-PROOF CEILING LAMP SERIES		





WELCOME TO
LUMI SERIES





STEP 1

Download the LUMI App and create an account



STEP 2

Add the smart products through Wi-Fi / Bluetooth into your cloud account (NO Hub required)



STEP 3

Connected successfully and you can now control the smart products with the LUMI App



• RGB • Cool White • Warm White





LED Smart Wi-Fi Light Bulb Series




GLBP104 A60

CDLP100 C37

GLBP105 G45

G10PI01 GU10

Model NO.	Wattage(W)	Voltage(V)	Base	Color Temp	Lumen	Product size(mm)
GLBP104 A60	10W	180-265V	E27/E14/B22	RGB+CCT	800lm	60 x 118
CDLP100 C37	5.5W	180-265V	E27/E14/B22	RGB+CCT	440lm	37 x 100
GLBP105 G45	5.5W	180-265V	E27/E14/B22	RGB+CCT	440lm	45 x 80
G10PI01 GU10	5.5W	180-265V	GU10	RGB+CCT	440lm	50 x 56



LED SMART WI-FI LIGHT BULB SERIES


RGB Mode 16 Million colors combination

LED Smart Strip Light Series



BLSA-3M

Model NO.	CRI	Voltage(V)	IP RATING	Color Temp	Product size(mm)
BLSA-3M	>80	180-265V	IP44	RGB-CW	12x3000mm




LED SMART LED STRIP LIGHT SERIES

LED Smart Ceiling Light Series



Model NO.	Wattage(W)	Voltage(V)	Color Temp	Lumen(LM)	Star Effect	Option	Lamp base size(mm)
BSCLB	36W	180-265V	RGB+CCT-DIMMBLE	3010lm	✓		Ø450
BSCLC	36W	180-265V	RGB+CCT-DIMMBLE	3350lm	✓		Ø450
BSCLD(T)	36W	180-265V	RGB+CCT-DIMMBLE	3210lm	X		Ø450
BSCLD(W)	36W	180-265V	RGB+CCT-DIMMBLE	2990lm	X		Ø450
BSCLF	36W	180-265V	RGB+CCT-DIMMBLE	3540lm	X		Ø450
BSCLJ	36W	180-265V	RGB+CCT-DIMMBLE	1760lm	X		Ø450
BSCLN	36W	180-265V	RGB+CCT-DIMMBLE	2480lm	✓		Ø450
BSCLP	36W	180-265V	RGB+CCT-DIMMBLE	3180lm	X		Ø450




LED SMART CEILING LIGHT SERIES

LED Smart Ceiling Light Series



Model NO.	Wattage(W)	Voltage(V)	Color Temp	Lumen(LM)	Star Effect	Option	Lamp base size(mm)
BSCLQ	36W	180-265V	RGB+CCT-DIMMBLE	3200lm	✓		Ø450
BSCLR	36W	180-265V	RGB+CCT-DIMMBLE	2910lm	X		Ø450
BSCLS	36W	180-265V	RGB+CCT-DIMMBLE	2910lm	X		Ø450
BSCLT	36W	180-265V	RGB+CCT-DIMMBLE	3200lm	X		Ø450
BSCLU	36W	180-265V	RGB+CCT-DIMMBLE	2350lm	X		Ø450
BSCLV	36W	180-265V	RGB+CCT-DIMMBLE	1870lm	X		Ø450
BSCLY	36W	180-265V	RGB+CCT-DIMMBLE	2620lm	X		Ø450



LED SMART CEILING LIGHT SERIES



LED BULB SERIES



GLBPA00

Model NO.	Wattage(W)	Voltage(V)	Lampe Base	Color Temperature(K)	Lumen(LM)	Product size (mm)		Packaging(Pcs/box)
						Diameter	Length	
GLBPA00	3W	180-265V	E14/E27/B22	3000K/4000K/6500K	255	55	109	100
GLBPA00	5W	180-265V	E14/E27/B22	3000K/4000K/6500K	425	55	109	100
GLBPA00	6W	180-265V	E14/E27/B22	3000K/4000K/6500K	510	60	113	100
GLBPA00	7W	180-265V	E14/E27/B22	3000K/4000K/6500K	595	60	113	100
GLBPA00	8W	180-265V	E14/E27/B22	3000K/4000K/6500K	680	60	113	100
GLBPA00	9W	180-265V	E14/E27/B22	3000K/4000K/6500K	765	60	113	100
GLBPA00	10W	180-265V	E14/E27/B22	3000K/4000K/6500K	850	60	113	100
GLBPA00	11W	180-265V	E14/E27/B22	3000K/4000K/6500K	935	60	113	100
GLBPA00	12W	180-265V	E14/E27/B22	3000K/4000K/6500K	1020	60	113	100
GLBPA00	15W	180-265V	E14/E27/B22	3000K/4000K/6500K	1275	65	113	100
GLBPA00	18W	180-265V	E14/E27/B22	3000K/4000K/6500K	1530	65	113	100



- GLOBE SERIES**
- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
 - ◆ High efficacy: up to 85lm/W
 - ◆ Meet ERP standards

G45 Globe Series

G95 & G120 Globe Series



GLBPC00

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
GLBPC00	3W	180-265V	E14/E27/B22	3000K/4000K/6500K	255	45 81	50
GLBPC00	4W	180-265V	E14/E27/B22	3000K/4000K/6500K	340	45 81	40
GLBPC00	5W	180-265V	E14/E27/B22	3000K/4000K/6500K	425	45 81	40
GLBPC00	6W	180-265V	E14/E27/B22	3000K/4000K/6500K	510	45 81	20
GLBPC00	7W	180-265V	E14/E27/B22	3000K/4000K/6500K	595	45 81	40
GLBPC00	8W	180-265V	E14/E27/B22	3000K/4000K/6500K	680	45 81	20



G45 GLOBE SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ High efficacy up to 85lm/W



GLBPA11

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
GLBPA11	13W	180-265V	E14/E27/B22	3000K/4000K/6500K	1105	200°	95 138	30
GLBPA11	15W	180-265V	E14/E27/B22	3000K/4000K/6500K	1275	200°	125 153	30
GLBPA11	18W	180-265V	E14/E27/B22	3000K/4000K/6500K	1530	200°	125 153	30



G95 & G120 GLOBE SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

Candle Series



Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
CDLPB12	3W	180-265V	E14/E27/B22	3000K/4000K/6500K	255	37 105	100
CDLPB12	4W	180-265V	E14/E27/B22	3000K/4000K/6500K	340	37 105	100
CDLPB12	5W	180-265V	E14/E27/B22	3000K/4000K/6500K	425	37 105	100
CDLPB12	6W	180-265V	E14/E27/B22	3000K/4000K/6500K	510	37 105	100
CDLPB12	7W	180-265V	E14/E27/B22	3000K/4000K/6500K	595	37 105	100
CDLPB12	8W	180-265V	E14/E27/B22	3000K/4000K/6500K	680	37 105	100



CANDLE SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ High efficacy, up to 85lm/W
- ◆ Meet ERP standards

GU10 Spotlight Series



Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
G10PD07	3W	180-265V	GU10	3000K/4000K/6500K	255	38°/110°	50 60	100
G10PD07	4W	180-265V	GU10	3000K/4000K/6500K	340	38°/110°	50 60	100
G10PD07	5W	180-265V	GU10	3000K/4000K/6500K	425	38°/110°	50 60	100
G10PD07	6W	180-265V	GU10	3000K/4000K/6500K	510	38°/110°	50 60	100
G10PD07	7W	180-265V	GU10	3000K/4000K/6500K	595	38°/110°	50 60	100
G10PD07	8W	180-265V	GU10	3000K/4000K/6500K	680	38°/110°	50 60	100
G10PD07	9W	180-265V	GU10	3000K/4000K/6500K	765	38°/110°	50 60	100



GU10 SPOTLIGHT SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

MR16 Spot Light Series



MT16PA03

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Fcs/box) Inner Outer
MT16PA03	3W	12VDC	GU 5.3	3000K/4000K/6500K	255	38°/110°	50 53	100
MT16PA03	4W	12VDC	GU 5.3	3000K/4000K/6500K	340	38°/110°	50 53	100
MT16PA03	5W	12VDC	GU 5.3	3000K/4000K/6500K	425	38°/110°	50 53	100
MT16PA03	6W	12VDC	GU 5.3	3000K/4000K/6500K	510	38°/110°	50 53	100
MT16PA03	7W	12VDC	GU 5.3	3000K/4000K/6500K	595	38°/110°	50 53	100



MR16 SPOTLIGHT SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

Pin Lamp Series



TLBPA00-C

TLBPA00-B

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Fcs/box) Inner Outer
TLBPA00-C	6W	170-265V	E27/G24D	3000K/4000K/6500K	510	200°	35 85	25 100
TLBPA00-C	8W	170-265V	E27/G24D	3000K/4000K/6500K	680	200°	37 114	25 100
TLBPA00-B	7W	170-265V	E27/G24D	3000K/4000K/6500K	595	200°	41 110	25 100
TLBPA00-B	9W	170-265V	E27/G24D	3000K/4000K/6500K	765	200°	45 133	25 100
TLBPA00-B	10W	170-265V	E27/G24D	3000K/4000K/6500K	850	200°	37 114	25 100
TLBPA00-B	12W	170-265V	E27/G24D	3000K/4000K/6500K	1020	200°	41 110	25 100



PIN LAMP SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Suitable for PL fitting use
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

High Power Globe Series



TLBPA01

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter	Product size (mm) Length	Packaging(Pcs/box) Outer
TLBPA01	20W	180-265V	E14/E27/B22	3000K/4000K/6500K	1700	180°	80	129	50
TLBPA01	30W	180-265V	E14/E27/B22	3000K/4000K/6500K	2500	180°	100	153	40
TLBPA01	40W	180-265V	E14/E27/B22	3000K/4000K/6500K	3400	180°	120	168	40
TLBPA01	50W	180-265V	E14/E27/B22	3000K/4000K/6500K	4250	180°	140	191	20



HIGH POWER GLOBE SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Suitable for warehouse use
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

UFO Lamp Series



UFOPA01

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter	Product size (mm) Length	Packaging(Pcs/box) Outer
UFOPA01	20W	180-265V	E14/E27/B22	3000K/4000K/6500K	1700	110°	160	98	10
UFOPA01	30W	180-265V	E14/E27/B22	3000K/4000K/6500K	2550	110°	190	109	10
UFOPA01	40W	180-265V	E14/E27/B22	3000K/4000K/6500K	3400	110°	220	119	10



UFO LAMP SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

Reflector Series



R50PA00



R63PA00



P38PA02

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
R50PA00	6W	180-265V	E14/E27/B22	3000K/4000K/6500K	510	110°	50 87	1000
R63PA00	8W	180-265V	E14/E27/B22	3000K/4000K/6500K	680	110°	63 102	1000

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
P30PA00	12W	180-265V	E14/E27/B22	3000K/4000K/6500K	1020	38°	95 97	10
P38PA02	14W	180-265V	E14/E27/B22	3000K/4000K/6500K	1190	38°	121 131	10



REFLECTOR SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects



PAR SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

Filament Series

G4 & G9 Series



Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Dimming Option	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
L-CDLGA01	2W	180-265V	E14	3000K/4000K/6500K	200	300°	✓	35 105	100
L-CDLGA01	4W	180-265V	E14	3000K/4000K/6500K	400	300°	✓	35 105	100
L-CDLGA00	2W	180-265V	E14	3000K/4000K/6500K	200	300°	✓	35 120	100
L-CDLGA00	4W	180-265V	E14	3000K/4000K/6500K	400	300°	✓	35 120	100
L-GLBGC00	4W	180-265V	E14/E27/B22	3000K/4000K/6500K	400	300°	✓	64 146	100
L-GLBGC00	8W	180-265V	E14/E27/B22	3000K/4000K/6500K	800	300°	✓	64 146	100
L-GLBGB00	2W	180-265V	E14/E27/B22	3000K/4000K/6500K	200	300°	✓	45 78	100
L-GLBGB00	4W	180-265V	E14/E27/B22	3000K/4000K/6500K	400	300°	✓	45 78	100
L-GLBGB01	4W	180-265V	E14/E27/B22	3000K/4000K/6500K	400	300°	✓	60 106	100
L-GLBGB01	6W	180-265V	E14/E27/B22	3000K/4000K/6500K	600	300°	✓	60 106	100
L-GLBGB01	8W	180-265V	E14/E27/B22	3000K/4000K/6500K	800	300°	✓	60 106	100
L-GLBGB03	4W	180-265V	E14/E27/B22	3000K/4000K/6500K	400	300°	✓	95 128	30



FILAMENT SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects



G4 & G9 SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

COLORED Bulb Series



Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
L-GLBPG01	1W	180-265V	E27/B22	RED/ORANGE/YELLOW/GREEN	180°	45 70	100
L-GLBPG01	2W	180-265V	E27/B22	RED/ORANGE/YELLOW/GREEN	180°	45 70	100
L-GLBPG01	3W	180-265V	E27/B22	RED/ORANGE/YELLOW/GREEN	180°	45 70	100
GLBPA02	3W	180-265V	E14/E27/B22	RED/ORANGE/YELLOW/GREEN	220°	60 109	100
GLBPA02	4W	180-265V	E14/E27/B22	RED/ORANGE/YELLOW/GREEN	220°	60 109	100
GLBPA02	5W	180-265V	E14/E27/B22	RED/ORANGE/YELLOW/GREEN	220°	60 109	100
GLBPA02	6W	180-265V	E14/E27/B22	RED/ORANGE/YELLOW/GREEN	220°	60 109	100
GLBPA02	7W	180-265V	E14/E27/B22	RED/ORANGE/YELLOW/GREEN	220°	60 109	100




COLORED BULB SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

LED Specialty Series



Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Inner Outer
GLBPW02	8W	180-265V	E14/E27/B22	3000K/6500K	640	130°	60 113	25 100
GLBPW02	10W	180-265V	E14/E27/B22	3000K/6500K BUG REPELLING LIGHT	800	130°	60 113	25 100



LED SPECIALTY SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ 2 color temperature options
- ◆ Amber yellow light can repel mosquito and bug
- ◆ Control by ON/OFF switch
- ◆ Suitable for balcony, porch

Remote Control Bulbs Series




Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base	Lumen(LM)	Beam Angle	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
GLBP103	8W	180-265V	3000K/4000K/6500K	E27	640	180°	60 119	100
GLBP106	13W	180-265V	3000K/4000K/6500K	E27	1440	220°	95 125	100
UFOP100	20W	180-265V	3000K/4000K/6500K	E27	1600	130°	160 98	10
UFOP100	24W	180-265V	3000K/4000K/6500K	E27	1800	130°	190 109	10
UFOP100	36W	180-265V	3000K/4000K/6500K	E27	2900	130°	220 119	10

*Batteries are not included



REMOTE CONTROL BULBS SERIES

- ◆ Meet the new ERP2.0 standard mandatorily needed for current Euro market
- ◆ Remote control included *
- ◆ 3 color temperature options
- ◆ Night light function

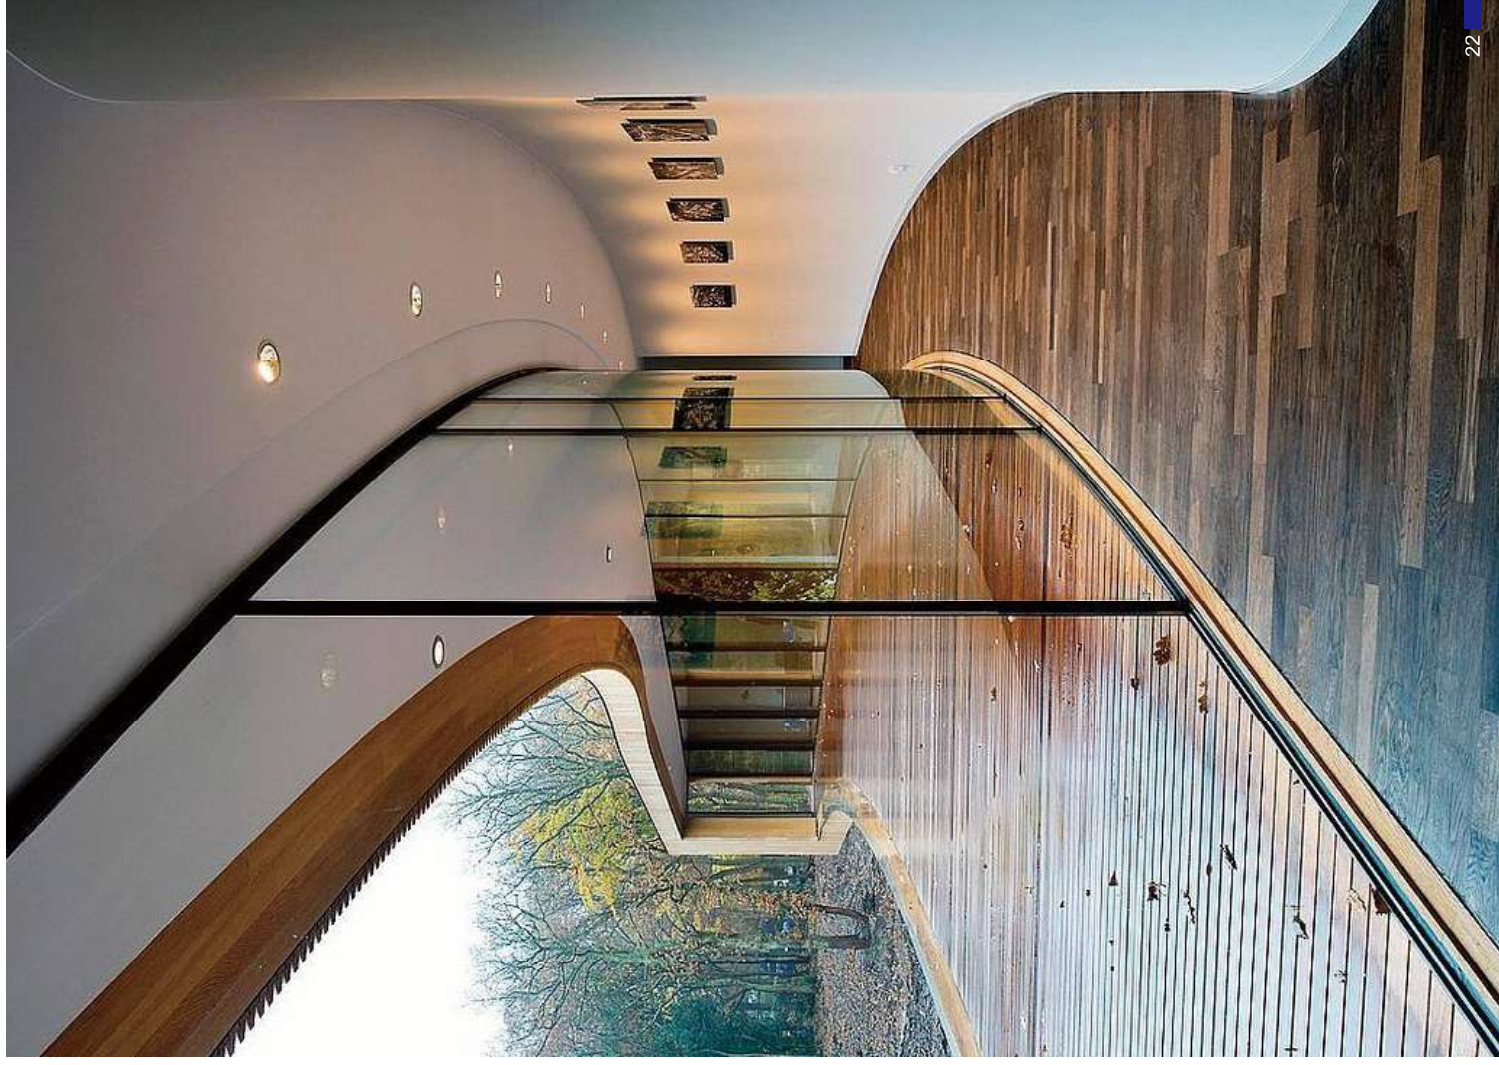

DOWNLIGHT SERIES

Downlight Series



DLTPA00-P



DLTPA00

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Product Color	Beam Angle	Cut Hole Size(mm)		Product size (mm)		Packaging(Pcs/box)	
									Weight	Height	Outer	Inner
DLTPA00-P	5W	170-265V	3000K/4000K/6500K	425	WHITE	100°	75-82	98	25.5	80		
DLTPA00-P	9W	170-265V	3000K/4000K/6500K	765	WHITE	100°	95-100	118	25.5	40		
DLTPA00-P	12W	170-265V	3000K/4000K/6500K	1020	WHITE	100°	116-120	145	25.5	20		
DLTPA00-P	18W	170-265V	3000K/4000K/6500K	1530	WHITE	100°	148-155	175	26.5	40		
DLTPA00-P	24W	170-265V	3000K/4000K/6500K	2040	WHITE	100°	185-200	222	27.5	20		
DLTPA00	5W	170-265V	3000K/4000K/6500K	425	WHITE	100°	75-82	92	20	48		
DLTPA00	7W	170-265V	3000K/4000K/6500K	595	WHITE	100°	75-82	92	20	24		
DLTPA00	7W	170-265V	3000K/4000K/6500K	595	WHITE	100°	95-100	115	26	12		
DLTPA00	9W	170-265V	3000K/4000K/6500K	765	WHITE	100°	95-100	115	26	12		




DOWNLIGHT SERIES

- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects

Downlight Series

Waterproof Lamp Series

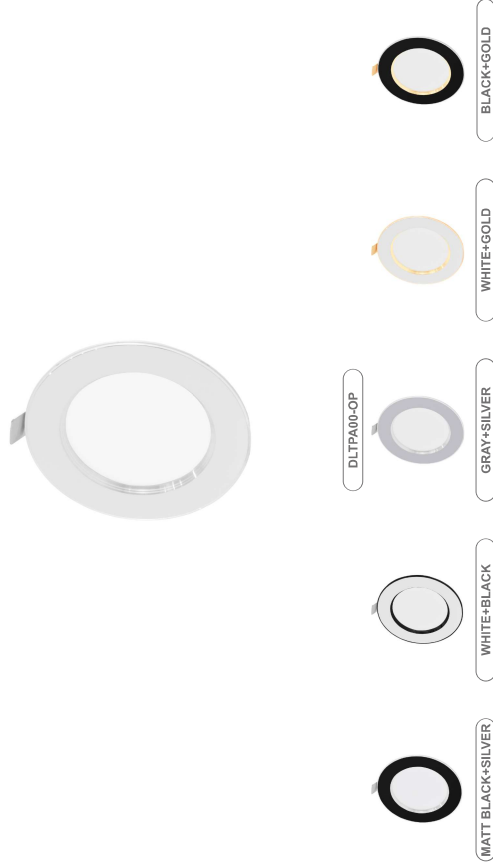

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Color Option	Beam Angle	Cut Hole Size(mm)	Product size (mm) Diameter	Height
DLTPA00-OP	5.5W	170-265V	3000K/4000K/6500K	400	WHITE/BLACK SILVER/GOLD	110°	75	102	31



ABSPA01

ABSPA00

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	IP Rating	Beam Angle	Product size (mm) Length Width Height	Packaging(Pcs/box) Outer
ABSPA00	15W	180-265V	3000K/4000K/6500K	1200	IP54	130°	175 52 175	40
ABSPA00	20W	180-265V	3000K/4000K/6500K	1600	IP54	130°	210 52 210	20
ABSPA01	15W	180-265V	3000K/4000K/6500K	1200	IP54	130°	188 96 46	40
ABSPA01	20W	180-265V	3000K/4000K/6500K	1600	IP54	130°	230 104 49	40



DOWNLIGHT SERIES

- ◆ Long life with average life up to 15,000 hours
- ◆ High CRI, truly reflect the original colors of objects



WATERPROOF LAMP SERIES

- ◆ Suitable for outdoor use
- ◆ It can be ceiling or wall mount
- ◆ Long life with average life up to 15,000 hours

CEILING LAMP



Beauty Shadow

LED Ceiling Lamp



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Diameter(mm)	Packaging(Pcs/box)
BCLB-ST/R	30/38	180-265V	3000K/4000K/6500K	1680/2330	350/450	5
BCLC-ST/R	30/38	180-265V	3000K/4000K/6500K	1680/2150	350/450	5
BCLD(T)-T/R	38	180-265V	3000K/4000K/6500K	2620	450	5
BCLD(W)-T/R	38	180-265V	3000K/4000K/6500K	2360	450	5
BCLD(W)-T/R	30/38	180-265V	3000K/4000K/6500K	1850/2450	450	5
BCLF-ST/R	30/38	180-265V	3000K/4000K/6500K	2330/2930	350/400	5
BCLJ-ST/R	30/38	180-265V	3000K/4000K/6500K	1260/1440	230/300/350	5

80%
ENERGY
SAVING

CRI
≥80%

IP20

UV
Free

LED CEILING LIGHT SERIES

- ◆ Single Tone Ceiling Light Series
- ◆ Tri-tone Ceiling Light Series
- ◆ Remote Control Ceiling Light Series

Single tone series (6500K / 3000K) : 12W/18W/30W
Tri-tone & Remote Control series (6500K / 4000K / 3000K) : 30W/38W/48W

LED Ceiling Lamp

LED Ceiling Lamp



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Diameter(mm)	Packaging(Pcs/box)
BCLV-T/R	38	180-265V	6500K/4000K/3000K	1780	450	5
BCLW-S/T/R	18/30	180-265V	6500K/4000K/3000K	1400/1950	300/350	5
BCLX-S/T/R	30	180-265V	6500K/4000K/3000K	1980	350	5
BCLY-T/R	38	180-265V	6500K/4000K/3000K	2580	450	5
BCLR-S/T/R	30/38	180-265V	6500K/4000K/3000K	1780/2270	350/400	5
BCLS-T/R	38	180-265V	6500K/4000K/3000K	2080	450	5
BCLT-T/R	38	180-265V	6500K/4000K/3000K	2600	450	5
BCLU-S/T/R	30/38	180-265V	6500K/4000K/3000K	1630/1990	300/350	5



LED CEILING LIGHT SERIES

- ◆ Single Tone Ceiling Light Series
- ◆ Tri-tone Ceiling Light Series
- ◆ Remote Control Ceiling Light Series

Single tone series (6500K/3000K) : 2W/18W/30W

Tri-tone & Remote Control series (6500K/4000K/3000K) : 30W/38W/48W



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Diameter(mm)	Packaging(Pcs/box)
BCLK-S/T/R	12/18/30	180-265V	3000K/4000K/6500K	890/1410/2010	230/300/350	5
BCLK-S/T/R	12/18/30	180-265V	3000K/4000K/6500K	760/1240/1770	230/300/350	5
BCLM-S/T/R	12/18/30	180-265V	3000K/4000K/6500K	780/1200/1830	230/300/350/450	5
BCLN-S/T/R	12/18/30/38	180-265V	3000K/4000K/6500K	950/1530/2500/1930	230/300/350/450	5
BCLP-S/T/R	30/38	180-265V	3000K/4000K/6500K	2140/2360	350/400	5
BCLQ-S/T/R	30/38	180-265V	3000K/4000K/6500K	2000/2520	350/400	5
BCLSL-S/T/R	38/48	180-265V	3000K/4000K/6500K	2350/2900	400/500	5
BCLSN-S/T/R	38/48	180-265V	3000K/4000K/6500K	2000/2520	400/500	5



LED CEILING LIGHT SERIES

- ◆ Single Tone Ceiling Light Series
- ◆ Tri-tone Ceiling Light Series
- ◆ Remote Control Ceiling Light Series

Single tone series (6500K / 3000K) : 12W/18W/30W

Tri-tone & Remote Control series (6500K / 4000K / 3000K) : 30W/38W/48W



TRI-PROOF CEILING LAMP SERIES

Tri-proof Ceiling Lamp Series



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Lamp Size(mm)
ABSAA3P-NO	12W	170-265V	3000K/4000K/6500K	900	DIA250x35
ABSAA3P-NO	21W	170-265V	3000K/4000K/6500K	1575	DIA320x60
ABSAA3P-NO	28W	170-265V	3000K/4000K/6500K	2100	DIA380x80
ABSAA3P-SL	12W	170-265V	3000K/4000K/6500K	900	DIA250x35
ABSAA3P-SL	21W	170-265V	3000K/4000K/6500K	1575	DIA320x60
ABSAA3P-SL	28W	170-265V	3000K/4000K/6500K	2100	DIA380x80
ABSAA3P-FL	12W	170-265V	3000K/4000K/6500K	900	DIA250x35
ABSAA3P-FL	21W	170-265V	3000K/4000K/6500K	1575	DIA320x60
ABSAA3P-FL	28W	170-265V	3000K/4000K/6500K	2100	DIA380x80



TRI-PROOF CEILING LAMP SERIES

- ◆ Single Tone Ceiling Light Series
- ◆ Tri-tone Ceiling Light Series
- ◆ Insect-proof, Water-proof & Dust-proof.
- ◆ Whole Plastic Housing & Cover

CEILING FAN



Beauty Shadow

LED Ceiling Fan



Model NO.	Wattage(W)	Voltage(V)	Color Temp	Lumen(LM)	Fan Motor Wattage	Star Effect Option	Lamp base size(mm)
BCFBP	24W	85-265V, 50Hz	3000K/4000K/6500K	1900lm	Max.75W	X	Q450
BCFBQ	24W	85-265V, 50Hz	3000K/4000K/6500K	1900lm	Max.75W	X	Q450
BCFBR	24W	85-265V, 50Hz	3000K/4000K/6500K	1750lm	Max.75W	X	Q450
BCFBU	24W	85-265V, 50Hz	3000K/4000K/6500K	1400lm	Max.75W	X	Q450
BCFBW	24W	85-265V, 50Hz	3000K/4000K/6500K	1850lm	Max.75W	X	Q450



DC Motor, 3 speed, 3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

3000K/4000K/6500K

36" CEILING FAN RETRACTABLE BLADES

LED Ceiling Fan



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(k)	Lumen(lm)	Fan Motor Wattage	Star Effect Option	Lamp base size(mm)
BCFBB	24	85-260V, 50Hz	3000K/4000K/6500K	1620	Max. 75W	✓	Q350
BCFBF	24	85-260V, 50Hz	3000K/4000K/6500K	2260	Max. 75W	X	Q350
BCFBL	24	85-260V, 50Hz	3000K/4000K/6500K	1750	Max. 75W	✓	Q350
BCFBM	24	85-260V, 50Hz	3000K/4000K/6500K	1660	Max. 75W	X	Q350
BCFBN	24	85-260V, 50Hz	3000K/4000K/6500K	1750	Max. 75W	✓	Q350



36" CEILING FAN RETRACTABLE BLADES

Strong wind with larger fan blades
The upgraded fan blades are much lighter and thinner 2MM.
The upgraded version is 30% lighter than the old version. LED flicker-free light offer super bright light.

LED Ceiling Fan



Model NO.	Wattage(W)	Voltage(V)	Color Temp	Lumen(LM)	Fan Motor Wattage	Star Effect Option	Lamp base size(mm)
BCFBQ	36W	85-260V, 50Hz	3000K/4000K/6500K	2550lm	Max. 95W	✓	Q450
BCFBR	36W	85-260V, 50Hz	3000K/4000K/6500K	2340lm	Max. 95W	X	Q450
BCFBS	36W	85-260V, 50Hz	3000K/4000K/6500K	2150lm	Max. 95W	X	Q450
BCFTB	36W	85-260V, 50Hz	3000K/4000K/6500K	2500lm	Max. 95W	X	Q450
BCFBU	36W	85-260V, 50Hz	3000K/4000K/6500K	2000lm	Max. 95W	X	Q450
BCFBV	36W	85-260V, 50Hz	3000K/4000K/6500K	1620lm	Max. 95W	X	Q450
BCFBY	36W	85-260V, 50Hz	3000K/4000K/6500K	2050lm	Max. 95W	X	Q450



42" CEILING FAN RETRACTABLE BLADES



Beauty Shadow

Single / Double Tube Series



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base	Lumen(LM)	Beam Angle	Product size (mm) Length Diameter	Packaging(Pcs/box) Outer
T8TGA01	9W	170-265V	3000K/4000K/6500K	G13	900	280°	600 25	25
T8TGA01	12W	170-265V	3000K/4000K/6500K	G13	1200	280°	900 25	25
T8TGA01	18W	170-265V	3000K/4000K/6500K	G13	1800	280°	1200 25	25
T8TGA01	24W	170-265V	3000K/4000K/6500K	G13	2400	280°	1500 25	25
T5TGA01	8W	170-265V	3000K/4000K/6500K	G5	800	280°	600 16	25
T5TGA01	12W	170-265V	3000K/4000K/6500K	G5	1200	280°	900 16	25
T5TGA01	16W	170-265V	3000K/4000K/6500K	G5	1600	280°	1200 16	25
T5TGA01	24W	170-265V	3000K/4000K/6500K	G5	2000	280°	1500 16	25

★ Option: Single / Double Ends

CRI
≥80
High CRI

IP20
For indoor use

Not dimmable

25000H
Long life span

T8 & T5 TUBE SERIES



Track Light Series



TRKAA02



Finish Option: WHITE BLACK

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Product Color	Beam Angle	Product size (mm) Length Height	Packaging(Pcs/box) Outer
TRKAA02	10W	180-265V	3000K/4000K/6500K	800	BLACK/WHITE	24°	50 130	30
TRKAA02	20W	180-265V	3000K/4000K/6500K	1600	BLACK/WHITE	24°	66 158	20
TRKAA02	30W	180-265V	3000K/4000K/6500K	2400	BLACK/WHITE	24°	77 182	20



TRACK LIGHT SERIES
◆ Long life with average life up to 15,000 hours
◆ High CRI, truly reflect the original colors of objects



FLOOD LIGHT SERIES

Flood Light Series



L-OUTAA01

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Product Color	Product size (mm)			Packaging(Pcs/box)
						Length	Width	Height	
L-OUTAA01	10W	220-240V	2300K/6500K	800	BLACK	97	75	31	50
L-OUTAA01	20W	220-240V	2300K/6500K	1600	BLACK	128	92	31	40
L-OUTAA01	30W	220-240V	3000K/6500K	2400	BLACK	154	107	31	20
L-OUTAA01	50W	220-240V	3000K/6500K	4000	BLACK	225	154	31	12
L-OUTAA01	100W	220-240V	2300K/6500K	8000	BLACK	295	212	31	12
L-OUTAA01	150W	220-240V	3000K/6500K	12000	BLACK	356	256	35	8
L-OUTAA01	200W	220-240V	3000K/6500K	16000	BLACK	420	306	36	8



- FLOOD LIGHT SERIES**
- ◆ Long life with average life up to 15,000 hours
 - ◆ High CRI, truly reflect the original colors of objects

READING LIGHT SERIES




Beauty Shadow

Reading Light Series



BLCC-W


Model NO.	Wattage(W)	Input	Sensing Angle	Sensing Angle	Battery Capacity	Color Temperature (K)	Product size (mm)			Packaging(Pcs/box)
							Length	Width	Height	
BLCC-W	2.8W	DC 5V 1A/2A	90°	3M	2000mAh(3.7V)	3000K / 4500K / 6000K	320	36	38	50



- READING LIGHT SERIES
- ◆ Dimmable with 3 color temperature options
 - ◆ Easy installation
 - ◆ Flexible base provides a customized illumination angle



Spiral (Full Spiral) Series



S-24A

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
S-16A	8W	220-240V	2700K/6500K	450	43 89	100
S-16A	12W	220-240V	2700K/6500K	680	43 103	100
S-03D	15W	220-240V	2700K/6500K	820	49 110	300
S20	20W	220-240V	2700K/6500K	1160	49 127	100
S-24A	23W	220-240V	2700K/6500K	1470	53 134	300



SPIRAL (FULL SPIRAL) SERIES

- ◆ Provide different wattages to satisfy various needs
- ◆ Suitable for commercial and home use

U Tube Series



3U-06 11W

Model NO.	Wattage(W)	Voltage(V)	Lamp Base	Color Temperature(K)	Lumen(LM)	Product size (mm) Diameter Length	Packaging(Pcs/box) Outer
3U-06	11W	220-240V	E27/E14	2700K/6500K	600	41 115	100
3U-08	15W	220-240V	E27/E14	2700K/6500K	800	48 138	100
3U-20	20W	220-240V	E27/E14	2700K/6500K	1180	51 150	100



U TUBE SERIES

- ◆ Provide different wattages to satisfy various needs
- ◆ Suitable for commercial and home use

MAGNETIC TRACK SERIES




MAGNETIC FLOOD LIGHT


DESIGN ADVANTAGES

- Linkable structure, customized length is available (th linkable length could be up to 40 meters).
- Using imported high transmittance PMMA anti-glarelens, which is specially designed for LED source.
- Up and down emitting structure, could make the ceiling brighter.
- Using "I" "X" "T" "L" types of connection to meet the lighting needs in different scenes.
- Surface and suspension installation methods to meet the needs of different workplaces.

PHOTOMETRIC CURVE

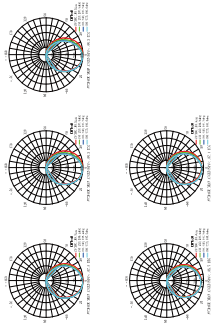

SIZE

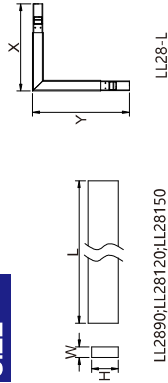

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base angle	Lumen(LM)	Product size (mm)
FGD-20-300	10W	DC48V	3000K/4000K/6500K	35°/60°/2x25°	355.33	L300*W20*H25
FGD-20-450	15W	DC48V	3000K/4000K/6500K	35°/60°/2x25°	562.25	L450*W20*H25
FGD-20-600	20W	DC48V	3000K/4000K/6500K	35°/60°/2x25°	732.23	L600*W20*H25
FGD-20-900	30W	DC48V	3000K/4000K/6500K	35°/60°/2x25°	983.18	L900*W20*H25
FGD-20-1200	40W	DC48V	3000K/4000K/6500K	35°/60°/2x25°	1323.9	L1200*W20*H25

APPLICATION

Clothing shops, Shopping malls, Art galleries, Offices, HOME, Etc.

MOUNT TYPE




STRUCTURE




Side



Suspension




Through-conducting adapter



Power

ACCESSORY

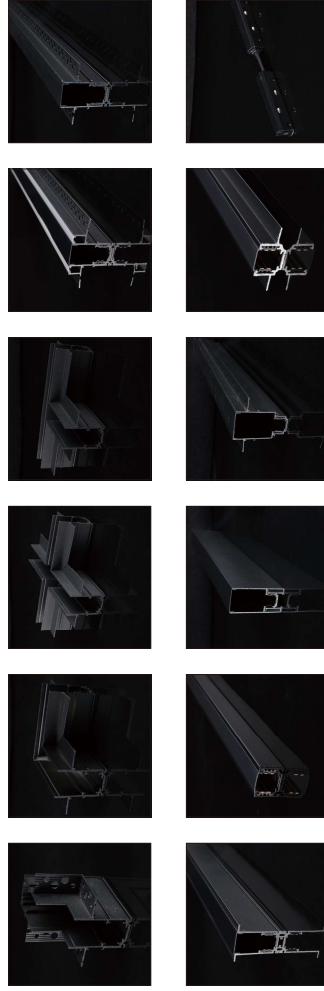

About system please check the install instruction.

APPLICATION CASE




MAGNETIC GRILLE LIGHT


DESIGN ADVANTAGES

- Linkable Solution, Customized length Maxium link to 40M.
- Use I L T X connector, Fit for different applications.
- Anti-Glare optical design friendly to eyes.
- Easily change the lens and change the beam angle (35°, 60°)
- Mount type: Ceiling/Suspension/Track

PHOTOMETRIC CURVE



SIZE

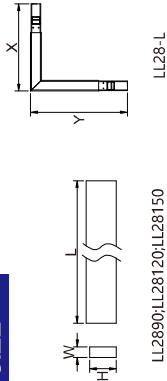


Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base angle	Lumen(LM)	Product size (mm)
GSD-20-6	6W	DC48V	3000K/4000K/6500K	25.5	427.07	L112*W20*H25
GSD-20-12	12W	DC48V	3000K/4000K/6500K	25.7	1026.4	L220*W20*H25
GSD-20-18	18W	DC48V	3000K/4000K/6500K	26.2	1056.9	L330*W20*H25
GSD-20-24	24W	DC48V	3000K/4000K/6500K	26.5	1756.2	L440*W20*H25


APPLICATION

Fashion shops, Shopping malls, Art Museum, Warehouse, Classroom.

MOUNT TYPE



STRUCTURE

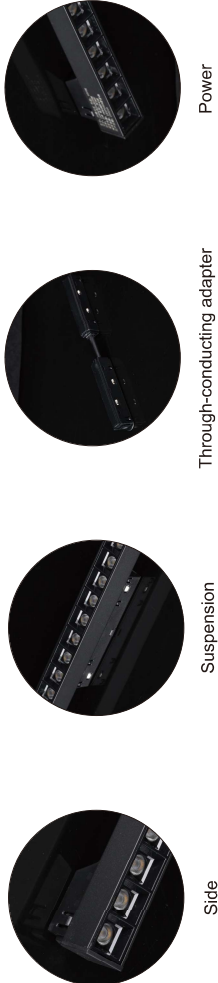


ACCESSORY



About system please ckeck the install instruction.

APPLICATION CASE

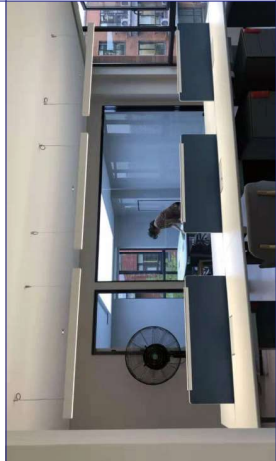


MAGNETIC TRACK LIGHT

DESIGN ADVANTAGES

- Linkable Solution, Customized length Maximum link to 40M.
- Use I L T X connector, Fit for different applications.
- Anti-Glare optical design friendly to eyes.
- Easily change the lens and change the beam angle (35°, 60°)
- Mount type: Ceiling/Suspension/Track

PHOTOMETRIC CURVE

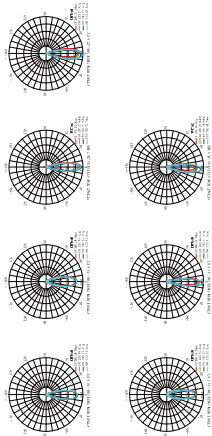


APPLICATION

Fashion shops, Shopping malls, Art Museum, Warehouse, Classroom.

MOUNT TYPE



SIZE

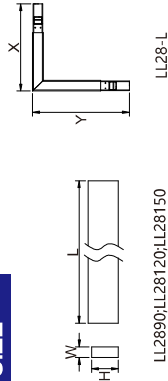

LL2890/LL28120/LL28150

LL28-L

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base angle	Lumen(LM)	Product size (mm)
GDD-HJ6W	6W	DC48V	3000K/4000K/6500K	180°	375.03	Φ35°L180
GDD-HJ10W	10W	DC48V	3000K/4000K/6500K	180°	694.34	Φ45°L100
GDD-HJ15W	15W	DC48V	3000K/4000K/6500K	180°	1254.5	Φ55°L115
GDD-HJ20W	20W	DC48V	3000K/4000K/6500K	180°	1698.2	Φ65°L135
GDD-HM10W	10W	DC48V	3000K/4000K/6500K	180°	754.59	Φ50°L90
GDD-HM15W	15W	DC48V	3000K/4000K/6500K	180°	1145.9	Φ60°L115
GDD-HM20W	20W	DC48V	3000K/4000K/6500K	180°	1440.9	Φ80°L135

STRUCTURE



Side







Suspension




Through-conducting adapter

ACCESSORY



About system please check the install instruction.

APPLICATION CASE

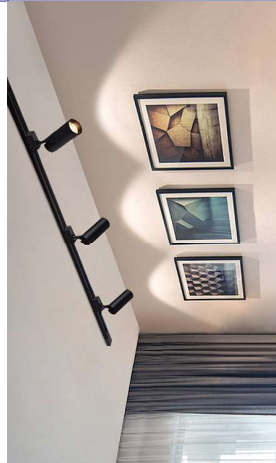


MAGNETIC FOLDABLE GRILLE LIGHT-ALUMINUM


DESIGN ADVANTAGES

- Linkable Solution, Customized length Maximum link to 40M.
- Use I L T X connector, Fit for different applications.
- Anti-Glare optical design friendly to eyes.
- Easily change the lens and change the beam angle (35°, 60°)
- Mount type: Ceiling/Suspension/Track


PHOTOMETRIC CURVE



SIZE

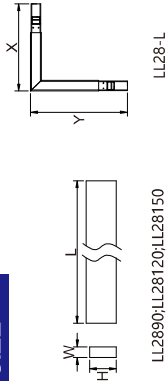

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base angle	Lumen(LM)	Product size (mm)
ZD-20-6a	6W	DC36V	3000K/4000K/6500K	38.3°	536.1	L115*W22*H25mm
ZD-20-12a	12W	DC36V	3000K/4000K/6500K	38.5°	1084.5	L223*W22*H25mm
ZD-20-18a	18W	DC36V	3000K/4000K/6500K	38.5°	1502	L331*W22*H25mm
ZD-20-24a	24W	DC36V	3000K/4000K/6500K	38.9°	2014.6	L439*W22*H25mm

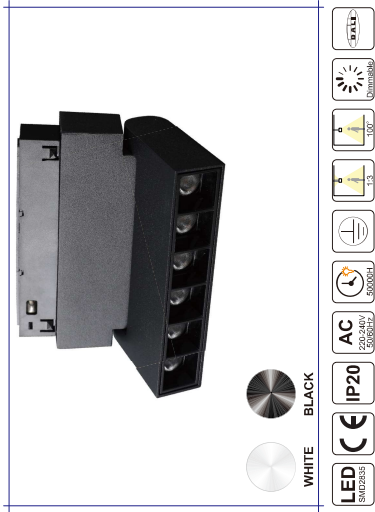

APPLICATION


Fashion shops, Shopping malls, Art Museum, Warehouse, Classroom.

MOUNT TYPE



About system please check the install instruction.

APPLICATION CASE

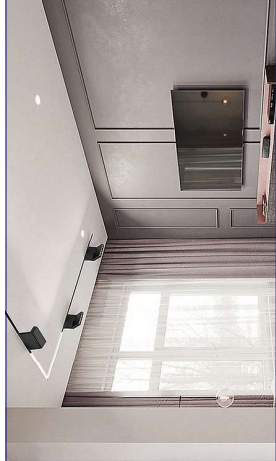

STRUCTURE



Side



Suspension







Through-conducting adapter



Power

ACCESSORY




MAGNETIC FOLDABLE DIE CASTING FLOOD LIGHT

DESIGN ADVANTAGES

- Linkable Solution, Customized length Maxium link to 40M.
- Use I L T X connector, Fit for different applications.
- Anti-Glare optical design friendly to eyes.
- Easily change the lens and change the beam angle (35°, 60°)
- Mount type: Ceiling/Suspension/Track

PHOTOMETRIC CURVE




APPLICATION

Fashion shops, Shopping malls, Art Museum, Warehouse, Classroom.

MOUNT TYPE




SIZE



Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Base angle	Lumen(LM)	Product size (mm)
FFL-20-0600	6W	DC48V	3000K/4000K/6500K	38.3°	536.1	L110*W22*H82
FFL-20-1200	12W	DC48V	3000K/4000K/6500K	38.5°	1084.5	L220*W22*H82

STRUCTURE



Side



Suspension







Through-conducting adapter




Power

ACCESSORY



About system please check the install instruction.

APPLICATION CASE

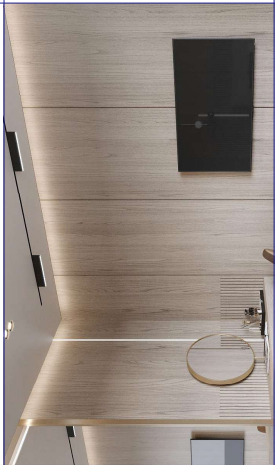

PROJECT DOWNLIGHT



Beauty Shadow

Project Downlight Series



DLTPA-KZ



BLACK



WHITE+GOLD



BLACK+GOLD


Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Housing Color	Beam Angle	Cut Hole Size(mm)	Product size (mm) Diameter Height
DLTPA-KZ	5W	170-265V	3000K/4000K/6500K	425	WHITE/BACK/SILVER/GOLD	24°/36°	55	68 80
DLTPA-KZ	9W	170-265V	3000K/4000K/6500K	765	WHITE/BACK/SILVER/GOLD	24°/36°	75/85	85 80
DLTPA-KZ	17W	170-265V	3000K/4000K/6500K	1445	WHITE/BACK/SILVER/GOLD	24°/36°	95/110	110 80
DLTPA-KZ	23.5W	170-265V	3000K/4000K/6500K	1998	WHITE/BACK/SILVER/GOLD	24°/36°	120/130	130 80
DLTPA-KZ	33W	170-265V	3000K/4000K/6500K	2805	WHITE/BACK/SILVER/GOLD	24°/36°	150/160	160 80



Not-Overmolded CE Certification

- PROJECT DOWNLIGHT SERIES**
- ◆ Provide different wattages to satisfy various needs
 - ◆ Suitable for commercial and home use

Project Downlight Series



DLTPA-AA

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Housing Color	Beam Angle	Cut Hole Size(mm)	Product size (mm) Diameter Height
DLTPA-AA	5W	170-265V	3000K/4000K/6500K	425	WHITE	36°	55	69 82
DLTPA-AA	9W	170-265V	3000K/4000K/6500K	765	WHITE	36°	75/85	86 82
DLTPA-AA	17W	170-265V	3000K/4000K/6500K	1445	WHITE	36°	95/110	111 82
DLTPA-AA	23.5W	170-265V	3000K/4000K/6500K	1998	WHITE	36°	120/130	131 82



PROJECT DOWNLIGHT SERIES

- ◆ Provide different wattages to satisfy various needs
- ◆ Suitable for commercial and home use

Project Downlight Series



DLTPA-FC

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Housing Color	Beam Angle	Cut Hole Size(mm)	Product size (mm) Diameter Height
DLTPA-FC	5W	170-265V	3000K/4000K/6500K	765	WHITE	110°	75/85	85 82
DLTPA-FC	9W	170-265V	3000K/4000K/6500K	1445	WHITE	110°	95/110	110 82
DLTPA-FC	17W	170-265V	3000K/4000K/6500K	1998	WHITE	110°	120/130	130 82



PROJECT DOWNLIGHT SERIES

- ◆ Provide different wattages to satisfy various needs
- ◆ Suitable for commercial and home use

Project Downlight Series



DLTPA-BD

NOTE:

Model NO.	Wattage(W)	Voltage(V)	Color Temperature(K)	Lumen(LM)	Housing Color	Beam Angle	Cut Hole Size(mm)	Product size (mm)	
								Diameter	Height
DLTPA-BD	8W	180-265V	3000K/4000K/6500K	680	BLACK	110°	75	86	185
DLTPA-BD	11W	180-265V	3000K/4000K/6500K	935	BLACK	110°	95	109	74
DLTPA-BD	20W	180-265V	3000K/4000K/6500K	1700	BLACK	110°	120/125	134	195
DLTPA-BD	28W	180-265V	3000K/4000K/6500K	2380	BLACK	110°	150	157	110
DLTPA-BD	35W	180-265V	3000K/4000K/6500K	2975	BLACK	110°	175	183	124



PROJECT DOWNLIGHT SERIES
◆ Provide different wattages to satisfy various needs
◆ Suitable for commercial and home use