



DECO-EDEN

WALL LAMP

EMERGENCY

HF SENSOR

MASTER/SLAVE

DALI

OPTIONAL
BRIGHTNESS

3000K
4000K
Dual Colour
Temperature


Built-in
PHOTOCELL

LIFE
100,000 HRS
L80B50

90
LM/W


Flicker Free

IP66 IK10 CE

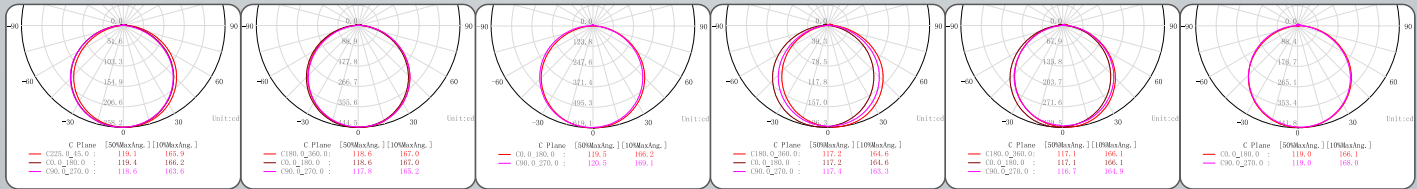

APPLICATION


- Houses
- Offices
- Retail
- Schools
- Hotels
- Hospitals
- Open public area

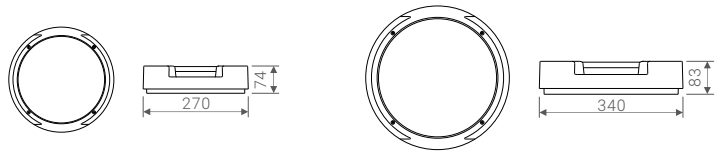

Code	V	LED	W	LM						(ΦxH)
DEN-800	220-240V~	SMD2835	9 W	800/400 Lm	—	—	—	1.67		Φ270x74 mm
DEN-800S	220-240V~	SMD2835	10.5 W	800/400 Lm	—	—	●	1.68		Φ270x74 mm
DEG-1300	220-240V~	SMD2835	15 W	1300/850/600 Lm	—	—	—	2.53		Φ340x83 mm
DEG-1300S	220-240V~	SMD2835	16.5 W	1300/850/600 Lm	—	—	●	2.54		Φ340x83 mm
DEG-1300EN01	220-240V~	SMD2835	16 W	1300/850/600 Lm	250 Lm	1h	Ni-CD AA700mAhHT 7.2V	—	2.82	Φ340x83 mm
DEG-1300EN03	220-240V~	SMD2835	16.5 W	1300/850/600 Lm	250 Lm	3h	Ni-CD SC1700mAhHT 7.2V	—	2.98	Φ340x83 mm
DEG-1300EN01S	220-240V~	SMD2835	17.5 W	1300/850/600 Lm	250 Lm	1h	Ni-CD AA700mAhHT 7.2V	●	2.83	Φ340x83 mm
DEG-1300EN03S	220-240V~	SMD2835	18 W	1300/850/600 Lm	250 Lm	3h	Ni-CD SC1700mAhHT 7.2V	●	2.99	Φ340x83 mm
DEG-2000	220-240V~	SMD2835	23 W	2000/1300/900 Lm	—	—	—	2.53		Φ340x83 mm
DEG-2000S	220-240V~	SMD2835	24 W	2000/1300/900 Lm	—	—	●	2.54		Φ340x83 mm
DEG-2000EN01	220-240V~	SMD2835	23.5 W	2000/1300/900 Lm	250 Lm	1h	Ni-CD AA700mAhHT 7.2V	—	2.82	Φ340x83 mm
DEG-2000EN03	220-240V~	SMD2835	23.8 W	2000/1300/900 Lm	250 Lm	3h	Ni-CD SC1700mAhHT 7.2V	—	2.98	Φ340x83 mm
DEG-2000EN01S	220-240V~	SMD2835	24.5 W	2000/1300/900 Lm	250 Lm	1h	Ni-CD AA700mAhHT 7.2V	●	2.83	Φ340x83 mm
DEG-2000EN03S	220-240V~	SMD2835	24.8 W	2000/1300/900 Lm	250 Lm	3h	Ni-CD SC1700mAhHT 7.2V	●	2.99	Φ340x83 mm

* DEG-1300EN01-**ST**---Emergency version with self-testing function
DEG-1300-**DA**---DALI version
DEG-1300-**DU**---Dual colour temperature version
DEG-1300-**PH**---Built-in Photocell version

Emergency Lumen
Parameter tolerance: ±10%
CCT: 4000K

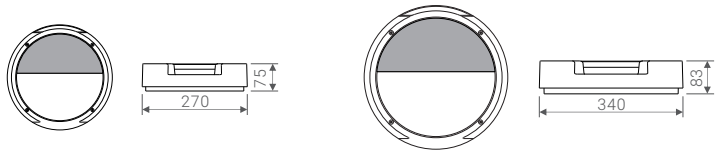


Code	V	LED	W	LM						(ΦxH)
DEN-C800	220-240V~	SMD2835	9 W	650/330 Lm	—	—	—	1.83		Φ270x75 mm
DEN-C800S	220-240V~	SMD2835	10.5 W	650/330 Lm	—	—	●	1.84		Φ270x75 mm
DEG-C1300	220-240V~	SMD2835	15 W	1000/700/500 Lm	—	—	—	2.77		Φ340x83 mm
DEG-C1300S	220-240V~	SMD2835	16.5 W	1000/700/500 Lm	—	—	●	2.78		Φ340x83 mm
DEG-C1300EN01	220-240V~	SMD2835	16 W	1000/700/500 Lm	200 Lm	1h	Ni-CD AA700mAhHT 7.2V	—	3.06	Φ340x83 mm
DEG-C1300EN03	220-240V~	SMD2835	16.5 W	1000/700/500 Lm	200 Lm	3h	Ni-CD SC1700mAhHT 7.2V	—	3.22	Φ340x83 mm
DEG-C1300EN01S	220-240V~	SMD2835	17.5 W	1000/700/500 Lm	200 Lm	1h	Ni-CD AA700mAhHT 7.2V	●	3.07	Φ340x83 mm
DEG-C1300EN03S	220-240V~	SMD2835	18 W	1000/700/500 Lm	200 Lm	3h	Ni-CD SC1700mAhHT 7.2V	●	3.23	Φ340x83 mm
DEG-C2000	220-240V~	SMD2835	23 W	1600/1000/700 Lm	—	—	—	2.77		Φ340x83 mm
DEG-C2000S	220-240V~	SMD2835	24 W	1600/1000/700 Lm	—	—	●	2.78		Φ340x83 mm
DEG-C2000EN01	220-240V~	SMD2835	23.5 W	1600/1000/700 Lm	200 Lm	1h	Ni-CD AA700mAhHT 7.2V	—	3.06	Φ340x83 mm
DEG-C2000EN03	220-240V~	SMD2835	23.8 W	1600/1000/700 Lm	200 Lm	3h	Ni-CD SC1700mAhHT 7.2V	—	3.22	Φ340x83 mm
DEG-C2000EN01S	220-240V~	SMD2835	24.5 W	1600/1000/700 Lm	200 Lm	1h	Ni-CD AA700mAhHT 7.2V	●	3.07	Φ340x83 mm
DEG-C2000EN03S	220-240V~	SMD2835	24.8 W	1600/1000/700 Lm	200 Lm	3h	Ni-CD SC1700mAhHT 7.2V	●	3.23	Φ340x83 mm

* DEG-C1300EN01-**ST**---Emergency version with self-testing function
DEG-C1300-**DA**---DALI version
DEG-C1300-**DU**---Dual colour temperature version
DEG-C1300-**PH**---Built-in Photocell version

Emergency Lumen
Parameter tolerance: ±10%
CCT: 4000K

WALL Mounting

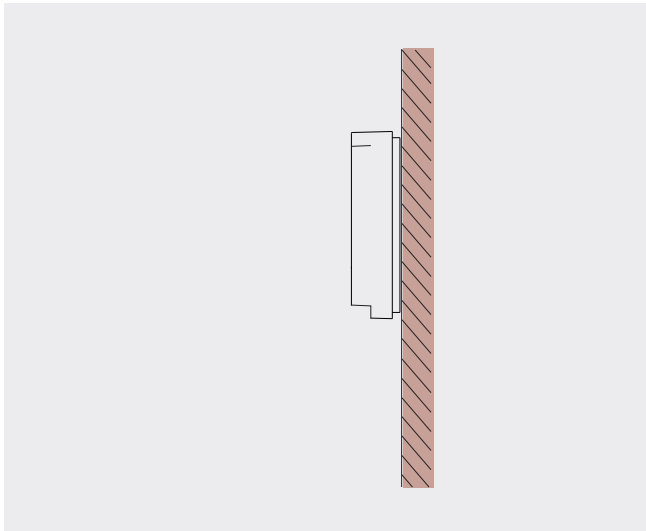

SURFACE Mounting

