



PRO-SMART AREA

AREA LIGHTING

EMERGENCY

HF SENSOR

MASTER/SLAVE

Dual Colour Temperature

DALI

LIFE

100,000 HRS
L80B50

130
LM/W

Flicker Free


IP66 IK09

PSA06-2100

PSA12-4000

PSA15-5500


PSA15-7300

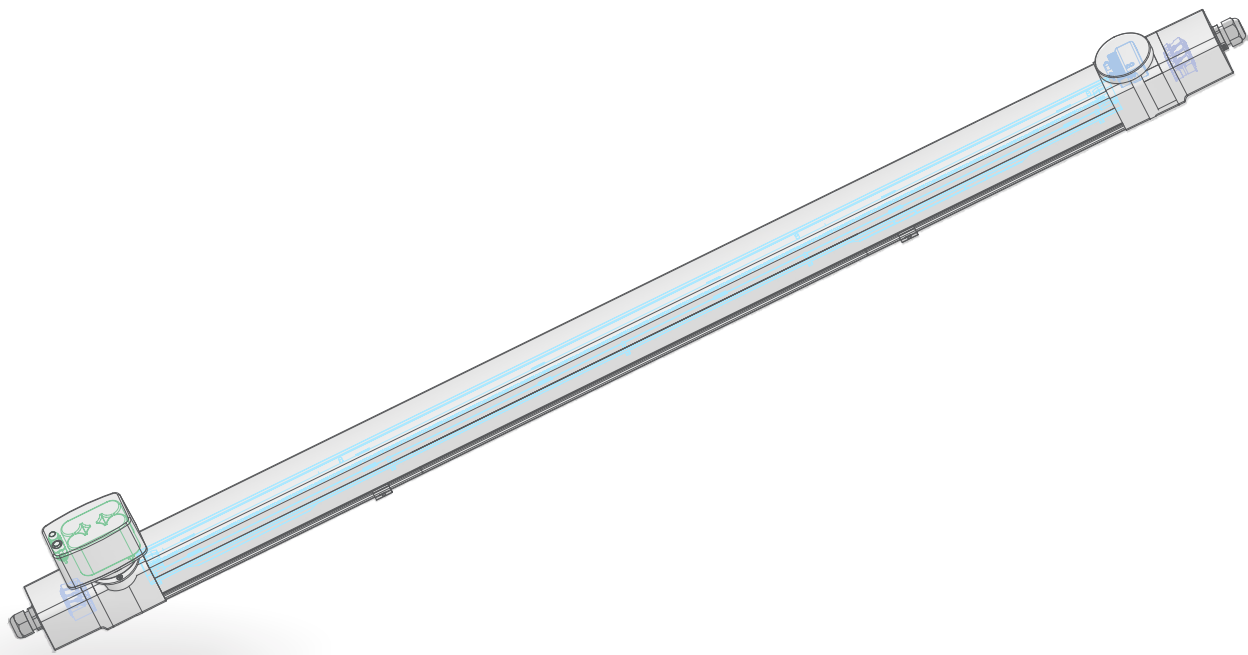

APPLICATION

- Car parking
- Tunnels
- Subway
- Industries
- Farms
- Workshop
- Warehouse
- Open public area



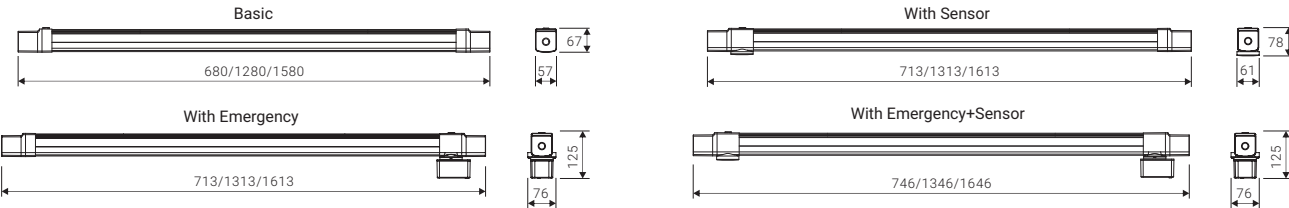


Code	V	LED	W	LM						
PSA06-2100	220-240V~	SMD2835	16.5 W	2100 Lm	—	—	—	0.58	680x57x67 mm	
PSA06-2100S	220-240V~	SMD2835	17.5 W	2100 Lm	—	—	●	0.63	713x61x78 mm	
PSA06-2100EN01	220-240V~	SMD2835	17.5 W	2100 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	—	0.84	713x76x125 mm
PSA06-2100EN03	220-240V~	SMD2835	18 W	2100 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	—	1.00	713x76x125 mm
PSA06-2100EN01S	220-240V~	SMD2835	18.5 W	2100 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	●	0.89	746x76x125 mm
PSA06-2100EN03S	220-240V~	SMD2835	19 W	2100 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	●	1.05	746x76x125 mm
PSA06-2100EL01	220-240V~	SMD2835	17.5 W	2100 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	—	0.78	713x76x125 mm
PSA06-2100EL03	220-240V~	SMD2835	17.5 W	2100 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	—	0.82	713x76x125 mm
PSA06-2100EL01S	220-240V~	SMD2835	18.5 W	2100 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	●	0.83	746x76x125 mm
PSA06-2100EL03S	220-240V~	SMD2835	18.5 W	2100 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	●	0.87	746x76x125 mm
PSA12-4000	220-240V~	SMD2835	31 W	4000 Lm	—	—	—	0.96	1280x57x67 mm	
PSA12-4000S	220-240V~	SMD2835	32 W	4000 Lm	—	—	●	1.01	1313x61x78 mm	
PSA12-4000EN01	220-240V~	SMD2835	32 W	4000 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	—	1.22	1313x76x125 mm
PSA12-4000EN03	220-240V~	SMD2835	32.5 W	4000 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	—	1.38	1313x76x125 mm
PSA12-4000EN01S	220-240V~	SMD2835	33 W	4000 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	●	1.27	1346x76x125 mm
PSA12-4000EN03S	220-240V~	SMD2835	33.5 W	4000 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	●	1.43	1346x76x125 mm
PSA12-4000EL01	220-240V~	SMD2835	32 W	4000 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	—	1.16	1313x76x125 mm
PSA12-4000EL03	220-240V~	SMD2835	32 W	4000 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	—	1.20	1313x76x125 mm
PSA12-4000EL01S	220-240V~	SMD2835	33 W	4000 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	●	1.21	1346x76x125 mm
PSA12-4000EL03S	220-240V~	SMD2835	33 W	4000 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	●	1.25	1346x76x125 mm
PSA15-5500	220-240V~	SMD2835	42 W	5500 Lm	—	—	—	1.13	1580x57x67 mm	
PSA15-5500S	220-240V~	SMD2835	43 W	5500 Lm	—	—	●	1.18	1613x61x78 mm	
PSA15-5500EN01	220-240V~	SMD2835	43 W	5500 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	—	1.39	1613x76x125 mm
PSA15-5500EN03	220-240V~	SMD2835	43.5 W	5500 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	—	1.55	1613x76x125 mm
PSA15-5500EN01S	220-240V~	SMD2835	44 W	5500 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	●	1.44	1646x76x125 mm
PSA15-5500EN03S	220-240V~	SMD2835	44.5 W	5500 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	●	1.60	1646x76x125 mm
PSA15-5500EL01	220-240V~	SMD2835	43 W	5500 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	—	1.33	1613x76x125 mm
PSA15-5500EL03	220-240V~	SMD2835	43 W	5500 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	—	1.37	1613x76x125 mm
PSA15-5500EL01S	220-240V~	SMD2835	44 W	5500 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	●	1.38	1646x76x125 mm
PSA15-5500EL03S	220-240V~	SMD2835	44 W	5500 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	●	1.42	1646x76x125 mm
PSA15-7300	220-240V~	SMD2835	56 W	7300 Lm	—	—	—	1.15	1580x57x67 mm	
PSA15-7300S	220-240V~	SMD2835	57 W	7300 Lm	—	—	●	1.20	1613x61x78 mm	
PSA15-7300EN01	220-240V~	SMD2835	57 W	7300 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	—	1.41	1613x76x125 mm
PSA15-7300EN03	220-240V~	SMD2835	57.5 W	7300 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	—	1.57	1613x76x125 mm
PSA15-7300EN01S	220-240V~	SMD2835	58 W	7300 Lm	300 Lm	1h	Ni-CD, 0.7Ah, 7.2V	●	1.46	1646x76x125 mm
PSA15-7300EN03S	220-240V~	SMD2835	58.5 W	7300 Lm	300 Lm	3h	Ni-CD, 1.7Ah, 7.2V	●	1.62	1646x76x125 mm
PSA15-7300EL01	220-240V~	SMD2835	57 W	7300 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	—	1.35	1613x76x125 mm
PSA15-7300EL03	220-240V~	SMD2835	57 W	7300 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	—	1.39	1613x76x125 mm
PSA15-7300EL01S	220-240V~	SMD2835	58 W	7300 Lm	300 Lm	1h	LiFePO4, 0.6Ah, 6.4V	●	1.40	1646x76x125 mm
PSA15-7300EL03S	220-240V~	SMD2835	58 W	7300 Lm	300 Lm	3h	LiFePO4, 1.5Ah, 6.4V	●	1.44	1646x76x125 mm


* PSA15-5500EN01-**ST** --- Emergency version with self-testing function
PSA15-5500-**DA**---DALI version
PSA15-5500-**DU**---Dual colour temperature version

Emergency Lumen
Parameter tolerance: ±10%
CCT: 4000K


Easy Installation

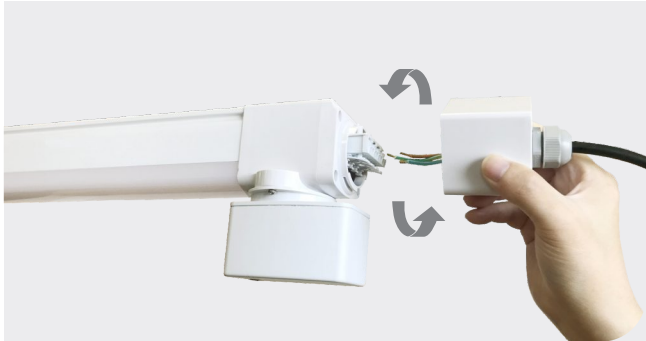


Vent

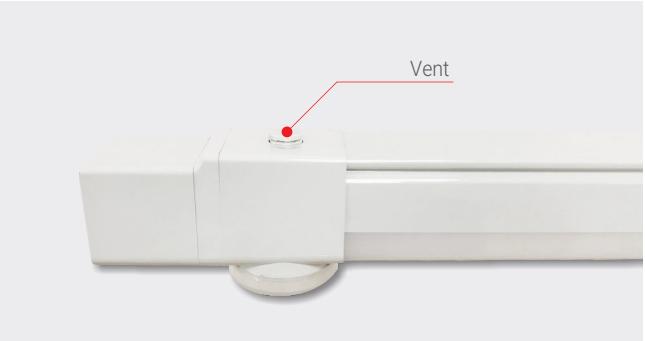

Battery Replacement

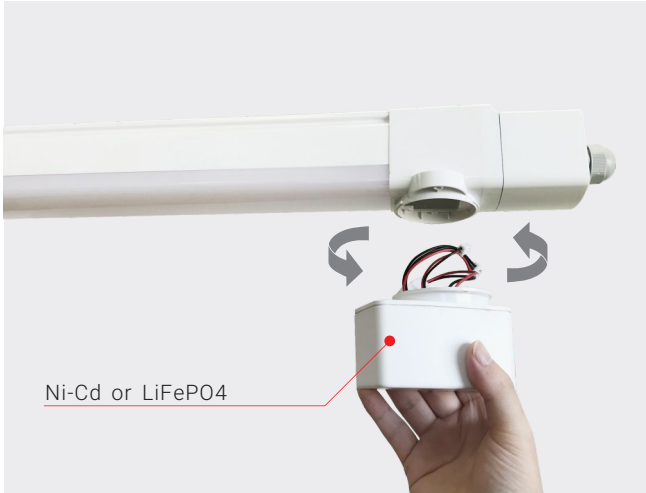


Sensor and Dual CCT

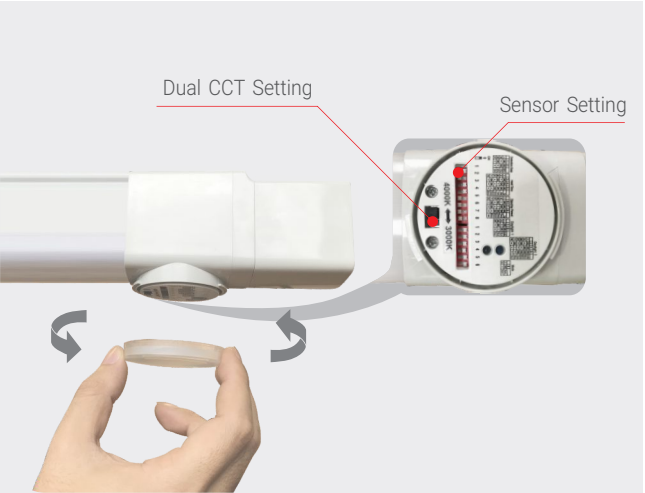


PRO-SMART AREA

AREA LIGHTING

SURFACE Mounting

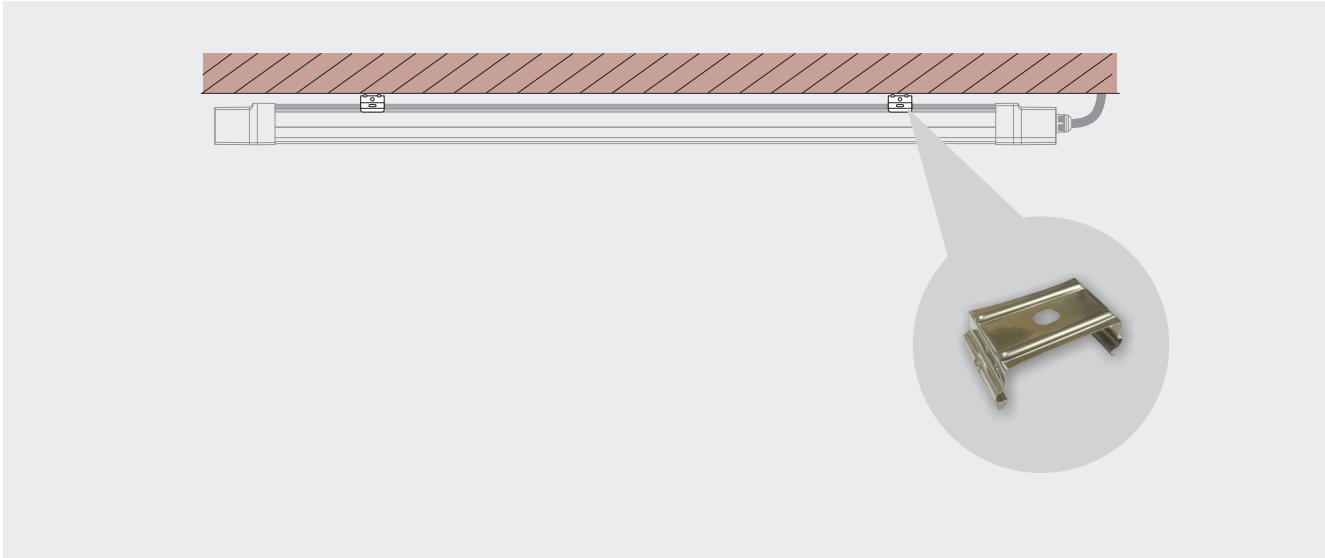

Internal Through Wires

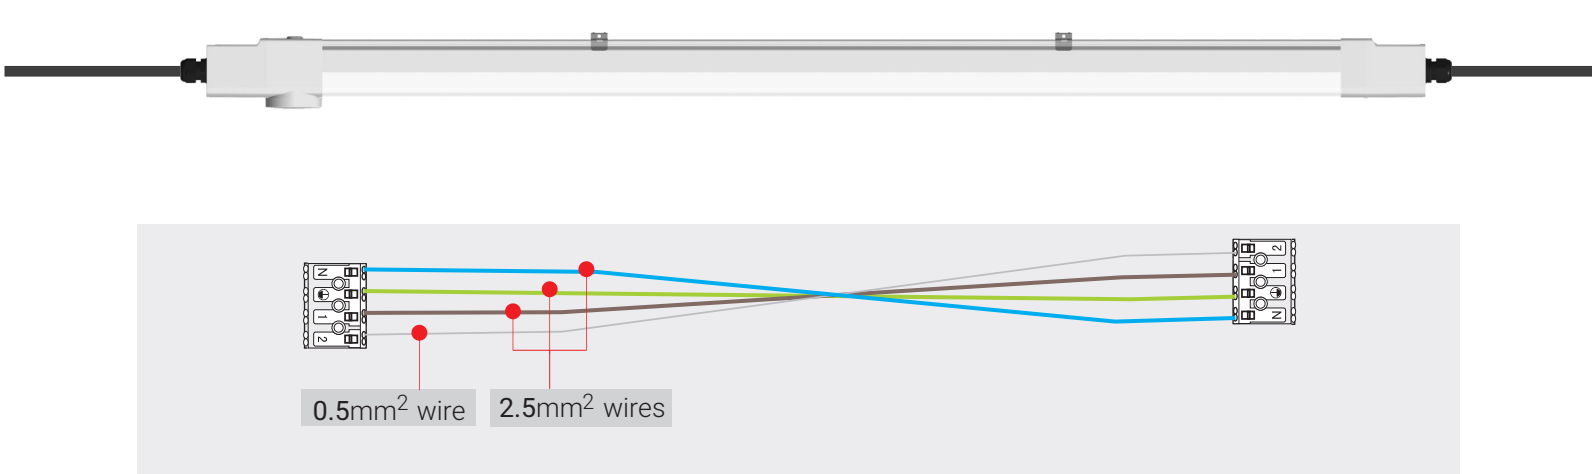

PENDANT Mounting

