

Climar
L I G H T I N G

we create
the light of
tomorrow

ARCHITECTURAL TECHNICAL OUTDOOR

climarlighting.com

TUPOLI
SUSPENDED





TUPOLI 38

SUSPENDED



EN

- > Homogeneous lighting luminaire with 300° light emission.
- > Suspended luminaire on false ceiling through stainless steel suspension with tool-less height adjustment.
- > Tubular design with 38 mm diameter.
- > Can be used as single luminaire or in clusters of several units powered from a single Driver.
- > External class II constant voltage Driver.
- > Opal PMMA tubular diffuser.
- > White opaque acrylic end caps.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 300°.
- > Application suspendue en faux plafond par câble en acier inoxydable avec réglage en hauteur sans outil.
- > Forme tubulaire avec 38 mm de diamètre.
- > Peut être utilisé comme luminaire individuel ou en groupes de luminaires alimentées à partir d'un seul Driver.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en PMMA Opale.
- > Embouts en acrylique opaque blanc.

QUICK INFO

GENERAL

Suspended
IP40
IK04
650°C
Class III
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 122 lm/W
3000 K, 4200 K
CRI >80
Lifetime 30 000 H
L70/B10 @Tc=25°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI 38 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
994	1153	12	24 VDC	33.49.005.08.73
1500	1730	18	24 VDC	33.49.005.08.74
2000	2307	24	24 VDC	33.49.005.08.75
4200 K				
994	1203	12	24 VDC	33.49.005.08.76
1500	1805	18	24 VDC	33.49.005.08.77
2000	2405	24	24 VDC	33.49.005.08.78

COMPONENTS

SUSPENSION SYSTEM (1pc)



TYPE	1m	3m
Matt White	35.49.002.08.80	35.49.002.08.81

RECESSED CEILING CUP (1pc)



TYPE	1m	3m
Matt White Ø80 mm	35.49.002.08.78	35.49.002.08.79



DRIVER - EXTERNAL



CLASS II

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.

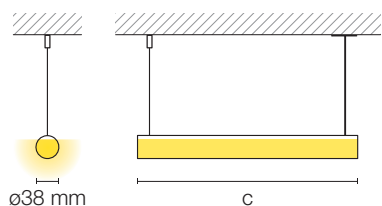

TUPOLI 38

SURFACE



EN

- > Homogeneous lighting luminaire with 300° light emission.
- > Surface mounted luminaire on false ceiling through polycarbonate mounting brackets.
- > Tubular design with 38 mm diameter.
- > Can be used as single luminaire or in clusters of several units powered from a single Driver.
- > External class II constant voltage Driver.
- > Opal PMMA tubular diffuser.
- > White opaque acrylic end caps.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 300°.
- > Application apparente en faux plafond par pattes de fixation en polycarbonate.
- > Forme tubulaire avec 38 mm de diamètre.
- > Peut être utilisé comme luminaire individuel ou en groupes de luminaires alimentées à partir d'un seul Driver.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en PMMA Opale.
- > Embouts en acrylique opaque blanc.

QUICK INFO

GENERAL

Surface
IP40
IK04
650°C
Class III
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 122 lm/W
3000 K, 4200 K
CRI >80
Lifetime 30 000 H
L70/B10 @Tc=25°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI 38 SURFACE

OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
994	1153	12	24 VDC	33.49.002.08.12
1500	1730	18	24 VDC	33.49.002.08.13
2000	2307	24	24 VDC	33.49.002.08.14
4200 K				
994	1203	12	24 VDC	33.49.002.08.15
1500	1805	18	24 VDC	33.49.002.08.16
2000	2405	24	24 VDC	33.49.002.08.17

COMPONENTS

SURFACE MOUNTING SYSTEM (2pcs)

TYPE	COD
Polycarbonate Mounting Brackets	35.49.001.08.29

RECESSED CEILING CUP (1pc)

TYPE	COD
Matt White Ø80 mm	35.49.001.08.55

DRIVER - EXTERNAL



ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73

DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.




CLASS II



TUPOLI 55

SUSPENDED

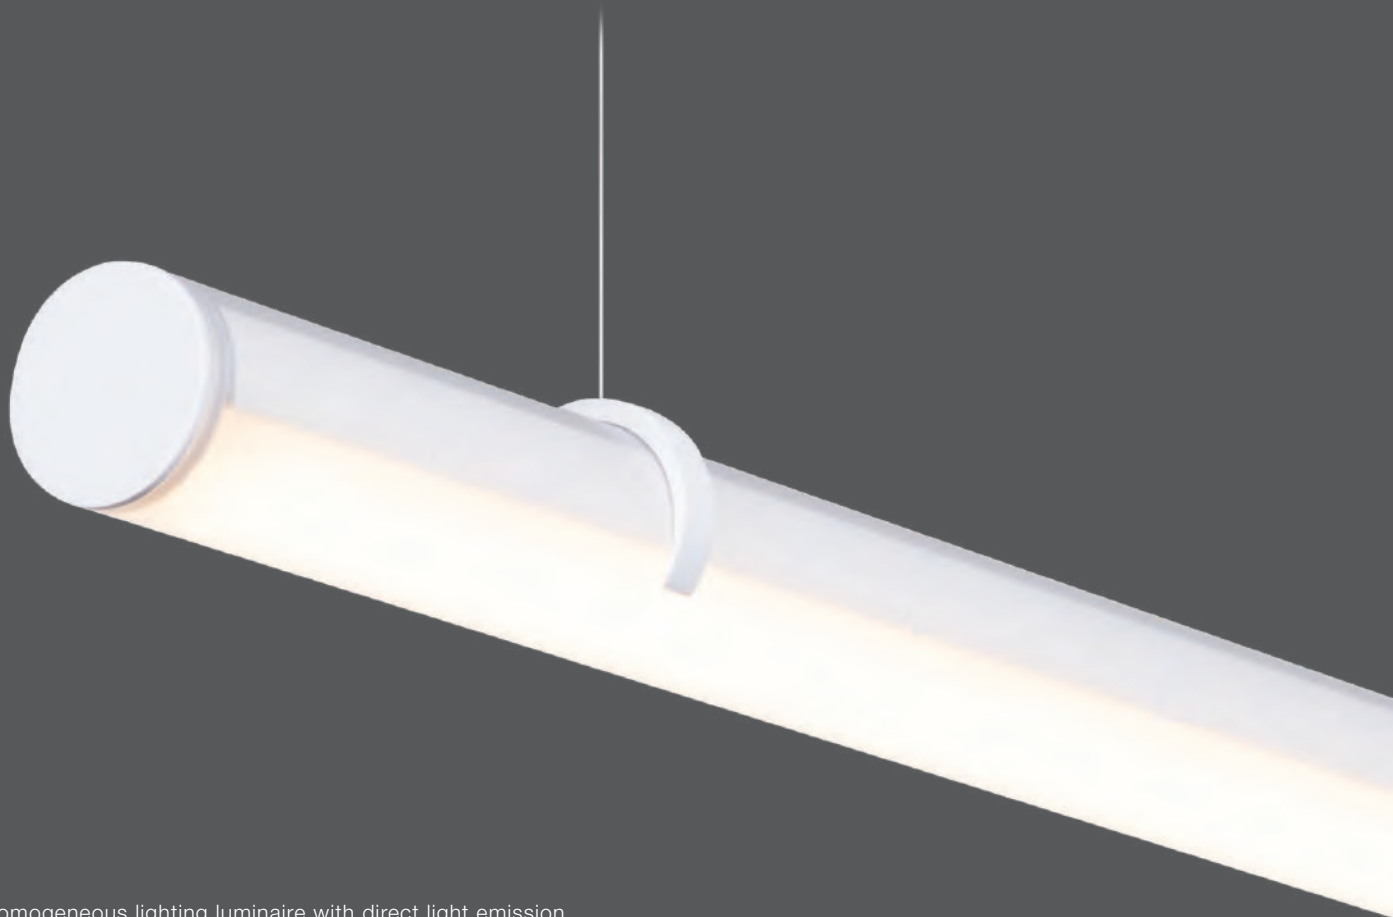

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI 55 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
900	2323	19	33.49.003.08.14	33.49.003.08.23
1181	2287	18	33.49.003.08.15	33.49.003.08.24
	3096	26	33.49.003.08.16	33.49.003.08.25
1462	2858	23	33.49.003.08.17	33.49.003.08.26
	3871	32	33.49.003.08.18	33.49.003.08.27
2305	4574	36	33.49.003.08.19	33.49.003.08.28
	6193	52	33.49.003.08.20	33.49.003.08.29
2867	5716	45	33.49.003.08.21	33.49.003.08.30
	7742	64	33.49.003.08.22	33.49.003.08.31
4000 K				
900	2431	19	33.49.002.08.96	33.49.003.08.05
1181	2393	18	33.49.002.08.97	33.49.003.08.06
	3241	26	33.49.002.08.98	33.49.003.08.07
1462	2991	23	33.49.002.08.99	33.49.003.08.08
	4052	32	33.49.003.08.00	33.49.003.08.09
2305	4786	36	33.49.003.08.01	33.49.003.08.10
	6482	52	33.49.003.08.02	33.49.003.08.11
2867	5981	45	33.49.003.08.03	33.49.003.08.12
	8103	64	33.49.003.08.04	33.49.003.08.13

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

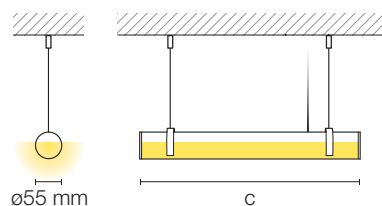

TUPOLI 55

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.49.001.08.32	35.49.001.08.33	35.49.002.08.75



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*


* Applies to lengths equal to or greater than 1181 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI 70

SUSPENDED

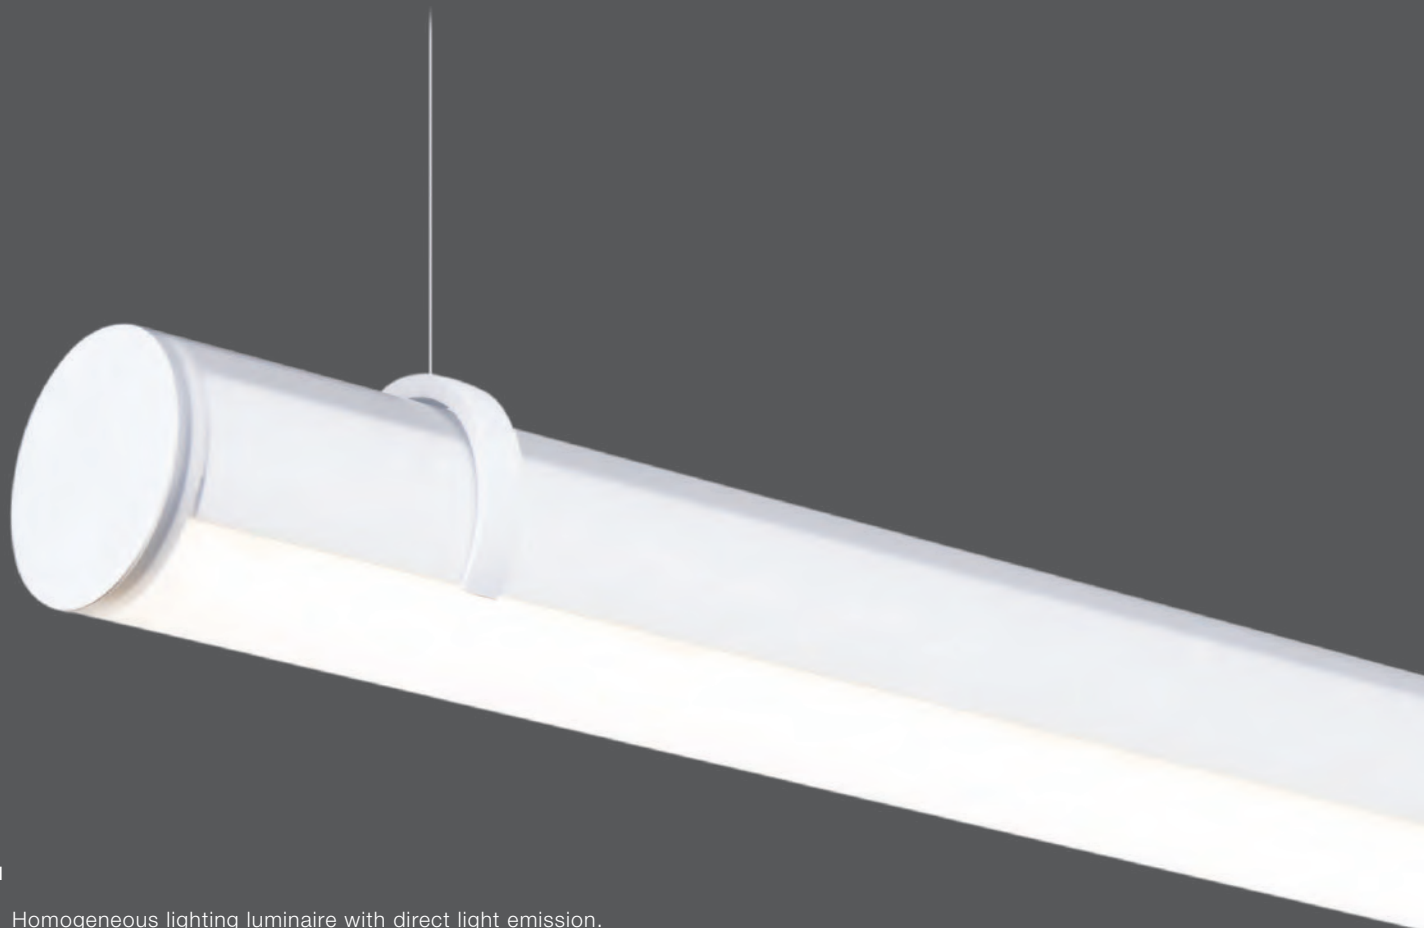

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 193 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI 70 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
900	1880	14	33.49.005.08.18	33.49.005.08.19
	2705	22	33.49.003.08.32	33.49.003.08.41
	4440	38	33.49.006.08.92	33.49.006.08.97
1181	2506	19	33.49.003.08.33	33.49.003.08.42
	3607	29	33.49.003.08.34	33.49.003.08.43
	5919	51	33.49.006.08.93	33.49.006.08.98
1462	3133	24	33.49.003.08.35	33.49.003.08.44
	4509	37	33.49.003.08.36	33.49.003.08.45
	7399	63	33.49.006.08.94	33.49.006.08.99
2305	5013	38	33.49.003.08.37	33.49.003.08.46
	7213	58	33.49.003.08.38	33.49.003.08.47
	11839	101	33.49.006.08.95	33.49.007.08.00
2867	6266	48	33.49.003.08.39	33.49.003.08.48
	9018	73	33.49.003.08.40	33.49.003.08.49
	14798	127	33.49.006.08.96	33.49.007.08.01
4000 K				
900	1967	14	33.49.005.08.20	33.49.005.08.21
	2831	22	33.49.003.08.50	33.49.003.08.59
	4652	38	33.49.007.08.02	33.49.007.08.07
1181	2623	19	33.49.003.08.51	33.49.003.08.60
	3774	29	33.49.003.08.52	33.49.003.08.61
	6203	51	33.49.007.08.03	33.49.007.08.08
1462	3278	24	33.49.003.08.53	33.49.003.08.62
	4717	37	33.49.003.08.54	33.49.003.08.63
	7753	63	33.49.007.08.04	33.49.007.08.09
2305	5246	38	33.49.003.08.55	33.49.003.08.64
	7547	58	33.49.003.08.56	33.49.003.08.65
	12406	101	33.49.007.08.05	33.49.007.08.10
2867	6557	48	33.49.003.08.57	33.49.003.08.66
	9435	73	33.49.003.08.58	33.49.003.08.67
	15507	127	33.49.007.08.06	33.49.007.08.11

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

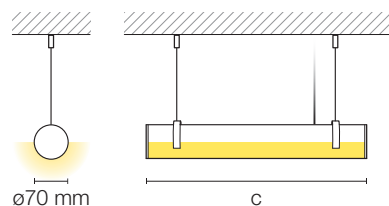

TUPOLI 70

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.49.003.01.48	35.49.003.01.49	35.49.002.08.76



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1181 mm. ** Applies to lengths equal to or greater than 1462 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI 70 I-LIGHT

INVISIBLE LIGHT - UGR <13

SUSPENDED



EN

- > Invisible light luminaire with outstanding glare control.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > The light source is invisible, offering high visual comfort with UGR <13 for maximum glare protection.
- > The integrated lens optics allow beam angles of 16°, 40° and 35°x12° (elliptical).
- > Clear impact-resistant polycarbonate tubular body.
- > Aluminium end caps.

FR

- > Luminaire de lumière invisible offrant un contrôle exceptionnelle de l'éblouissement.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > La source de lumière est invisible, offrant un grand confort visuel avec UGR <13 pour une protection anti-éblouissement maximale.
- > L'optique de lentille intégrée permet des angles de diffusion de 16°, 40° et 35°x12° (elliptique).
- > Corps tubulaire en polycarbonate transparent résistante aux chocs.
- > Embouts en aluminium.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Clear Polycarbonate

LED

Efficacy up to 143 lm/W
3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9005 Matt Black

TUPOLI 70 I-LIGHT SUSPENDED
CLEAR DIFFUSER

MATT BLACK FINISHING

Beam Angle (°)	c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K					
16°	1176	3560	28	33.49.006.08.47	33.49.006.08.53
	1459	4450	35	33.49.006.08.50	33.49.006.08.56
40°	1176	3591	28	33.49.006.08.48	33.49.006.08.54
	1459	4488	35	33.49.006.08.51	33.49.006.08.57
Elliptical 35° x 12°	1176	3348	28	33.49.006.08.49	33.49.006.08.55
	1459	4185	35	33.49.006.08.52	33.49.006.08.58
4000 K					
16°	1176	3615	28	33.49.006.08.59	33.49.006.08.65
	1459	4518	35	33.49.006.08.62	33.49.006.08.68
40°	1176	3646	28	33.49.006.08.60	33.49.006.08.66
	1459	4557	35	33.49.006.08.63	33.49.006.08.69
Elliptical 35° x 12°	1176	3399	28	33.49.006.08.61	33.49.006.08.67
	1459	4249	35	33.49.006.08.64	33.49.006.08.70

OPTIONS

LED

2700 K, 5000 K, 6500 K

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING



 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

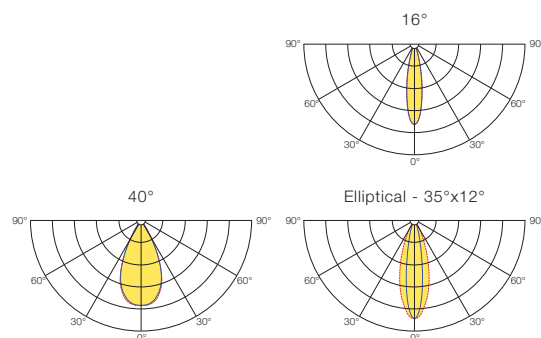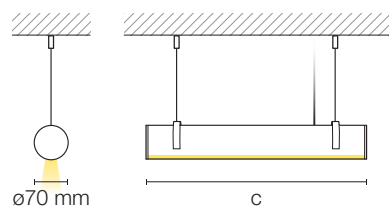

TUPOLI 70 I-LIGHT

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt Black + Stainless Steel Cable	35.49.002.08.97	35.49.002.08.98	35.49.002.08.99



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)


MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74



> TUPOLI 70 I-LIGHT SUSPENDED

TUPOLI-V 70

SUSPENDED

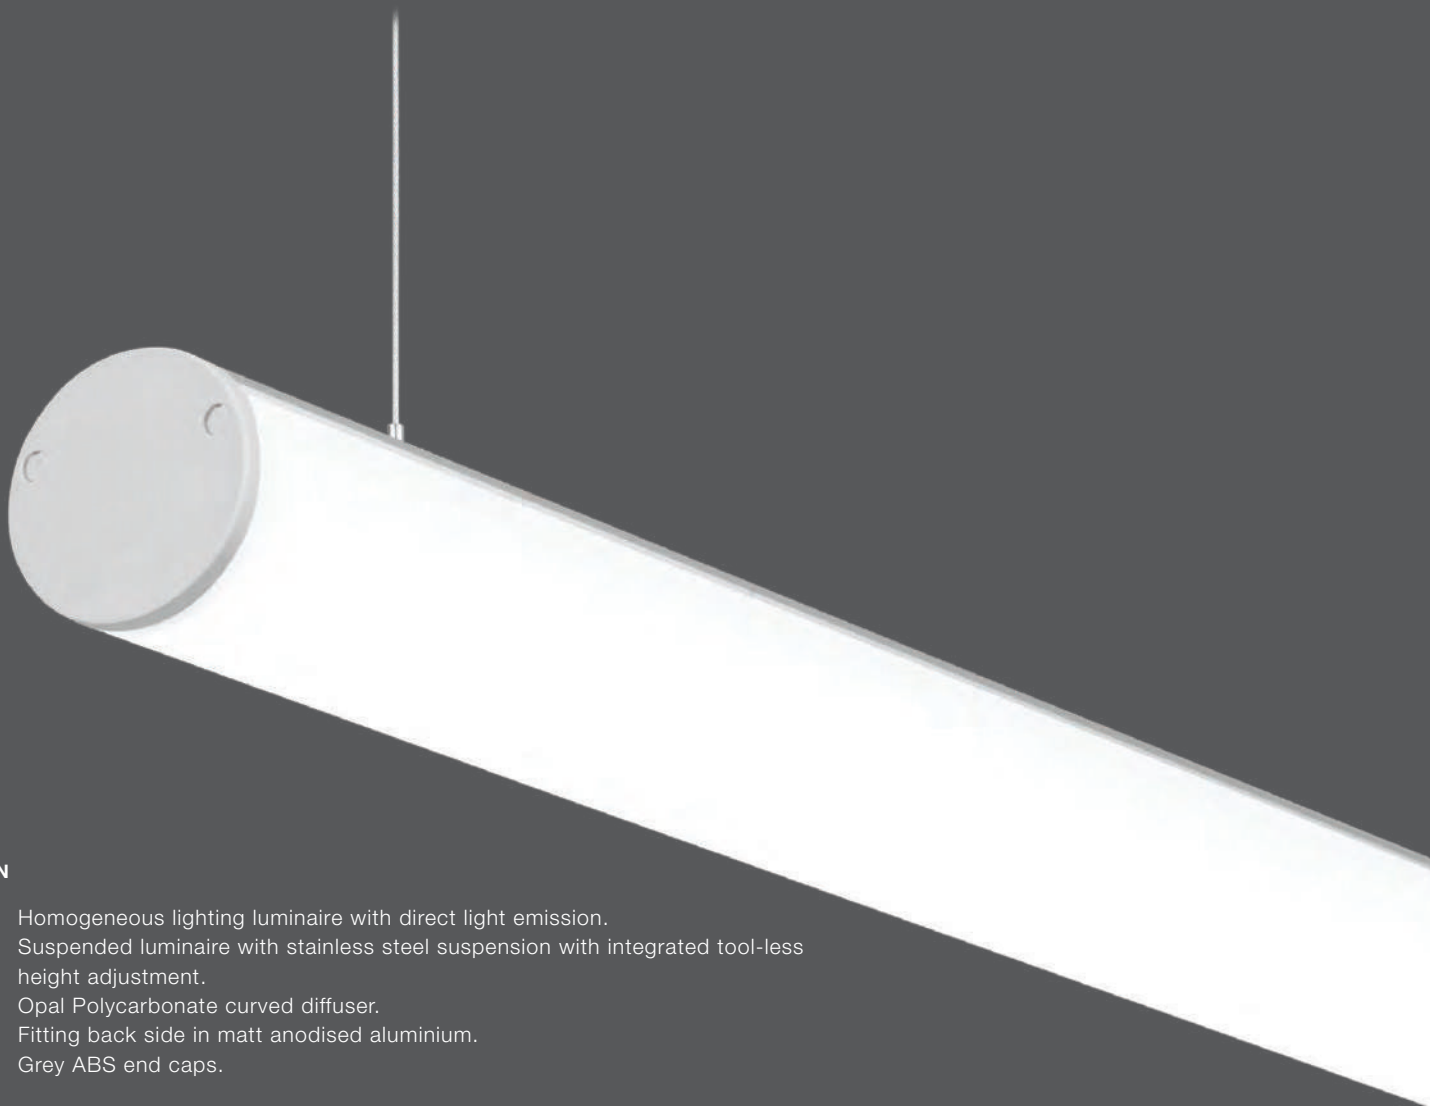

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate curved diffuser.
- > Fitting back side in matt anodised aluminium.
- > Grey ABS end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur cintré en Polycarbonate Opale.
- > Profilé portant en aluminium anodisée mat.
- > Embouts en ABS finition gris.

QUICK INFO

GENERAL

Suspended
IP40
IK04
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI-V 70 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
868	2177	19	33.49.004.08.72	33.49.004.08.82
	4353	38	33.49.004.08.73	33.49.004.08.83
1149	2901	25	33.49.004.08.74	33.49.004.08.84
	5805	50	33.49.004.08.75	33.49.004.08.85
1430	3627	31	33.49.004.08.76	33.49.004.08.86
	7255	63	33.49.004.08.77	33.49.004.08.87
2273	5803	50	33.49.004.08.78	33.49.004.08.88
	11609	101	33.49.004.08.79	33.49.004.08.89
2835	7254	63	33.49.004.08.80	33.49.004.08.90
	14511	126	33.49.004.08.81	33.49.004.08.91
4000 K				
868	2278	19	33.49.004.08.92	33.49.005.08.02
	4555	38	33.49.004.08.93	33.49.005.08.03
1149	3037	25	33.49.004.08.94	33.49.005.08.04
	6073	50	33.49.004.08.95	33.49.005.08.05
1430	3796	31	33.49.004.08.96	33.49.005.08.06
	7591	63	33.49.004.08.97	33.49.005.08.07
2273	6073	50	33.49.004.08.98	33.49.005.08.08
	12146	101	33.49.004.08.99	33.49.005.08.09
2835	7592	63	33.49.005.08.00	33.49.005.08.10
	15183	126	33.49.005.08.01	33.49.005.08.11

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

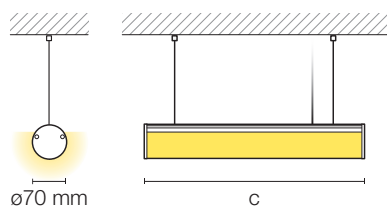

TUPOLI-V 70

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*


* Applies to lengths equal to or greater than 1430 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI-V 70

SURFACE

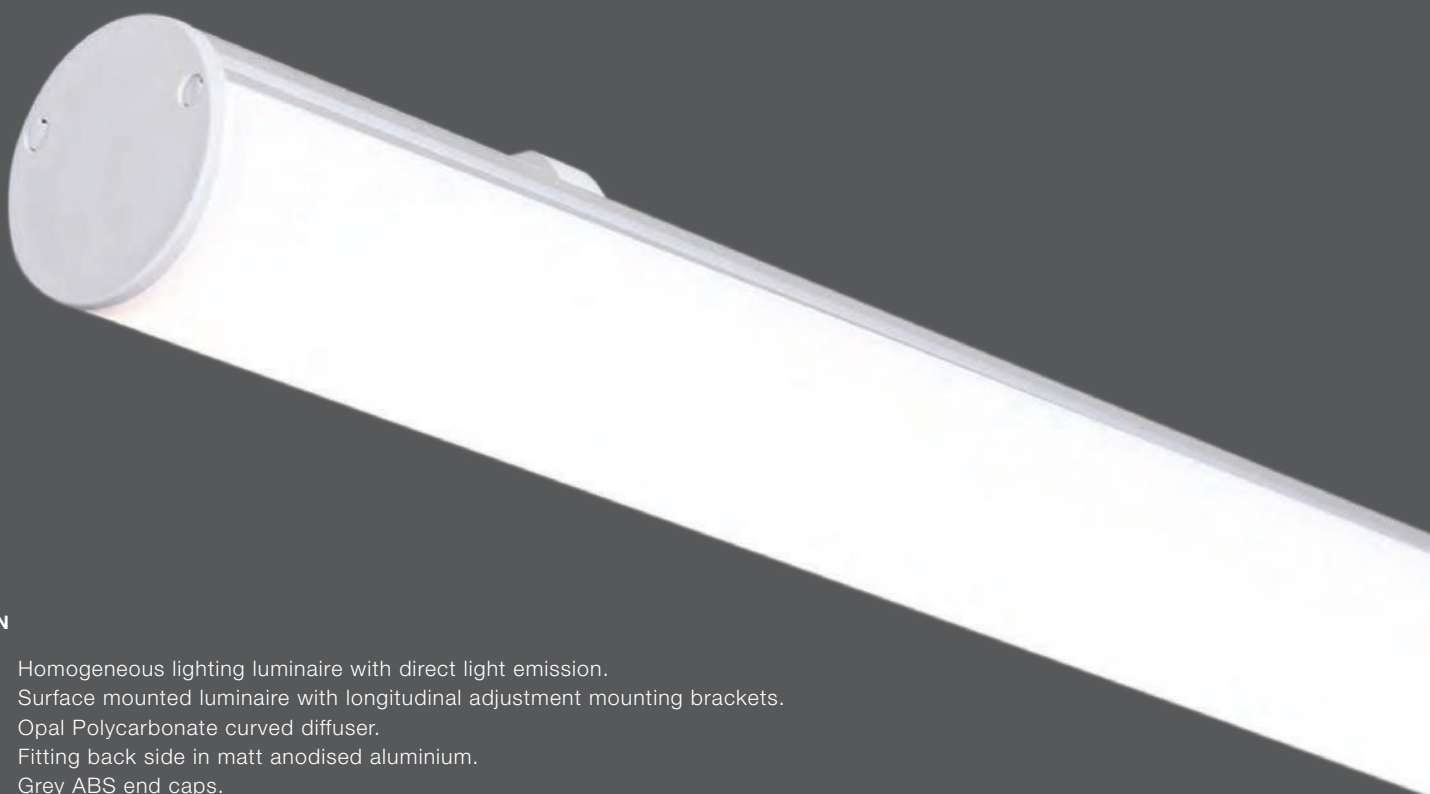

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Surface mounted luminaire with longitudinal adjustment mounting brackets.
- > Opal Polycarbonate curved diffuser.
- > Fitting back side in matt anodised aluminium.
- > Grey ABS end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application apparente par pattes de fixation à réglage longitudinal.
- > Diffuseur cintré en Polycarbonate Opale.
- > Profilé portant en aluminium anodisée mat.
- > Embouts en ABS finition gris.

QUICK INFO

GENERAL

Surface
IP40
IK07
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI-V 70 SURFACE

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
868	2177	19	33.49.004.08.32	33.49.004.08.42
	4353	38	33.49.004.08.33	33.49.004.08.43
1149	2901	25	33.49.004.08.34	33.49.004.08.44
	5805	50	33.49.004.08.35	33.49.004.08.45
1430	3627	31	33.49.004.08.36	33.49.004.08.46
	7255	63	33.49.004.08.37	33.49.004.08.47
2273	5803	50	33.49.004.08.38	33.49.004.08.48
	11609	101	33.49.004.08.39	33.49.004.08.49
2835	7254	63	33.49.004.08.40	33.49.004.08.50
	14511	126	33.49.004.08.41	33.49.004.08.51
4000 K				
868	2278	19	33.49.004.08.52	33.49.004.08.62
	4555	38	33.49.004.08.53	33.49.004.08.63
1149	3037	25	33.49.004.08.54	33.49.004.08.64
	6073	50	33.49.004.08.55	33.49.004.08.65
1430	3796	31	33.49.004.08.56	33.49.004.08.66
	7591	63	33.49.004.08.57	33.49.004.08.67
2273	6073	50	33.49.004.08.58	33.49.004.08.68
	12146	101	33.49.004.08.59	33.49.004.08.69
2835	7592	63	33.49.004.08.60	33.49.004.08.70
	15183	126	33.49.004.08.61	33.49.004.08.71

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



OPTIONS

EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*


* Applies to lengths equal to or greater than 1430 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI-360 70

SUSPENDED

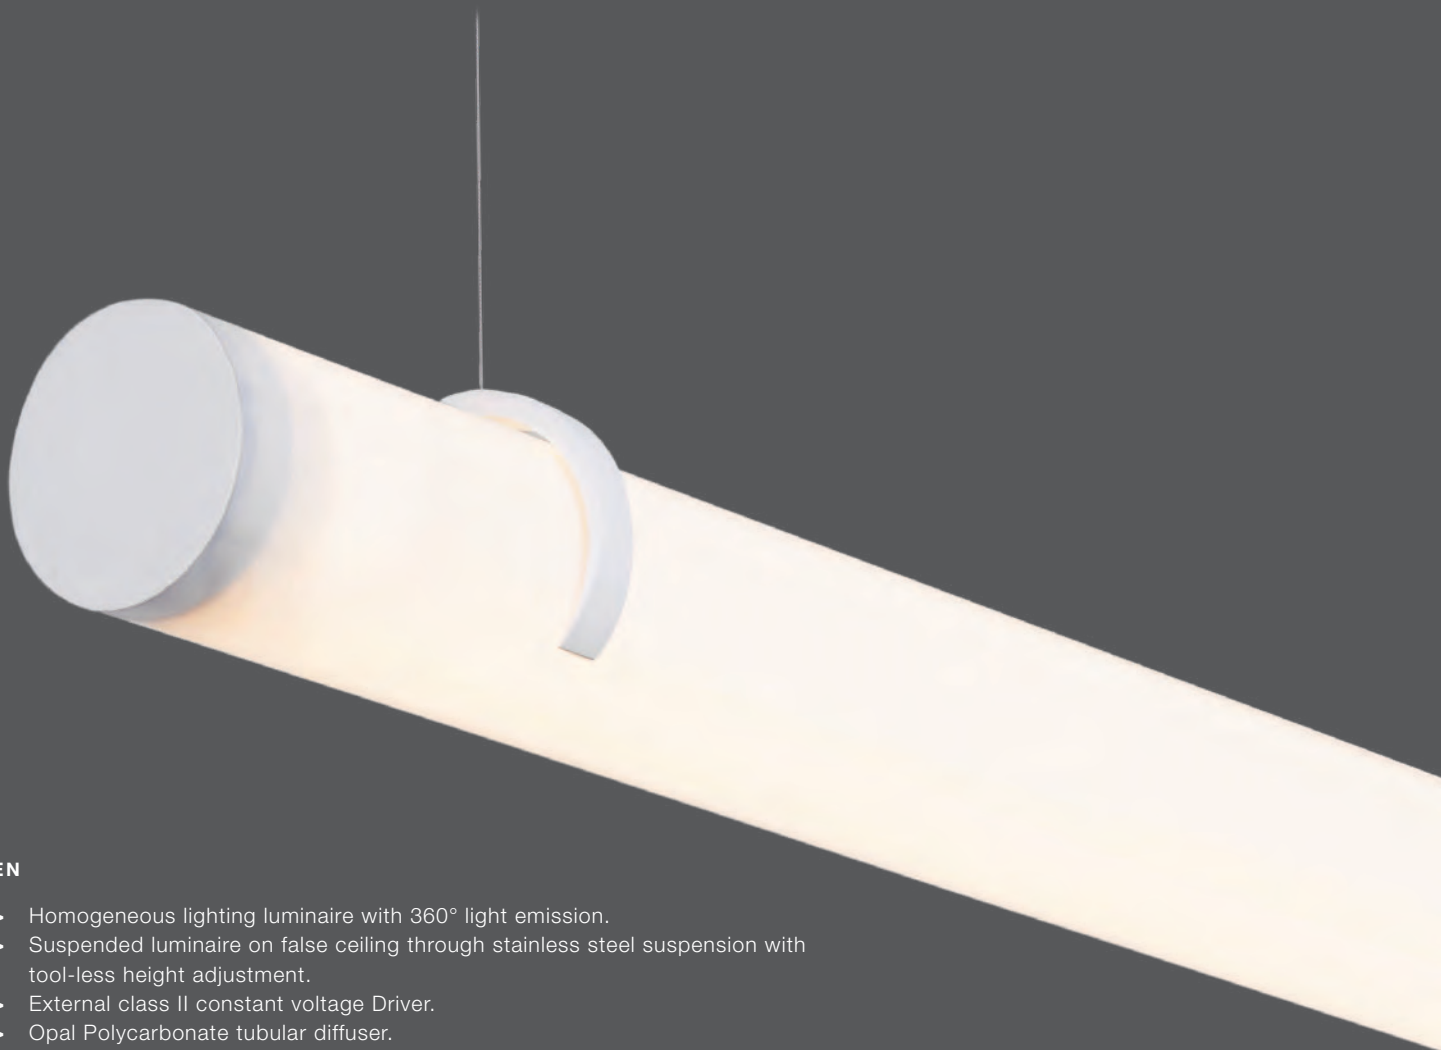

EN

- > Homogeneous lighting luminaire with 360° light emission.
- > Suspended luminaire on false ceiling through stainless steel suspension with tool-less height adjustment.
- > External class II constant voltage Driver.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps without visible screws.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 360°.
- > Application suspendue en faux plafond par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat et sans aucune vis visible.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class III
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI-360 70 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
574	824	8	24 VDC	33.49.004.08.20
1074	1648	16	24 VDC	33.49.004.08.21
1574	2472	23	24 VDC	33.49.004.08.22
4000 K				
574	824	7	24 VDC	33.49.004.08.26
1074	1648	15	24 VDC	33.49.004.08.27
1574	2472	22	24 VDC	33.49.004.08.28

COMPONENTS

SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White	35.49.003.01.48	35.49.003.01.49	35.49.002.08.76

RECESSED CEILING CUP (1pc)



TYPE	1m	3m	5m
Matt White Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71

DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73

DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.

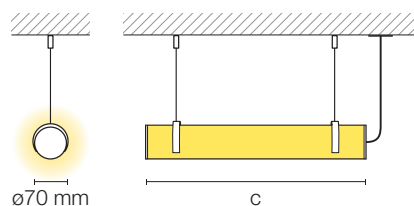



> TUPOLI-360 70 SUSPENDED



> TUPOLI-360 70 VERTICAL SUSPENDED

TUPOLI-360 70 VERTICAL SUSPENDED



EN

- > Homogeneous lighting luminaire with 360° light emission.
- > Suspended luminaire on false ceiling through stainless steel suspension with tool-less height adjustment.
- > External class II constant voltage Driver.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps without visible screws.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 360°.
- > Application suspendue en faux plafond par câble en acier inoxydable avec réglage en hauteur sans outil.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat et sans aucune vis visible.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class III
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI-360 70 VERTICAL SUSPENDED
OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
574	824	8	24 VDC	33.49.004.08.08
1074	1648	16	24 VDC	33.49.004.08.09
1574	2472	23	24 VDC	33.49.004.08.10
4000 K				
574	824	7	24 VDC	33.49.004.08.14
1074	1648	15	24 VDC	33.49.004.08.15
1574	2472	22	24 VDC	33.49.004.08.16

COMPONENTS

SUSPENSION SYSTEM (1pc)



TYPE	1 m	3 m	5 m
Matt White	35.42.001.01.77	35.42.001.01.78	35.42.001.01.79

RECESSED CEILING CUP (1pc)



TYPE	1 m	3 m	5 m
Matt White Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71



DRIVER - EXTERNAL



CLASS II


ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.




TUPOLI 70 SUSPENDED



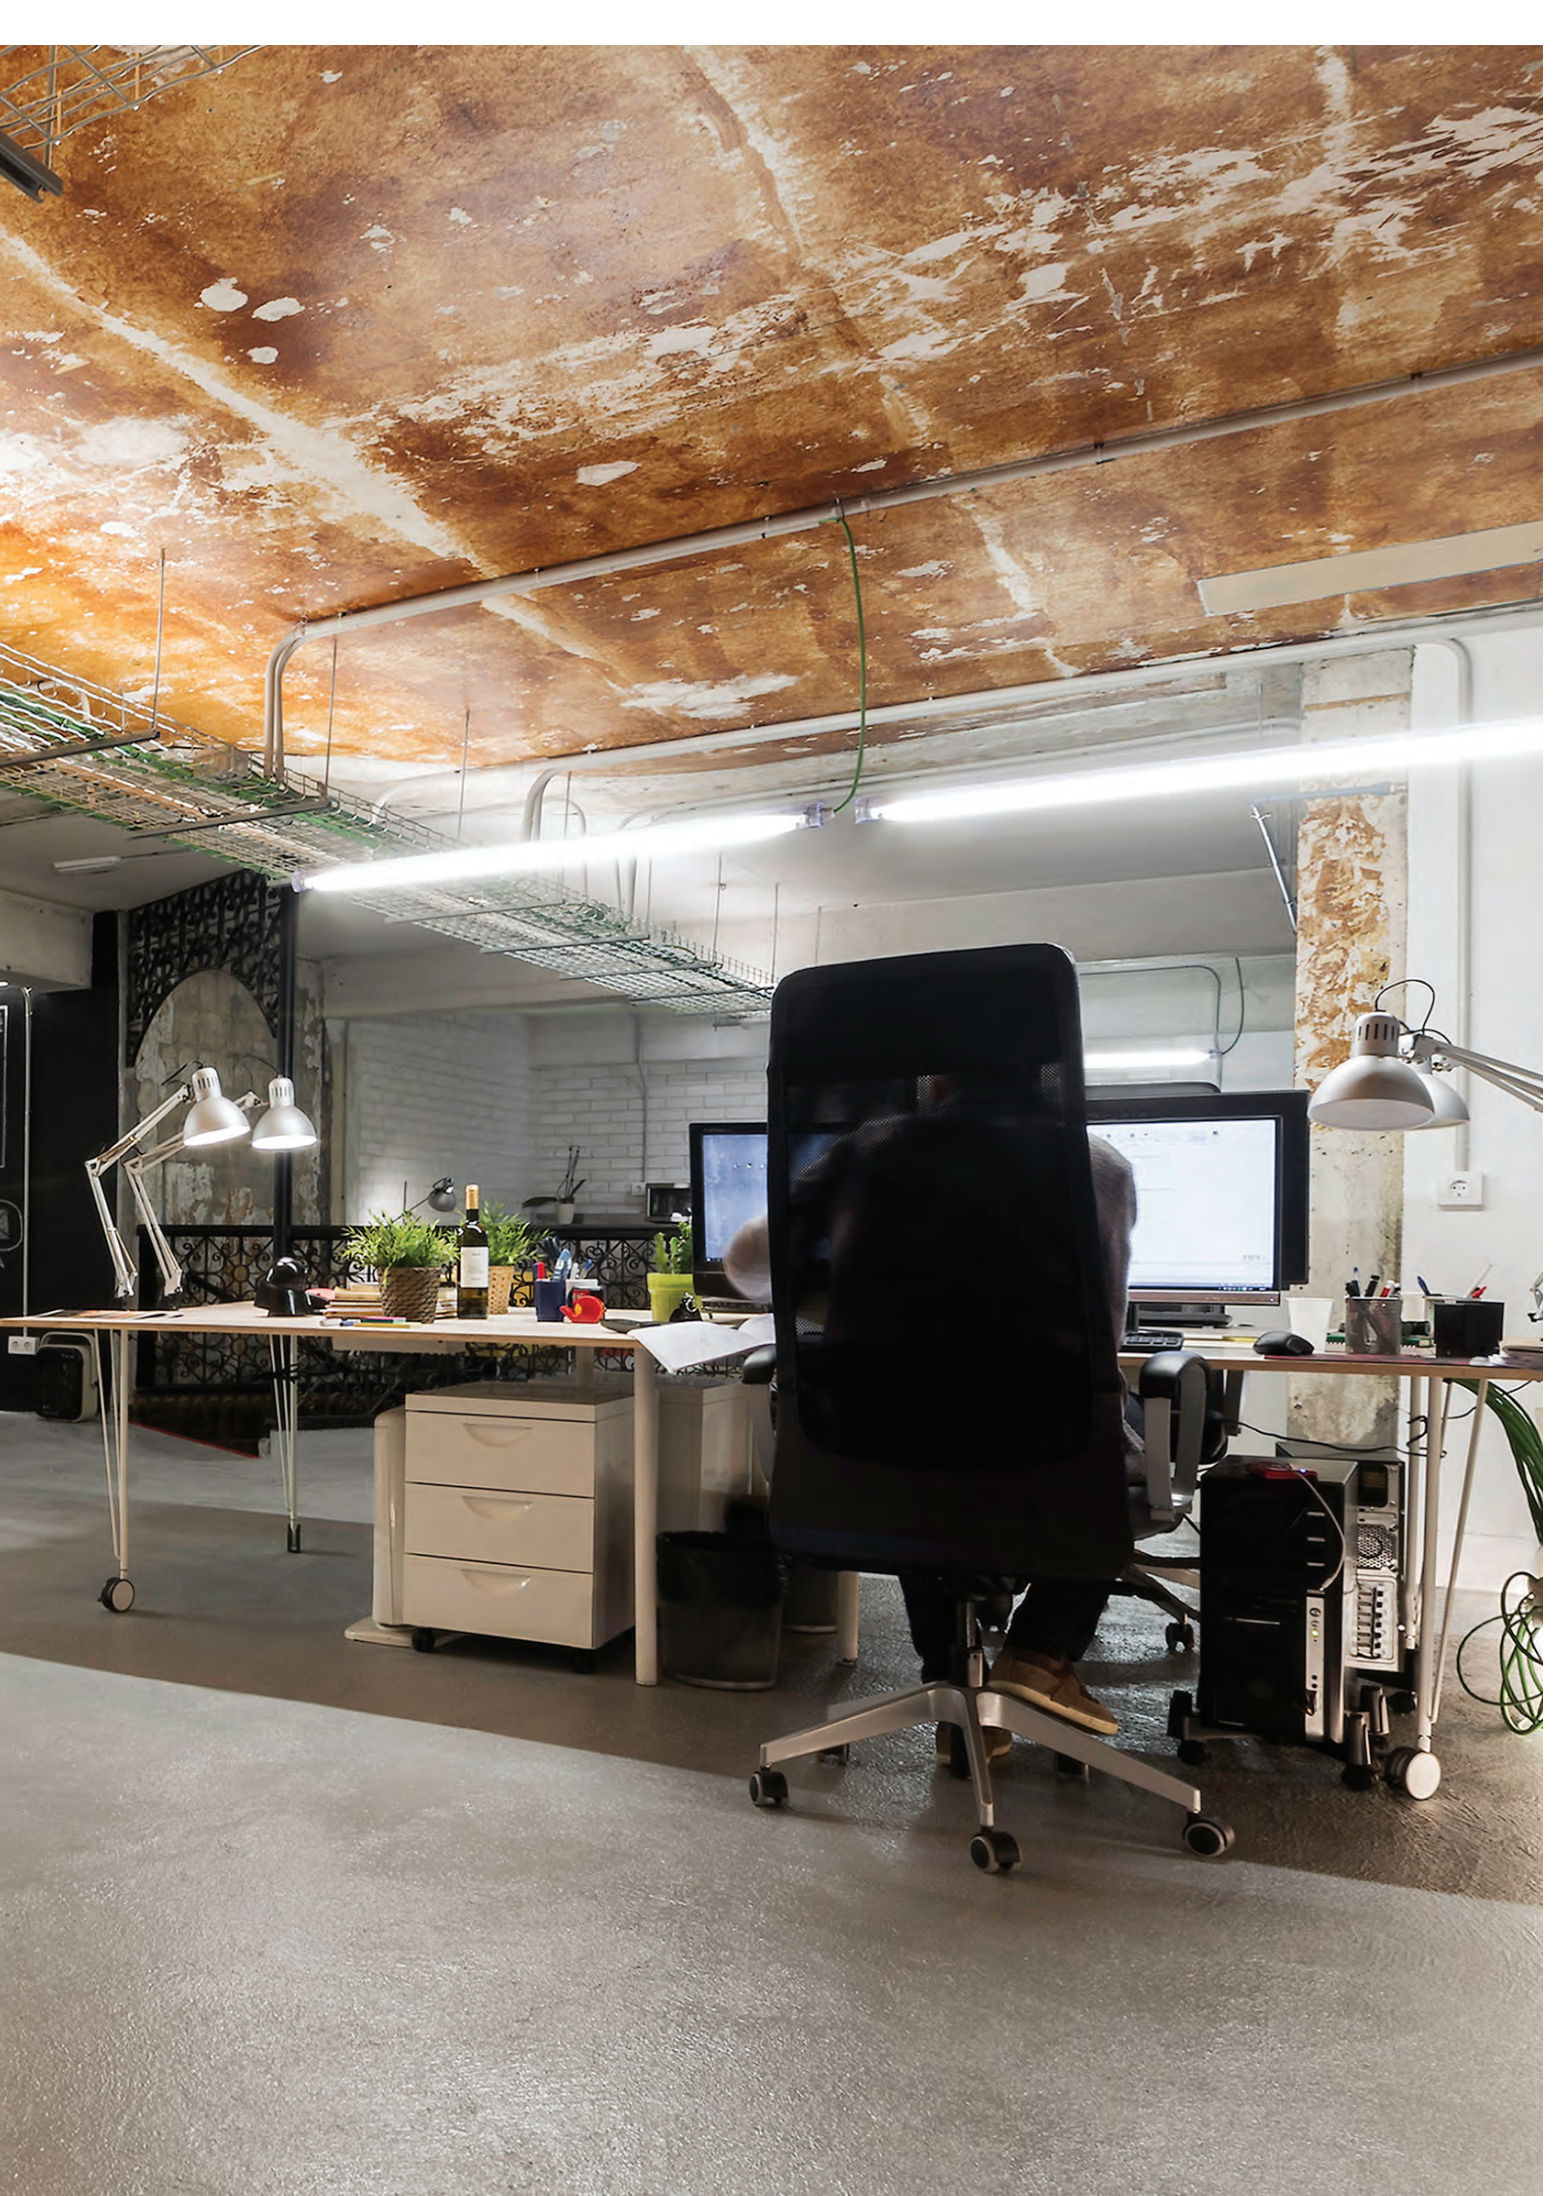

TUPOLI 70 IP65, IP66

SUSPENDED

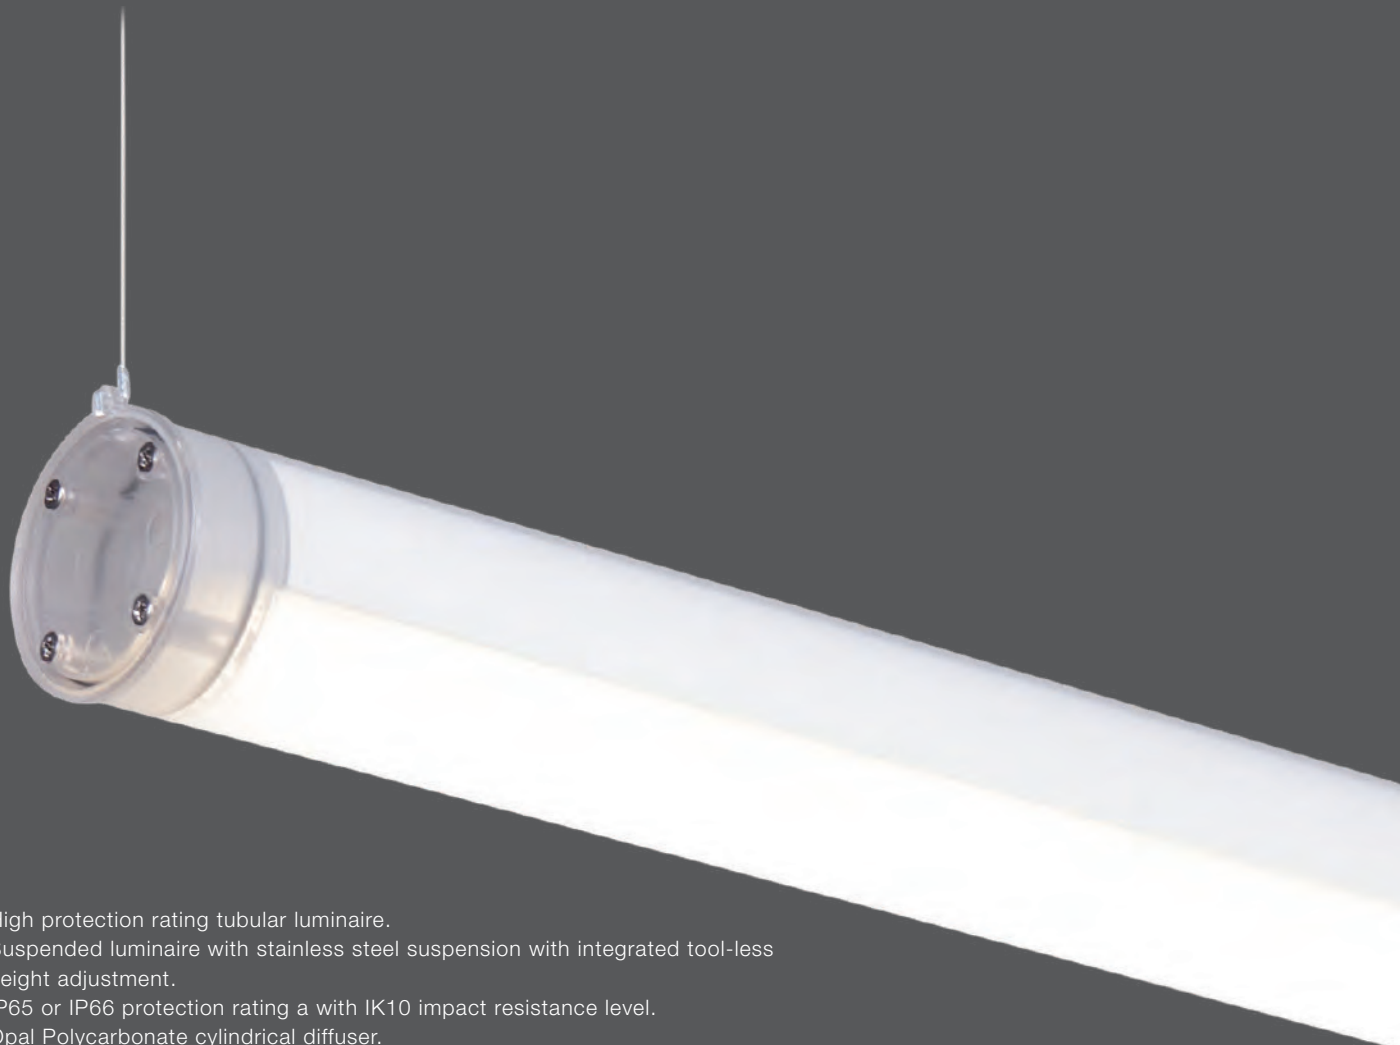

EN

- > High protection rating tubular luminaire.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > IP65 or IP66 protection rating a with IK10 impact resistance level.
- > Opal Polycarbonate cylindrical diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Polycarbonate end cap with cable gland to ensure the IP of the luminaire.

FR

- > Luminaire tubulaire à haut degré de protection.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Degré de protection IP65 ou IP66 et résistance aux impacts IK10.
- > Diffuseur cylindrique en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embout en Polycarbonate avec presse-étoupe pour assurer l'IP du luminaire.

QUICK INFO

GENERAL

Suspended
IP65
IK10
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 196 lm/W
3000 K, 4000 K
CRI >80
Lifetime 60 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

GENERAL

Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI 70 SUSPENDED
OPAL DIFFUSER

IP65

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
931	1965	15	33.49.005.08.14	33.49.005.08.15
	2836	23	33.49.003.08.68	33.49.003.08.77
	4796	38	33.49.007.08.12	33.49.007.08.15
1212	2620	19	33.49.003.08.69	33.49.003.08.78
	3781	30	33.49.003.08.70	33.49.003.08.79
	6395	51	33.49.007.08.13	33.49.007.08.16
1493	3275	24	33.49.003.08.71	33.49.003.08.80
	4726	38	33.49.003.08.72	33.49.003.08.81
	7994	63	33.49.007.08.14	33.49.007.08.17
4000 K				
931	2058	15	33.49.005.08.16	33.49.005.08.17
	2971	23	33.49.003.08.86	33.49.003.08.99
	5026	38	33.49.007.08.18	33.49.007.08.21
1212	2744	19	33.49.003.08.87	33.49.004.08.00
	3961	30	33.49.003.08.88	33.49.004.08.01
	6701	51	33.49.007.08.19	33.49.007.08.22
1493	3430	24	33.49.003.08.89	33.49.004.08.02
	4951	38	33.49.003.08.90	33.49.004.08.03
	8377	63	33.49.007.08.20	33.49.007.08.23

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

COMPONENTS

SUSPENSION SYSTEM (2pcs)

TYPE	1 m	3 m	5 m
Matt White + Stainless Steel Cable	35.49.003.01.72	35.49.003.01.73	35.49.003.01.74





OPTIONS

EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**

DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1212 mm. ** Applies to lengths equal to or greater than 1493 mm.
> On request – External Emergency. Box dimensions: 45x120x360 mm.

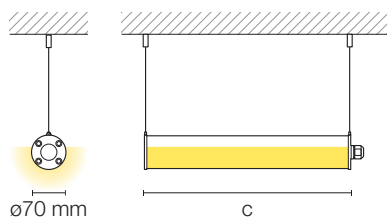

QUICK INFO

GENERAL

Suspended
IP66
IK10
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 196 lm/W
3000 K, 4000 K
CRI >80
Lifetime 60 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

GENERAL

Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI 70 SUSPENDED OPAL DIFFUSER

IP66

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
939	1965	15	33.49.006.08.71	33.49.006.08.28
	2836	23	33.49.006.08.72	33.49.006.08.29
	4796	38	33.49.007.08.24	33.49.007.08.27
1220	2620	19	33.49.006.08.73	33.49.006.08.30
	3781	30	33.49.006.08.25	33.49.006.08.31
	6395	51	33.49.007.08.25	33.49.007.08.28
1501	3275	24	33.49.006.08.26	33.49.006.08.32
	4726	38	33.49.006.08.27	33.49.006.08.33
	7994	63	33.49.007.08.26	33.49.007.08.29
4000 K				
939	2058	15	33.49.006.08.34	33.49.006.08.40
	2971	23	33.49.006.08.35	33.49.006.08.41
	5026	38	33.49.007.08.30	33.49.007.08.33
1220	2744	19	33.49.006.08.36	33.49.006.08.42
	3961	30	33.49.006.08.37	33.49.006.08.43
	6701	51	33.49.007.08.31	33.49.007.08.34
1501	3430	24	33.49.006.08.38	33.49.006.08.44
	4951	38	33.49.006.08.39	33.49.006.08.45
	8377	63	33.49.007.08.32	33.49.007.08.35

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

COMPONENTS

SUSPENSION SYSTEM (2pcs)

TYPE	1 m	3 m	5 m
Matt White + Stainless Steel Cable	35.49.003.01.72	35.49.003.01.73	35.49.003.01.74



OPTIONS

EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**

DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**


* Applies to lengths equal to or greater than 1212 mm. ** Applies to lengths equal to or greater than 1493 mm.
> On request – External Emergency. Box dimensions: 45x120x360 mm.

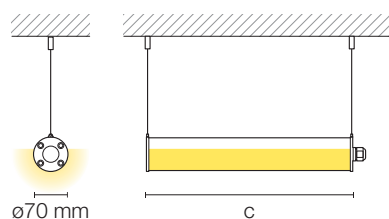



TUPOLI 70 IP65, IP66

SURFACE

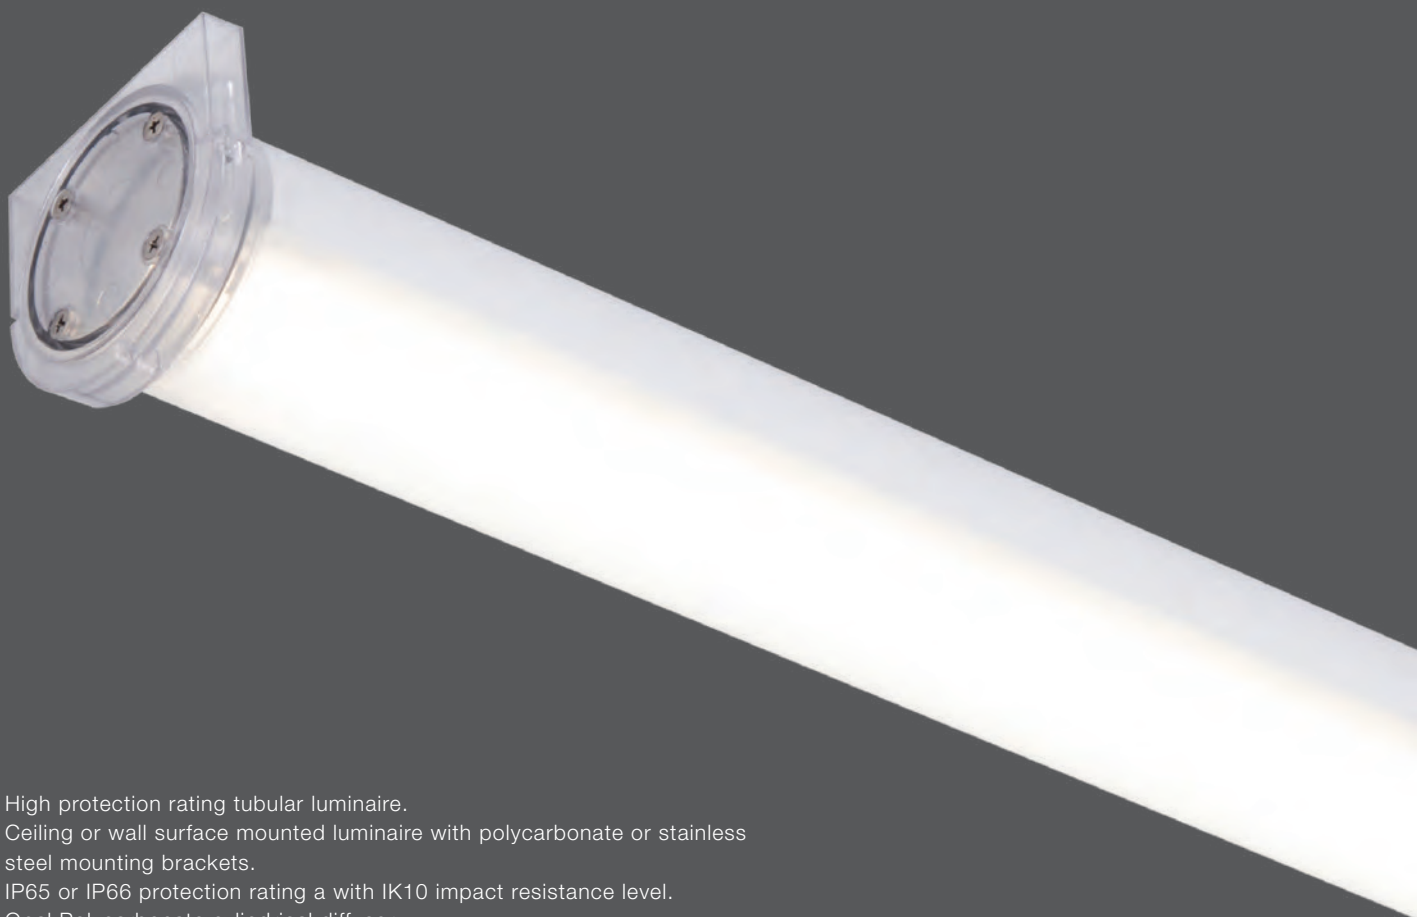

EN

- > High protection rating tubular luminaire.
- > Ceiling or wall surface mounted luminaire with polycarbonate or stainless steel mounting brackets.
- > IP65 or IP66 protection rating a with IK10 impact resistance level.
- > Opal Polycarbonate cylindrical diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Polycarbonate end cap with cable gland to ensure the IP of the luminaire.

FR

- > Luminaire tubulaire à haut degré de protection.
- > Application apparente au plafond ou au mur par pattes de fixation en polycarbonate ou acier inoxydable.
- > Degré de protection IP65 ou IP66 et résistance aux impacts IK10.
- > Diffuseur cylindrique en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embout en Polycarbonate avec presse-étoupe pour assurer l'IP du luminaire.

QUICK INFO

GENERAL

Surface
IP65
IK10
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 196 lm/W
3000 K, 4000 K
CRI >80
Lifetime 60 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

GENERAL

Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI 70 SURFACE
OPAL DIFFUSER

IP65

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
931	1965	15	33.49.003.08.95	33.49.003.08.96
	2836	23	33.49.002.08.54	33.49.002.08.63
	4796	38	33.49.007.08.36	33.49.007.08.41
1212	2620	19	33.49.002.08.55	33.49.002.08.64
	3781	30	33.49.002.08.56	33.49.002.08.65
	6395	51	33.49.007.08.37	33.49.007.08.42
1493	3275	24	33.49.002.08.57	33.49.002.08.66
	4726	38	33.49.002.08.58	33.49.002.08.67
	7994	63	33.49.007.08.38	33.49.007.08.43
2336	5239	39	33.49.002.08.59	33.49.002.08.68
	7562	60	33.49.002.08.60	33.49.002.08.69
	12790	101	33.49.007.08.39	33.49.007.08.44
2898	6549	49	33.49.002.08.61	33.49.002.08.70
	9452	75	33.49.002.08.62	33.49.002.08.71
	15988	127	33.49.007.08.40	33.49.007.08.45
4000 K				
931	2058	15	33.49.003.08.97	33.49.003.08.98
	2971	23	33.49.002.08.72	33.49.002.08.81
	5026	38	33.49.007.08.46	33.49.007.08.51
1212	2744	19	33.49.002.08.73	33.49.002.08.82
	3961	30	33.49.002.08.74	33.49.002.08.83
	6701	51	33.49.007.08.47	33.49.007.08.52
1493	3430	24	33.49.002.08.75	33.49.002.08.84
	4951	38	33.49.002.08.76	33.49.002.08.85
	8377	63	33.49.007.08.48	33.49.007.08.53
2336	5489	39	33.49.002.08.77	33.49.002.08.86
	7921	60	33.49.002.08.78	33.49.002.08.87
	13403	101	33.49.007.08.49	33.49.007.08.54
2898	6861	49	33.49.002.08.79	33.49.002.08.88
	9902	75	33.49.002.08.80	33.49.002.08.89
	16753	127	33.49.007.08.50	33.49.007.08.55

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



QUICK INFO

GENERAL

Surface
IP66
IK10
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 196 lm/W
3000 K, 4000 K
CRI >80
Lifetime 60 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

GENERAL

Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light



TUPOLI 70 SURFACE

OPAL DIFFUSER

IP66

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
939	1965	15	33.49.005.08.85	33.49.005.08.95
	2836	23	33.49.005.08.86	33.49.005.08.96
	4796	38	33.49.007.08.56	33.49.007.08.61
1220	2620	19	33.49.005.08.87	33.49.005.08.97
	3781	30	33.49.005.08.88	33.49.005.08.98
	6395	51	33.49.007.08.57	33.49.007.08.62
1501	3275	24	33.49.005.08.89	33.49.005.08.99
	4726	38	33.49.005.08.90	33.49.006.08.00
	7994	63	33.49.007.08.58	33.49.007.08.63
2344	5239	39	33.49.005.08.91	33.49.006.08.01
	7562	60	33.49.005.08.92	33.49.006.08.02
	12790	101	33.49.007.08.59	33.49.007.08.64
2906	6549	49	33.49.005.08.93	33.49.006.08.03
	9452	75	33.49.005.08.94	33.49.006.08.04
	15988	127	33.49.007.08.60	33.49.007.08.65
4000 K				
939	2058	15	33.49.006.08.05	33.49.006.08.15
	2971	23	33.49.006.08.06	33.49.006.08.16
	5026	38	33.49.007.08.66	33.49.007.08.71
1220	2744	19	33.49.006.08.07	33.49.006.08.17
	3961	30	33.49.006.08.08	33.49.006.08.18
	6701	51	33.49.007.08.67	33.49.007.08.72
1501	3430	24	33.49.006.08.09	33.49.006.08.19
	4951	38	33.49.006.08.10	33.49.006.08.20
	8377	63	33.49.007.08.68	33.49.007.08.73
2344	5489	39	33.49.006.08.11	33.49.006.08.21
	7921	60	33.49.006.08.12	33.49.006.08.22
	13403	101	33.49.007.08.69	33.49.007.08.74
2906	6861	49	33.49.006.08.13	33.49.006.08.23
	9902	75	33.49.006.08.14	33.49.006.08.24
	16753	127	33.49.007.08.70	33.49.007.08.75

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



TUPOLI 70

SURFACE

COMPONENTS



1

MOUNTING SYSTEM (2pcs)

TYPE	FIG	COD
Polycarbonate Mounting Brackets	1	35.49.003.01.46
Stainless Steel Mounting Brackets	2	35.49.003.01.47



2

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1212 mm. ** Applies to lengths equal to or greater than 1493 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.

DETAILS

1 > POLYCARBONATE MOUNTING BRACKETS



2 > STAINLESS STEEL MOUNTING BRACKETS





> TUPOLI IP65 COLUMNS

TUPOLI IP65

COLUMNS

EN

- > Decorative lighting column with 360° light emission.
- > Ideal to create visual guidance and safe ambience in pedestrian urban spaces.
- > IP65 protection rating with IK07 impact resistance level.
- > Pre-wired with 1000 mm H05RN-F connecting cable for quick and easy installation.
- > Opal Polycarbonate diffuser.
- > UV resistant polyester powder coated aluminium mounting base and body with anti-corrosion surface treatment.

FR

- > Colonne d'éclairage décorative avec diffusion de lumière sur 360°.
- > Idéal pour offrir un bon guidage visuel et un sentiment de sécurité dans des zones de circulation piétonnière des espaces urbains.
- > Degré de protection IP65 avec résistance aux impacts IK07.
- > Pré-câblé avec 1000 mm de câble H05RN-F pour une installation rapide et facile.
- > Diffuseur en Polycarbonate Opale.
- > Corps et socle de fixation en aluminium avec traitement primaire anti-corrosion et revêtement en polyester résistant aux UV.



QUICK INFO

GENERAL

Floor
IP65
IK07
850°C
Class I
Ta= -20°C +40°C

OPTIC

Opal Polycarbonate

LED


Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

Metallic Textured Grey

TUPOLI IP65
OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	COD
3000 K			
1760	1648	16	32.WX.018.08.10
2060	2472	23	32.WX.018.08.11
4000 K			
1760	1648	15	32.WX.018.08.12
2060	2472	22	32.WX.018.08.13



OPTIONS

LED

2700 K, 5000 K, 6500 K

ELECTRICAL SYSTEM

DALI, DIM 1-10V

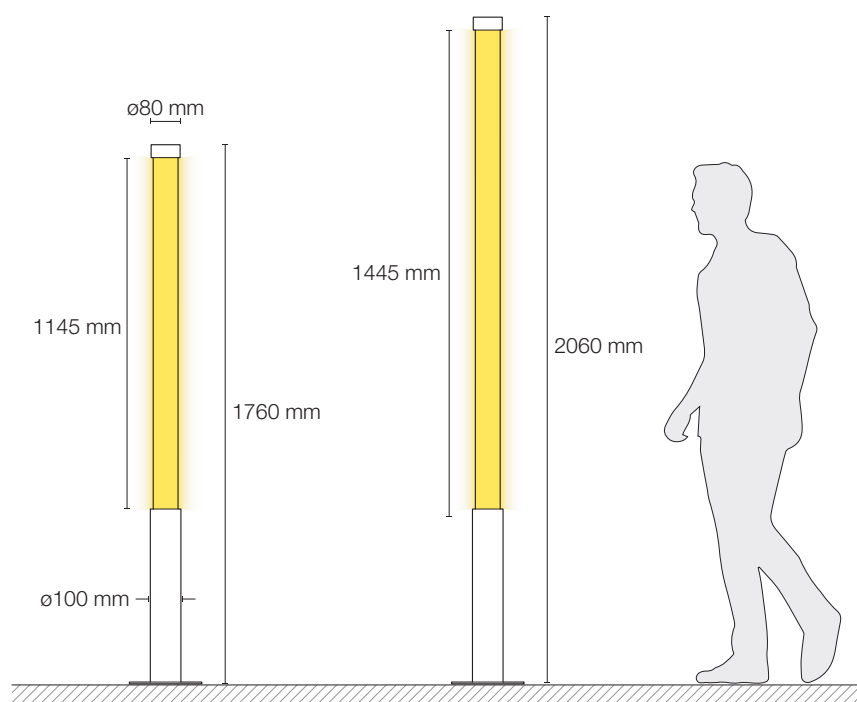

Climar - Indústria de Iluminação, S.A.

Headquarters

Rua Estrada Real, 50
3750-866 Águeda - Portugal

Lisbon Office

Rua Amorim, 2
1950-022 Lisboa - Portugal

t +351 234 690 330 | **m** +351 915 599 110
e geral@climar.pt

London Office

31 – 35 Kirby Street
London EC1N 8TE - UK

t +44 (0)20 7492 1707 | **m** +44 (0)749 637 8770
e info@climarlighting.co.uk