

# ARCHITECTURAL LIGHT SLOTS (ALS)

## H02: 4-3/4" APERTURE

Top-Mounted luminaires provide up to 1800 Lumens and 98 CRI, Field Adjustable w/ HVAC & Emergency Integration.



## H06: 6" APERTURE

Magnet-Mounted Zoom Object, Wallwash and Fixed Optic Object luminaires, 1800 Lumens, 98 CRI.



## H09: 5-1/2" APERTURE

Side-Mounted Zoom Object, Wallwash and Fixed Optic Object fixtures, 1800 Lumens, 98 CRI, LED Back-Lighting.



## H10: 5-1/2" APERTURE

Side-Mounted Zoom Object, Wallwash and Fixed Optic Object fixtures, 1800 Lumens, 98 CRI, LED Back-Lighting.



## SSS: 2-1/4" DIA. APERTURE

Center-Mounted Object Fixture, 1800 Lumens, 98 CRI, 2700K, 3000K, 3500K. Provides up to 8 Circuits, 2" Dia. Aperture and Emergency.



Litelab Slot Systems represent over 20 years of research and development in the field of linear recessed lighting. All systems provide seamless aesthetic integration at the finished ceiling and building systems integration for HVAC, Emergency, Sensor Networks, Power and Data.

Available for use in Gypsum, Wood, Stone, Acoustical Tile and other Ceiling Types, Litelab's ALS systems also include corners of variable degrees, and custom solutions for unique conditions.

ALS Fixtures provide a wide array of options, including 10° - 30° zoom, Wallwashing and Fixed Optic Object luminaires, up to 1800 Lumens, 98 CRI, and 2700K, 3000K or 3500K CCT. Dim-to-Warm and Tunable White options are also available.

ALS H06, H09 and H10 offer an option for linear LED back-lighting, which can enhance the visual impact of the overall design, while also providing wayfinding cues.

Ideal for Corporate, Hospitality, Retail and Residential applications, Litelab's ALS Systems provide flexibility and elegance to any design!

## M3Z | M3W | M3O



10° - 30° Zoom



Wallwash



Fixed Object

## S3Z | S3W | S3O



10° - 30° Zoom




Wallwash



Fixed Object



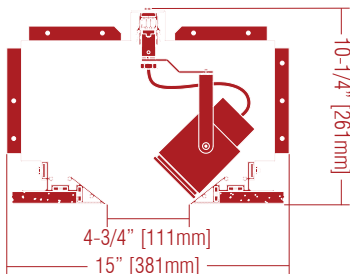

## H02

Aperture:	4-3/4" [111mm]
Overall Dimensions:	15" [381mm] W x 10-1/4" [261mm] H
Fixture Mounting:	Center
Ceiling Compatibility:	Gypsum, Wood, Acoustical Tile, Custom
Options:	Field Adjustable, Beam Jumpers, HVAC & Emergency Integration

## Y3Z | Y3W | Y3O



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	10° - 30° Adjustable Focus



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Wallwash




Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Fixed 10°, 22°, 33°

Y3Z

Y3W

Y3O

H02

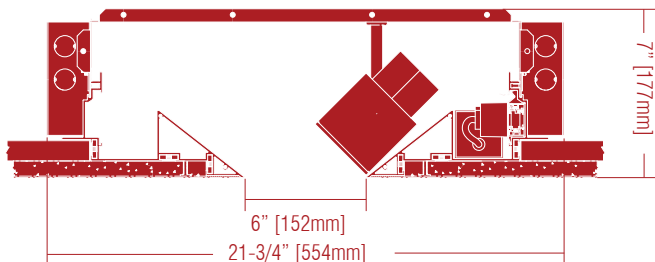

## H06

Aperture:	6" [152mm]
Overall Dimensions:	21-3/4" [554mm] W x 7" [177mm] H
Fixture Mounting:	Magnet (Variable Position)
Ceiling Compatibility:	Gypsum, Wood, Acoustical Tile, Custom
Options:	Linear LED Back-lighting, Beam Jumpers HVAC, Data & Emergency Integration

## M3Z | M3W | M30



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	10° - 30° Adjustable Focus



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Wallwash




Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Fixed 10°, 22°, 33°

M3Z

M3W

M30

H06

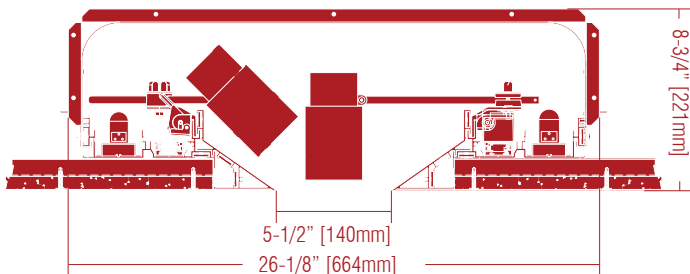

## H09

Aperture:	5-1/2" [140mm]
Overall Dimensions:	26-1/8" [664mm] W x 8-3/4" [221mm] H
Fixture Mounting:	Side Stem
Ceiling Compatibility:	Gypsum, Wood, Acoustical Tile, Custom
Options:	Linear LED Back-lighting, Data-Bus Control HVAC, Data & Emergency Integration

## S3Z | S3W | S3O



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	10° - 30° Adjustable Focus



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Wallwash




Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Fixed 10°, 22°, 33°

S3Z

S3W

S3O

H09

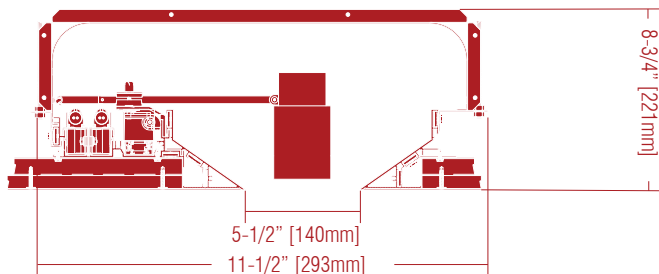

## H10

Aperture:	5-1/2" [140mm]
Overall Dimensions:	11-1/2" [293mm] W x 8-3/4" [221mm] H
Fixture Mounting:	Side Stem
Ceiling Compatibility:	Gypsum, Wood, Acoustical Tile, Custom
Options:	Linear LED Back-lighting, Data-Bus Control HVAC, Data & Emergency Integration

## S3Z | S3W | S3O



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	10° - 30° Adjustable Focus



Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Wallwash




Lumen Output:	1800 Lumens
CRI:	93 CRI
CCT:	2700K, 3000K, 3500K
Optics:	Fixed 10°, 22°, 33°

S3Z

S3W

S3O

H10

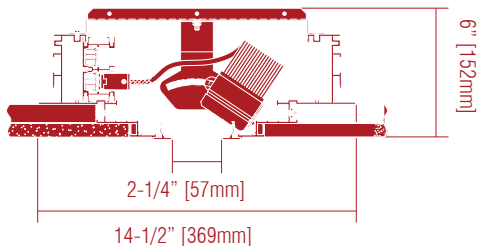

## SSS

Aperture:	2-1/4" [57mm]
Overall Dimensions:	14-1/2" [369mm] W x 6" [152mm] H
Fixture Mounting:	Center
Ceiling Compatibility:	Gypsum, Wood, Acoustical Tile, Custom
Options:	9" Aperture Plates with 2-1/4" Dia. Aperture, Up to 8 Separate Circuits, Small Profile

## L1608



Lumen Output:	1800 Lumens
CRI:	90 CRI
CCT:	2700, 3000, 3500K
Optics:	12°, 21°, 32°

Visit our new website at: [www.litelab.com](http://www.litelab.com)

Follow us on Instagram at:

<https://www.instagram.com/litelabcorp/>

Litelab Corporation

251 Elm Street

Buffalo, NY 14203

716.856.4300

