




TUNTO

LED₁₂₀ FIX

700 mm	28 W		Built-in / Casambi DIM, PUSH DIM
700 mm	28 W		External
400 mm	16 W		Built-in / Casambi DIM, PUSH DIM
400 mm	16 W		External
200 mm	6 W		Built-in / non-dimmable
200 mm	6 W		External



Drivers / Built-in

Non-dimmable (200 mm size)	RACD06
CASAMBI DIM, PUSH DIM	CASBI

Drivers / External

DALI, PUSH DIM	LCM40DA
CASAMBI DIM	LCM40BLE

Led120 Fix is a sophisticated wall light that provides atmospheric indirect lighting for a wide variety of purposes. Similar to the Pendant model, the Fix model's light is directed both upwards and downwards. The Casambi light control system adds versatility for using the light creatively.

Available in oak, ash or walnut and in black and white.

Collection



Led₁₂₀

TUNTO


Collection



Led₁₂₀

TUNTO

Collection

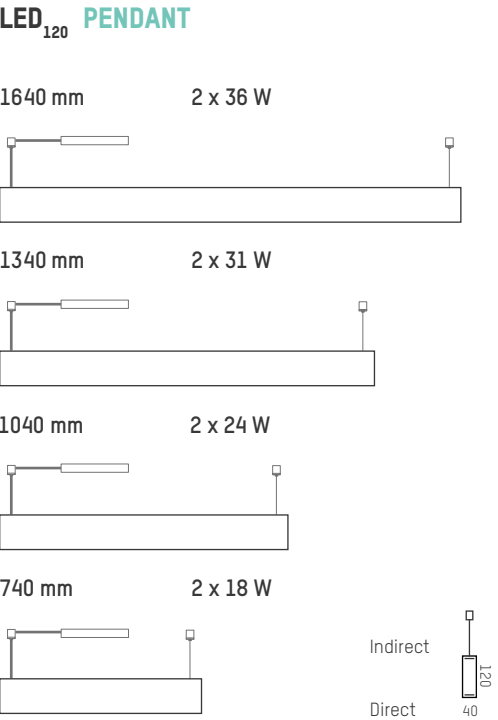

Drivers / External

DALI , PUSH DIM	LCM40DA
CASAMBI DIM	LCM40BLE


Drivers / External, Tunable white

DALI , PUSH DIM	HLC45
CASAMBI DIM	TRILC


Led120 Pendant is an elegant and versatile light that suits spaces which benefit from both direct and indirect lighting. The light is directed upwards and downwards, creating a stylish, eye-catching atmosphere. Both light directions can be controlled separately. The ceiling casing has room for two power sources. The optional Casambi light control system adds versatility for using the light creatively.

Available in oak, ash or walnut and in black and white.


FIX / External model

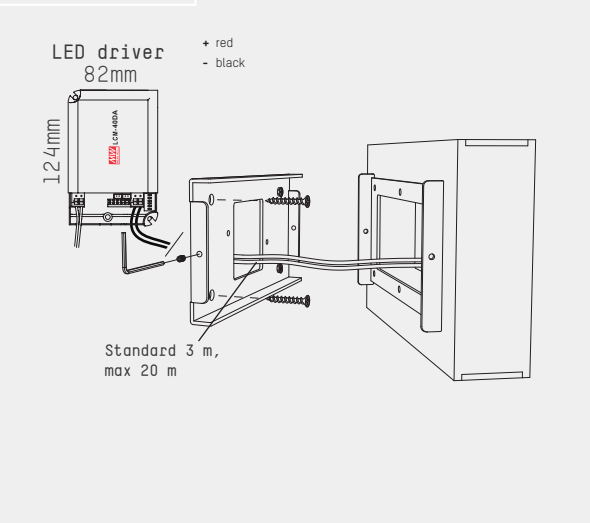

FIX / Built-in model

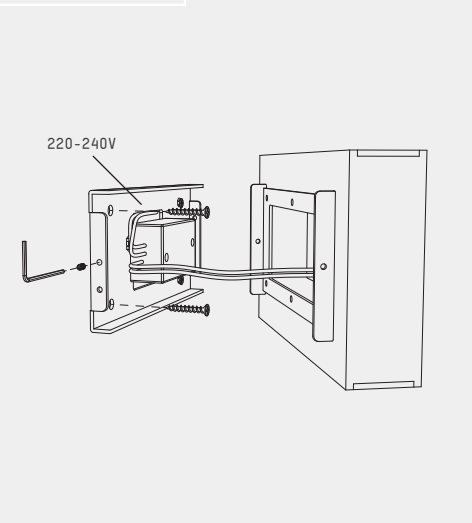

PENDANT / Power box model

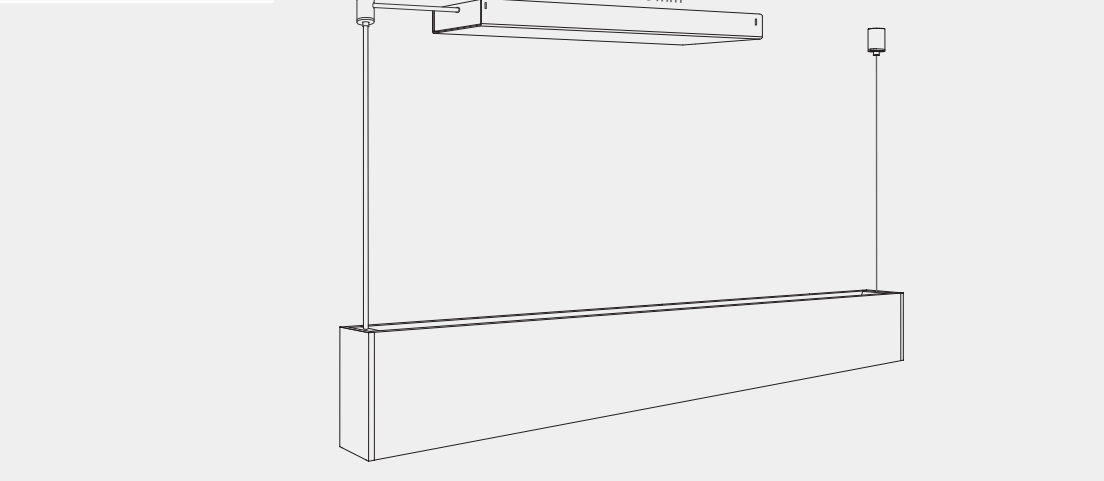

Led₁₂₀

TUNTO


TECHNICAL SPECIFICATIONS

Available colors and materials


				
Oak	Ash	Walnut	Black stained Oak	White stained Oak

Surface Finish Ash: White Oil wax / Oak, Walnut: Oil wax
Black and White, Lacquer

Led₁₂₀ 1600 mm pendant lx

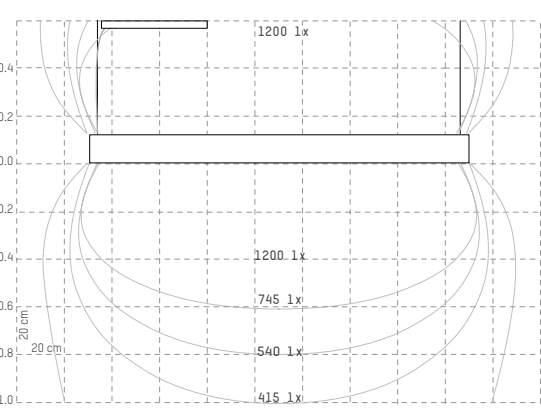

Led₁₂₀ 1600 mm pendant lx / measured 1.0 m on the table

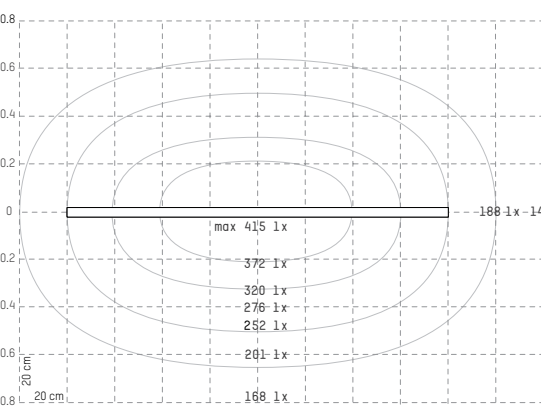

Drivers / External

700 mA	DALI, PUSH DIM	LCM40DA
	CASAMBI DIM	LCM40BLE

Drivers / Built-in

500 mA	Non-dimmable (200mm size)	RACD06
700 mA	CASAMBI DIM, PUSH DIM	CASBI

Drivers / External, Tunable white

700 mA	DALI, PUSH DIM	HLC45
	CASAMBI DIM	TRILC

Rated Power Voltage Output	Fix 6-31 W, pendant 2 x 18-36 W 180-295V 50/60 Hz, fix 6-34V, pendant 2 x 20-46V, 700 mA	Kelvin	2700 K, 3000 K, 4000 K Tunable white 2700-6500 K
		Lumen	200mm / 300 lm, 400 mm / 800 lm, 700 mm / 1500 lm, 1040m / 2200 lm, 1340mm / 3260 lm, 1640mm / 3600 lm
Cord Length	Pendant, standard 2 m, transparent. FIX, standard 3m, Max 20m.	CRI, UGR	93, UGR<19
Power Box	White ceiling cup 430 x 110 x 35 mm RAL 9003 fine efekt	Package Size Package Weight	120 x 110-200 x 300-1700 mm 3,5-8 kg

INDOOR USE ONLY

NON-USER REPLACEABLE LIGHT SOURCE

IP20

CE



Collection