

THE SMOOTH AND ELEGANTLY
CURVED SWAN SERIES REVEALS THE
ULTIMATE PROOF OF TUNTO'S VISION
AND EXPERTISE. HERE, WOOD AND
SEAMLESSLY INTEGRATED LENSES
ARE COMBINED IMPECCABLY FOR
THE PERFECT FINISH.



Swan collection



Swan pendant


TUNTO



STRIKINGLY SMOOTH


The Swan Pendant is a spectacularly elegant choice for interiors with even the most demanding requirements for an impressive appearance.

Collection

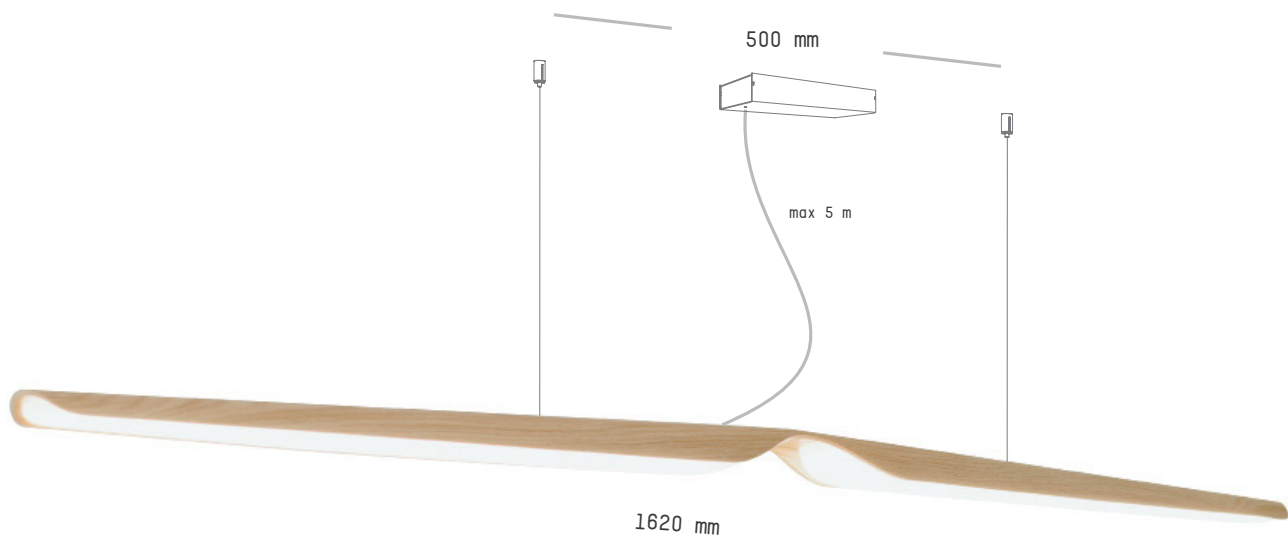


TECHNICAL SPECIFICATIONS

Available colors
and materials



Surface Finish Lacquer

Swan Pendant 500mA lx measured 1.0 m on the table

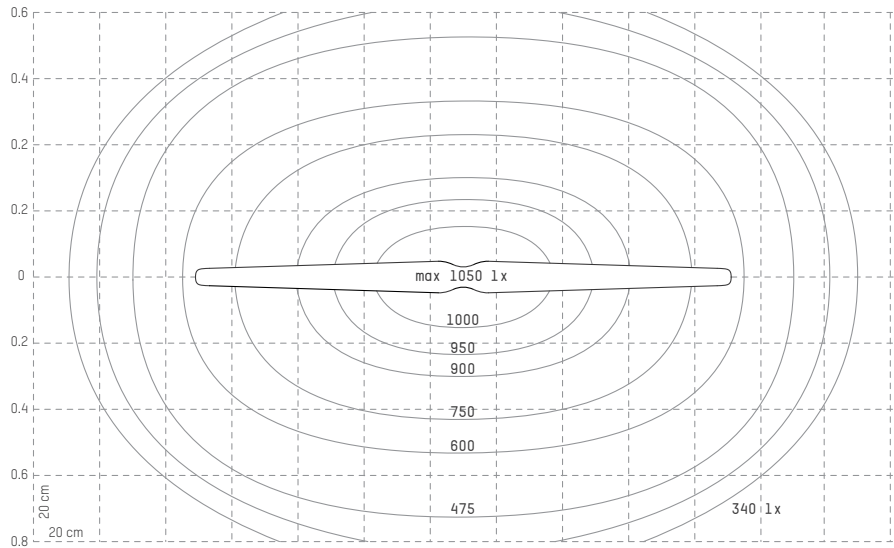

Drivers / Power Box

350 / 500 mA	DALI, PUSH DIM	LCM40DA
	CASAMBI DIM	LCM40BLE

Drivers / Power Box

600 mA	DALI, PUSH DIM	LCM60DA
	CASAMBI DIM	LCM60BLE

Rated Power Voltage Output	25-43 W 180-295V 50/60 Hz, 350, 500, 600 mA	Kelvin Lumen	2700 K, 3000 K 350 mA, 25 W / 2814 lm 500 mA, 36 W / 3951 lm 600 mA, 43 W / 4616 lm
			93
Cord Length	Standard 2 m, on request max 5 m, transparent	CRI	
Power Box	White ceiling cup 220x100x35mm RAL 9003 fine efekt	Package Size	130 x 110 x 1660 mm
		Package Weight	3,5 kg

INDOOR USE ONLY NON-USER REPLACEABLE LIGHT SOURCE IP20


Swan pendant

ELEGANCE IN THE AIR

The Swan Wing Pendant complements the elegant Swan family with a graceful lining. The Wing provides a completely new way of combining the lights.

Swan wing



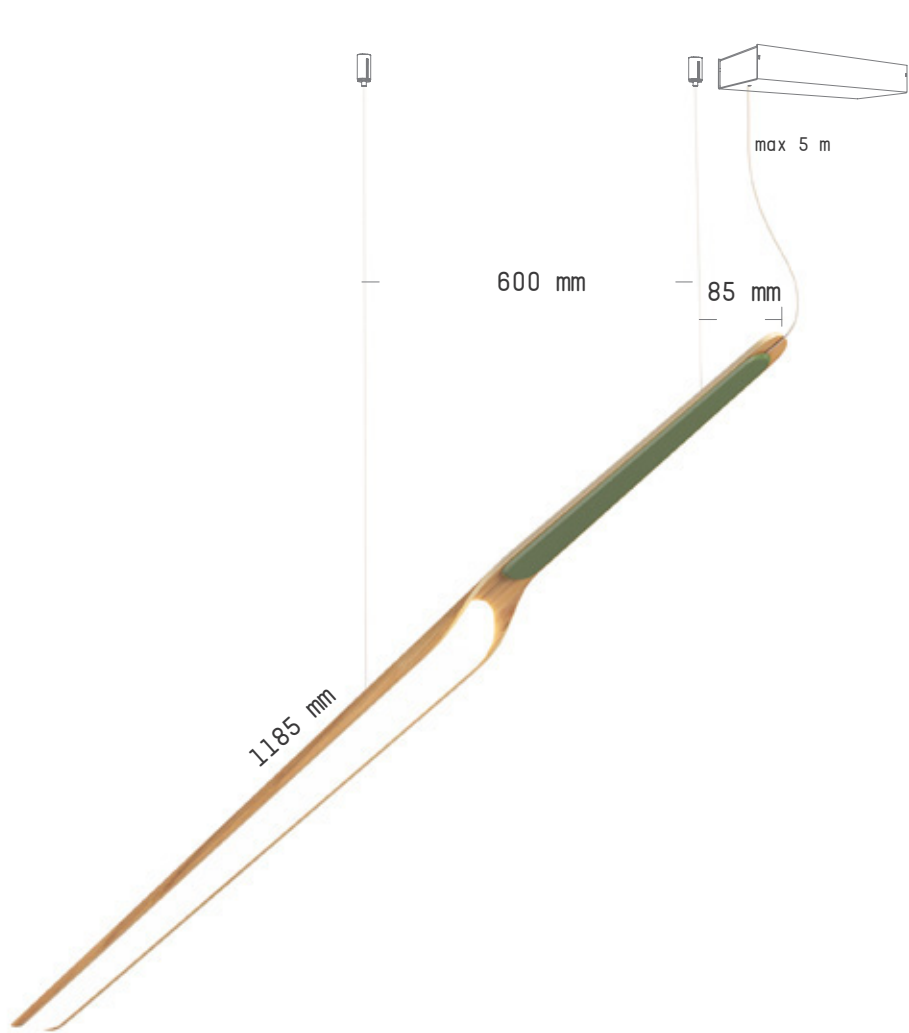

TECHNICAL SPECIFICATIONS

Available colors and materials

Oak

Walnut

Black stained Oak

White stained Oak

Cover plate colors and materials

Oak

Walnut

Black


White

Green

Red

Surface Finish

Lacquer

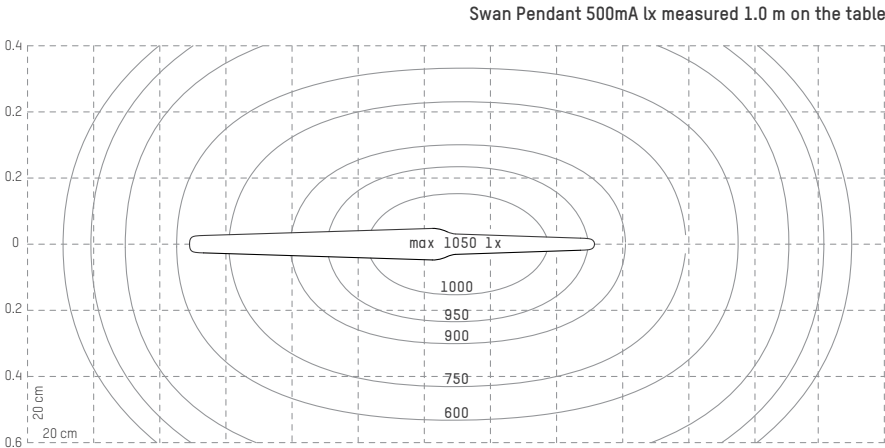

Drivers / Power Box

350 / 500 mA, 600mA	DALI, PUSH DIM	LCM40DA
	CASAMBI DIM	LCM40BLE

Rated Power Voltage Output	15-25 W 180-295V 50/60 Hz, 350, 500, 600 mA	Kelvin Lumen	2700 K, 3000 K, 350 mA, 15 W / 1400 lm 500 mA, 21 W / 1975 lm 600 mA, 25 W / 2310 lm
Cord Length	Standard 2 m, on request max 5 m, transparent	CRI	93
Power Box	White ceiling cup 220x100x35mm or round cup 40x180mm. RAL 9003 fine efekt	Package Size Package Weight	130 x 110 x 1245 mm 2,5 kg

TASTEFUL CURVES ON THE TABLE

The Swan Table light combines functionality with a smooth and curvy appearance. It is perfect for tables in any interior where elegant lighting is required.

Swan table





Swan table

TUNTO

TECHNICAL SPECIFICATIONS

Available colors and materials

Oak

Walnut



Black stained oak

White stained oak

Surface Finish

Lacquer

Swan table lx

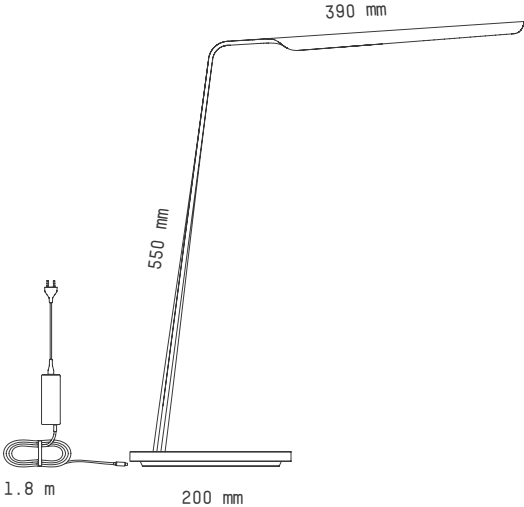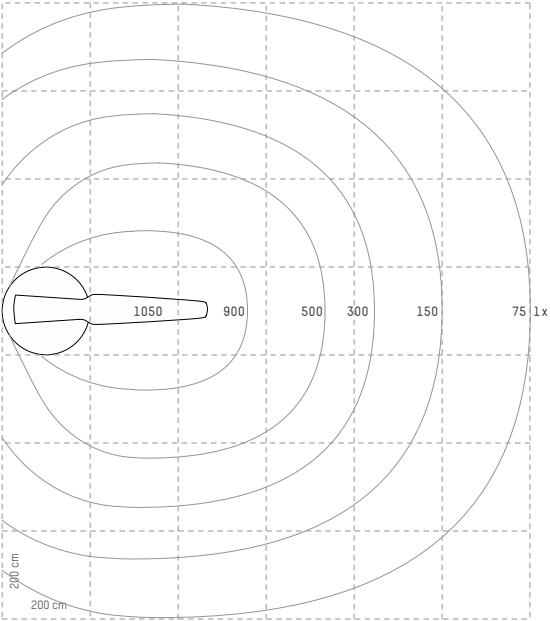

Power Use	14-7,5 W, with Qi 20W	Kelvin	2700 K, 3000 K
Voltage	100-240V 50/60 Hz	Lumen	max 1090 lm, lowest level 660 lm
Output	18-24V	CRI	93 Typ
Cord Length	1,8 m	Package Size	590 x 570 x 220 mm
Suitable	EURO, UK, USA/Japan	Package Weight	3 kg
Qi Operating Mode	Qi 1.0 standard compatible		
INDOOR USE ONLY		NON-USER REPLACEABLE LIGHT SOURCE	
		IP20 CE III	

Collection

A SWAN ON THE WALL

The Swan Wall light completes the Swan series with its graceful appearance. It can be used as stand-alone or a group of lights on various kinds of walls and corridors.

Swan wall

TUNTO

Collection



Swan wall

TUNTO

TECHNICAL SPECIFICATIONS

Available colors
and materials



Oak



Walnut




Black
stained
Oak



White
stained
Oak

Surface Finish Lacquer

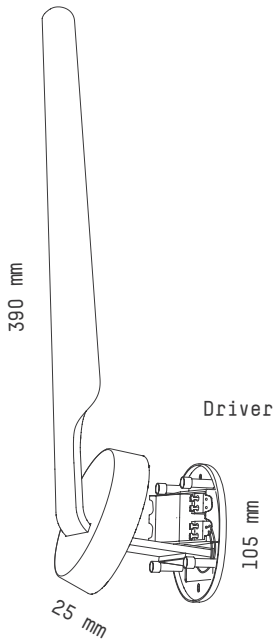

BUILT-IN MODEL

Rated Power Voltage Output	6 W	Kelvin Lumen CRI	2700 K, 3000 K
	90-264V 50/60 Hz		600 lm
Drivers	15V 500 mA	Package Size Package Weight	93
	Non-dimmable Driver size 58 x 35 x 21mm		500 x 125 x 120 mm 1 kg
INDOOR USE ONLY		NON-USER REPLACEABLE LIGHT SOURCE	
		IP20 CE	

Collection

ELEGANCE ON THE FLOOR

The Swan Floor is noble and slender at the same time, suiting various kinds of interiors and environments.

The stepless touch-sensitive switch is stylishly hidden in the body of the lamp.

Swan floor





Swan floor

TUNTO

TECHNICAL SPECIFICATIONS

Available colors
and materials

Oak



Walnut

Black
stained
Oak

White
stained
Oak

Surface Finish Lacquer

Swan floor lx

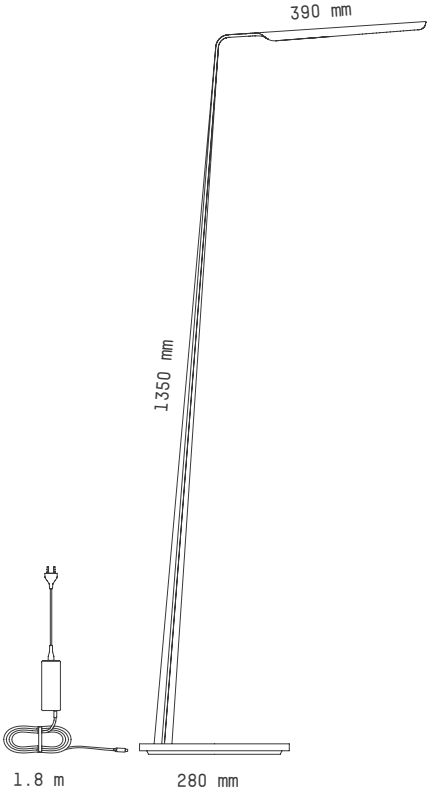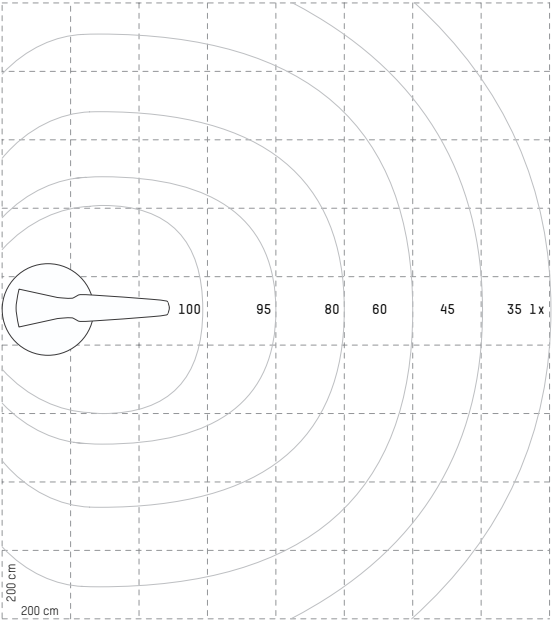

Power Use	14-7,5 W	Kelvin	2700 K, 3000 K
Voltage	100-240V 50/60 Hz	Lumen	max 1090 lm, lowest level 660 lm
Output	18-24V	CRI	93
Cord Length	1,8 m	Package Size	1450 x 500 x 340 mm
Suitable	EURO, UK, USA/Japan	Package Weight	7 kg
INDOOR USE ONLY		NON-USER REPLACEABLE LIGHT SOURCE	
		IP20 CE	

Collection