


FLOODLIGHT

THOR

Version 01

Thor is a floodlight that is installed on any surface for highlighting the space or object using a high-performance LED.




Technical Data

| Color temperature(K)                                                                       |                                                     | 40W                                       |  | 60W      |  |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|--|----------|--|
| <div><div></div><div></div><div></div></div> <div>3000K 4000K 5000K</div>                  |                                                     |                                           |  |          |  |
| Optic                                                                                      |                                                     |                                           |  |          |  |
| spot, 15°, 20°, 36°, 68°                                                                   |                                                     |                                           |  |          |  |
| Protection class                                                                           |                                                     |                                           |  |          |  |
| IP66                                                                                       |                                                     |                                           |  |          |  |
| Controls                                                                                   |                                                     |                                           |  |          |  |
| On/Off 0~10Vdim                                                                            |                                                     |                                           |  |          |  |
| Certifications                                                                             |                                                     |                                           |  |          |  |
| <div><div></div><div>Registration of Broadcasting and Communication Equipments</div></div> |                                                     |                                           |  |          |  |
| Features                                                                                   |                                                     |                                           |  |          |  |
|                                                                                            | Light source                                        | High-performance LED COB                  |  |          |  |
|                                                                                            | Luminaire luminous flux (based on 3000K, 68° Optic) | 4391 lm                                   |  | 6467 lm  |  |
|                                                                                            | Luminaire efficacy                                  | 110 lm/W                                  |  | 108 lm/W |  |
|                                                                                            | Optic                                               | spot, 15°, 20°, 36°, 68°                  |  |          |  |
|                                                                                            | Color temperature                                   | 3000K, 4000K, 5000K                       |  |          |  |
|                                                                                            | Bin/Step                                            | 3-step MacAdam ellipse                    |  |          |  |
|                                                                                            | CRI                                                 | Ra ≥ 80                                   |  |          |  |
|                                                                                            | Tilt/Rotation                                       | 120° tiltable hinge, 170° rotatable plate |  |          |  |
| Physical                                                                                   |                                                     |                                           |  |          |  |
|                                                                                            | Housing material                                    | Diecast aluminum                          |  |          |  |
|                                                                                            | Cover material                                      | Clear tempered glass                      |  |          |  |
|                                                                                            | Reflector material                                  | Aluminum reflector                        |  |          |  |
|                                                                                            | Gasket material                                     | Silicone gaskets                          |  |          |  |
|                                                                                            | Finish                                              | Dark gray (powder-coated) color           |  |          |  |
|                                                                                            | Size                                                | 174(W) x 299(H) x 221 (D)                 |  |          |  |
|                                                                                            | Weight                                              | 5.2 kg                                    |  |          |  |
| Electrical & Control                                                                       |                                                     |                                           |  |          |  |
|                                                                                            | Power consumption                                   | 40W                                       |  | 60W      |  |
|                                                                                            | Input voltage                                       | 220~240Vac 50~60Hz                        |  |          |  |
|                                                                                            | Control                                             | On/Off Switchable or 0~10V dimmable       |  |          |  |
|                                                                                            | Power factor                                        | ≥0.90                                     |  |          |  |
|                                                                                            | Power supply                                        | Integral driver                           |  |          |  |

|               |                           |             |
|---------------|---------------------------|-------------|
| Environmental | Operating temperature     | -30℃ to 50℃ |
|               | Storage temperature       | -40℃ to 70℃ |
|               | Ingress protection rating | IP66        |


### Mounting Options

#### Surface mount (standard)

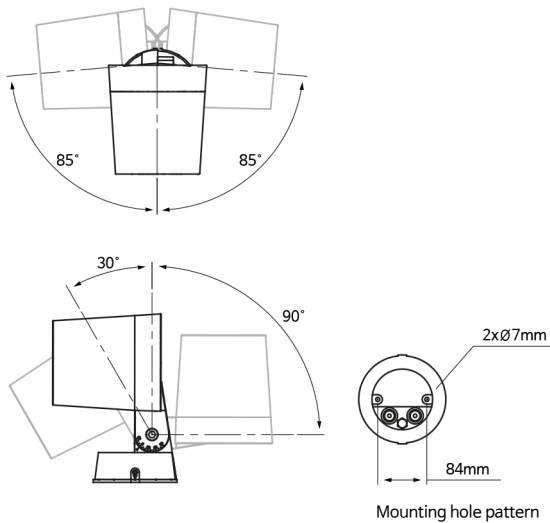


#### Ground mount with spike (order separately)

It is essential for mounting on the grass and earthen floor.

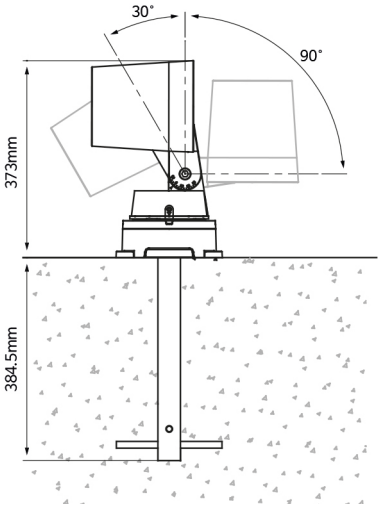


#### Surface mount with junction box (order separately)

It can be used with the anchor when an external wire connection is required and when installing on the wet surface. (grass, earthen floor, etc.)

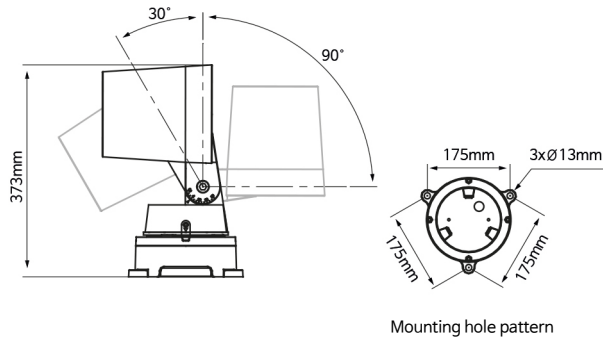


#### Pole mount (order separately)


It is for mounting on the pole.

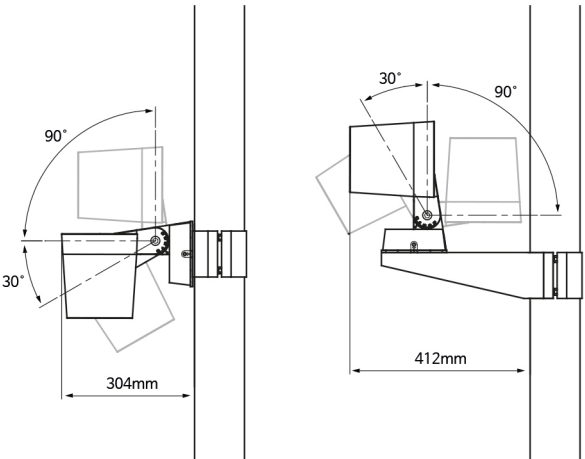


## Accessories

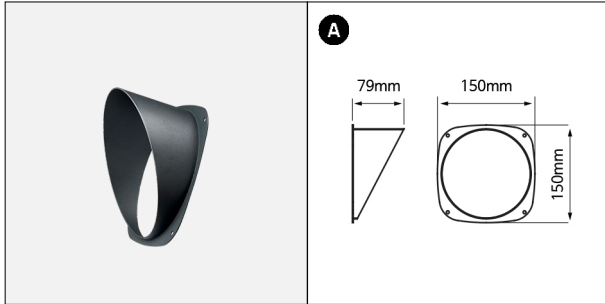**Shield CA0011**


- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

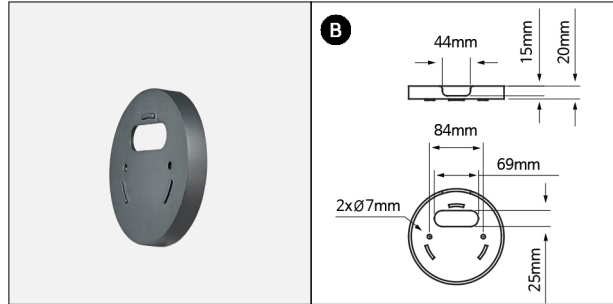**Spacer CA0012**


- Material: Aluminum
- Finish: Dark gray (powder-coated) color

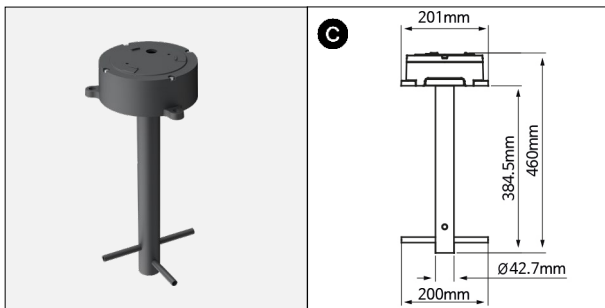**Spike CA0014**

- Material: Aluminum, Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

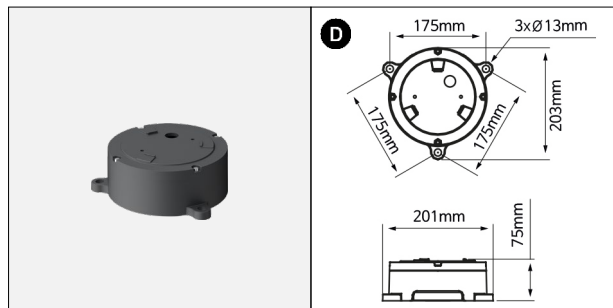
**Junction Box CA0013**

- Material: Aluminum
- Finish: Dark gray (powder-coated) color
- IP65

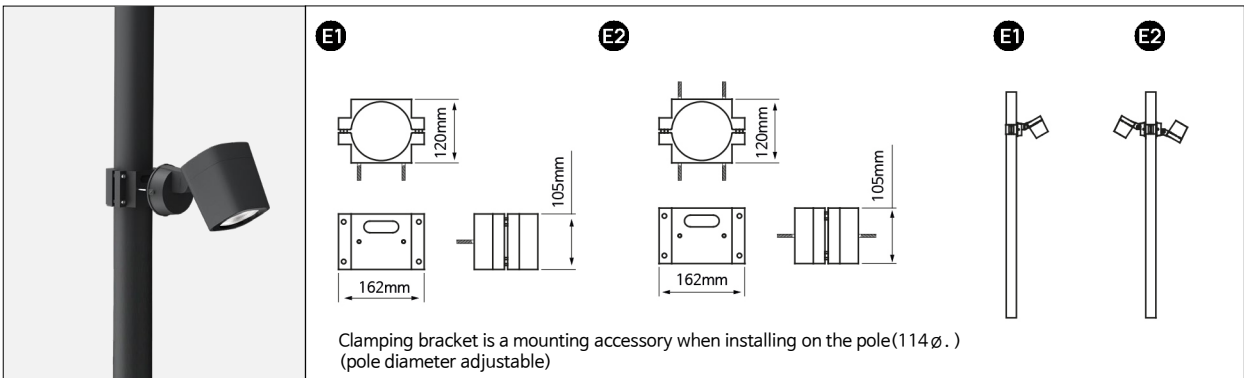**Clamping bracket CA0016 / CA0026**


- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

Accessories

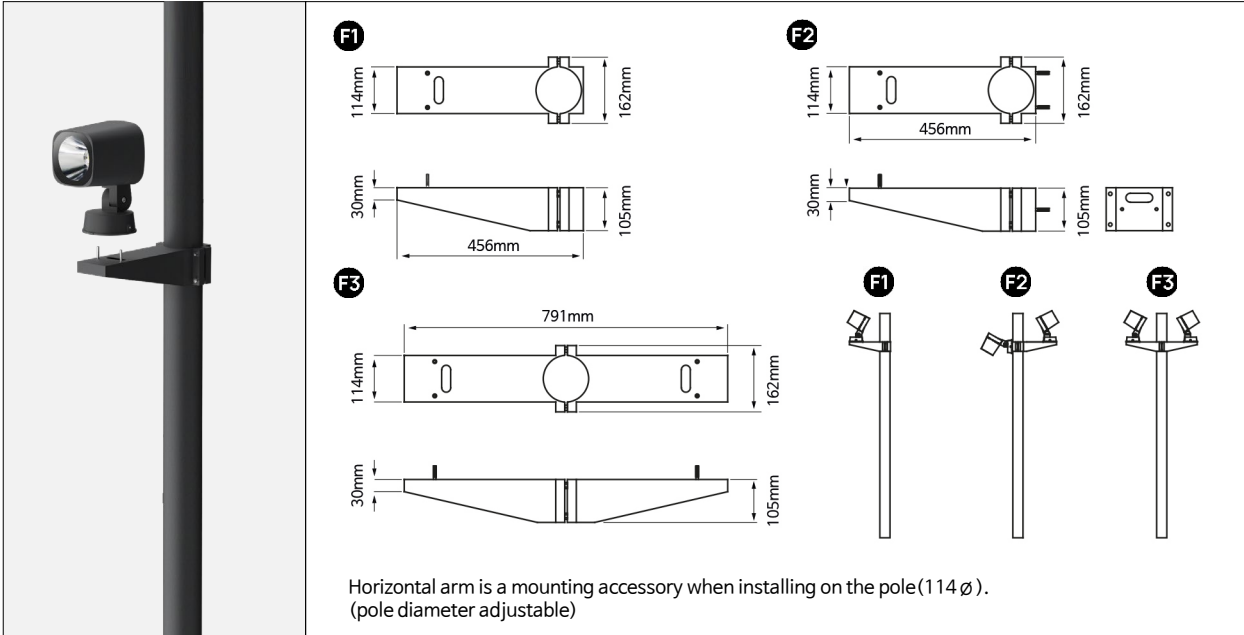

**Horizontal arm CA0015 / CA0027 / CA0025**

- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

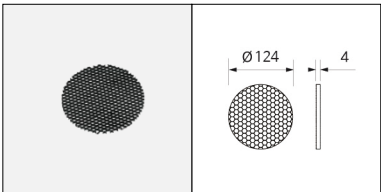


**Honeycomb CA0031**

- Material: Aluminum

Photometric Data

Power Consumption: 40W

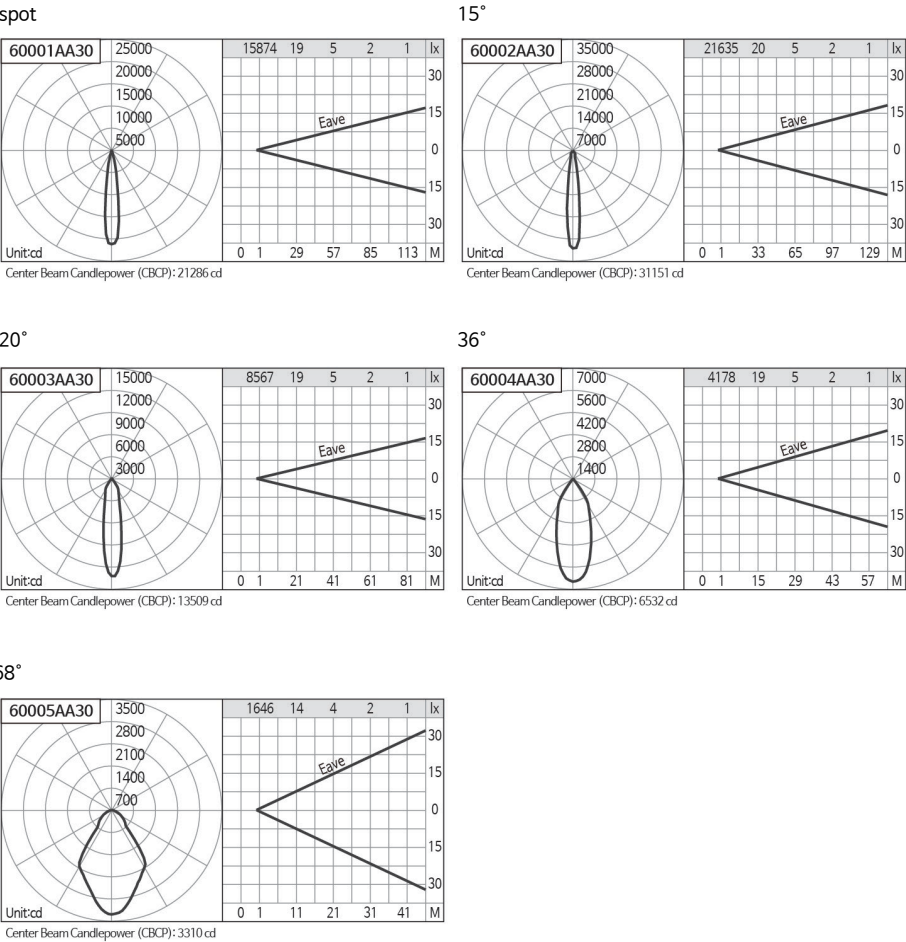

| Optic              | spot  |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 2274  | >2274 | >2274 |

| Optic              | 15°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4351  | >4351 | >4351 |


| Optic              | 20°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4193  | >4193 | >4193 |

| Optic              | 36°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4001  | >4001 | >4001 |

| Optic              | 68°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4391  | >4391 | >4391 |

Photometric Data

Power Consumption: 60W

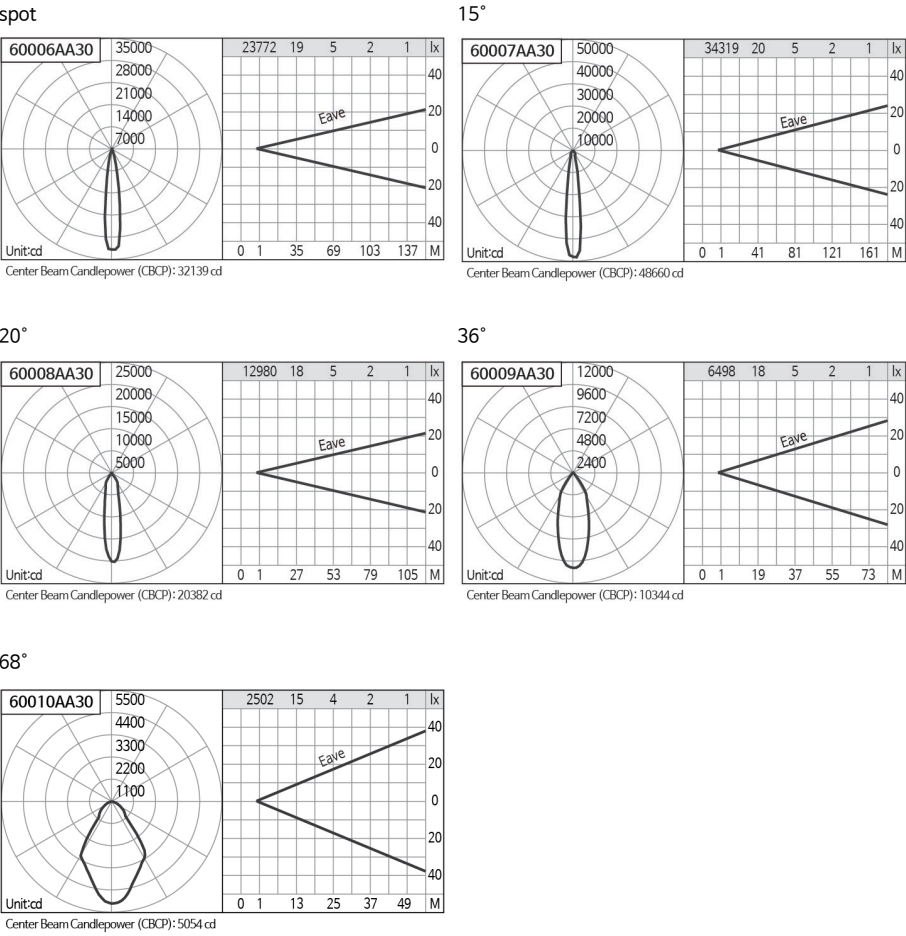

| Optic              | spot  |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 3313  | >3313 | >3313 |

| Optic              | 15°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 6472  | >6472 | >6472 |


| Optic              | 20°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 6121  | >6121 | >6121 |

| Optic              | 36°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 5882  | >5882 | >5882 |

| Optic              | 68°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 6467  | >6467 | >6467 |

Photometric Data

Power Consumption: 40W

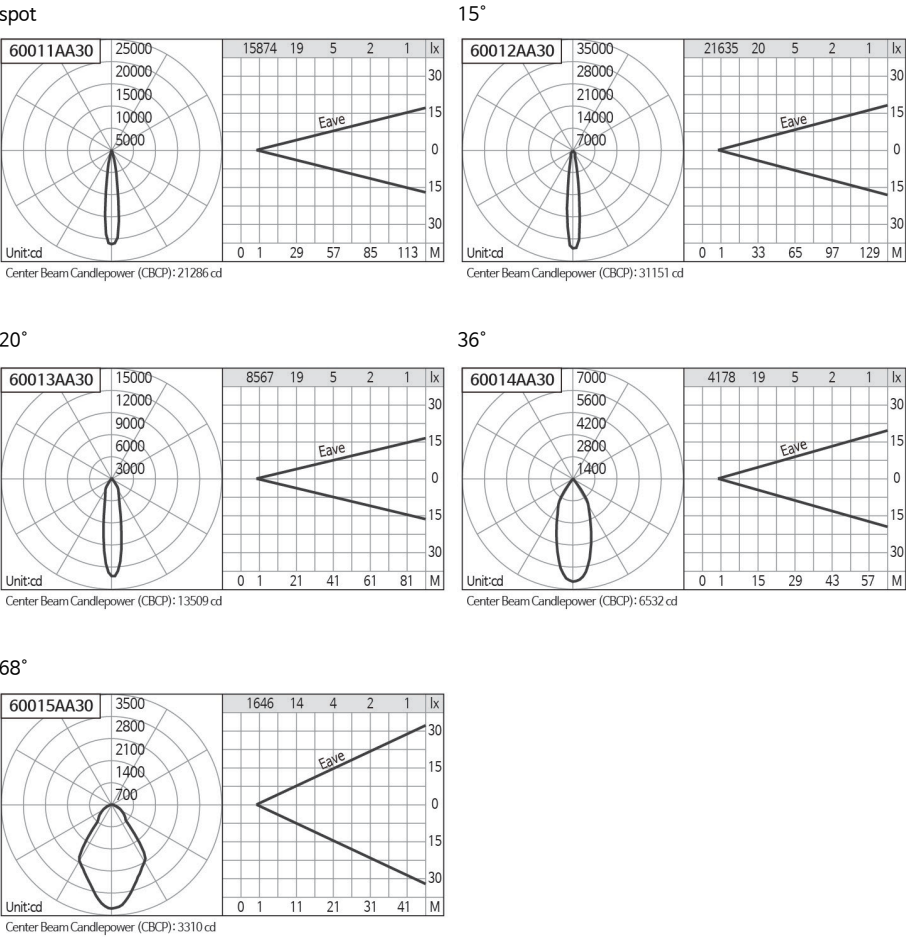

| Optic              | spot  |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 2274  | >2274 | >2274 |

| Optic              | 15°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4351  | >4351 | >4351 |




| Optic              | 20°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4193  | >4193 | >4193 |

| Optic              | 36°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4001  | >4001 | >4001 |

| Optic              | 68°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 4391  | >4391 | >4391 |

Photometric Data

Power Consumption: 60W

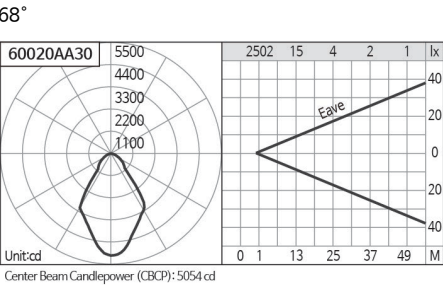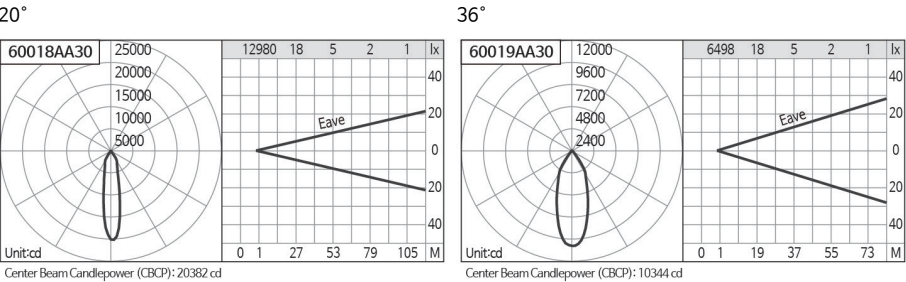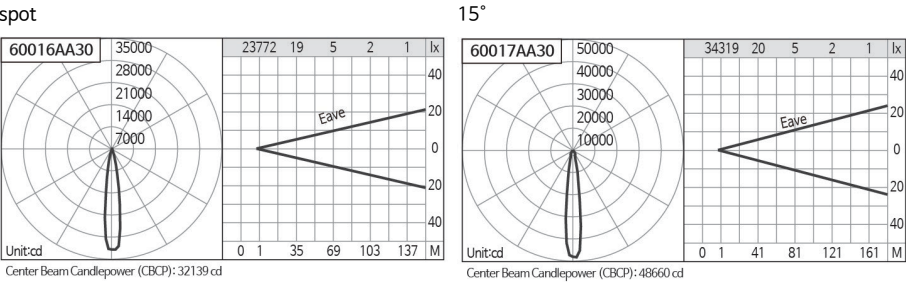

| Optic              | spot  |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 3313  | >3313 | >3313 |

| Optic              | 15°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 6472  | >6472 | >6472 |

| Optic              | 20°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 6121  | >6121 | >6121 |

| Optic              | 36°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 5882  | >5882 | >5882 |

| Optic              | 68°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 6467  | >6467 | >6467 |



# Ordering

| Code | W   |  | K     | Optic | Finish    | Size(mm)        | Control  |
|------|-----|--|-------|-------|-----------|-----------------|----------|
|      | 40W |  | 3000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
|      | 60W |  | 4000K | 15°   |           |                 | 0-10Vdim |
|      |     |  | 5000K | 20°   |           |                 |          |
|      |     |  |       | 36°   |           |                 |          |
|      |     |  |       | 68°   |           |                 |          |

| Code      | W   | lm    | K     | Optic | Finish    | Size(mm)        | Control  |
|-----------|-----|-------|-------|-------|-----------|-----------------|----------|
| 60001AA30 | 40W | 2274  | 3000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
| 60001AA40 | 40W | >2274 | 4000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
| 60001AA50 | 40W | >2274 | 5000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
| 60002AA30 | 40W | 4351  | 3000K | 15°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60002AA40 | 40W | >4351 | 4000K | 15°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60002AA50 | 40W | >4351 | 5000K | 15°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60003AA30 | 40W | 4193  | 3000K | 20°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60003AA40 | 40W | >4193 | 4000K | 20°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60003AA50 | 40W | >4193 | 5000K | 20°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60004AA30 | 40W | 4001  | 3000K | 36°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60004AA40 | 40W | >4001 | 4000K | 36°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60004AA50 | 40W | >4001 | 5000K | 36°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60005AA30 | 40W | 4391  | 3000K | 68°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60005AA40 | 40W | >4391 | 4000K | 68°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60005AA50 | 40W | >4391 | 5000K | 68°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60006AA30 | 60W | 3313  | 3000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
| 60006AA40 | 60W | >3313 | 4000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
| 60006AA50 | 60W | >3313 | 5000K | spot  | Dark gray | 174 x 299 x 221 | On/Off   |
| 60007AA30 | 60W | 6472  | 3000K | 15°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60007AA40 | 60W | >6472 | 4000K | 15°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60007AA50 | 60W | >6472 | 5000K | 15°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60008AA30 | 60W | 6121  | 3000K | 20°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60008AA40 | 60W | >6121 | 4000K | 20°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60008AA50 | 60W | >6121 | 5000K | 20°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60009AA30 | 60W | 5882  | 3000K | 36°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60009AA40 | 60W | >5882 | 4000K | 36°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60009AA50 | 60W | >5882 | 5000K | 36°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60010AA30 | 60W | 6467  | 3000K | 68°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60010AA40 | 60W | >6467 | 4000K | 68°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60010AA50 | 60W | >6467 | 5000K | 68°   | Dark gray | 174 x 299 x 221 | On/Off   |
| 60011AA30 | 40W | 2274  | 3000K | spot  | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60011AA40 | 40W | >2274 | 4000K | spot  | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60011AA50 | 40W | >2274 | 5000K | spot  | Dark gray | 174 x 299 x 221 | 0-10Vdim |


| Code      | W   | lm    | K     | Optic | Finish    | Size(mm)        | Control  |
|-----------|-----|-------|-------|-------|-----------|-----------------|----------|
| 60012AA30 | 40W | 4351  | 3000K | 15°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60012AA40 | 40W | >4351 | 4000K | 15°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60012AA50 | 40W | >4351 | 5000K | 15°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60013AA30 | 40W | 4193  | 3000K | 20°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60013AA40 | 40W | >4193 | 4000K | 20°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60013AA50 | 40W | >4193 | 5000K | 20°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60014AA30 | 40W | 4001  | 3000K | 36°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60014AA40 | 40W | >4001 | 4000K | 36°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60014AA50 | 40W | >4001 | 5000K | 36°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60015AA30 | 40W | 4391  | 3000K | 68°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60015AA40 | 40W | >4391 | 4000K | 68°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60015AA50 | 40W | >4391 | 5000K | 68°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60016AA30 | 60W | 3313  | 3000K | spot  | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60016AA40 | 60W | >3313 | 4000K | spot  | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60016AA50 | 60W | >3313 | 5000K | spot  | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60017AA30 | 60W | 6472  | 3000K | 15°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60017AA40 | 60W | >6472 | 4000K | 15°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60017AA50 | 60W | >6472 | 5000K | 15°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60018AA30 | 60W | 6121  | 3000K | 20°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60018AA40 | 60W | >6121 | 4000K | 20°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60018AA50 | 60W | >6121 | 5000K | 20°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60019AA30 | 60W | 5882  | 3000K | 36°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60019AA40 | 60W | >5882 | 4000K | 36°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60019AA50 | 60W | >5882 | 5000K | 36°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60020AA30 | 60W | 6467  | 3000K | 68°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60020AA40 | 60W | >6467 | 4000K | 68°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |
| 60020AA50 | 60W | >6467 | 5000K | 68°   | Dark gray | 174 x 299 x 221 | 0-10Vdim |

FLOODLIGHT

THOR NANO

Version 01

Thor nano is a floodlight that is installed on any surface for highlighting the space or object using a high-performance LED.

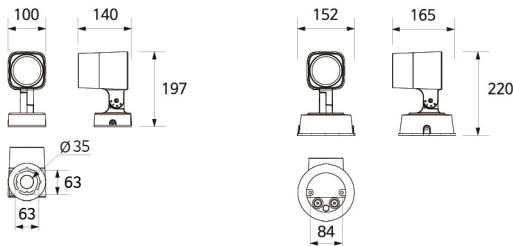

External connection type

Internal connection type

Technical Data

| Color temperature(K)                                                                        |                                                     | 14W                                      |                                           |
|---------------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------|-------------------------------------------|
| <div><div></div><div></div><div></div></div> <div>3000K 4000K 5000K</div>                   |                                                     |                                          |                                           |
| Optic                                                                                       |                                                     | High-performance LED COB                 |                                           |
| 15°, 30°, 60°                                                                               |                                                     | 1432 lm                                  |                                           |
| Protection class                                                                            |                                                     | 102 lm/W                                 |                                           |
| IP66                                                                                        |                                                     | 15°, 30°, 60°                            |                                           |
| Controls                                                                                    |                                                     | 3000K, 4000K, 5000K                      |                                           |
| On/Off                                                                                      |                                                     | 3-step MacAdam ellipse                   |                                           |
| Certifications                                                                              |                                                     | Ra ≥ 80                                  |                                           |
| <div><div></div></div> <div>Registration of Broadcasting and Communication Equipments</div> |                                                     |                                          |                                           |
| Features                                                                                    | Light source                                        | High-performance LED COB                 |                                           |
|                                                                                             | Luminaire luminous flux (based on 3000K, 15° Optic) | 1432 lm                                  |                                           |
|                                                                                             | Luminaire efficacy                                  | 102 lm/W                                 |                                           |
|                                                                                             | Optic                                               | 15°, 30°, 60°                            |                                           |
|                                                                                             | Color temperature                                   | 3000K, 4000K, 5000K                      |                                           |
|                                                                                             | Bin/Step                                            | 3-step MacAdam ellipse                   |                                           |
|                                                                                             | CRI                                                 | Ra ≥ 80                                  |                                           |
|                                                                                             | Connection type                                     | External                                 | Internal                                  |
| Physical                                                                                    | Tilt/Rotation                                       | 135° tiltable hinge, 70° rotatable plate | 135° tiltable hinge, 170° rotatable plate |
|                                                                                             | Housing material                                    | Diecast aluminum                         |                                           |
|                                                                                             | Cover material                                      | Clear tempered glass                     |                                           |
|                                                                                             | Reflector material                                  | Aluminum reflector                       |                                           |
|                                                                                             | Gasket material                                     | Silicone gasket                          |                                           |
|                                                                                             | Finish                                              | Dark gray (powder-coated) color          |                                           |
|                                                                                             | Size                                                | 100(W) x 197(H) x 140(D)                 | 152(W) x 220(H) x 165(D)                  |
|                                                                                             | Weight                                              | 1.9 kg                                   | 2.7 kg                                    |
| Electrical & Control                                                                        | Power consumption                                   | 14W                                      |                                           |
|                                                                                             | Input voltage                                       | 220~240Vac 50~60Hz                       |                                           |
|                                                                                             | Control                                             | On/Off Switchable                        |                                           |
|                                                                                             | Power factor                                        | ≥0.90                                    |                                           |
|                                                                                             | Power supply                                        | Integral driver                          |                                           |

|               |                           |             |
|---------------|---------------------------|-------------|
| Environmental | Operating temperature     | -30℃ to 50℃ |
|               | Storage temperature       | -40℃ to 70℃ |
|               | Ingress protection rating | IP66        |

Product Types




Internal connection type

Wires are connected inside of the luminaire.  
The mounting plate is designed to waterproof and has enough space for wiring.



External connection type


Wires are connected outside of the luminaire.  
The mounting plate is small and compact but IP-rated junction boxes (provided by others) are necessary for wiring.




Mounting Options

Surface mount (standard)

- External connection type

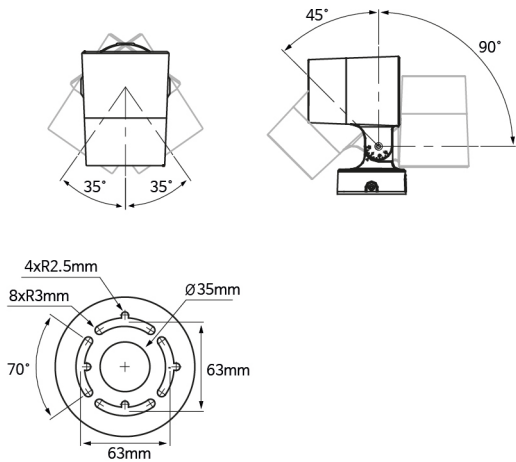


- Internal connection type

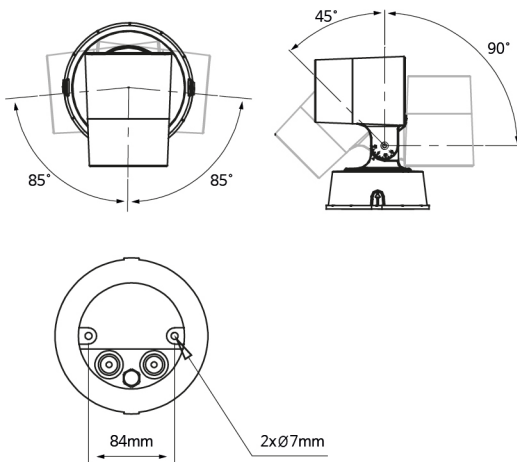


Ground mount with spike(order separately)

- External connection type




- Internal connection type




Pole mount(order separately)


- External connection type

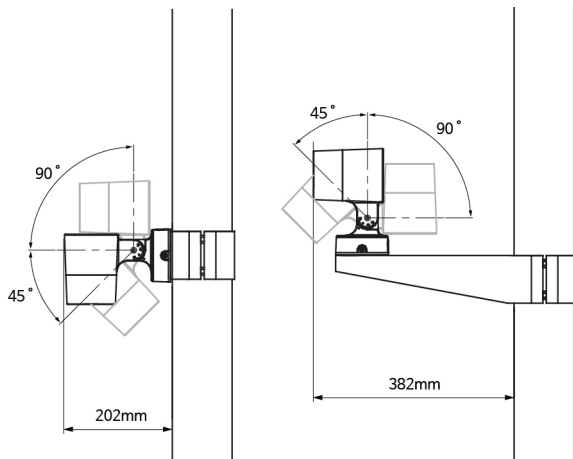

- Internal connection type

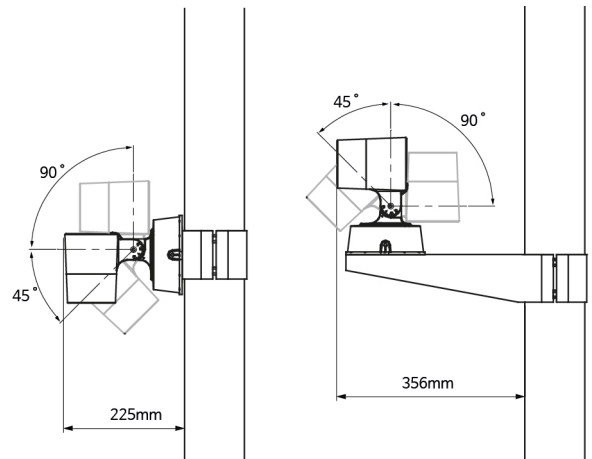


Accessories

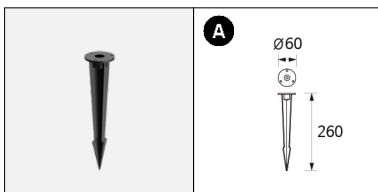


**Spike(External) CA0001**

- Material: Aluminum  
- Finish: Powder coating (dark gray)

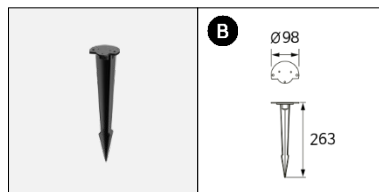

**Spike(Internal) CA0028**


- Material: Aluminum  
- Finish: Powder coating (dark gray)

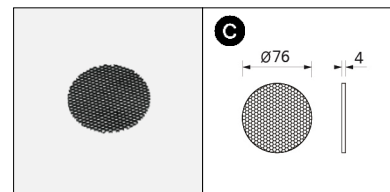


**Honeycomb CA0006**

- Material: Aluminum

## Accessories

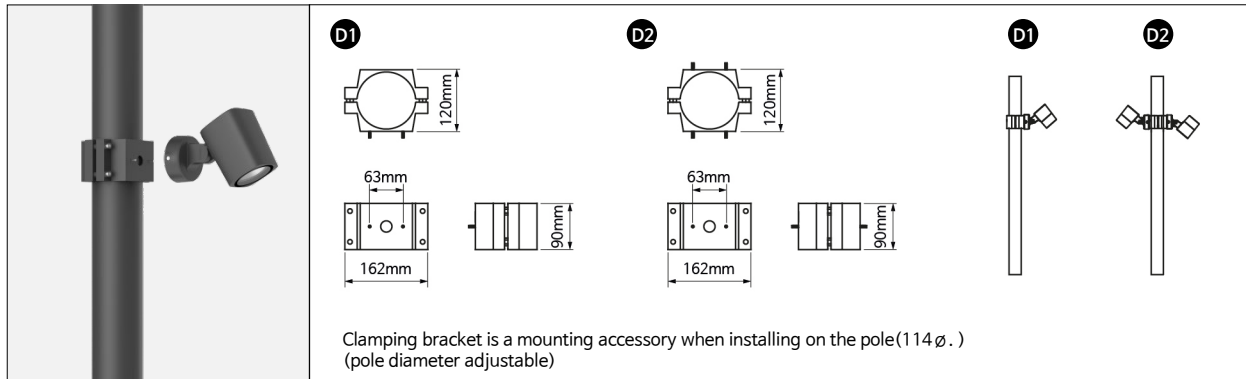
**Clamping bracket(External) CA0050 / CA0051**

- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

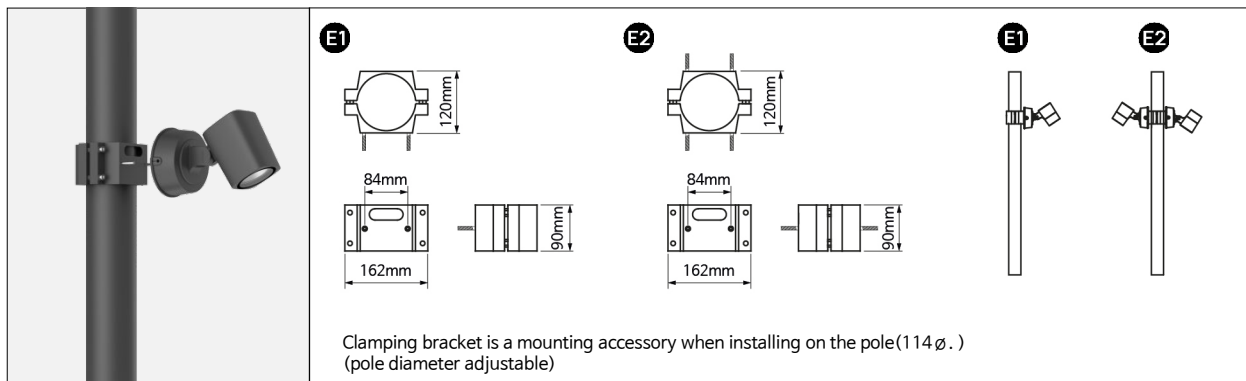
**Clamping bracket(Internal) CA0052 / CA0053**

- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

## Accessories

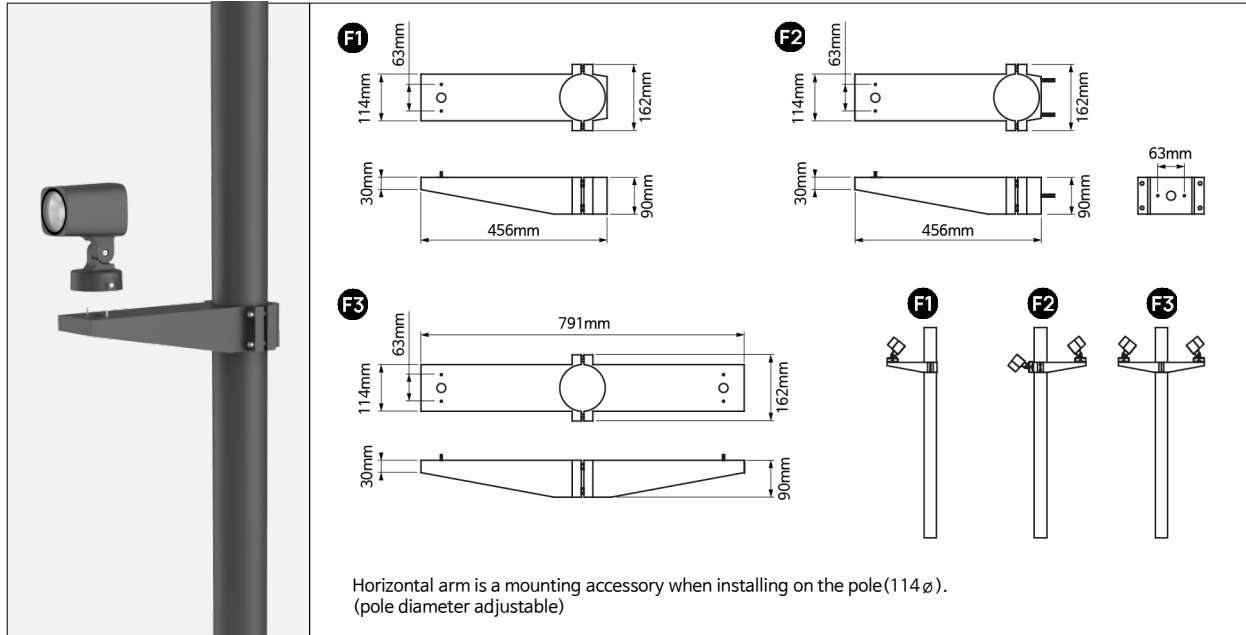**Horizontal arm(External)** CA0054 / CA0055 / CA0056

- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color


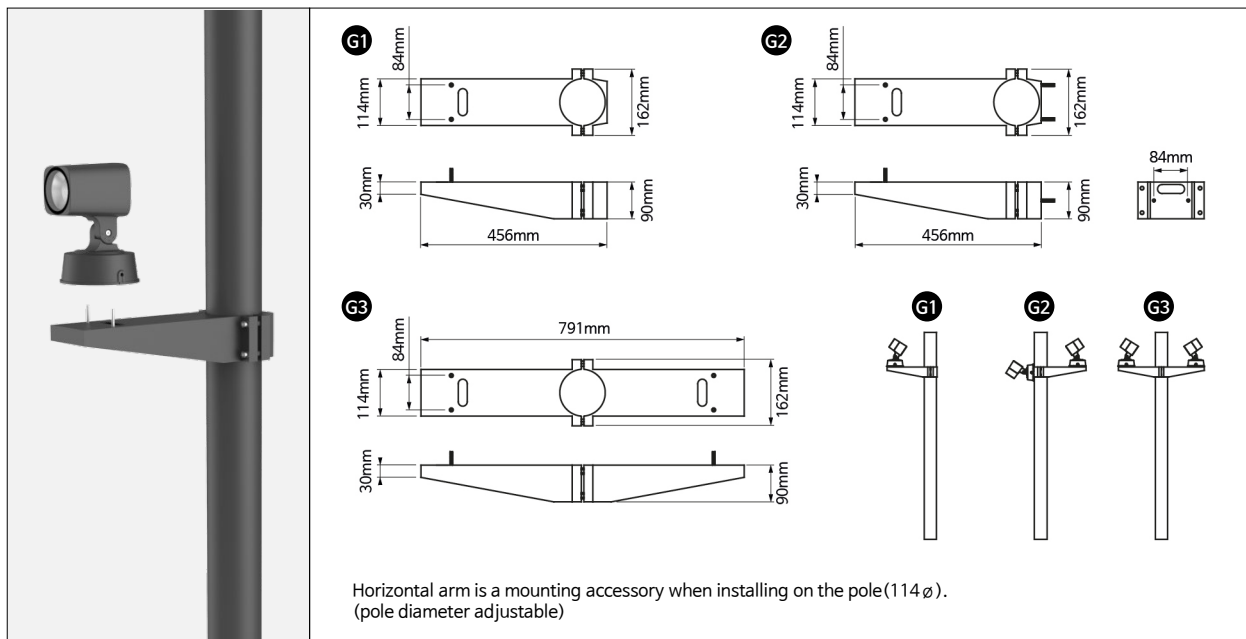
**Horizontal arm(Internal)** CA0057 / CA0058 / CA0059

- Material: Stainless steel(SUS)
- Finish: Dark gray (powder-coated) color

Photometric Data

External connection type

Power Consumption: 14W

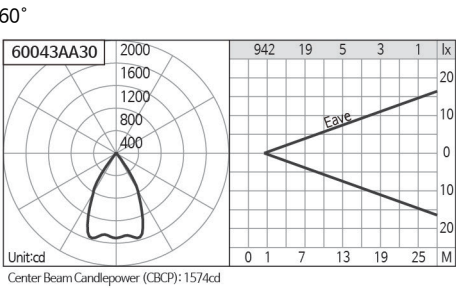
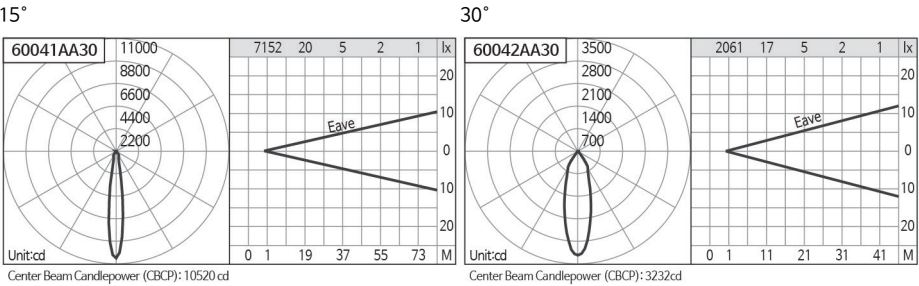


| Optic              | 15°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 1432  | >1432 | >1432 |
| Optic              | 30°   |       |       |
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 1325  | >1325 | >1325 |

| Optic              | 60°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 1400  | >1400 | >1400 |

Internal connection type

Power Consumption: 14W

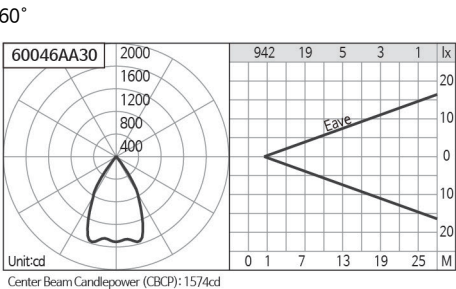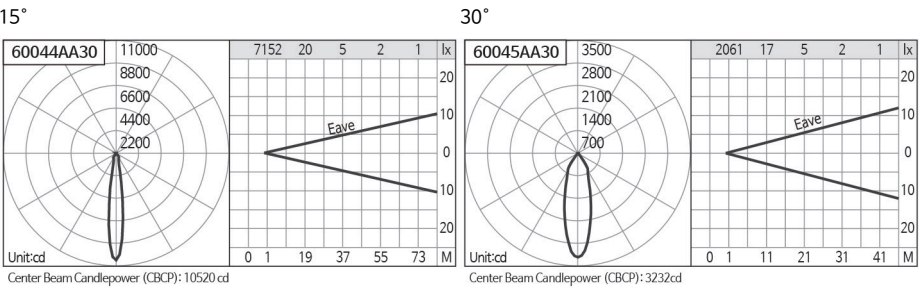

| Optic              | 15°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 1432  | >1432 | >1432 |
| Optic              | 30°   |       |       |
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 1325  | >1325 | >1325 |

| Optic              | 60°   |       |       |
|--------------------|-------|-------|-------|
| CCT (K)            | 3000K | 4000K | 5000K |
| Luminous Flux (lm) | 1400  | >1400 | >1400 |



Ordering

| Code | W   |  | K     | Optic | Finish    | Mounting Method     | Size(mm)        | Control |
|------|-----|--|-------|-------|-----------|---------------------|-----------------|---------|
|      | 14W |  | 3000K | 15°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
|      |     |  | 4000K | 30°   |           | Internal connection | 152 x 220 x 165 |         |
|      |     |  | 5000K | 60°   |           |                     |                 |         |

| Code      | W   | lm    | K     | Optic | Finish    | Mounting Method     | Size(mm)        | Control |
|-----------|-----|-------|-------|-------|-----------|---------------------|-----------------|---------|
| 60041AA30 | 14W | 1432  | 3000K | 15°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60041AA40 | 14W | >1432 | 4000K | 15°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60041AA50 | 14W | >1432 | 5000K | 15°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60042AA30 | 14W | 1325  | 3000K | 30°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60042AA40 | 14W | >1325 | 4000K | 30°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60042AA50 | 14W | >1325 | 5000K | 30°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60043AA30 | 14W | 1400  | 3000K | 60°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60043AA40 | 14W | >1400 | 4000K | 60°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60043AA50 | 14W | >1400 | 5000K | 60°   | Dark gray | External connection | 100 x 197 x 140 | On/Off  |
| 60044AA30 | 14W | 1432  | 3000K | 15°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60044AA40 | 14W | >1432 | 4000K | 15°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60044AA50 | 14W | >1432 | 5000K | 15°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60045AA30 | 14W | 1325  | 3000K | 30°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60045AA40 | 14W | >1325 | 4000K | 30°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60045AA50 | 14W | >1325 | 5000K | 30°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60046AA30 | 14W | 1400  | 3000K | 60°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60046AA40 | 14W | >1400 | 4000K | 60°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |
| 60046AA50 | 14W | >1400 | 5000K | 60°   | Dark gray | Internal connection | 152 x 220 x 165 | On/Off  |