




SURFACE MOUNTED LUMINAIRE

BRICK

Version 01

Brick is a LED surface mounted luminaire for installation on the wall in architecture and landscape area.

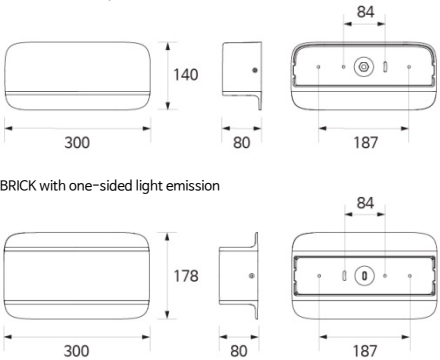

BRICK with one-sided light emission

BRICK with two-sided light emission


Technical Data

Color temperature(K)
  3000K · 4000K
Protection class
IP65
Controls
On/Off
Certifications
 Registration of Broadcasting and Communication Equipments


		20W	30W	40W(20Wx2)
Features	Application	Wall		
	Light source	High-performance LED		
	Luminaire luminous flux (based on 3000K)	1349 lm	1953 lm	2782 lm
	Luminaire efficacy	67 lm/W	65 lm/W	70 lm/W
	Color temperature	3000K, 4000K		
	CRI	Ra ≥ 80		
Physical	Housing material	Cast aluminum		
	Cover material	Frosted tempered glass		
	Gasket material	Silicone gasket		
	Finish	Dark gray (powder-coated) color		
	Emission	One-sided		Two-sided
	Size	300(W) x 140(H) x 80(D)		300(W) x 178(H) x 80(D)
	Weight	4 kg		5 kg
Electrical & Control	Power consumption	20W	30W	40W(20Wx2)
	Input voltage	220~240Vac 50~60Hz		
	Control	On/Off Switchable		
	Power factor	≥0.90		
	Power supply	Integral driver		
Environmental	Operating temperature	-30℃ to 50℃		
	Storage temperature	-40℃ to 70℃		
	Ingress protection rating	IP65		

Photometric Data


20W

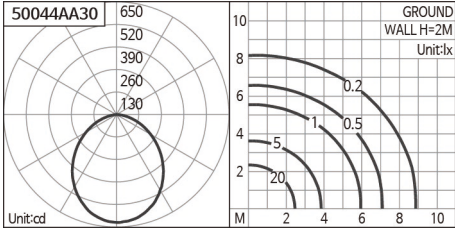

30W

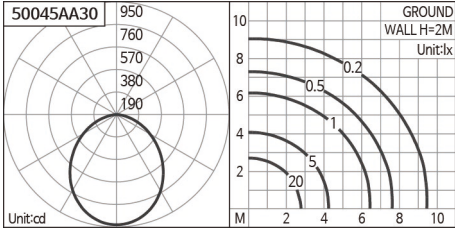

40W (20Wx2)

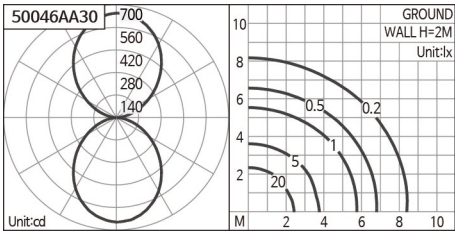

Power Consumption	20W	
CCT (K)	3000K	4000K
Luminous Flux (lm)	1349	>1349
Power Consumption	30W	
CCT (K)	3000K	4000K
Luminous Flux (lm)	1953	>1953

Power Consumption	40W (20Wx2)	
CCT (K)	3000K	4000K
Luminous Flux (lm)	2782	>2782

Ordering

Code	W		K	Finish	Size(mm)	Control
	20W		3000K	Dark gray	300 x 140 x 80	On/Off
	30W		4000K		300 x 178 x 80	
	40W (20Wx2)					


Code	W	lm	K	Finish	Size(mm)	Control
50044AA30	20W	1349	3000K	Dark gray	300 x 140 x 80	On/Off
50044AA40	20W	>1349	4000K	Dark gray	300 x 140 x 80	On/Off
50045AA30	30W	1953	3000K	Dark gray	300 x 140 x 80	On/Off
50045AA40	30W	>1953	4000K	Dark gray	300 x 140 x 80	On/Off
50046AA30	40W (20Wx2)	2782	3000K	Dark gray	300 x 178 x 80	On/Off
50046AA40	40W (20Wx2)	>2782	4000K	Dark gray	300 x 178 x 80	On/Off

SURFACE MOUNTED LUMINAIRE

BRICK MINI

Version 02


Brick Mini is a LED surface mounted luminaire for installation on the wall in architecture and landscape area.

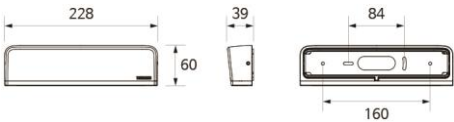


Technical Data

Color temperature(K)		6W		12W	
3000K 4000K					
Protection class					
IP65					
Controls					
On/Off					
Features	Application	Wall			
	Light source	High-performance LED			
	Luminaire luminous flux (based on 3000K)	671 lm		1284 lm	
	Luminaire efficacy	112 lm/W		107 lm/W	
	Color temperature	3000K, 4000K			
	CRI	Ra ≥ 80			
Physical	Housing material	Diecast aluminum			
	Cover material	Clear tempered glass			
	Gasket material	Silicone gasket			
	Finish	Dark gray (powder-coated) color			
	Size	228(W) x 60(H) x 39(D)			
	Weight	0.8 Kg			
Electrical & Control	Power consumption	6W		12W	
	Input voltage	220~240Vac 50~60Hz			
	Control	On/Off Switchable			
	Power factor	≥0.50			
	Power supply	Integral driver			
Environmental	Operating temperature	-30℃ to 50℃			
	Storage temperature	-40℃ to 70℃			
	Ingress protection rating	IP65			

Accessories




Micro Louver CA0049
- Material: Bronze



Anti-Glare Filter CA0047
- Material: Aluminum


Photometric Data

Power Consumption: 6W

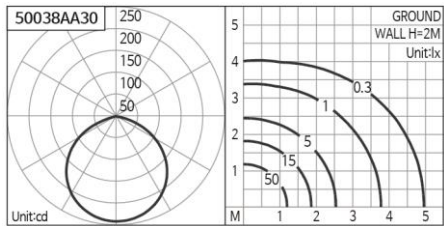

CCT (K)	3000K	4000K
Luminous Flux (lm)	671	>671

Power Consumption: 12W

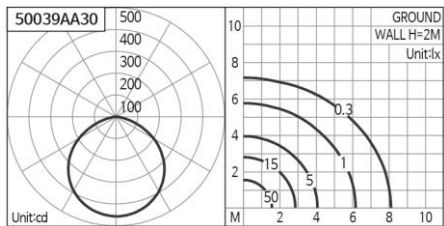

CCT (K)	3000K	4000K
Luminous Flux (lm)	1284	>1284

Ordering

Code	W		K	Finish	Input voltage	Size(mm)	Control
	6W		3000K	Dark gray	220~240Vac	228 x 60 x 39	On/Off
	12W		4000K				

Code	W	lm	K	Finish	Input voltage	Size(mm)	Control
50038AA30	6W	671	3000K	Dark gray	220~240Vac	228 x 60 x 39	On/Off
50038AA40	6W	>671	4000K	Dark gray	220~240Vac	228 x 60 x 39	On/Off
50039AA30	12W	1284	3000K	Dark gray	220~240Vac	228 x 60 x 39	On/Off
50039AA40	12W	>1284	4000K	Dark gray	220~240Vac	228 x 60 x 39	On/Off