

2023

HOMI LIGHTING

Dedicated LED Design and Manufacture to Europe





ABOUT US

2007

Founded in Shenzhen,
16 Years experiences of 100% exporting LED Lighting Products

2010

Awarded of "National High-Tech Enterprise"

2015

Passed ISO9001:2008, ISO14001

2019


Obtained 57 patents in innovation & utility & appearance

2022


Achieved 15% growth in North American market

2023

Integrate injection Die-casting Stamping factory

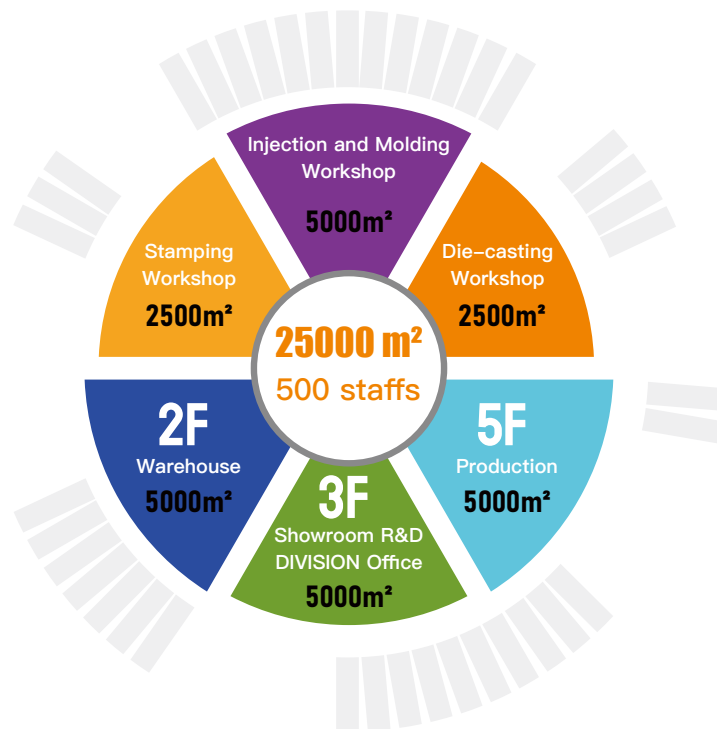

CERTIFICATES

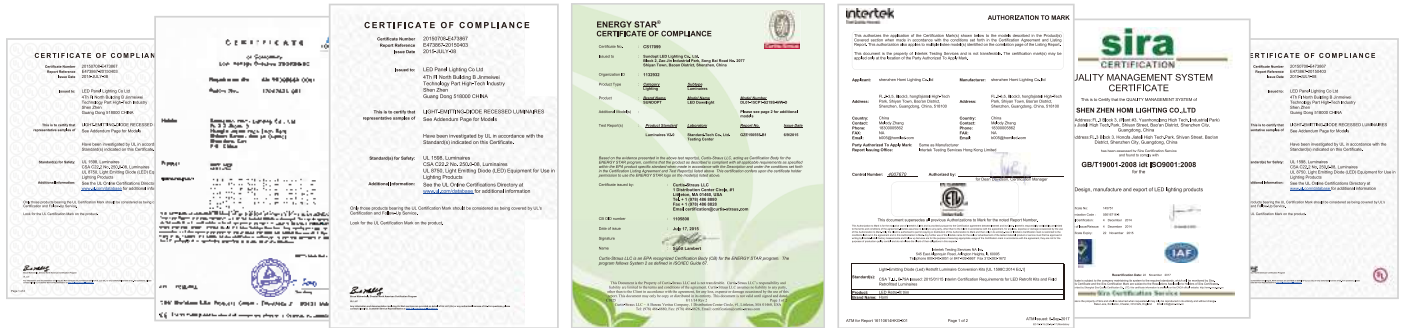


CONTENTS

● AL06 LED Rectangle Frameless Surface Mount Panel Light	Page 01-04
● AL05 Linear LED Surface Mount Panel Light	Page 05-07
● PL19 Frameless LED Slim Panel Light	Page 08-10
● PL17 Clip On Narrow Frame Slim Panel Light.....	Page 11-13
● PL04 Clip On Slim Panel Light	Page 14-16
● PL20 Premium Clip on Slim LED Panel Light	Page 17-19
● PL08 Plastic LED Round Panel Light	Page 20-24
● PL20 IP54 PIR Sensor LED Panel Light	Page 25-27
● PL07 PIR Sensor LED Panel Light	Page 28-30
● DC01 Aluminum Slim Mini Panel Light	Page 31-32
● CL01 Smart & Slim Frameless Ceiling Light	Page 33-35
● PL11 Snap On Mini Panel Light	Page 36-38
● PL18 Nightlight Slim LED Panel Light	Page 39-41
● DC13 Clip On Aluminum Panel Light	Page 42-44
● CL06 LED Slim Frameless Ceiling Light	Page 45-47
● CL07 Modern LED Ceiling Light	Page 48-50

AL06

LED RECTANGLE FRAMELESS SURFACE MOUNT PANEL LIGHT

100x600mm, 150x600mm, 100x1200mm, 150x1200mm



01




- UGR<19, 120LM/W High Efficiency
- CCT Changeable & Power Selectable, Replaceable Driver
- Frameless Design
- Linkable To Different Shapes
- Four Sizes 100*600mm,150*600mm,100*1200mm,150*1200mm

Two Steps Installation

Patented

02

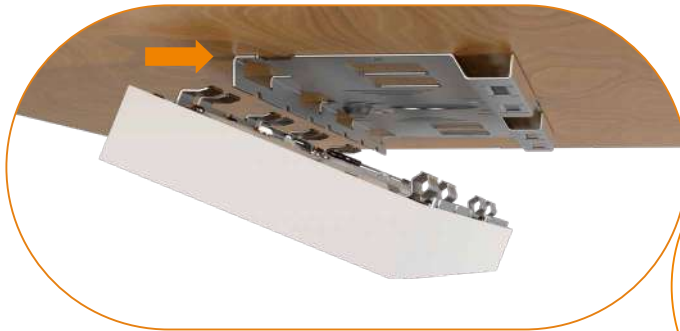

Step 1: Buckle


Step 2: Push




Linkable Installation




| Key Features



120LM/W



Power Selectable



Frameless



Micro-prismatic Lens
UGR<19


04

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
AL06	22W	AC200-240V	2420LM	120°	100*600*40mm	2700/3000/3500/4000/6500K
AL06	22W	AC200-240V	2420LM	120°	150*600*40mm	2700/3000/3500/4000/6500K
AL06	20/30/40W	AC200-240V	2200/3300/4400LM	120°	100*1200*40mm	2700/3000/3500/4000/6500K
AL06	20/30/40W	AC200-240V	2200/3300/4400LM	120°	150*1200*40mm	2700/3000/3500/4000/6500K


AL05

LINEAR LED SURFACE MOUNT PANEL LIGHT

100x600mm, 150x600mm, 300x600mm, 100x1200mm, 150x1200mm, 300x1200mm



05

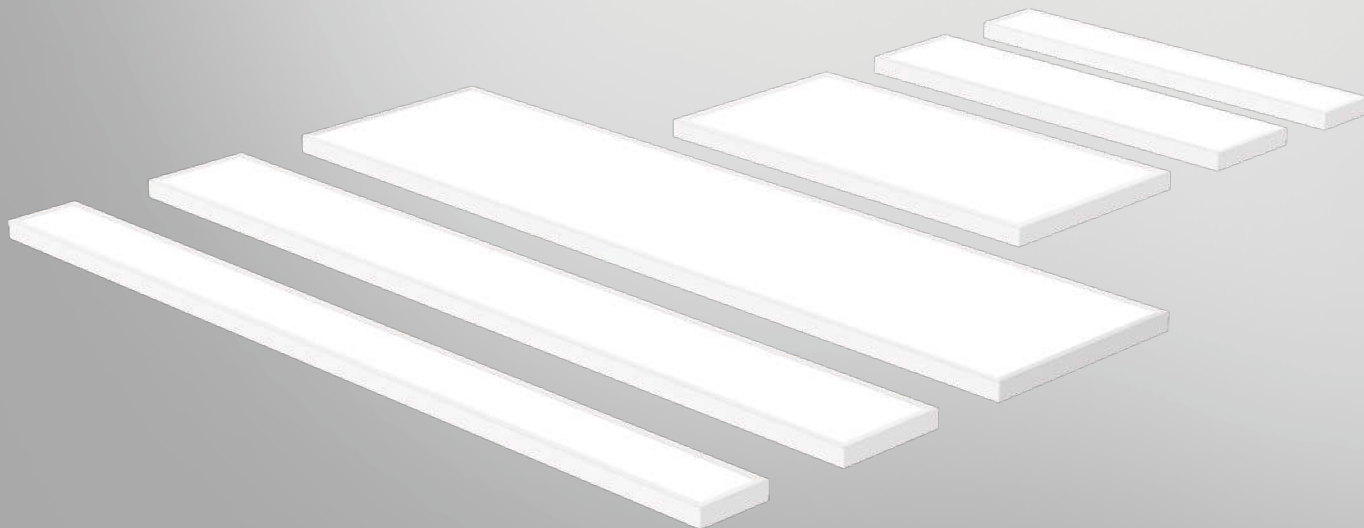

- UGR<19
- 120LM/W High Efficiency
- Quicker & Easier Installation
- CCT Changeable & Power Selectable
- Six Sizes 100*600mm, 150*600mm, 300*600mm, 100*1200mm, 150*1200mm, 300*1200mm

Two Steps Installation

Patented




Step 1: Buckle


Step 2: Push




Key Features



3CCT / 5CCT



Power Selectable



120LM/W



Micro-prismatic Lens
UGR<19


07

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
AL05	22W	AC200-240V	2420LM	120°	100x600x24mm	2700/3000/3500/4000/6500K
AL05	22W	AC200-240V	2420LM	120°	150x600x24mm	2700/3000/3500/4000/6500K
AL05	22W	AC200-240V	2420LM	120°	300x600x24mm	2700/3000/3500/4000/6500K
AL05	20/30/40W	AC200-240V	2200/3300/4400LM	120°	100x1200x24mm	2700/3000/3500/4000/6500K
AL05	20/30/40W	AC200-240V	2200/3300/4400LM	120°	150x1200x24mm	2700/3000/3500/4000/6500K
AL05	20/30/40W	AC200-240V	2200/3300/4400LM	120°	300x1200x24mm	2700/3000/3500/4000/6500K

PL19


FRAMELESS LED SLIM PANEL LIGHT

Φ122mm, Φ174mm, Φ230mm, Φ300mm, Φ350mm




- Frameless Design
- CCT Changeable
- IP54 Waterproof
- Rotatable Easy Installation
- Five Sizes $\Phi 122\text{mm}$, $\Phi 174\text{mm}$, $\Phi 230\text{mm}$, $\Phi 300\text{mm}$, $\Phi 350\text{mm}$

Easy Installation

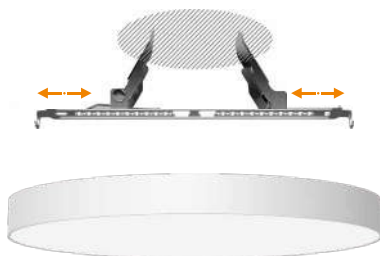

Recessed

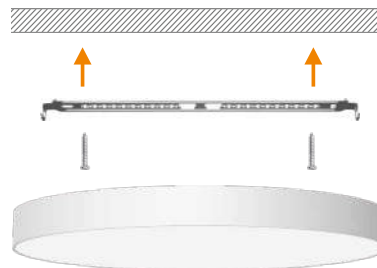

Surface Mount

Key Features



IP54



3CCT / 5CCT




Frameless

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL19	8W	AC200-240V	640LM	120°	Φ122*22mm	2700/3000/3500/4000/6500K
PL19	12W	AC200-240V	960LM	120°	Φ174*22mm	2700/3000/3500/4000/6500K
PL19	18W	AC200-240V	1440LM	120°	Φ230*22mm	2700/3000/3500/4000/6500K
PL19	24W	AC200-240V	2040LM	120°	Φ300*22mm	2700/3000/3500/4000/6500K
PL19	28W	AC200-240V	2380LM	120°	Φ350*22mm	2700/3000/3500/4000/6500K

PL17


CLIP ON NARROW FRAME SLIM PANEL LIGHT

Φ140mm, Φ165mm, Φ215mm, Φ290mm




- 120LM/W High Efficiency
- CCT Changeable
- White & Black Color
- 11mm Super Narrow Frame
- 2 IN 1 Recessed & Surface Mount Installation, Fit All Ceiling

Easy Installation

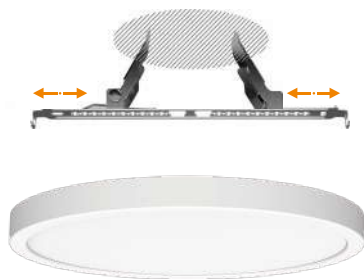

Recessed

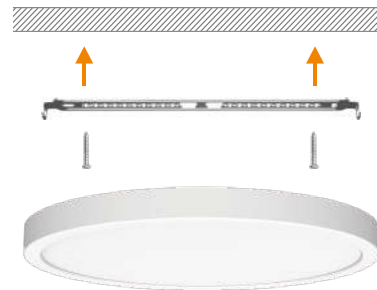


Surface Mount


Key Features




3CCT / 5CCT



Narrow Frame



Sliding Spring



120LM/W


13

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL17	6W	AC200-240V	480LM	120°	Φ140*19.5mm	2700/3000/3500/4000/6500K
PL17	12W	AC200-240V	980LM	120°	Φ165*19.5mm	2700/3000/3500/4000/6500K
PL17	18W	AC200-240V	1620LM	120°	Φ215*19.5mm	2700/3000/3500/4000/6500K
PL17	24W	AC200-240V	2160LM	120°	Φ290*19.5mm	2700/3000/3500/4000/6500K

PL04


CLIP ON SLIM PANEL LIGHT

Φ140mm, Φ165mm, Φ217mm, Φ290mm




- 120LM/W High Efficiency
- DIY Colorful Ring
- 2 IN 1 Recessed & Surface Mount Installation, Fit All Ceiling
- CCT Changeable & Power Selectable

Easy Installation

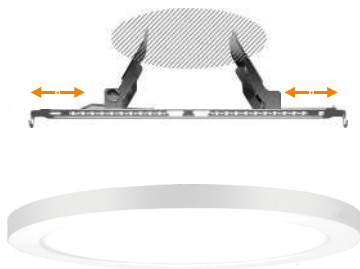


Recessed

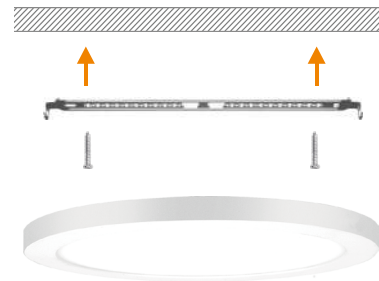


Surface Mount

Key Features



3CCT / 5CCT




Sliding Spring



DIY Colorful Ring



Power Selectable



120LM/W

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL04	6W	AC200-240V	360LM	120°	Φ140*15/140*140*15mm	2700/3000/3500/4000/6500K
PL04	12W	AC200-240V	840LM	120°	Φ165*15/165*165*15mm	2700/3000/3500/4000/6500K
PL04	18W	AC200-240V	1440LM	120°	Φ217*15/217*217*15mm	2700/3000/3500/4000/6500K
PL04	24W	AC200-240V	1920LM	120°	Φ290*15/290*290*15mm	2700/3000/3500/4000/6500K

PL20


PREMIUM CLIP ON SLIM PANEL LIGHT

Φ307mm, Φ350mm




- 120LM/W High Efficiency
- IP54 Waterproof
- CCT Changeable & Power Selectable
- Quick Connector Without Screw
- 2 in 1 Recessed & Surface Mount Installation, Fit All Ceiling

Easy Installation



Recessed

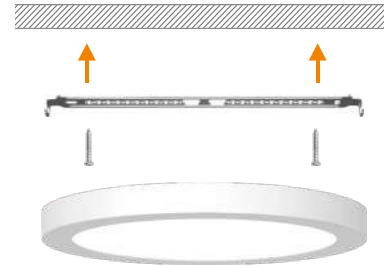


Surface Mount


Key Features




3CCT / Power Selectable



Quick Connector



Sliding Spring




120LM/W

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL20	24W	AC200-240V	1920LM	120°	Φ307*24mm	3000/4000/6500K
PL20	30W	AC200-240V	2400LM	120°	Φ350*24mm	3000/4000/6500K

PL08

PLASTIC LED ROUND PANEL LIGHT


Φ208mm, Φ293mm, Φ397mm, Φ600mm

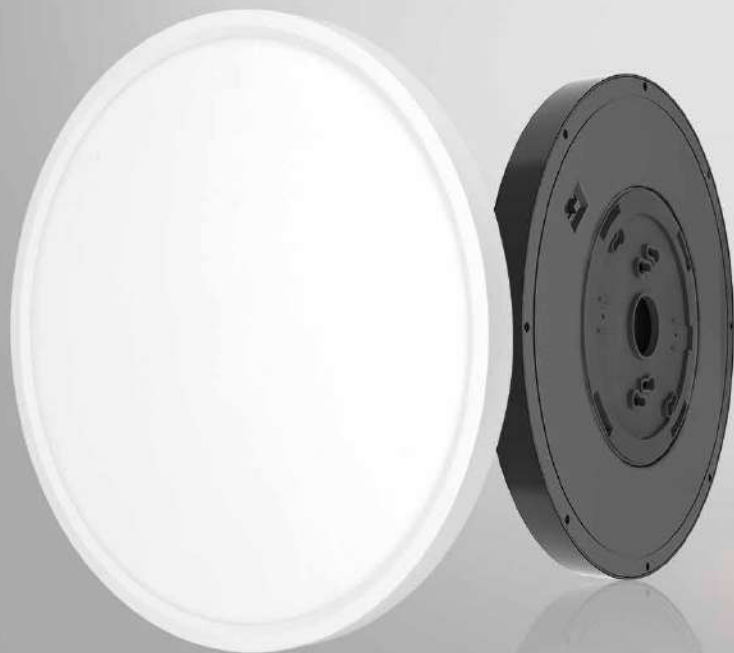

Remote Control Backlight LED Ceiling Light




Brightness Adjust 5-100% Smooth Dimmable Adjust

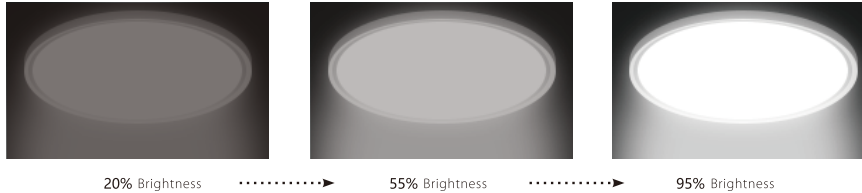

21

CCT Adjust Realize Any Light Color Between 2700-6500K

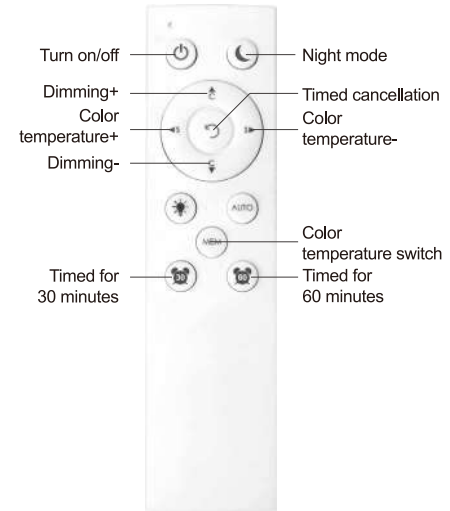

CCT
Selectable

OFF
30/60 min

Nightlight

Dimmable
5%_100 %

WIFI Control Backlight LED Flush Mount



RGB Backlight To Create A Colorful Ambience



Red



Yellow



Blue

tuya

+

Works with
GoogleHome

+

Works with
amazonecho

- UGR<19
- 120LM/W High Efficiency
- CCT Changeable
- Surface Mount / Suspending / Semi-Flush Mount

Easy Installation


23



Surface Mount



Semi-Flush Mount




Rod Suspending
(293mm/397mm)



Steel Wire Suspending
(600mm)

Key Features




3CCT / 5CCT



Narrow Frame



120LM/W



Rotatable Bracket

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL08	15W	AC200-240V	1800LM	120°	Φ208*24mm	2700/3000/3500/4000/6500K
PL08	20W	AC200-240V	2400LM	120°	Φ293*24mm	2700/3000/3500/4000/6500K
PL08	30W	AC200-240V	3600LM	120°	Φ397*24mm	2700/3000/3500/4000/6500K
PL08	40W	AC200-240V	4800LM	120°	Φ600*24mm	2700/3000/3500/4000/6500K

PL20

IP54 PIR SENSOR SLIM LED PANEL LIGHT

Φ307mm, Φ350mm




25




- IP54 Waterproof
- CCT Changeable & Power Selectable
- PIR Sensor With Multiple Function
- Quick Connector Without Screw
- 2 in 1 Recessed & Surface Mount Installation, Fit All Ceiling

Easy Installation



Recessed

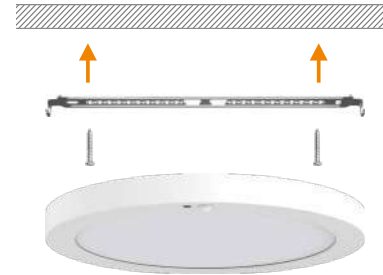

Surface Mount

I Key Features



IP54



Multiple-Function

Multiple Function



Daylight Sensor
10Lux/20Lux/40Lux/24H



Hold Time
5s/30s/1min/3min



Soft on/off
No/Yes

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL20	24W	AC200-240V	1920LM	120°	Φ307*24mm	3000/4000/6500K
PL20	30W	AC200-240V	2400LM	120°	Φ350*24mm	3000/4000/6500K

PL07


PIR SENSOR LED PANEL LIGHT

Φ165mm, Φ227mm




- PIR Motion Sensor
- CCT Changeable, Quick Connector
- 2 IN 1 Recessed & Surface Mount Installation, Fit All Ceiling
- Multiple-Function

Easy Installation



Recessed

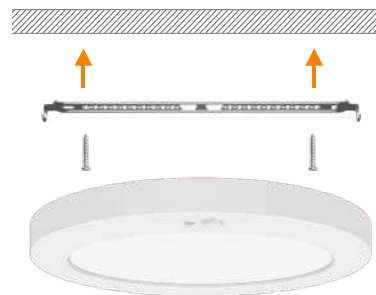


Surface Mount


Key Features



3CCT



Multiple-Function



Daylight Sensor
10Lux/20Lux/40Lux/24H



Hold Time
5s/30s/1min/3min



Soft on/off
No/Yes

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL07	12W	AC200-240V	960LM	120°	Φ165*20mm	3000/4000/6500K
PL07	18W	AC200-240V	1440LM	120°	Φ227*20mm	3000/4000/6500K

DC01

ALUMINUM SLIM MINI PANEL LIGHT

Φ120mm, Φ148mm, Φ168mm, Φ225mm, Φ300mm



31



I Key Features



Aluminum



Anti-Light Leakage



3CCT

- CCT Changeable
- Unique Design, Anti-Light Leakage
- Good Quality LGP And Diffuser Plate
- Tuya RGB Smart Version Available

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
DC01	6W	AC100-240V	400LM	120°	Φ120*22mm	3000/4000/6500K
DC01	9W	AC100-240V	650LM	120°	Φ148*22mm	3000/4000/6500K
DC01	12W	AC100-240V	950LM	120°	Φ168*22mm	3000/4000/6500K
DC01	18W	AC100-240V	1620LM	120°	Φ225*22mm	3000/4000/6500K
DC01	24W	AC100-240V	2160LM	120°	Φ300*22mm	3000/4000/6500K

CL01

SMART & SLIM LED CEILING LIGHT

Φ250mm, Φ300mm, Φ400mm



33



- DIY Colorful Ring
- CCT Changeable & Wall Switch Control
- Rotatable Easy Installation

Rotatable Easy Installation




Key Features



Super Slim



3CCT By 4 Modes



DIY Colorful Ring



Backlight

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
CL01	15W	AC200-240V	1500LM	120°	Φ250*49mm	3000/4000/6500K
CL01	18W	AC200-240V	1800LM	120°	Φ300*49mm	3000/4000/6500K
CL01	30W	AC200-240V	3000LM	120°	Φ400*49mm	3000/4000/6500K

PL11

SNAP ON MINI PANEL LIGHT

Φ150mm, Φ170mm, Φ223mm, Φ296mm



- Built-in Driver
- 2 IN 1 Recessed & Surface Mount
- CCT Changeable & Wall Switch Control
- Loop In & Loop Out

2 IN 1 Installation



Recessed




Surface Mount

Key Features



3CCT By 4 Modes

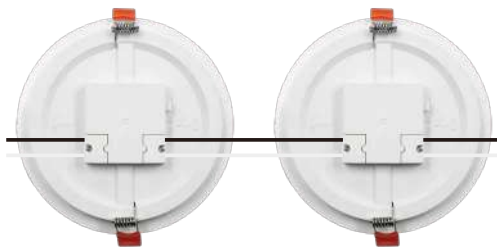

Loop In & Loop Out

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL11	6W	AC170-240V	390LM	120°	Φ150*24mm	3000/4000/6500K
PL11	9W	AC170-240V	600LM	120°	Φ150*24mm	3000/4000/6500K
PL11	12W	AC170-240V	850LM	120°	Φ170*24mm	3000/4000/6500K
PL11	18W	AC170-240V	1440LM	120°	Φ223*24mm	3000/4000/6500K
PL11	24W	AC170-240V	1920LM	120°	Φ296*24mm	3000/4000/6500K

PL18

NIGHTLIGHT SLIM PANEL LIGHT

Φ189mm





Backlight



Downlight



Nightlight

Easy Installation




Surface Mount

Key Features



3CCT / 5CCT



Super Slim

- CCT Changeable
- Rotatable Easy Installation
- Backlight & Downlight & Nightlight
Mode Changeable Via Wall Switch Control

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
PL18	12W+3W	AC200-240V	840LM	120°	Φ189*16.5mm	2700/3000/3500/4000/6500K

DC13

CLIP ON ALUMINUM PANEL LIGHT


Φ105mm, Φ152mm, Φ205mm, Φ280mm




- Super Slim 14mm
- 2 IN 1 Recessed & Surface Mount Installation, Fit All Ceiling
- Push To Fix, Drag To Detach

Fit All Ceiling

43

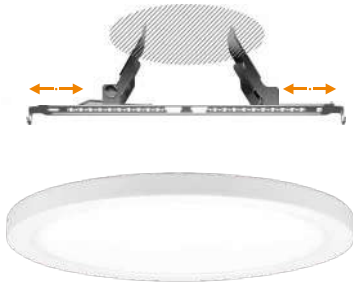


Recessed

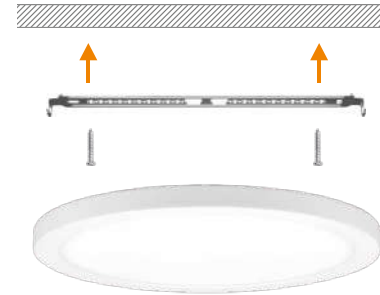


Surface Mount


I Key Features



Sliding Spring



Aluminum Housing





Super Slim

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
DC13	6W	AC200-240V	360LM	120°	Φ105*14mm	3000/4000/6500K
DC13	12W	AC200-240V	900LM	120°	Φ152*14mm	3000/4000/6500K
DC13	18W	AC200-240V	1500LM	120°	Φ205*14mm	3000/4000/6500K
DC13	24W	AC200-240V	2000LM	120°	Φ280*14mm	3000/4000/6500K

CL06

LED SLIM FRAMELESS CEILING LIGHT

Φ225mm, Φ293mm, Φ397mm

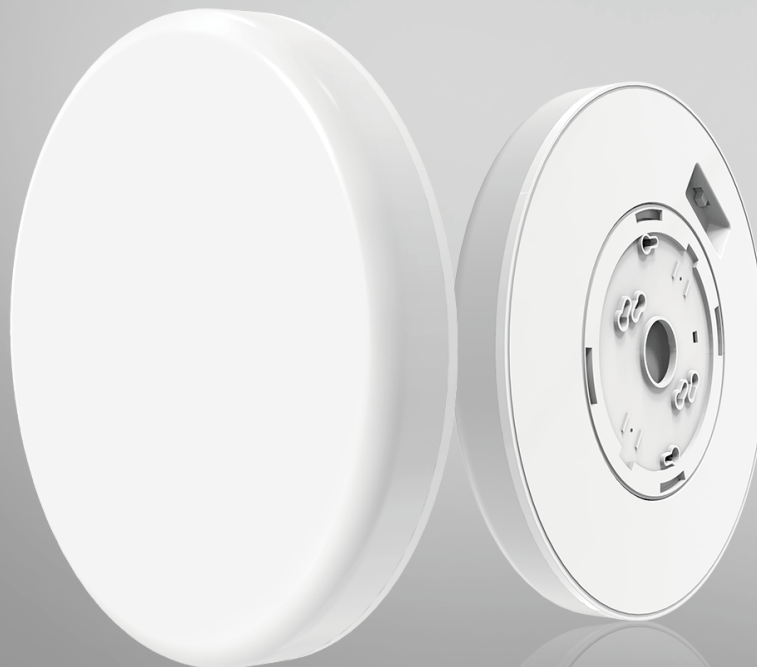


- Frameless Design, CCT Changeable
- Rotatable Super Easy Installation
- Three Sizes $\Phi 225\text{mm}$, $\Phi 293\text{mm}$, $\Phi 397\text{mm}$


Easy Installation



Key Features



3CCT / 5CCT



Frameless



MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
CL06	18W	AC200-240V	1440LM	120°	Φ225*37mm	2700/3000/3500/4000/6500K
CL06	25W	AC200-240V	2000LM	120°	Φ293*37mm	2700/3000/3500/4000/6500K
CL06	35W	AC200-240V	2800LM	120°	Φ397*37mm	2700/3000/3500/4000/6500K

CL07

MODERN LED CEILING LIGHT

Φ254mm, Φ330mm, Φ406mm



- Modern Design, 3 Different Sizes Available
- Rotatable Easy Installation
- Matte Black, White and Gold Finish

49

Easy Installation



Suspending



| Key Features



3CCT



Modern Design

MODEL	POWER	VOLTAGE	LUMENS	BEAM ANGLE	SIZE	CCT
CL07	20W	AC200-240V	1300LM	120°	Φ254*98mm	3000/4000/6500K
CL07	25W	AC200-240V	1600LM	120°	Φ330*98mm	3000/4000/6500K
CL07	30W	AC200-240V	2000LM	120°	Φ406*98mm	3000/4000/6500K



SHENZHEN HOMI LIGHTING CO., LTD.

 2.3.5F, Building No.3, Hongfa Jiateli High-Tech. Park, Shiyan Street,
Bao'an District, Shenzhen, China

 +86 (0) 755-2708 8037

 info@homiled.com

 <http://www.homiled.com>