

12-50V 6A - Mini LV780

LED connector system/3 pole,4 pole

Fongkit Specifications

Materials: PBT 94V-0

Rated values: Max 6A 12~50V

Temperature range: -25° C ~ +85° C

Contact resistance: <15mΩ




Insulation resistance: 1000MΩ Min

Withstanding voltage: 1500V AC/minute

Applicable wire: AWG#20~ #24

Applications: LED controller, LED receiver, RGB strip, RGBW strip.


Sensor switches, Recess/surface Downlights, Signal Input/output

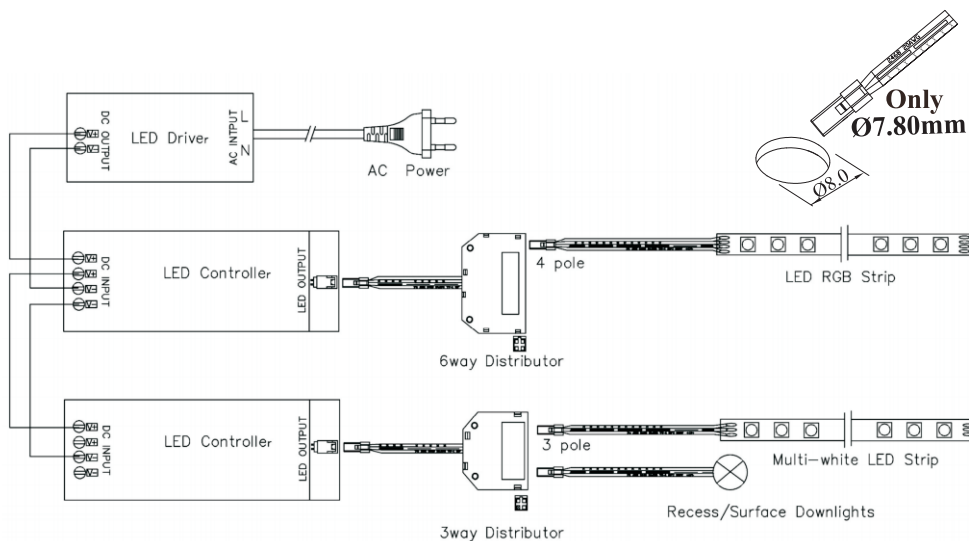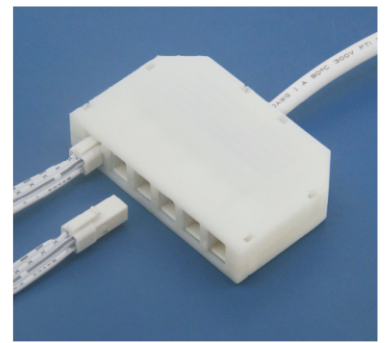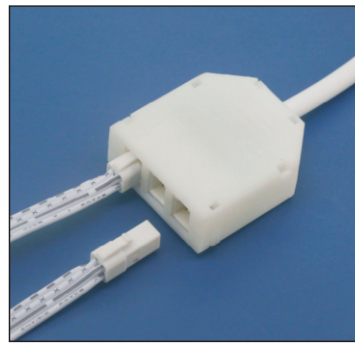

780-D6
6-way distributor



HF3
female socket 3pin

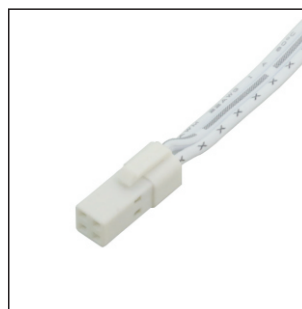

HM3
male plug 3pin



FME3
extension lead 3pin



HF4
female socket 4pin



HM4
male plug 4pin



FME4
extension lead 4pin