




Led Garden Light

JD-G030

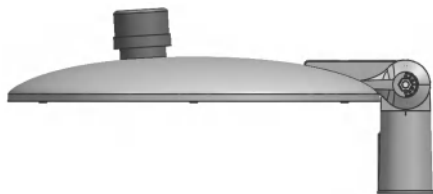

Philips Lumiled 5050 Led
Philips Meanwell, Inventronics driver

- Main material used in high strength aluminum die casting material, surface anit-ageing electrostatic spray Processing, super resistance to corrosion.
- High transparent tempered glass cover,high strength impact resistance.
- Horizontal version angle adjustable : +15° ~ -15°
- Vertical version andle adjustable : +15° ~ -15°
- Input voltage: AC100-240V, 50/60Hz;
- 5-year warranty
- IP66,IK09;

CE CB




技术参数 Specification


产品型号	Product Code	JD-G030A	JD-G030B	JD-G030C
电流 (mA)	Electric Current (mA)	67mA (3030) /50mA (5050)	67mA (3030) /50mA (5050)	84mA (3030) /63mA (5050)
LED数量	LED Quantity	72pcs 3030/24pcs 5050	144pcs 3030/48pcs 5050	192pcs 3030/64pcs 5050
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	130lm/w(3030) 140lm/w(5050)	130lm/w(3030) 140lm/w(5050)	130lm/w(3030) 140lm/w(5050)
输入电压	Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C-50°C	-40°C-50°C	-40°C-50°C
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ60mm	Φ60mm	Φ60mm
安装高度	Installation Height	3-5m	4-6m	7-9m
净重	Net Weight	6.1kg	6.5kg	7.9kg
毛重	Gross Weight	7.6kg	8kg	9.4kg
产品尺寸	Product Size	517x704x78mm	517x704x78mm	517x704x78mm
包装尺寸	Packing Size	540x630x130mm	540x630x130mm	540x630x130mm

注 包装尺寸为外尺寸 Packing size is outer size of box
本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。 All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

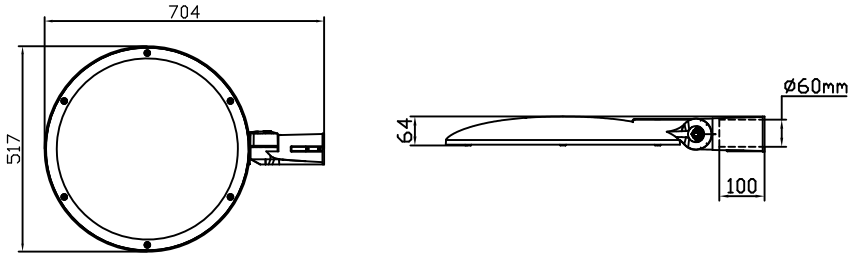

配光曲线图 Light Distribution Curve

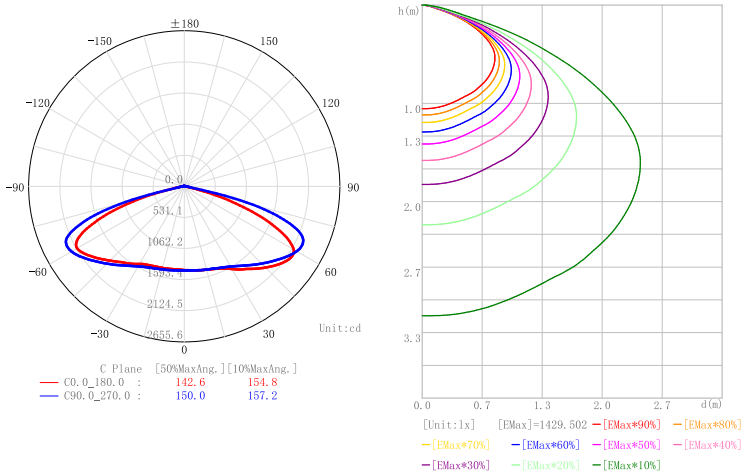

AC100-240V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~45 工作环境温度 Temperature of Working Condition	10~90% 工作环境湿度 Humidity of Working Condition	70000h 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	--	---	-----------------------------	----------------------------------



Led Garden Light

JD-G031



Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Main material used in high strength aluminum die casting material, surface anit-ageing electrostatic spray Processing, super resistance to corrosion.
- High transparent PC diffuser, high strength impact resistance.
- Input voltage: AC100-240V, 50/60Hz;
- 5-year warranty;
- IP66, IK09;

CE CB



技术参数 Specification

产品型号	Product Code	JD-G031A	JD-G031B	JD-G031C
电流 (mA)	Electric Current (mA)	60mA (3030) /50mA (5050)	100mA (3030) /67mA (5050)	108mA (3030) /111mA (5050)
LED数量	LED Quantity	72pcs 3030/24pcs 5050	96pcs 3030/36pcs 5050	144pcs 3030/36pcs 5050
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	130lm/w(3030) 140lm/w(5050)	120lm/w(3030) 130lm/w(5050)	100lm/w(3030) 110lm/w(5050)
输入电压	Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C-50°C	-40°C-50°C	-40°C-50°C
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ76mm	Φ76mm	Φ76mm
安装高度	Installation Height	3-5m	4-6m	7-9m
净重	Net Weight	4.8kg	5.2kg	6.6kg
毛重	Gross Weight	6.3kg	6.7kg	8.1kg
产品尺寸	Product Size	517x517x147mm	517x517x147mm	517x517x147mm
包装尺寸	Packing Size	540x540x200mm	540x540x200mm	540x540x200mm


注 包装尺寸为外尺寸

本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。



Packing size is outer size of box

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

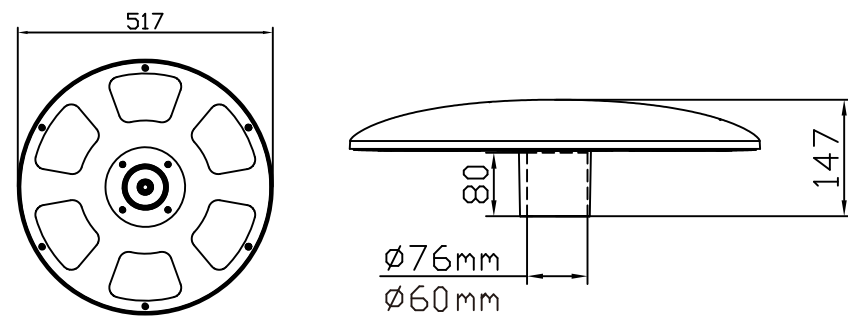

配光曲线图 Light Distribution Curve

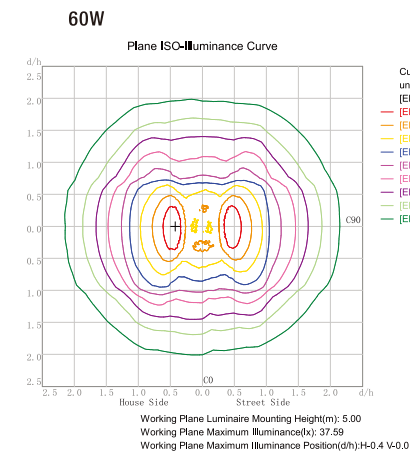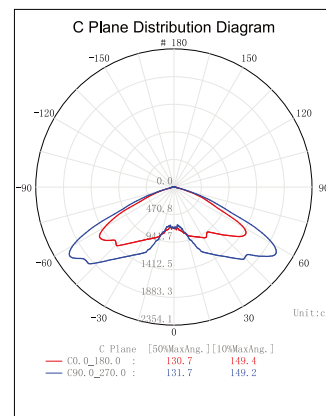

AC100-240V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~45℃ 工作环境温度 Temperature of Working Condition	10~90% 工作环境湿度 Humidity of Working Condition	70000h 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	---	---	-----------------------------	----------------------------------



Led Garden Light

JD-G032



Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Main material used in high strength aluminum die casting material, surface anit-ageing electrostatic spray Processing, super resistance to corrosion.
- PC diffuser, high strength impact resistance.
- Input voltage: AC100-240V, 50/60Hz;
- 5-year warranty;
- IP66,IK09;



技术参数 Specification

产品型号	Product Code	JD-G032A	JD-G032B	JD-G032C
电流 (mA)	Electric Current (mA)	67mA (3030) /50mA (5050)	67mA (3030) /50mA (5050)	84mA (3030) /63mA (5050)
LED数量	LED Quantity	72pcs 3030/24pcs 5050	144pcs 3030/48pcs 5050	192pcs 3030/64pcs 5050
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	130lm/w(3030) 140lm/w(5050)	130lm/w(3030) 140lm/w(5050)	130lm/w(3030) 140lm/w(5050)
输入电压	Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40℃-50℃	-40℃-50℃	-40℃-50℃
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ60mm	Φ60mm	Φ60mm
安装高度	Installation Height	3-5m	4-6m	7-9m
净重	Net Weight	6.3kg	6.7kg	8.1kg
毛重	Gross Weight	7.8kg	8 2kg	9.5kg
产品尺寸	Product Size	517x517x300mm	517x517x300mm	517x517x300mm
包装尺寸	Packing Size	540x540x350mm	540x540x350mm	540x540x350mm



注 包装尺寸为外尺寸

本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。



Packing size is outer size of box

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

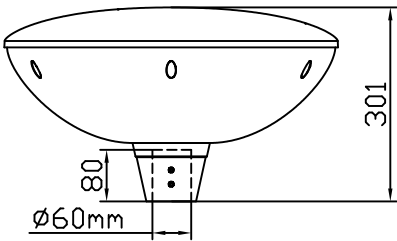


配光曲线图 Light Distribution Curve

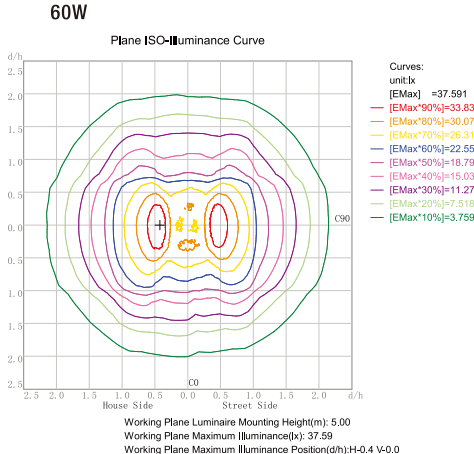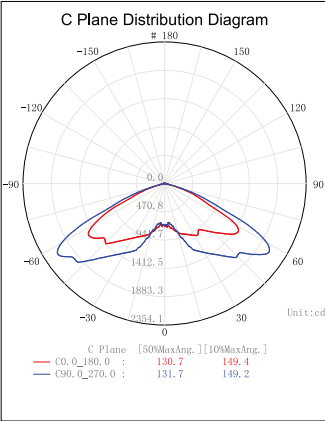



Led Garden Light

JD-G033

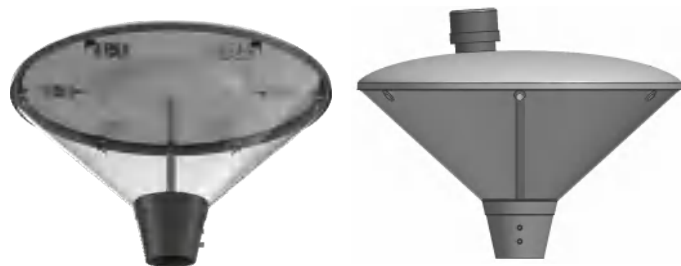

Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Main material used in high strength aluminum die casting material, surface anit-ageing electrostatic spray Processing, super resistance to corrosion.
- PC diffuser, high strength impact resistance.
- Input voltage: AC100-240V, 50/60Hz;
- 5-year warranty;
- IP66,IK09;

CE CB



技术参数 Specification

产品型号	Product Code	JD-G033A	JD-G033B	JD-G033C
电流 (mA)	Electric Current (mA)	67mA (3030) /50mA (5050)	67mA (3030) /50mA (5050)	84mA (3030) /63mA (5050)
LED数量	LED Quantity	72pcs 3030/24pcs 5050	144pcs 3030/48pcs 5050	192pcs 3030/64pcs 5050
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	130lm/w(3030) 140lm/w(5050)	130lm/w(3030) 140lm/w(5050)	130lm/w(3030) 140lm/w(5050)
输入电压	Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40 -50	-40℃ -50℃	-40℃ -50℃
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	60mm	Φ60mm	Φ60mm
安装高度	Installation Height	3-5m	4-6m	7-9m
净重	Net Weight	6kg	6.4kg	7.8kg
毛重	Gross Weight	7.5kg	7.9kg	9.3kg
产品尺寸	Product Size	517x517x300mm	517x517x330mm	517x517x330mm
包装尺寸	Packing Size	540x540x380mm	540x540x380mm	540x540x380mm



注 包装尺寸为外尺寸

本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。

Packing size is outer size of box

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.



产品尺寸 Product Dimension

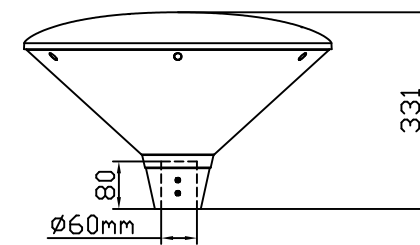

44

www.classiclight.com
sales@axclassiclighting.com

配光曲线图 Light Distribution Curve

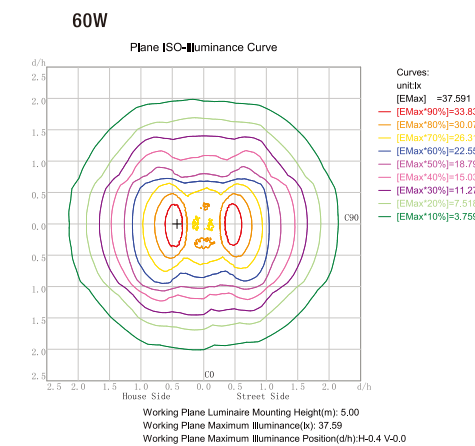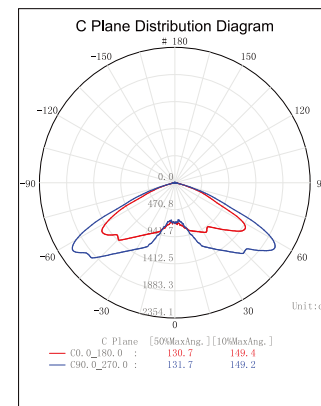

AC100-240V
输入电压
Input Voltage

Hz
50/60
频率范围
Frequency Range

PF
>0.92
功率因数
Power Factor

<15%
总谐波失真
THD

CRI
75
显色指数
Color Rendering Index

-40~45℃
工作环境温度
Temperature of Working Condition

10~90%
工作环境湿度
Humidity of Working Condition

70000h
使用寿命
Life Time

IP66
防护等级
Protection Grade