



Led Garden Light

JD-1061



JD-1061-4A



Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Used in high strength aluminum die casting material,surface anit-ageing electrostatic spray processing,super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
Input Voltage: AC100-240V, 50/60Hz, IP66, Ik09
- Different type lens for choice
- Windy area : JD-1060 600 cm² , JD-1061 815 cm²
- Spare parts for choice
10 kv/20kv SPD
0-10v dimming driver
auto switch
- 5 years warranty

CE CB




技术参数 Specification

产品型号	Product Code	JD-1061A/JD-1061-4A	JD-1061B/JD-1061-4B	JD-1061C/JD-1061-4C
电流(mA)	LED Current (mA)	50mA 5050/67mA 3030	54mA 5050/67mA 3030	63mA 5050/84mA 3030
LED数量	LED Quantity	24pcs 5050/72pcs 3030	48pcs 5050/144pcs 3030	64pcs 5050/192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	150lm/w/ 140lm/w(5050) 140lm/w 130lm/w(3030)	150lm/w/ 140lm/w(5050) 140lm/w 130lm/w(3030)	150lm/w/ 140lm/w(5050) 140lm/w 130lm/w(3030)
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	CRI	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C-50°C	-40°C-50°C	-40°C-50°C
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装高度	Installation Height	3-5m	5-8m	8-10m
净重	Net Weight	6.3kgs/8.1kgs	6.5kgs/8.46kgs	6.7kgs/8.5kgs
毛重	Gross Weight	7.5kgs/9.1kgs	7.7kgs/9.66kgs	7.9kgs/10.5kgs
产品尺寸	Product Size	590x480x470mm	590x480x470mm	590x480x470mm
包装尺寸	Packing Size	light head:63.5X53.5X15cm,bracket:56*56*31CM,bracket:JD-1060 42PCS/CTN,JD-1061/1064 10PCS/CTN,JD-1062W 25PCS/CTN,JD-1063 18PCS/CTN		

注：包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.


产品尺寸 Product Dimension

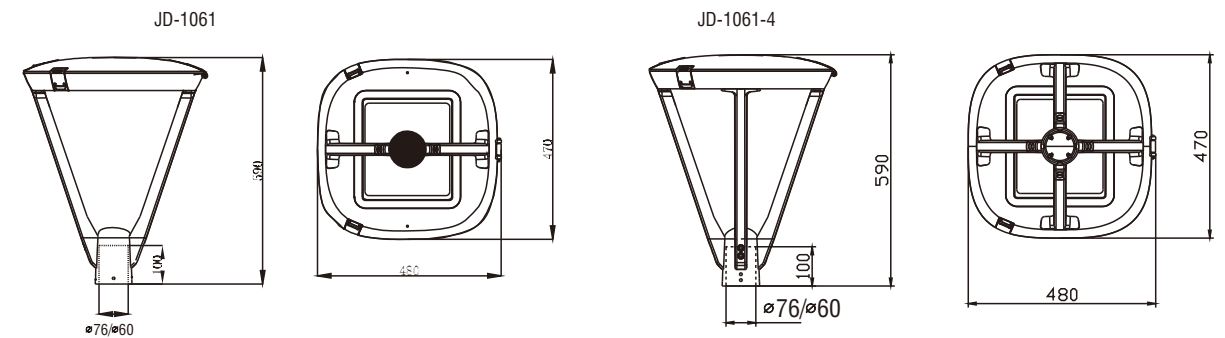

50

www.classiclight.com
sales@classiclighting.com

配光曲线图 Light Distribution Curve

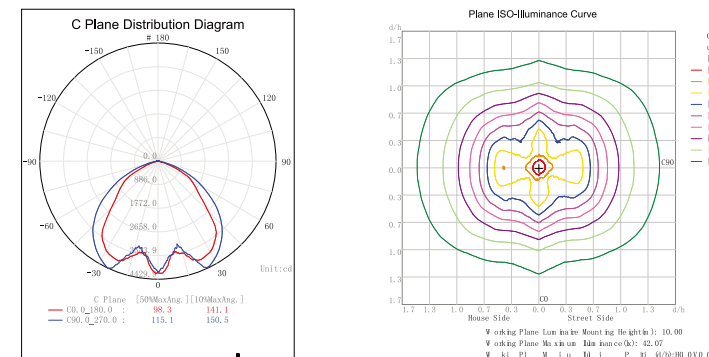

AC100-277V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~50℃ 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	70000h 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	---	---	-----------------------------	----------------------------------



Led Garden Light

JD-1060



JD-1062A



JD-1062W



Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Used in high strength aluminum die casting material,surface anit-ageing electrostatic spray processing,super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
Input Voltage: AC100-240V, 50/60Hz, IP66, Ik09
- Different type lens for choice
- Windy area : 700 cm²
- Spare parts for choice
10 kv/20kv SPD
0-10v dimming driver
auto switch
- 5 years warranty

CE CB




技术参数 Specification

产品型号	Product Code	JD-1060A/JD-1062A/JD-1062W 30W	JD-1060B/JD-1062A/JD-1062W 60W	JD-1060C/JD-1062A/JD-1062W 100W
led 电流 (mA)	LED Current (mA)	50mA 5050/67mA 3030	54mA 5050/67mA 3030	63mA 5050/84mA 3030
LED数量	LED Quantity	24pcs 5050/72pcs 3030	48pcs 5050/144pcs 3030	64pcs 5050/192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	150lm/w(5050) 140lm/w(3030)	150lm/w(5050) 140lm/w(3030)	150lm/w(5050) 140lm/w(3030)
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	CRI	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C -50°C	-40°C -50°C	-40°C -50°C
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装高度	Installation Height	3-5m	5-8m	8-10m
净重	Net Weight	6.3kgs	6.5kgs	6.7kgs
毛重	Gross Weight	7.5kgs	7.7kgs	7.9kgs
产品尺寸	Product Size	670x470x110mm/480x470x293mm/480x470x190mm	670x470x110mm/480x470x293mm/480*470*190mm	670x470x110mm/480x470x293mm/480x470x190mm
包装尺寸	Packing Size	light head:63.5X53.5X15cm,bracket:56*56*31CM,bracket:JD-1060 42PCS/CTN,JD-1061/1064 10PCS/CTN,JD-1062W 25PCS/CTN,JD-1063 18PCS/CTN		


注：包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

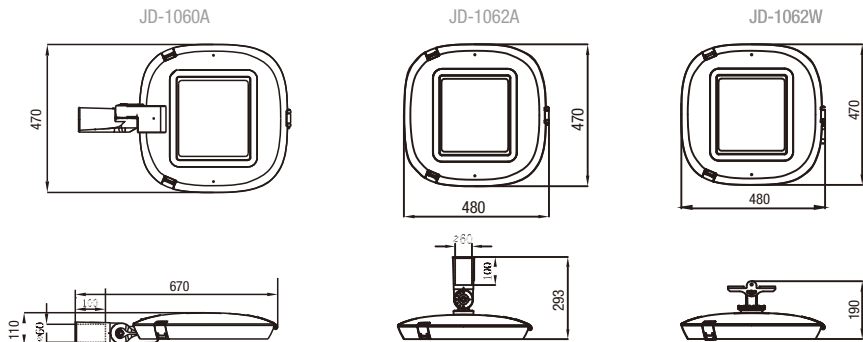

配光曲线图 Light Distribution Curve

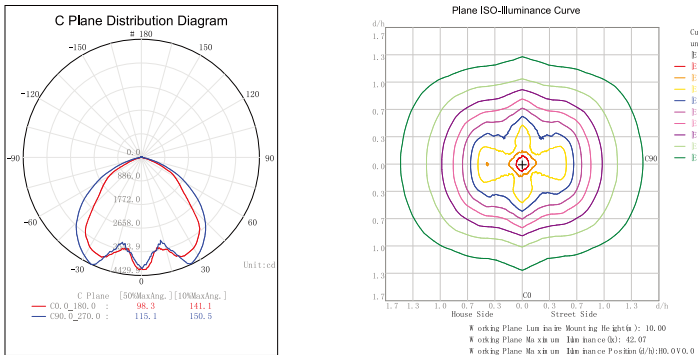

AC100-277V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~50 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	70000h 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	--	---	-----------------------------	----------------------------------



Led Garden Light JD-1063



Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Used in high strength aluminum die casting material, surface anit-ageing electrostatic Spray Processing, super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
- Input voltage: AC100-240V, 50/60Hz, IP66, IK09
- Different type lens for choice
- Windy area: 815cm²
- Spare parts for choice
- 10 kv/20kv SPD
- 0-10V dimming driver
- auto switch
- 5 year warranty

CE CB




技术参数 Specification

产品型号	Product Code	JD-1063A-30W	JD-1063B-60W	JD-1063C-100W
led 电流 (mA)	LED Current (mA)	50mA 5050/67mA 3030	54mA 5050/67mA 3030	63mA 5050/84mA 3030
LED数量	LED Quantity	24pcs 5050/72pcs 3030	48pcs 5050/144pcs 3030	64pcs 5050/192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	140lm/w(5050) 130lm/w(3030)	140lm/w(5050) 130lm/w(3030)	140lm/w(5050) 130lm/w(3030)
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	CRI	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C-50°C	-40°C-50°C	-40°C-50°C
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装高度	Installation Height	3-5m	5-8m	8-10m
净重	Net Weight	7.9kg	8.46kg	8.5kg
毛重	Gross Weight	9.1kg	9.66kg	10.5kg
产品尺寸	Product Size	550x480x470mm	550x480x470mm	550x480x470mm
包装尺寸	Packing Size	light head:63.5X53.5X15cm,bracket:56*56*31CM,bracket:JD-1060 42PCS/CTN,JD-1061/1064 10PCS/CTN,JD-1062W 25PCS/CTN,JD-1063 18PCS/CTN		


注：包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

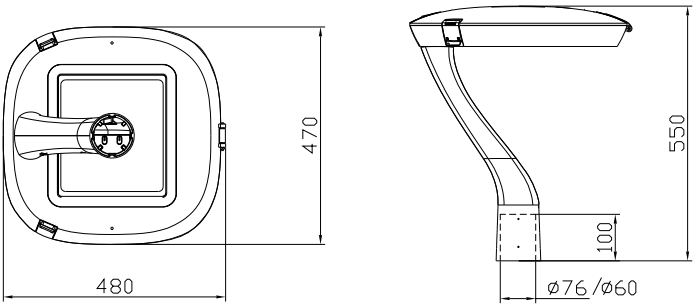

配光曲线图 Light Distribution Curve

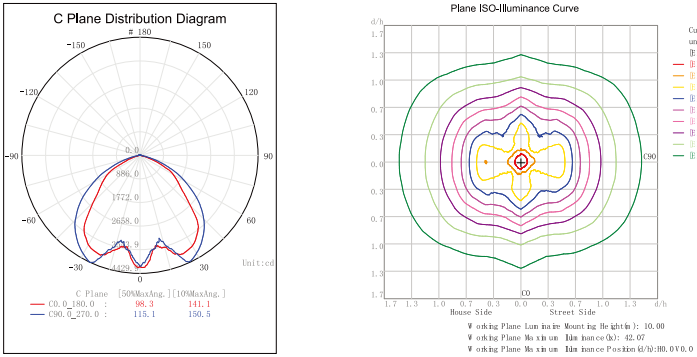

AC100-277V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~50°C 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	70000h 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	--	---	-----------------------------	----------------------------------



Led Garden Light

JD-1064



JD-1064P with pc diffuser



Philips Lumiled 5050 or 3030 Led
Philips Meanwell, Inventronics driver

- Used in high strength aluminum die casting material, surface anit-ageing electrostatic spray processing, super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
- Input Voltage: AC100-240V, 50/60Hz, IP66, IK09
- High transparent PC diffuser, high strength impact resistance.
- Different type lens for choice.
- Spare parts for choice
- 10 kv/20kv SPD
- 0-10v dimming driver
- auto switch
- 5 years warranty

CE CB




技术参数 Specification

产品型号	Product Code	JD-1064A/JD-1064P-A 30W	JD-1064B/ JD-1064P-B 60W	JD-1064C/JD-1064P-C 100W
led 电流 (mA)	LED Current (mA)	50mA 5050/67mA 3030	54mA 5050/67mA 3030	63mA 5050/84mA 3030
LED数量	LED Quantity	24pcs 5050/72pcs 3030	48pcs 5050/144pcs 3030	64pcs 5050/192pcs 3030
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminary EER	140lm/w(5050) 130lm/w(3030)	140lm/w(5050) 130lm/w(3030)	140lm/w(5050) 130lm/w(3030)
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	CRI	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40℃-50℃	-40℃-50℃	-40℃-50℃
工作环境湿度	humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	70000h	70000h	70000h
防护等级	Protestion Grade	IP66	IP66	IP66
安装高度	Installation Height	3-5m	5-8m	8-10m
净重	Net Weight	6.3kg/7.9kg	6.5kg/8.46kg	6.7kg/8.5kg
毛重	Gross Weight	7.5kg/9.1kg	7.7kg/9.66kg	7.9kg/10.5kg
产品尺寸	Product Size	590x480x470mm	590x480x470mm	590x480x470mm
包装尺寸	Packing Size	light head:63.5X53.5X15cm, bracket:56*56*31CM, bracket:JD-1060 42PCS/CTN, JD-1061/1064 10PCS/CTN, JD-1062W 25PCS/CTN, JD-1063 18PCS/CTN		

注：包装尺寸为外尺寸
本表所示技术参数均在环境温度为25℃，湿度35%的实验室环境中测得。

Packing size is outer size of box
All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

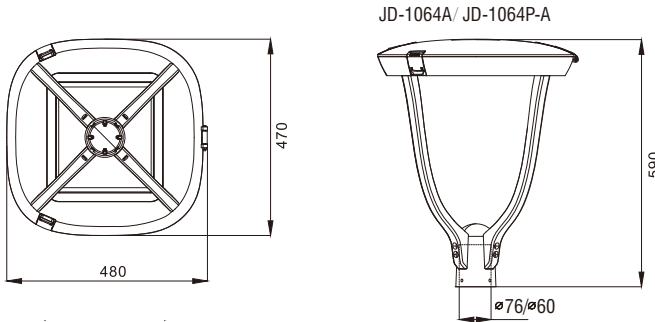

配光曲线图 Light Distribution Curve

