



西铁照明(中山)有限公司 SEITY LIGHT(ZHONGSHAN)CO.,LTD.

地址:广东省中山市横栏镇三沙茂辉工业区A区 邮编/P.C.528478

Add: District A Maohui Industrial Zone,Henglan Town,Zhongshan City Guangdong Pro.,China

电话/Tel : 国际 (+86) 760 87686877 国内:0760 87686868 87686875

传真/Fax: (+86) 760 87686870



 **400-8388-902**  **www.seitylighting.com**

注: 本画册所包含的产品图片可能与实际产品有细微变动出入, 恕不另行通知, 最终以实际产品为准;

LED LIGHTING PRODUCT MANUALS

设计因光更美丽

PRETTY LIGHT PRETTIER DESIGN

About Seity 关于西铁

Seity Light(Zhong Shan)Co.,Ltd was established in 2007. The company covers an area of 16,000 square meters and is equipped with a one-stop production system including mold workshop, die-casting workshop, CNC workshop, stamping workshop, polishing workshop, painting workshop and assembly workshop. All products are internally developed and produced.

Seity Lighting under it specializes in customizing high-end commercial lighting brands for high-end Hotel, Luxury villa, exclusively selling chain stores, shopping mall, offices etc.

Meticulously designed products, we make it possible for each customer feel the pulse of the light culture in the world.

Seity has become synonymous with individuality, symbolizing extensiveness and inclusiveness, displaying individualistic breakthroughs in the lighting culture, creating more natural, confident and splendid environment, and manifesting the unique individuality and charms of a top brand!

We are deeply convinced that what those who create miracles need is a kind of corresponding extraordinariness. With its top quality, unparalleled professional ability and outstanding services as well as the spirit and attitude of striving for perfection in everything. Seity Lighting keeps creating miracles for commercial lighting!

To forge a highly qualified team, realize intensive management people oriented, quality first is the philosophy that "Seity" has been insisting on for life and also our constant pursuit.

西铁照明(中山)有限公司成立于2007年，公司厂房面积16000平方米，配套有模具车间、压铸车间、数控车间、冲压车间、抛光车间、喷涂车间、组装车间等一条龙生产系统。公司产品均为自主研发生产。

公司旗下品牌 **Seity 西铁照明** 主要为高端酒店、豪宅、专卖连锁、商场、办公等场所量身打造的高端商业照明品牌！

公司以设计是产品的灵魂为基础，通过精心设计的产品，让用户得以感悟到世界灯光文化的脉搏。

Seity 西铁照明 是个性化的代名词，象征着博大与相容，彰显灯光文化的个性突破，缔造出更加自然、自信、张扬的环境，展现王者品牌特有的个性与魅力！

我们深信，对那些创造奇迹的人们，他们所需要的就是那份与之相应的非凡；

Seity 西铁照明 以其顶尖的质量，无与伦比的专业能力及超群的服务；以凡事所求完美的精神与态度，不断为高端商业照明创造奇迹！

铸造高素质团队、实现精细化管理。以人为本，“质”造未来！是“西铁”一生所坚持的理念，也是我们不变的追求！

www.seitylighting.com

LED DOWN LIGHT



101 001-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
24°/40°/60°
Adjustable
可調式



102 001-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
24°/40°/60°
Adjustable
可調式



102 003
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
24°/40°/60°
Adjustable
可調式



102 003-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
24°/40°/60°
Base down
固定式



103 004-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 45W
Beam angle
16°/25°/34°/50°
Adjustable
可調式



104 001
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 7W
Beam angle
15°/24°/36°
Adjustable
可調式



104 002
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 12W
Beam angle
15°/24°/36°
Adjustable
可調式



104 003
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
15°/24°/36°
Adjustable
可調式



104 004
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
15°/24°/36°
Adjustable
可調式



105 009
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 9W
Beam angle
15°/24°/36°/60°
Adjustable
可調式




111 013-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 9W
Beam angle
15°/24°/36°
Adjustable
可調式

Black ● white ○ Silver ●



111 003-1
Adjustable
可調式



111 003-2
Adjustable
可調式



111 003-3
Adjustable
可調式

LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 12W
Beam angle
15°/24°/36°/50°
Φ75mm
IP20/IP44





111 004-1
Adjustable
可調式




111 004-2
Adjustable
可調式



111 004-3
Adjustable
可調式

LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 12W
Beam angle
15°/24°/36°/50°
Φ75mm
IP20/IP44





118 001-3
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 7W
Beam angle
15°/24°/36°/60°
Base down
固定式



118 001-4
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
15°/24°/36°/60°
Base down
固定式



118 001-5
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
15°/24°/36°/60°
Base down
固定式



118 001-6
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
15°/24°/36°/60°
Base down
固定式



118 001-8
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
15°/24°/36°/60°
Base down
固定式



120 001-4
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 12W
Beam angle
24°/36°/60°
Φ102mm



120 001-6
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
24°/36°/60°
Φ155mm



120 001-8
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
24°/36°/60°
Φ205mm

专利结构, 仿冒必究
Patented Product, Counterfeiting Not Allowed

LED DOWN LIGHT



121 001-4
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
18°/24°/36°
Φ105mm



121 001-6
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 45W
Beam angle
18°/24°/36°
Φ155mm



121 001-8
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
18°/24°/36°
Φ205mm



122 001
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
18°/24°/36°
Φ128mm



122 001-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
18°/24°/36°
Φ125mm



122 001-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
18°/24°/36°
Φ135mm



124 001-4
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
24°/36°/42°
Φ102mm



124 001-6
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
18°/24°/36°
Φ155mm



124 001-8
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
18°/24°/36°
Φ205mm



126 001
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 7W
Beam angle
6°/12°/24°/36°
Φ75mm



126 003
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 9W
Beam angle
9°/20°/30°
Φ95mm



126 002
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 7W
Beam angle
6°/12°/24°/36°
Φ75mm



126 004
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 9W
Beam angle
9°/20°/30°
Φ95mm

Black ● white ○ Silver ●



134 001-2 MAX 7W
Φ55mm



132 001-2 MAX 9W
Φ75mm




133 001-2 MAX 18W
Φ95mm



134 001-2
Base down
固定式



134 003-2
Adjustable
可调式



LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 7W
Beam angle
6°/12°/24°/36°
Φ55mm



132 001-1
Base down
固定式



132 001-2
Base down
固定式



132 001-4
Base down
固定式



132 001-5
Base down
固定式



132 002-1
Adjustable
可调式




132 002-2
Adjustable
可调式



132 003-2
Adjustable
可调式



132 003-6
Adjustable
可调式



LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 9W
Beam angle
9°/20°/30°
Φ75mm



133 001-1
Base down
固定式



133 001-2
Base down
固定式




133 002-1
Adjustable
可调式



133 002-2
Adjustable
可调式



133 003-2
Adjustable
可调式



LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 18W
Beam angle
16°/24°/36°
Φ95mm



502 021-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
16°/24°/36°
Φ102mm



502 021-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°/50°
Φ153mm



502 021-3
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 45W
Beam angle
12°/24°/36°/50°
Φ180mm

LED DOWN LIGHT



515 015-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
60°/70°
Φ132mm
IP54



521 014
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
40°/60°
Φ105mm



521 015
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
24°/60°
Φ132mm



521 016
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
36°/60°
Φ155mm



521 017
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
24°/36°/60°
Φ180mm



522 014
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
24°
Φ105mm



522 015
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
24°
Φ132mm



522 016
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
24°/36°
Φ155mm



522 017
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
24°/36°/60°
Φ180mm

LED MULTI-DOWN LIGHT




206 001
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 5W
Beam angle
15°/24°/36°
Φ65mm




206 011
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 5W
Beam angle
15°/24°/36°
62*62mm




206 021
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 5W*2
Beam angle
15°/24°/36°
98*62mm




206 002
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 18W
Beam angle
15°/24°/36°
Φ98mm



206 012
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 18W
Beam angle
15°/24°/36°
90*90mm



206 022
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 18W*2
Beam angle
15°/24°/36°
180*90mm



206 032
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 18W*3
Beam angle
15°/24°/36°
270*90mm

LED MULTI-DOWN LIGHT


Black ● white ○ Silver ●



206 003
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
15°/24°/36°
Φ118mm



206 013
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
15°/24°/36°
110*110mm




206 023
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W*2
Beam angle
15°/24°/36°
230*110mm




206 033
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W*3
Beam angle
15°/24°/36°
345*110mm



206 004
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
15°/24°/36°
Φ140mm




206 014
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
15°/24°/36°
140*140mm



206 024
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W*2
Beam angle
15°/24°/36°
275*140mm




206 034
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W*3
Beam angle
15°/24°/36°
410*140mm




207 011-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
15°/24°/36°
140*140mm



207 021-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W*2
Beam angle
15°/24°/36°
310*140mm



207 031-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W*3
Beam angle
15°/24°/36°
470*140mm




207 013-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
24°/36°
170*170mm



207 023-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W*2
Beam angle
24°/36°
360*170mm



207 033-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W*3
Beam angle
24°/36°
550*170mm



207 014
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W
Beam angle
24°/40°/60°
90*90mm



207 024
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W*2
Beam angle
24°/40°/60°
190*90mm



207 034
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 15W*3
Beam angle
24°/40°/60°
290*90mm

LED TRACK LIGHT



110 006
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
16°/26°/36°
Ø75mm



110 006-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
16°/26°/36°
Ø85mm



110 006-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
16°/26°/36°
Ø95mm



110 106
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
16°/26°/36°



110 106-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
16°/26°/36°



110 106-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
16°/26°/36°



310 206
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
16°/26°/36°



310 206-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
16°/26°/36°



310 206-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
16°/26°/36°



310 207
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
16°/26°/36°



310 207-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
16°/26°/36°



310 207-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
16°/26°/36°



310 208
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
16°/26°/36°



310 208-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
16°/26°/36°



310 208-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
16°/26°/36°

LED TRACK LIGHT

Black ● white ○ Silver ●



310 206T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
15°~45°



310 206-1T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
15°~45°



310 206-2T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
15°~45°



310 207T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
20°~50°



310 207-1T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 34W
Beam angle
20°~50°



310 207-2T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 42W
Beam angle
20°~50°



310 208T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
20°~50°



310 208-1T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 34W
Beam angle
20°~50°



310 208-2T
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 42W
Beam angle
20°~50°



301 217-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°/60°/80°



301 217-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 42W
Beam angle
15°/30°/45°/60°



308 201-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°/50°



308 204-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°/50°



310 202-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
12°/24°/36°/50°



320 201-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
12°/24°/36°/50°



320 201-3
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
24°/36°




LIGHT SOURCE: PHILIPS LUMINUS CITIZEN CREE+
DRIVER: SETTY PHILIPS TRIDONIC

专利结构, 仿冒必究
Patented Product, Counterfeiting Not Allowed


LED TRACK LIGHT

Black ● white ○ Silver ●


324 201
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°/50°




327 201
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 45W
Beam angle
12°/24°/36°/50°



327 201-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 45W
Beam angle
12°/24°/36°/50°




329 201-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 40W
Beam angle
12°/24°/36°/50°




329 201-3
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
12°/24°/36°/50°




333 201
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
12°/24°/36°/50°




337 201-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
15°/24°/36°




337 201-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°/50°



337 201-3
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
12°/24°/36°/50°




336 201
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
12°/24°/36°



338 201-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
18°/24°/36°




338 201-3
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 35W
Beam angle
18°/24°/36°




340 201
LED
OSRAM
Power
Max: 35W

Wall Washer




125 101
LED
OSRAM
Power
Max: 45W
Φ165mm


Wall Washer




350 201-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 45W
Beam angle
12°/24°/36°/50°



342 201
LED
LUMINUS(COB)
Power
12W
Beam angle:
24°/36°/42°
Power
7W/9W
Beam angle:
9°/20°/30°




342 202
LED
LUMINUS(COB)
Power
12W
Beam angle:
24°/36°/42°
Power
7W/9W
Beam angle:
9°/20°/30°



307 205
LAMP
E27 for PAR30
Material
Aluminum




307 206-1
LAMP
GU10/GU5.3/E27
Material
Aluminum




307 206-2
LAMP
GU10/GU5.3
Material
Aluminum



307 208
LAMP
GU10/GU5.3
Material
Aluminum



339 201
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
20°~50°
Focus Lamp




339 201-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
15°/24°/38°



339 201-4
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 9W
Beam angle
15°/24°/38°




339 202-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
20°~50°
Focus Lamp



339 202-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
15°/24°/36°




339 203-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
20°~60°
Focus Lamp



339 203-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
12°/24°/36°




339 300-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 7W
Beam angle
12°/24°/36°



LED Pendant light




339 301
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
20°~50°
Focus Lamp





339 302-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
20°~50°
Focus Lamp






339 303-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
20°~60°
Focus Lamp






339 301-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 10W
Beam angle
15°/24°/38°





339 302-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 20W
Beam angle
15°/24°/36°






339 303-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
12°/24°/36°



LED WALL LAMP




506 510
LED
SMD
Power
Max: 6W






506 511
LED
SMD
Power
Max: 6W






506 512
LED
SMD
Power
Max: 6W






506 513
LED
SMD
Power
Max: 9W



LED SURFACE DOWNLIGHT




512 131
LED
LUMINUS(COB)
Power
12W
Beam angle:
24°/36°/42°
Power
7W/9W
Beam angle:
9°/20°/30°






512 132
LED
LUMINUS(COB)
Power
12W
Beam angle:
24°/36°/42°
Power
7W/9W
Beam angle:
9°/20°/30°






512 171-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 60W
Beam angle
18°/24°/36°/60°






512 131-1
LED
LUMINUS(COB)
Power
12W
Beam angle:
24°/36°/42°
Power
7W/9W
Beam angle:
9°/20°/30°






512 132-1
LED
LUMINUS(COB)
Power
12W
Beam angle:
24°/36°/42°
Power
7W/9W
Beam angle:
9°/20°/30°






512 171-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 60W
Beam angle
18°/24°/36°/60°



Black ● white ○ Silver ●



512 181-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 60W
Beam angle
18°/24°/36°/80°





512 133
LED
COB
Power
Max: 20W
Beam angle
20°/40°
Body size
Ø95*152
IP44/IP67



512 134
LED
COB
Power
Max: 30W
Beam angle
20°/40°
Body size
Ø115*152



512 135
LED
COB
Power
Max: 50W
Beam angle
20°/40°
Body size
Ø140*162




512 136
LED
COB
Power
Max: 60W
Beam angle
20°/40°
Body size
Ø170*182



512 137
LED
COB
Power
Max: 100W
Beam angle
20°/40°
Body size
Ø205*212



512 181-2
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 60W
Beam angle
18°/24°/36°/80°





512 133
LED
COB
Power
Max: 20W
Beam angle
20°/40°
Body size
Ø95*152
IP44/IP67



512 134
LED
COB
Power
Max: 30W
Beam angle
20°/40°
Body size
Ø115*152



512 135
LED
COB
Power
Max: 50W
Beam angle
20°/40°
Body size
Ø140*162



512 136
LED
COB
Power
Max: 60W
Beam angle
20°/40°
Body size
Ø170*182



512 137
LED
COB
Power
Max: 100W
Beam angle
20°/40°
Body size
Ø205*212

LED HIGHBAY



502 301
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
12°/24°/36°/50°






502 301-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 30W
Beam angle
12°/24°/36°/50°






502 304-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 170W
Beam angle
Lens:30°/45°/60°
Reflector:40°/70°






502 305-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 58W
Beam angle
Lens:30°/45°/60°
Reflector:40°/70°






502 306-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 170W
Beam angle
Lens:30°/45°/60°
Reflector:40°/70°





502 307
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
18°/24°/36°






502 307-1
LED
PHILIPS SLM/LUMINUS(COB)
Power
Max: 50W
Beam angle
18°/24°/36°



Integrated Linear light system

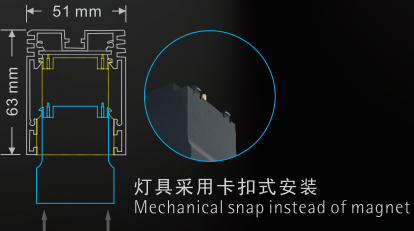

601 201

LED
PHILIPS SLM/LUMINUS(COB)

Power
7W

Beam angle
24°/38°

Voltage
DC 24V

601 201-1

LED
PHILIPS SLM/LUMINUS(COB)

Power
10W

Beam angle
16°/26°/36°

Voltage
DC 24V

601 202-1

LED
PHILIPS SLM/LUMINUS(COB)

Power
20W

Beam angle
16°/26°/36°

Voltage
DC 24V

601 203-1

LED
PHILIPS SLM/LUMINUS(COB)

Power
30W

Beam angle
16°/26°/36°

Voltage
DC 24V

601 211

LED
SMD

Power
12W

Beam angle
120°

Voltage
DC 24V

601 212

LED
SMD

Power
24W

Beam angle
120°

Voltage
DC 24V

601 213

LED
SMD

Power
36W

Beam angle
120°

Voltage
DC 24V

601 221

LED
OSRAM

Power
10W

Beam angle
15°/30°/45°

Voltage
DC 24V

601 223

LED
OSRAM

Power
25W

Beam angle
15°/30°/45°

Voltage
DC 24V

601 225

LED
OSRAM

Power
40W


Beam angle
15°/30°/45°

Voltage
DC 24V

601901
200*200mm

601902
200*200mm

轨道自由组合拼接
The tracks can be connected in all directions.

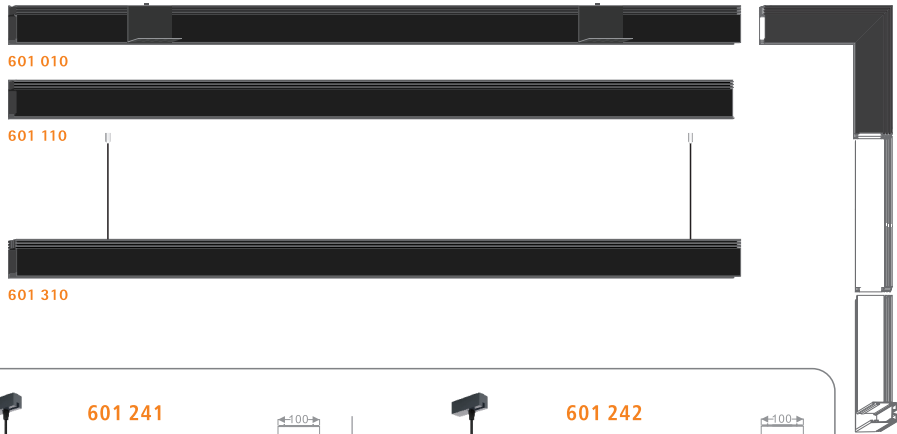

601 231

LED
OSRAM

Power
2W

Beam angle
15°/30°/45°

Voltage
DC 24V

601 241

LED
PHILIPS SLM/LUMINUS(COB)

Power
10W

Beam angle
20°~50°

Voltage
DC 24V

601 242

LED
PHILIPS SLM/LUMINUS(COB)

Power
20W

Beam angle
20°~50°

Voltage
DC 24V

601 251

LED
OSRAM

Power
10W

Beam angle
15°/30°/45°

Voltage
DC 24V

601 252

LED
OSRAM



Power
10W

Beam angle
120°

Voltage
DC 24V

Integrated Linear light system


Integrated Linear light system

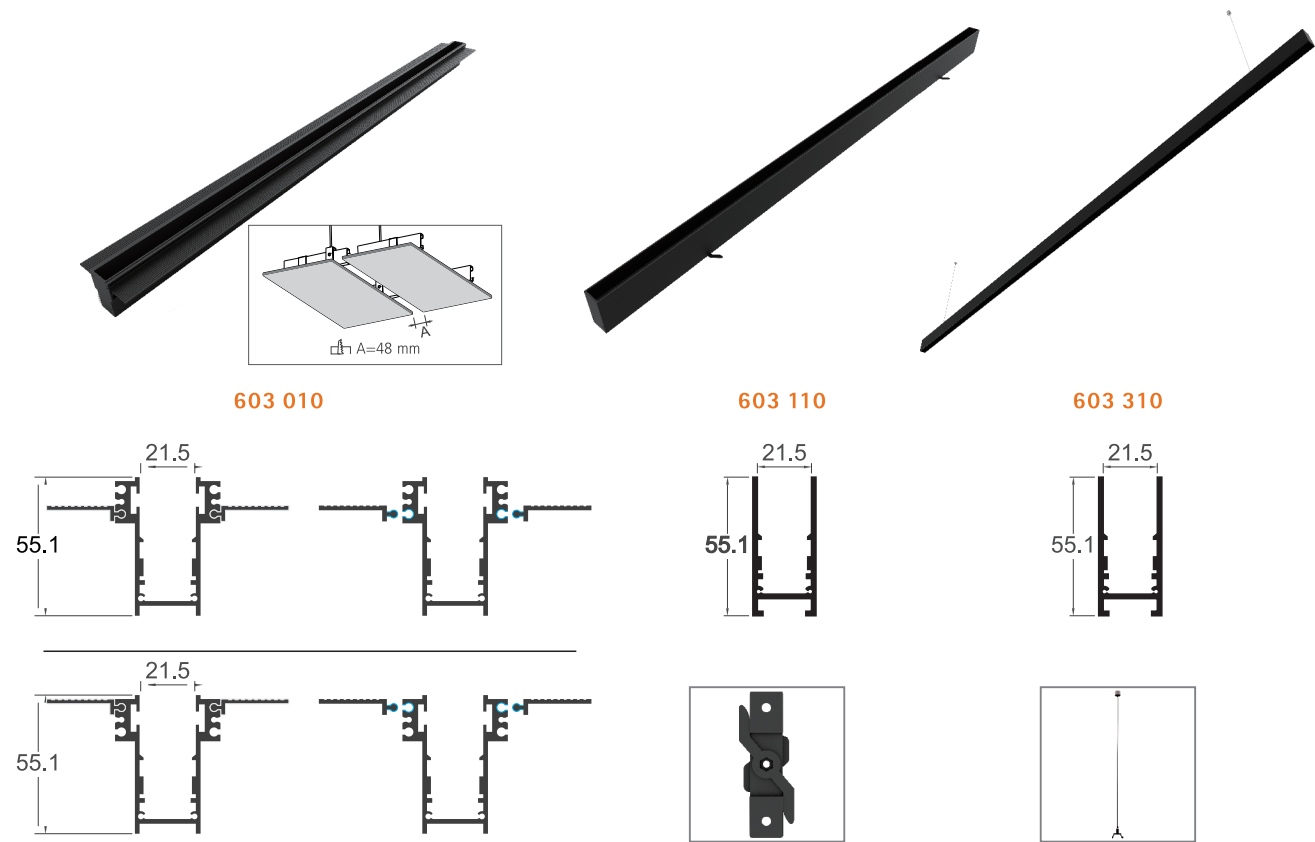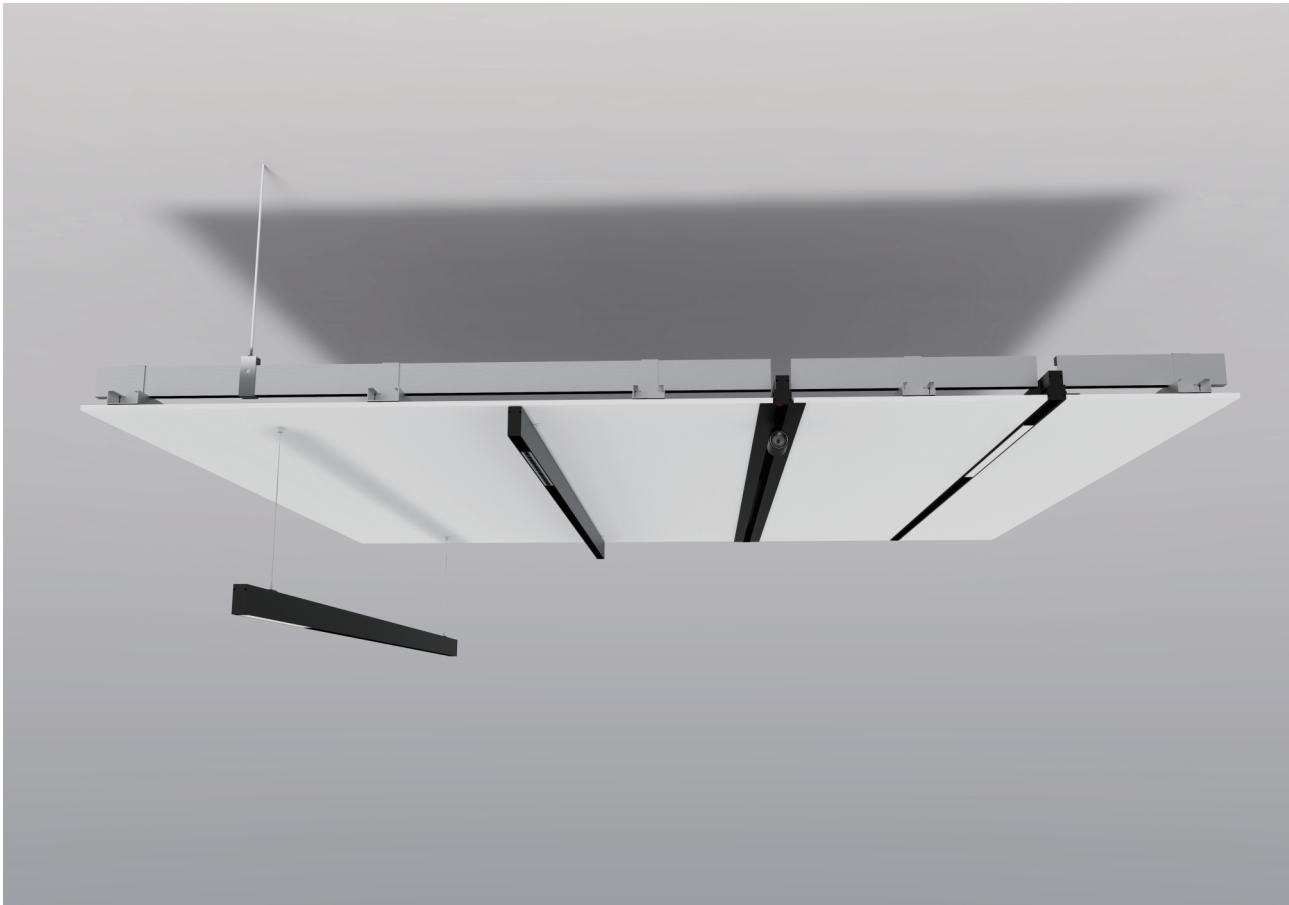

Black ● white ○ Silver ●




603 201
LED
COB
Power 3W
Beam angle 16°/24°/36°
Voltage DC 48V






603 202
LED
COB
Power 6W
Beam angle 16°/24°/36°
Voltage DC 48V






603 201
LED
COB
Power 3W
Beam angle 16°/24°/36°
Voltage DC 48V





603 202
LED
COB
Power 6W
Beam angle 16°/24°/36°
Voltage DC 48V





603 211
LED
OSRAM 2835
Power 8W
Beam angle 120°
Voltage DC 48V





603 212
LED
OSRAM 2835
Power 12W
Beam angle 120°
Voltage DC 48V






603 213
LED
OSRAM 2835
Power 20W
Beam angle 120°
Voltage DC 48V






603 222
LED
OSRAM 3030
Power 10W
Beam angle 15°/34°/55°
Voltage DC 48V





603 224
LED
OSRAM 3030
Power 20W
Beam angle 15°/34°/55°
Voltage DC 48V






603 241
LED
COB
Power 6W
Beam angle 16°/24°/36°
Voltage DC 48V






603 251
LED
OSRAM 3030
Power 10W
Beam angle 15°/34°/55°
Voltage DC 48V





603 252
LED
OSRAM 2835
Power 10W
Beam angle 120°
Voltage DC 48V



★★★ 专利结构, 仿冒必究
Patented Product, Counterfeiting Not Allowed

MAGIC CUBE

西铁·魔方 产品出光位置采用黑光技术, 每个发光位置采用独立的反光杯与透镜, 既而实现灯具的深度防眩, 做到UGR<15. 灯具采用型材外壳, 实现产品尺寸不受外壳限制, 满足客户使用需求。产品具备类似魔方的多变性, 具备多种安装方式, 且做到出光位置一致性, 形成家族式产品, 令产品有较高的辨识度。


SEITY • MAGIC CUBE Using dark light technology with seperated reflector and lens to achieve deep anti-glare, UGR<15. The housing is made of extrusion aluminum to do different size with no limit, to meet customers demands. It has a variability like a magic cube with different installation methods, with consistency of the light output, a whole family series, to be unique and highly recognition




602 001
LED
OSRAM 3030
Power
3W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
4035 mm




602 002
LED
OSRAM 3030
Power
4W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
7242 mm




602 004
LED
OSRAM 3030
Power
10W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
13842 mm




602 006
LED
OSRAM 3030
Power
12W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
20442 mm



602 012
LED
OSRAM 3030
Power
24W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
40442 mm




602 018
LED
OSRAM 3030
Power
36W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
60442 mm





602 002-1
LED
OSRAM 3030
Power
4W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
7540 mm




602 004-1
LED
OSRAM 3030
Power
10W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
14240 mm




602 006-1
LED
OSRAM 3030
Power
12W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
20840 mm




602 012-1
LED
OSRAM 3030
Power
24W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
40845 mm




602 018-1
LED
OSRAM 3030
Power
36W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
60645 mm




602 004-2
LED
OSRAM 3030
Power
10W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
15464 mm



602 006-2
LED
OSRAM 3030
Power
12W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
22064 mm



602 012-2
LED
OSRAM 3030
Power
24W
Beam angle
15°/25°/30°
Voltage
AC 220-240V
41864 mm



602 102
LED
OSRAM 3030
Power
4W
Beam angle
15°/25°/30°
Voltage
AC 220-240V



602 104
LED
OSRAM 3030
Power
10W
Beam angle
15°/25°/30°
Voltage
AC 220-240V



602 106
LED
OSRAM 3030
Power
12W
Beam angle
15°/25°/30°
Voltage
AC 220-240V




602 112
LED
OSRAM 3030
Power
24W
Beam angle
15°/25°/30°
Voltage
AC 220-240V




602 104-1
LED
OSRAM 3030
Power
10W
Beam angle
15°/25°/30°
Voltage
AC 220-240V




602 318
LED
OSRAM 3030
Power
18W
Beam angle
15°/25°/30°
Voltage
AC 220-240V



602 330
LED
OSRAM 3030
Power
30W
Beam angle
15°/25°/30°
Voltage
AC 220-240V



602 336
LED
OSRAM 3030
Power
36W
Beam angle
15°/25°/30°
Voltage
AC 220-240V



LIGHT SOURCE: **PHILIPS** **LUMINUS**
DRIVER: **PHILIPS** **SEITY**



专利结构, 仿冒必究
Patented Product, Counterfeiting Not Allowed

OFFICE PANEL SERIES


西铁照明办公照明系列灯具，灯体材料采用航空铝材6063-T5、底板采用硬质优质A3板材、透光板采用PMMA浇筑板材。外壳颜色可根据天花板颜色定制。根据场景和照明需求选择合适的规格。光源采用SMD-2835贴片光源，光线柔和，光斑均匀。安装方式多样化，可选择吊线安装和吸顶安装两种方式。

SEITY high-quality materials for Office Panel Series, aviation aluminum for lamp body, hard A3 plate for baseboard and pouring PMMA for diffuser. The colors of fixture are customized according to the ceiling. Different dimensions are for option according the requirements of lighting applications, as well as the installing ways of surface mount and suspension. The light source is SMD-2835 of which the light is even and soft.



Model	Input Voltage	CCT	Finishing color	Installation	Dimension	Power	QTY/CTN
611 303R	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø350*70MM	16.8W	1
611 103R	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø350*70MM	16.8W	1
611 304R	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø450*70MM	25W	1
611 104R	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø450*70MM	25W	1
611 306R	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø600*70MM	45W	1
611 106R	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø600*70MM	45W	1
611 309R	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø950*70MM	110W	1
611 109R	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø950*70MM	110W	1
611 312R	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø1200*70MM	215W	1
611 112R	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø1200*70MM	215W	1

Black ● white ○ Silver ●

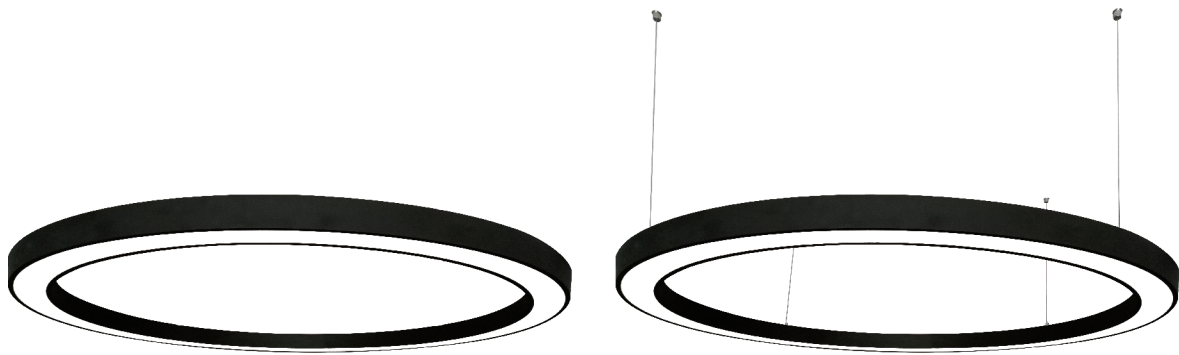

Model	Input Voltage	CCT	Finishing color	Installation	Dimension	Power	QTY/CTN
614 306	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø600*70MM	45W	1
614 106	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø600*70MM	45W	1
614 308	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø800*70MM	60W	1
614 108	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø800*70MM	60W	1
614 310	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø1000*70MM	80W	1
614 110	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø1000*70MM	80W	1
614 312	AC 220-240V	3000K/4000K	White/Black	吊装/Suspension	ø1200*70MM	95W	1
614 112	AC 220-240V	3000K/4000K	White/Black	吸顶/Surface mounted	ø1200*70MM	95W	1



LIGHT SOURCE: PHILIPS LUMINUS
DRIVER: PHILIPS seity

专利结构, 仿冒必究
Patented Product, Counterfeiting Not Allowed

LED STRIP LIGHT



Model	Input Voltage	LED QTY	CCT	Specifications	Protection grade	PCB(mm)	Power	QTY/CTN
CG2835-60D-LB	DC 24V	60	2700K/3000K/4000K	普通款/NomaI	IP20	8	4.8W	5m/Ro11
CG2835-120D-LB	DC 24V	120	2700K/3000K/4000K	普通款/NomaI	IP20	8	9.6W	5m/Ro11
WYJ2835-120D-LB	DC 24V	120	2700K/3000K/4000K	10米无压降 /10m Low voltage drop	IP20	8	9.6W	10m/Ro11
WYJ2835-60D-LB	DC 24V	60	2700K/3000K/4000K	20米无压降 /20m Low voltage drop	IP20	10	4.8W	20m/Ro11
CG2835-60D-TG	DC 24V	60	2700K/3000K/4000K	普通款/NomaI	IP44	8	4.8W	5m/Ro11
CG2835-120D-TG	DC 24V	120	2700K/3000K/4000K	普通款/NomaI	IP44	8	9.6W	5m/Ro11
WYJ2835-120D-TG	DC 24V	120	2700K/3000K/4000K	10米无压降 /10m Low voltage drop	IP44	8	9.6W	10m/Ro11
WYJ2835-60D-TG	DC 24V	60	2700K/3000K/4000K	20米无压降 /20m Low voltage drop	IP44	10	4.8W	10m/Ro11

备注：60珠建议最大做10W以内，120珠建议最大做15W以内
Note: 1Meter Strip light with 60 pcs LED do max 10W. 1Meter Strip light with 120 pcs LED do max 15W.

TRACK

Black ● white ○ Silver ●




Track type

Track type	Connection	size
2 line	"I"-connection	1m 1.5m 2m
	"L"-connection	
	"T"-connection	
	"X"-connection	
3 line	"I"-connection	1m 1.5m 2m
	"L"-connection	
	"T"-connection	
	"X"-connection	
4 line	"I"-connection	1m 1.5m 2m
	"L"-connection	
	"T"-connection	
	"X"-connection	


2 WIRE TRACK



2 wires track

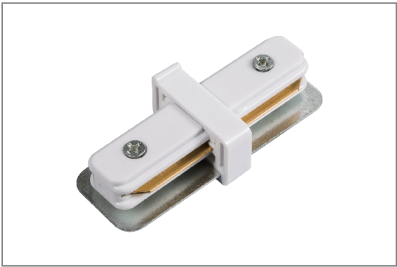


2 wires I shape joining

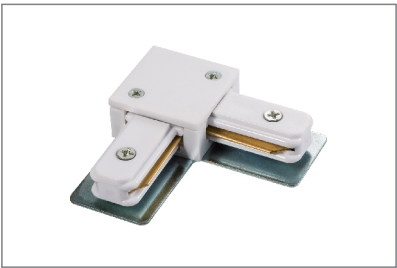

2 wires L shape joining



2 wires T shape joining

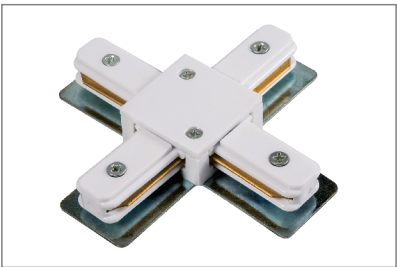

2 wires X shape joining



2 wires soft joining



2 wires end-feed




2 wires end cap




2 wires suspension kits

3 WIRE TRACK


Black ● white ○ Silver ●

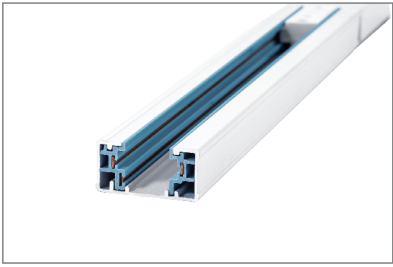

3 wires track

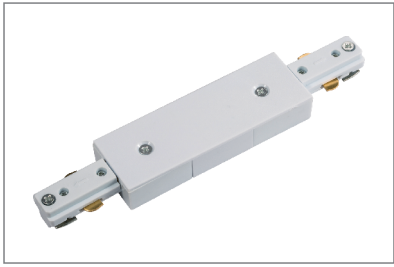


3 wires I shape joining

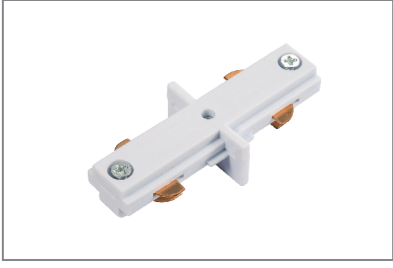

3 wires I inner joining




3 wires T shape joining

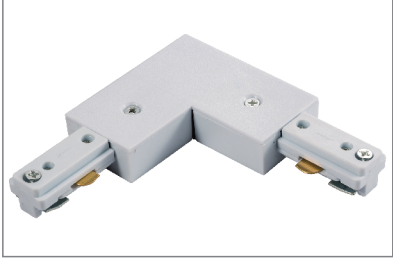

3 wires L shape joining




3 wires soft joining

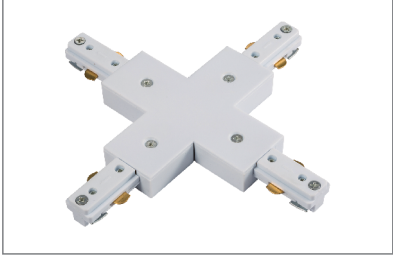

3 wires X shape joining



3 wires end cap

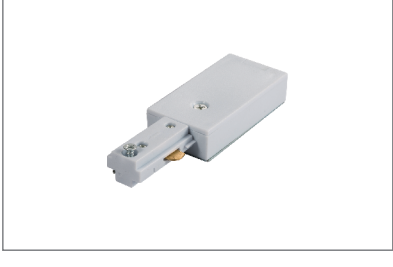


3 wires end-feed




3 wires suspension kits

4 WIRES TRACK (SQUARE)

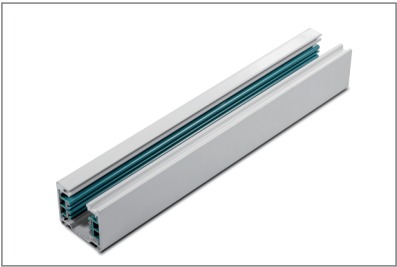

4 wires track

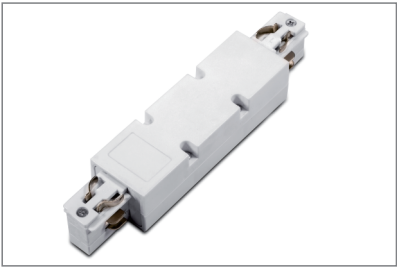

4 wires I shape joining




4 wires I inner joining



4 wires T shape joining



4 wires L shape joining

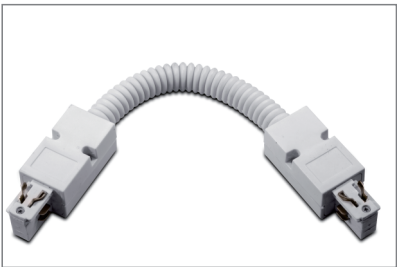

4 wires soft joining



4 wires X shape joining



4 wires end cap




4 wires end-feed



4 wires suspension kits

4 WIRES TRACK (ROUND)

Black ● white ○ Silver ●

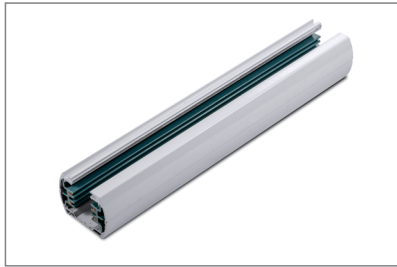

4 wires track



4 wires I shape joining



4 wires I inner joining



4 wires T shape joining



4 wires L shape joining



4 wires soft joining



4 wires X shape joining



4 wires end cap



4 wires end-feed



4 wires suspension kits

设计因光更美丽

PRETTY LIGHT PRETTIER DESIGN

