



FURNITURE



POWER R

FINISHING

---.14

---.18

CROMALINE




CODE COMPOSITION: type + optic + finishing + color (+ more features)

POWER R1 | 4,2 W | 6 LED | 24 V | 510 Lm | CRI > 90

IP40



TYPE
144



Optic
16° 01
25° 02
40° 03

Finishing
Anod. Alum. .14
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Driver remoto
Remote Driver




Pag. 454

More features

CROMALINE

Pag. 014




POWER R3 | 16,8 W | 24 LED | 24 V | 2040 Lm | CRI > 90

IP40



TYPE
144



Optic
16° 07
25° 08
40° 09

Finishing
Anod. Alum. .14
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Driver remoto
Remote Driver




Pag. 454

More features

CROMALINE

Pag. 014




POWER R5 | 33,6 W | 48 LED | 24 V | 4080 Lm | CRI > 90

IP40



TYPE
144



Optic
16° 13
25° 14
40° 15

Finishing
Anod. Alum. .14
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Driver remoto
Remote Driver




Pag. 454

More features

CROMALINE

Pag. 014



CODE COMPOSITION: type + optic + finishing + color (+ more features)

POWER Q1 | 4,2 W | 6 LED | 24 V | 510 Lm | CRI > 90

IP40



TYPE
145
16 14,5
16 270

Optic
16° 01
25° 02
40° 03

Finishing
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Kit fissaggio incluso
Fixing kit included



Driver remoto
Remote Driver
Pag. 454



More features



Pag. 014

POWER Q3 | 16,8 W | 24 LED | 24 V | 2040 Lm | CRI > 90

IP40



TYPE
145
16 14,5
16 1020

Optic
16° 07
25° 08
40° 09

Finishing
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Kit fissaggio incluso
Fixing kit included



Driver remoto
Remote Driver
Pag. 454



More features



Pag. 014

POWER Q5 | 33,6 W | 48 LED | 24 V | 4080 Lm | CRI > 90

IP40



TYPE
145
16 14,5
16 2020

Optic
16° 13
25° 14
40° 15

Finishing
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Kit fissaggio incluso
Fixing kit included



Driver remoto
Remote Driver
Pag. 454



More features



Pag. 014

POWER Q

FINISHING

---.18

CROMALINE



CODE COMPOSITION: type + optic + finishing + color (+ more features)




POWER S1 | 3 W | 3 LED | 350 mA | 650 Lm | CRI > 90

IP40



TYPE

146



Optic

16°

01

25°

02

40°

03

Finishing

Anod. Black

.18

Color

2700 K

.EW

3000 K

.WW

3500 K

.LW

4000 K

.NW

5000 K

.CW

Accessories

Kit fissaggio incluso
Fixing kit included



Driver remoto
Remote Driver



Pag. 454

More features

CROMALINE

Pag. 014




POWER S3 | 12 W | 12 LED | 350 mA | 2600 Lm | CRI > 90

IP40



TYPE

146



Optic

16°

07

25°

08

40°

09

Finishing

Anod. Black

.18

Color

2700 K

.EW

3000 K

.WW

3500 K

.LW

4000 K

.NW

5000 K

.CW

Accessories

Kit fissaggio incluso
Fixing kit included



Driver remoto
Remote Driver



Pag. 454

More features

CROMALINE

Pag. 014




POWER S5 | 24 W | 24 LED | 350 mA | 5200 Lm | CRI > 90

IP40



TYPE

146



Optic

16°

13

25°

14

40°

15

Finishing

Anod. Black

.18

Color

2700 K

.EW

3000 K

.WW

3500 K

.LW

4000 K

.NW

5000 K

.CW

Accessories

Kit fissaggio incluso
Fixing kit included



Driver remoto
Remote Driver



Pag. 454

More features

CROMALINE

Pag. 014

POWER S

FINISHING

---.18

CROMALINE





GAZE S

GAZE M

GAZE L

FINISHING

---.11

---.13

---.19



CROMALINE



CODE COMPOSITION: type + optic + finishing + color (+ more features)

GAZE S | 1 W | 24 V | 120 Lm | CRI > 90

IP20    



TYPE
16001

Optic

16° .01
24° .02
40° .03

Finishing

White .11
Black .13
Brush alum .19

Color

2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

BIN-X


Binario magnetico
Magnetic track

Pag. 357

More features

CROMALINE

Pag. 014



GAZE M | 2 W | 24 V | 240 Lm | CRI > 90

IP20    



TYPE
16002

Optic

16° .01
24° .02
40° .03

Finishing

White .11
Black .13
Brush alum .19

Color

2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

BIN-X


Binario magnetico
Magnetic track

Pag. 357

More features

CROMALINE

Pag. 014



GAZE L | 3 W | 24 V | 360 Lm | CRI > 90

IP20    



TYPE
16003

Optic

16° .01
24° .02
40° .03

Finishing

White .11
Black .13
Brush alum .19

Color

2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

BIN-X


Binario magnetico
Magnetic track

Pag. 357


More features

CROMALINE

Pag. 014



CODE COMPOSITION: type + lenght + finishing (+ more features)

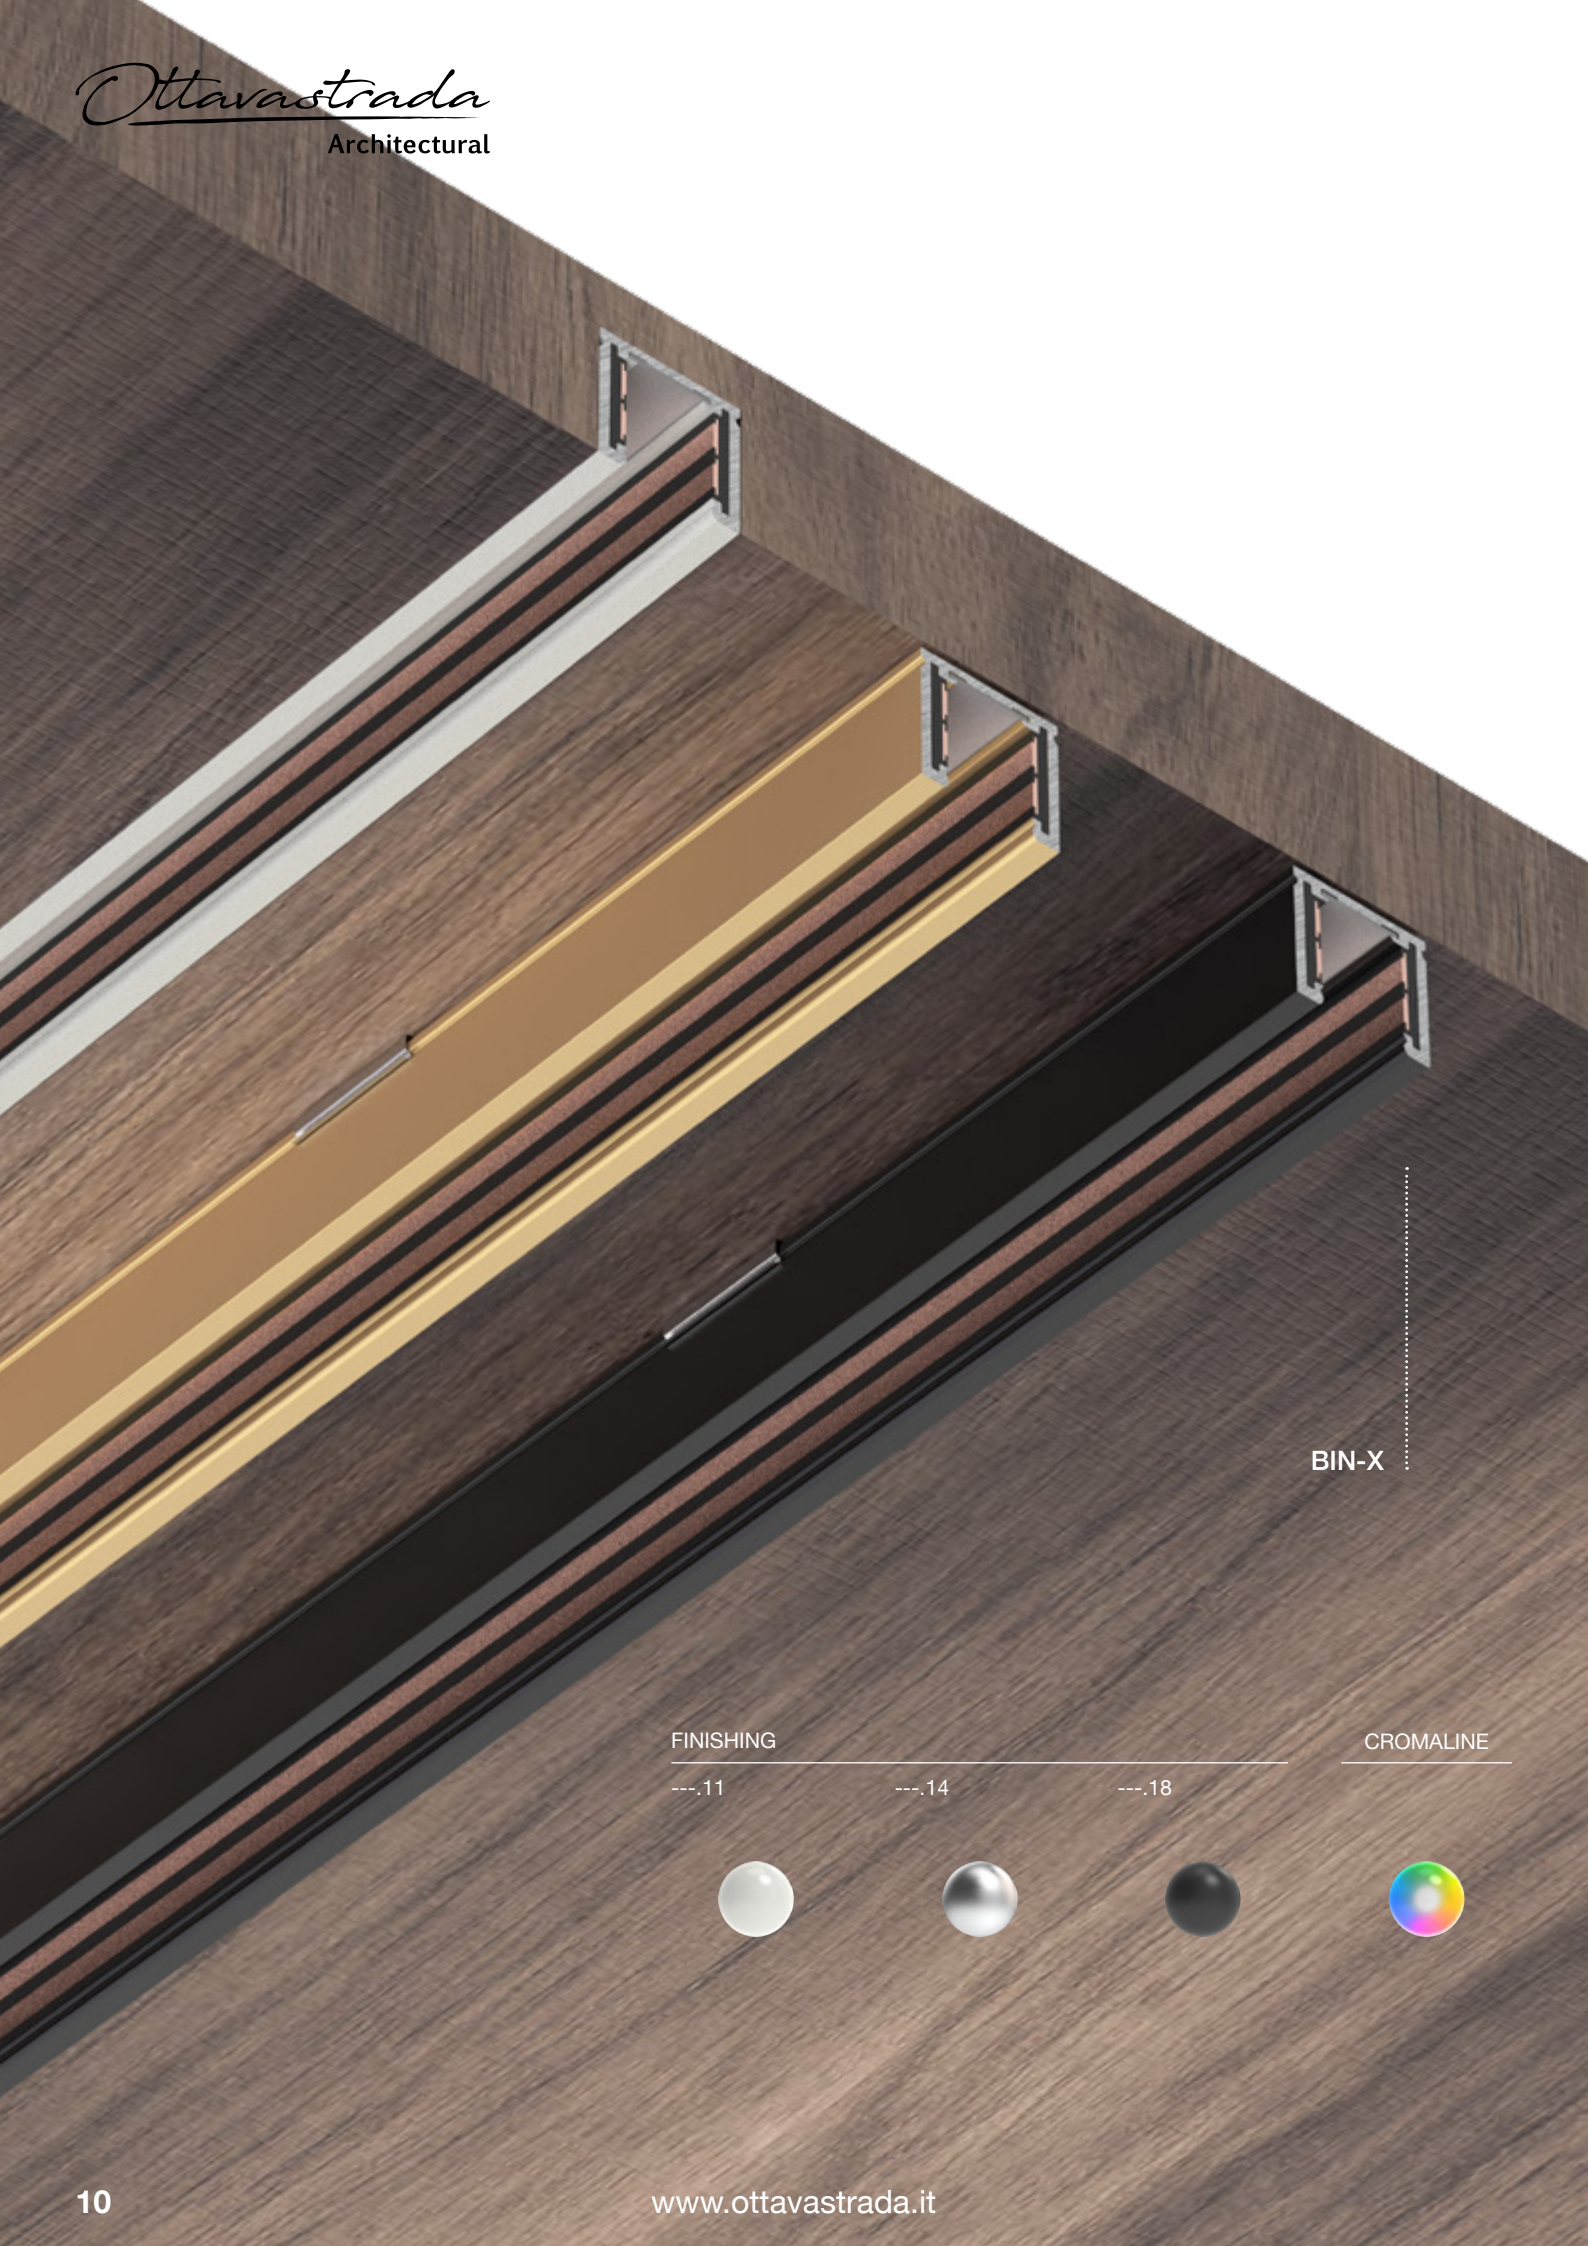

BIN-X

FINISHING

.11


.14

.18

CROMALINE


BIN-X

IP20    



TYPE

1497



Lenght

1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4

Finishing

White	.11
Black	.13
All. Anod	.14

Driver remoto
Remote Driver
Pag. 454



Accessories

ALI-X

Testata di
alimentazione
Power connector



END-X

Terminale di
chiusura
End cap



ANG-X


Giunto angolare
Angular joint



More features

CROMALINE

Pag. 014

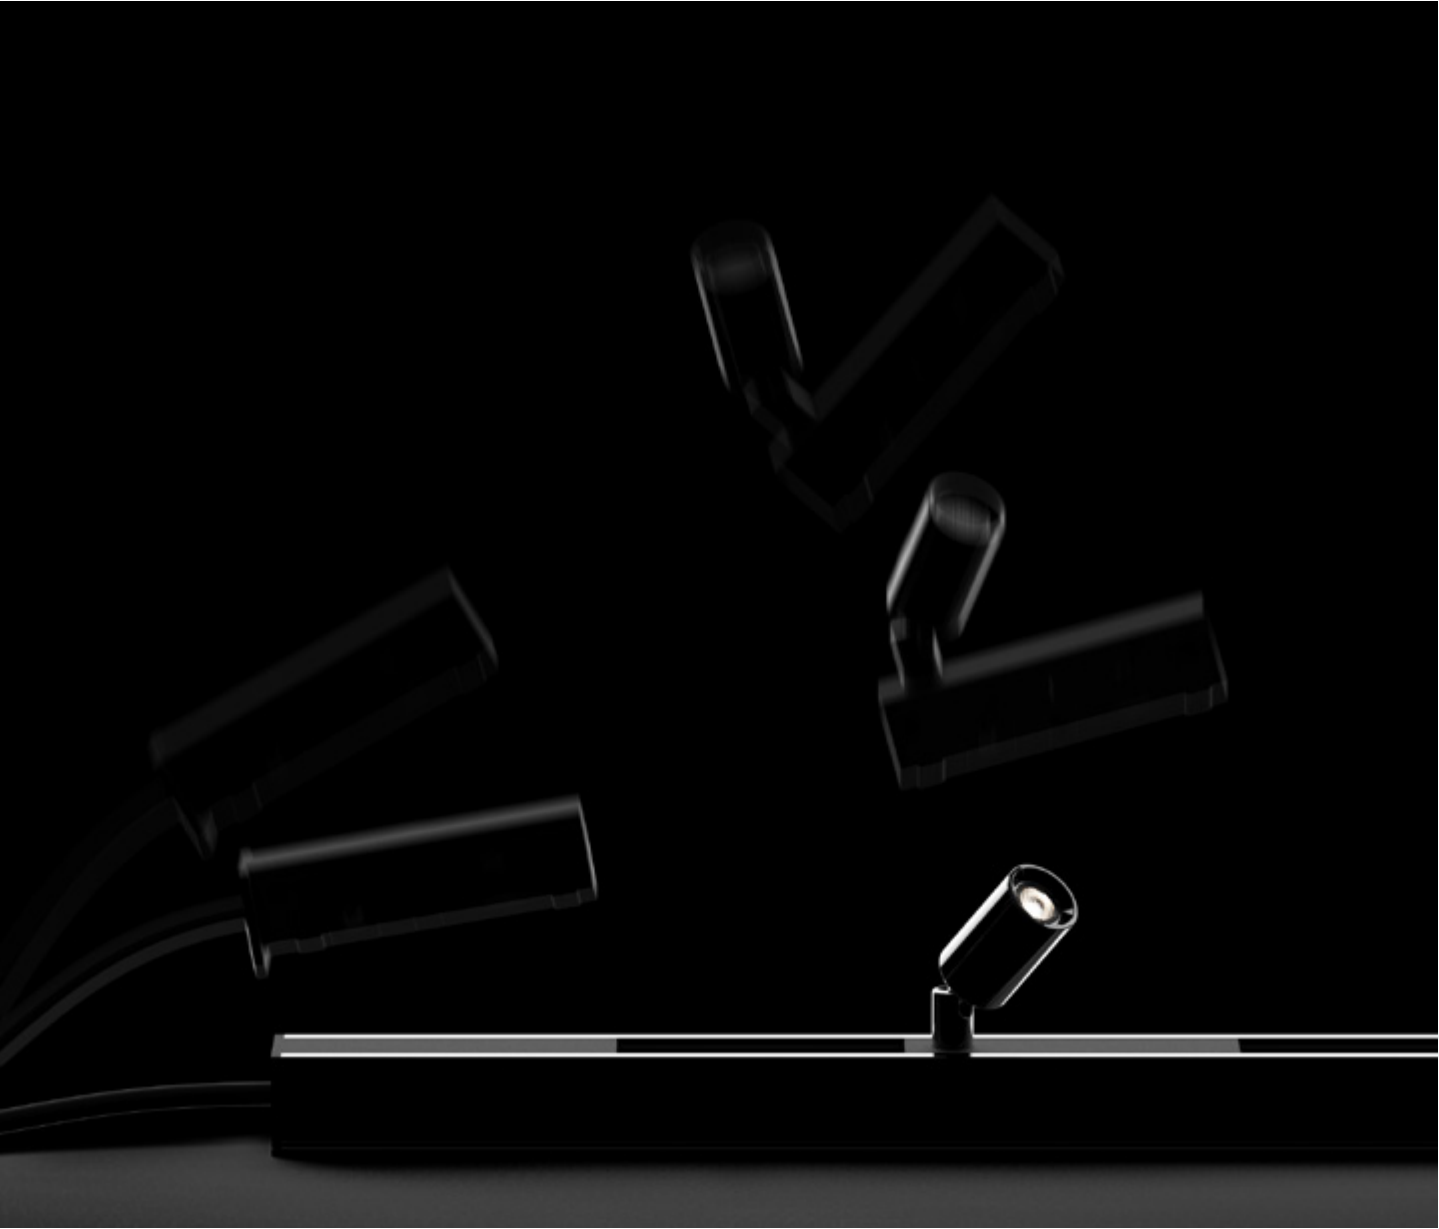

Ottavastrada
Architectural

Via Lavoratori Autobianchi, Strada numero 8, 22/N
c/o Polo Tecnologico Brianza
20832 DESIO (MB) ITALY
TEL : +39 0362 621115
MAIL : info@ottavastrada.it
WWW.OTTAVASTRADA.IT

Stealth Light s.r.l. si riserva di apportare ai propri prodotti qualsiasi modifica utile al miglioramento degli stessi. Foto, disegni, testi non hanno carattere contrattuale. Tutte le dimensioni, pesi, caratteristiche e colori dei prodotti di questo catalogo sono indicative e possono variare senza preavviso.
I valori del flusso luminoso sono forniti riferendosi a LED solo a $T_c=25^{\circ}\text{C}$.
Sono vietate riproduzioni sia parziali che totali senza autorizzazione scritta di Stealth Light S.r.l

Stealth Light s.r.l. reserves the right to make any changes to its products useful to the improvement. Photos, drawings, texts do not have a contractual nature. All dimensions, weights, features and colors of the products in this catalog are approximate and may change without notice.
Values of Luminous flux are provided talking about the LED only at $T_c=25^{\circ}\text{C}$.
Both partial and total reproductions are forbidden without the written authorization of Stealth Light S.r.l