




OUTDOOR LINEAR

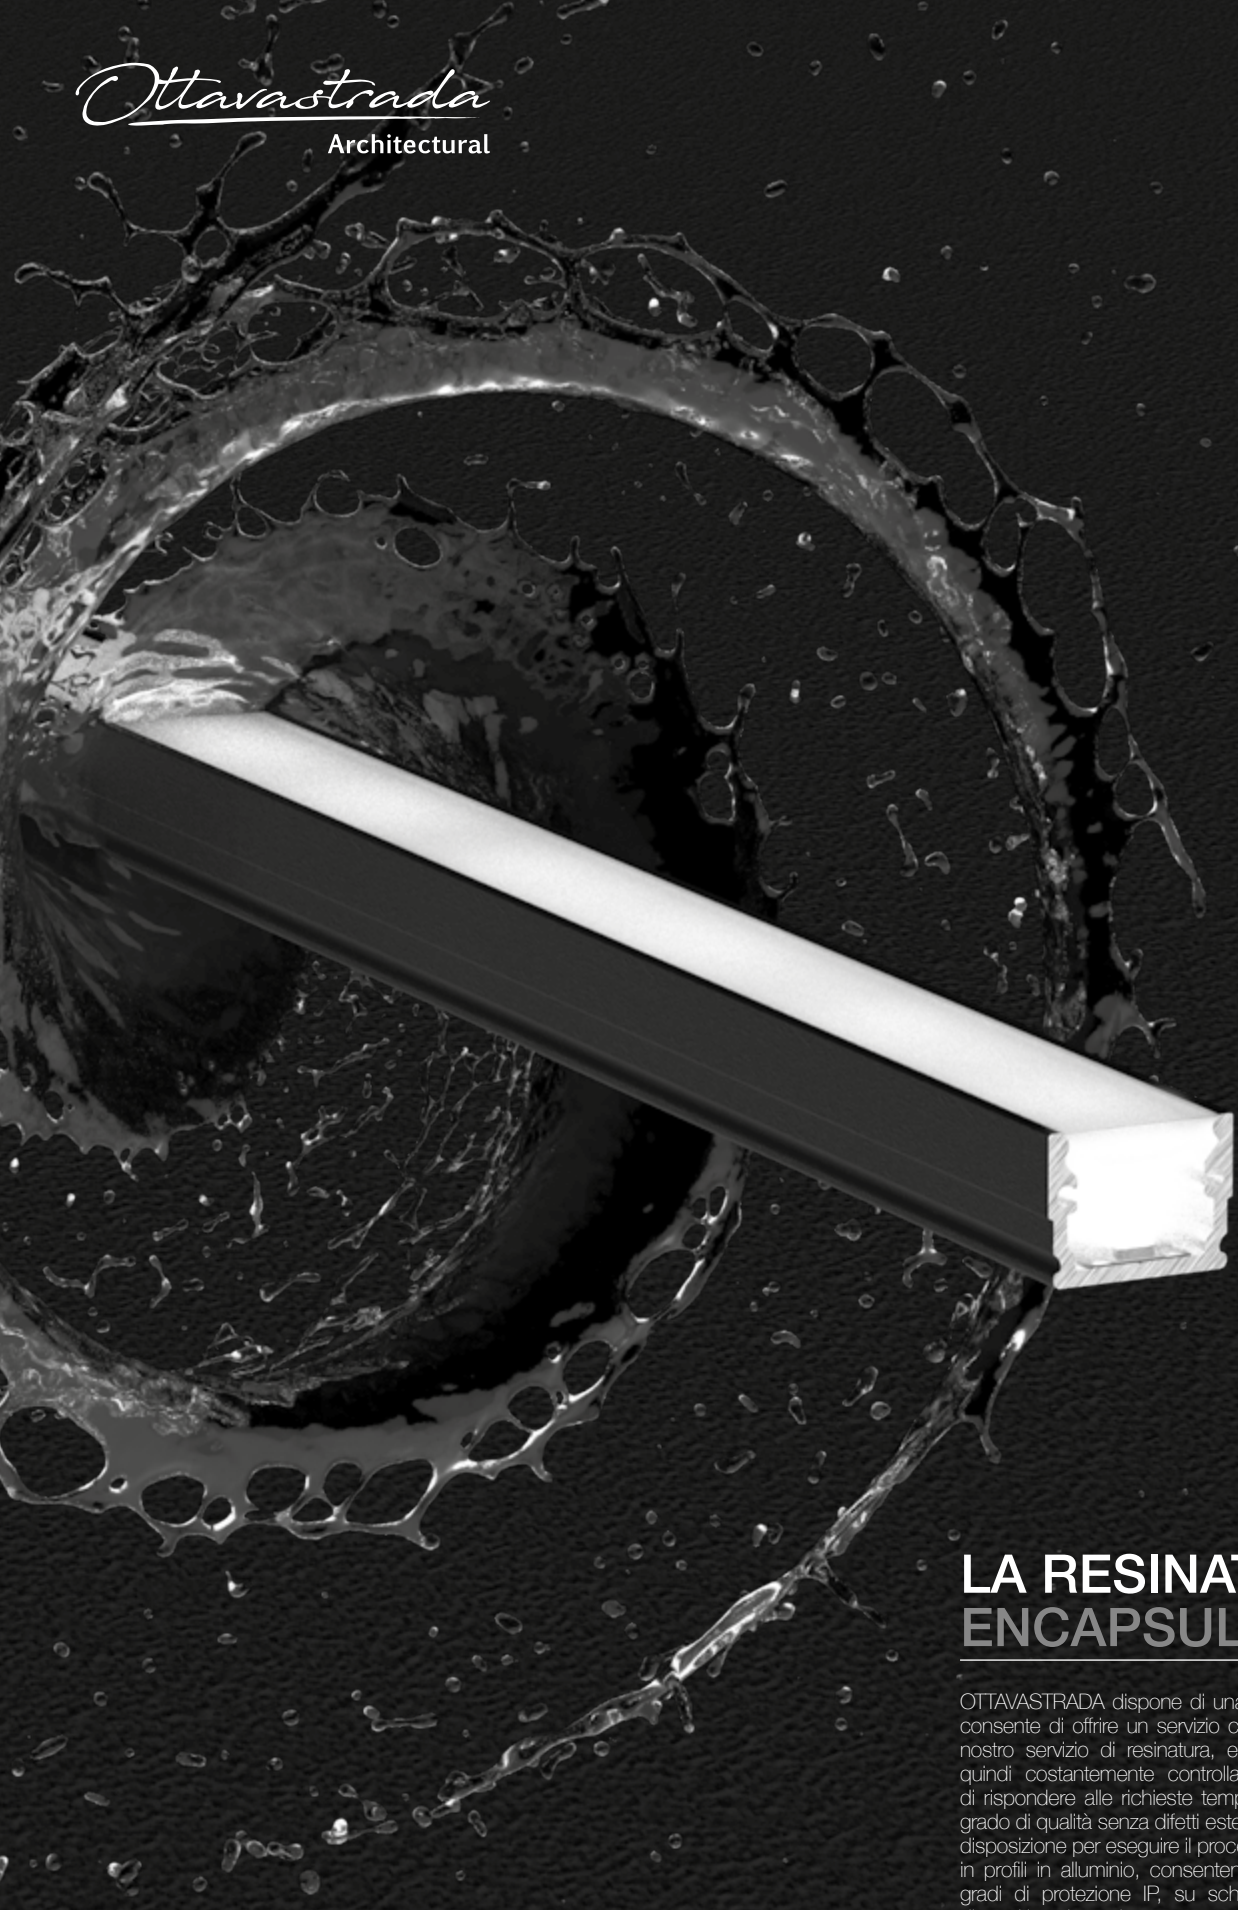

LA RESINATURA ENCAPSULATION

OTTAVASTRADA dispone di una linea di resinatura interna che consente di offrire un servizio conto terzi in tempi brevissimi. Il nostro servizio di resinatura, essendo sempre in funzione e quindi costantemente controllato e ottimizzato, ci consente di rispondere alle richieste tempestivamente e con un elevato grado di qualità senza difetti estetici. OTTAVASTRADA è a vostra disposizione per eseguire il processo di resinatura di barre a Led in profili in alluminio, consentendo il raggiungimento di diversi gradi di protezione IP, su schede elettroniche o qualunque dispositivo elettronico.

OTTAVASTRADA has an internal resin line that allows you to offer a third party service in a very short time. Our encapsulation service, being always in operation and therefore constantly controlled and optimized, allows us to respond to requests promptly and with a high degree of quality without aesthetic defects. OTTAVASTRADA is at your disposal to carry out the encapsulation treatment process of LED bars in aluminum profiles, allowing the achievement of different degrees of IP protection, on electronic boards or any electronic device.



Conformità agli standard International Protection (es. IP65-68).
Compliance with International Protection standards (eg IP65-68).

Filtro anti UV, anti ingiallimento.
Anti-UV, anti-yellowing filter.



Abbinabile ad additivi colorati o opalini
(per aumentare l'effetto scattering).
Combinable with colored or opal additives
(to increase the scattering effect).

Resistenza termica.
Heat resistance.





Eccellente trasparenza.
Excellent transparency.


Funzionalità inalterata nel tempo.
Functionality unchanged over time.



Facilità di pulizia.
Easy to clean.

Calpestabilità.
Walkable.

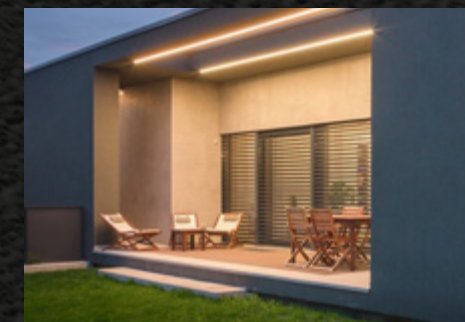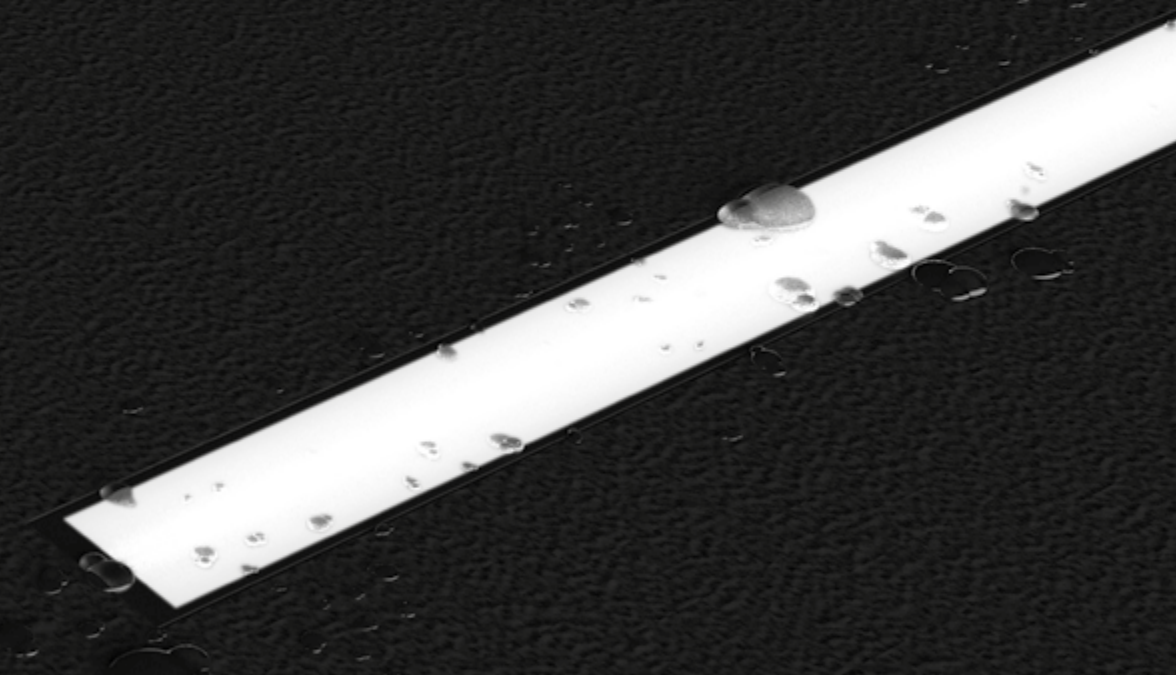

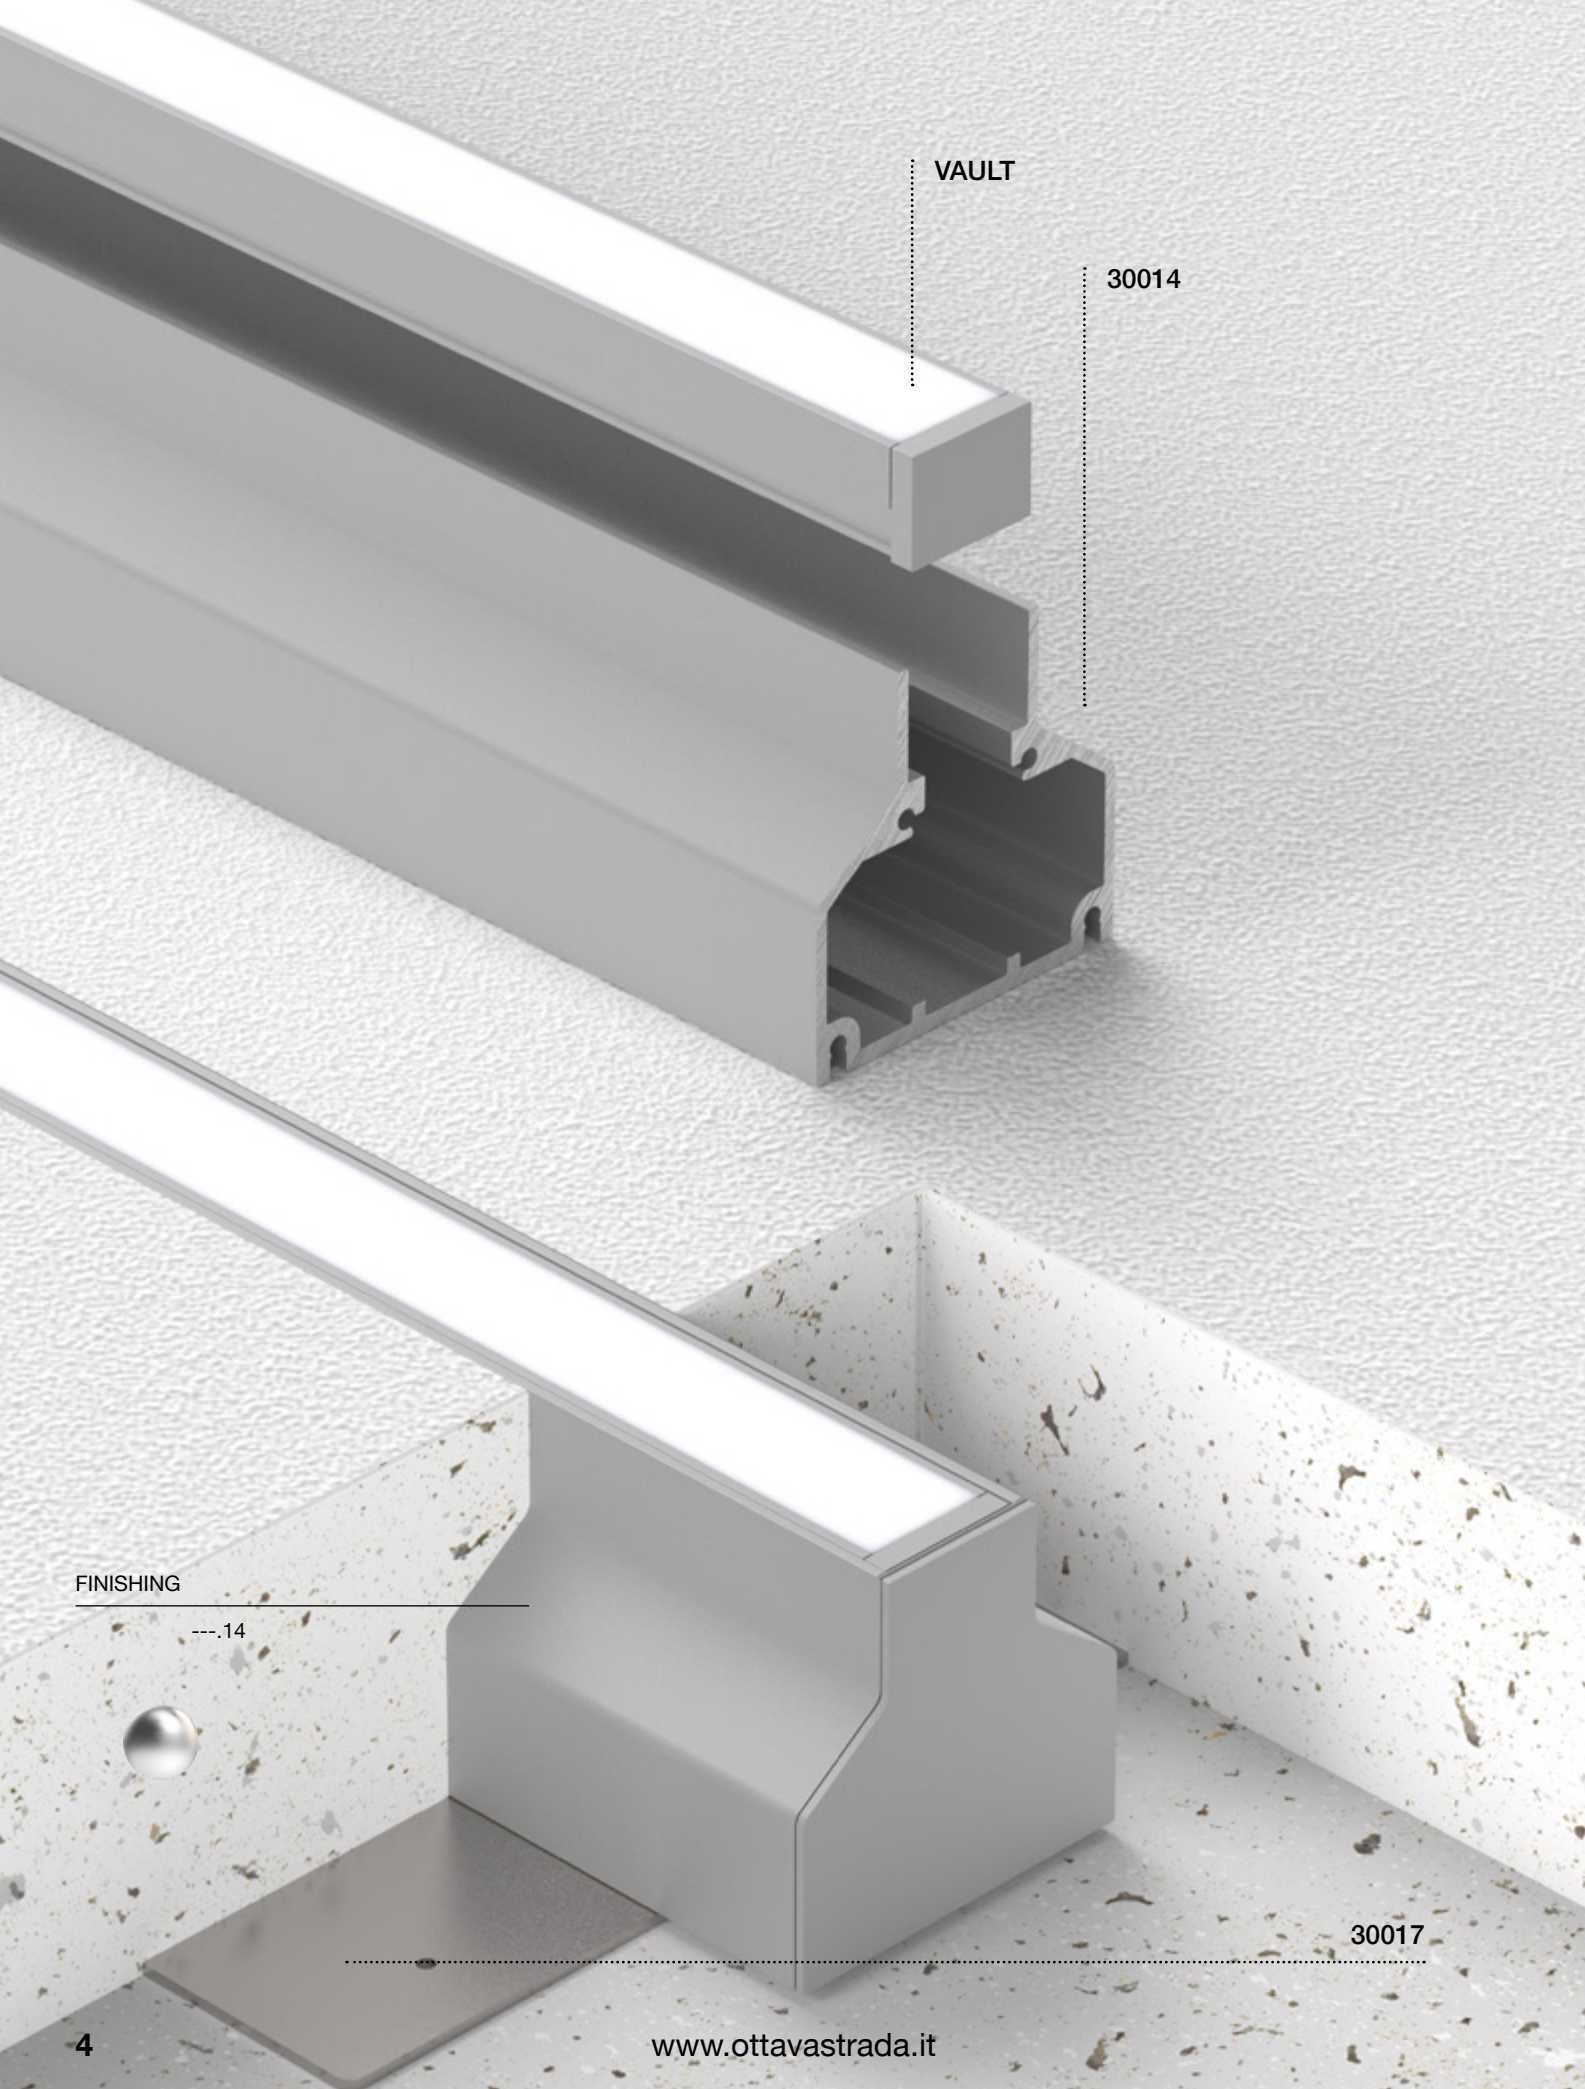

FINISHING

---.14

30017

CODE COMPOSITION: type + cover + finishing + color


VAULT1 | 15 W | 24 V | 1650 Lm | CRI > 90

IP67



TYPE

50401



1020

Cover

Transp .1
Opal .2

Finishing

Anod. Alum .14
Anod. Black .18

Color

2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Driver remoto
Remote Driver

Pag. 454



30014

Cassaforma
Formwork

45 x 45 x 1022 mm



30017

Staffa di fissaggio
Mounting bracket

130 mm x 60 mm




VAULT2 | 22,5 W | 24 V | 2500 Lm | CRI > 90

IP67



TYPE

50402



1520

Cover

Transp .1
Opal .2

Finishing

Anod. Alum .14
Anod. Black .18

Color

2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Driver remoto
Remote Driver

Pag. 454



30015

Cassaforma
Formwork

45 x 45 x 1522 mm



30017

Staffa di fissaggio
Mounting bracket

130 mm x 60 mm




VAULT3 | 30 W | 24 V | 3300 Lm | CRI > 90

IP67



TYPE

50403



2020

Cover

Transp .1
Opal .2

Finishing

Anod. Alum .14
Anod. Black .18

Color

2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW

Accessories

Driver remoto
Remote Driver

Pag. 454



30016

Cassaforma
Formwork

45 x 45 x 2022 mm



30017

Staffa di fissaggio
Mounting bracket

130 mm x 60 mm



BERGAMO

FINISHING


---.14



CODE COMPOSITION: type + cover + finishing + color

BERGAMO 1 | 7,5 W | 24 V | 825 Lm | CRI > 90

IP68 A++



Cover	Finishing	Color
Opal	Anod. Alum	2700 K .EW
		3000 K .WW
		3500 K .LW
		4000 K .NW
		5000 K .CW

Accessories




Driver remoto
Remote Driver
Pag. 454



BERGAMO 2 | 15 W | 24 V | 1650 Lm | CRI > 90

IP68 A++



Cover	Finishing	Color
Opal	Anod. Alum	2700 K .EW
		3000 K .WW
		3500 K .LW
		4000 K .NW
		5000 K .CW

Accessories



Driver remoto
Remote Driver
Pag. 454




Cassaforma Formwork

30020



Cassaforma L. 500 mm
Formwork L. 500 mm



30021




Cassaforma L. 1000 mm
Formwork L. 1000 mm



30022




Cassaforma L. 1500 mm
Formwork L. 1500 mm




30023



Cassaforma L. 2000 mm
Formwork L. 2000 mm




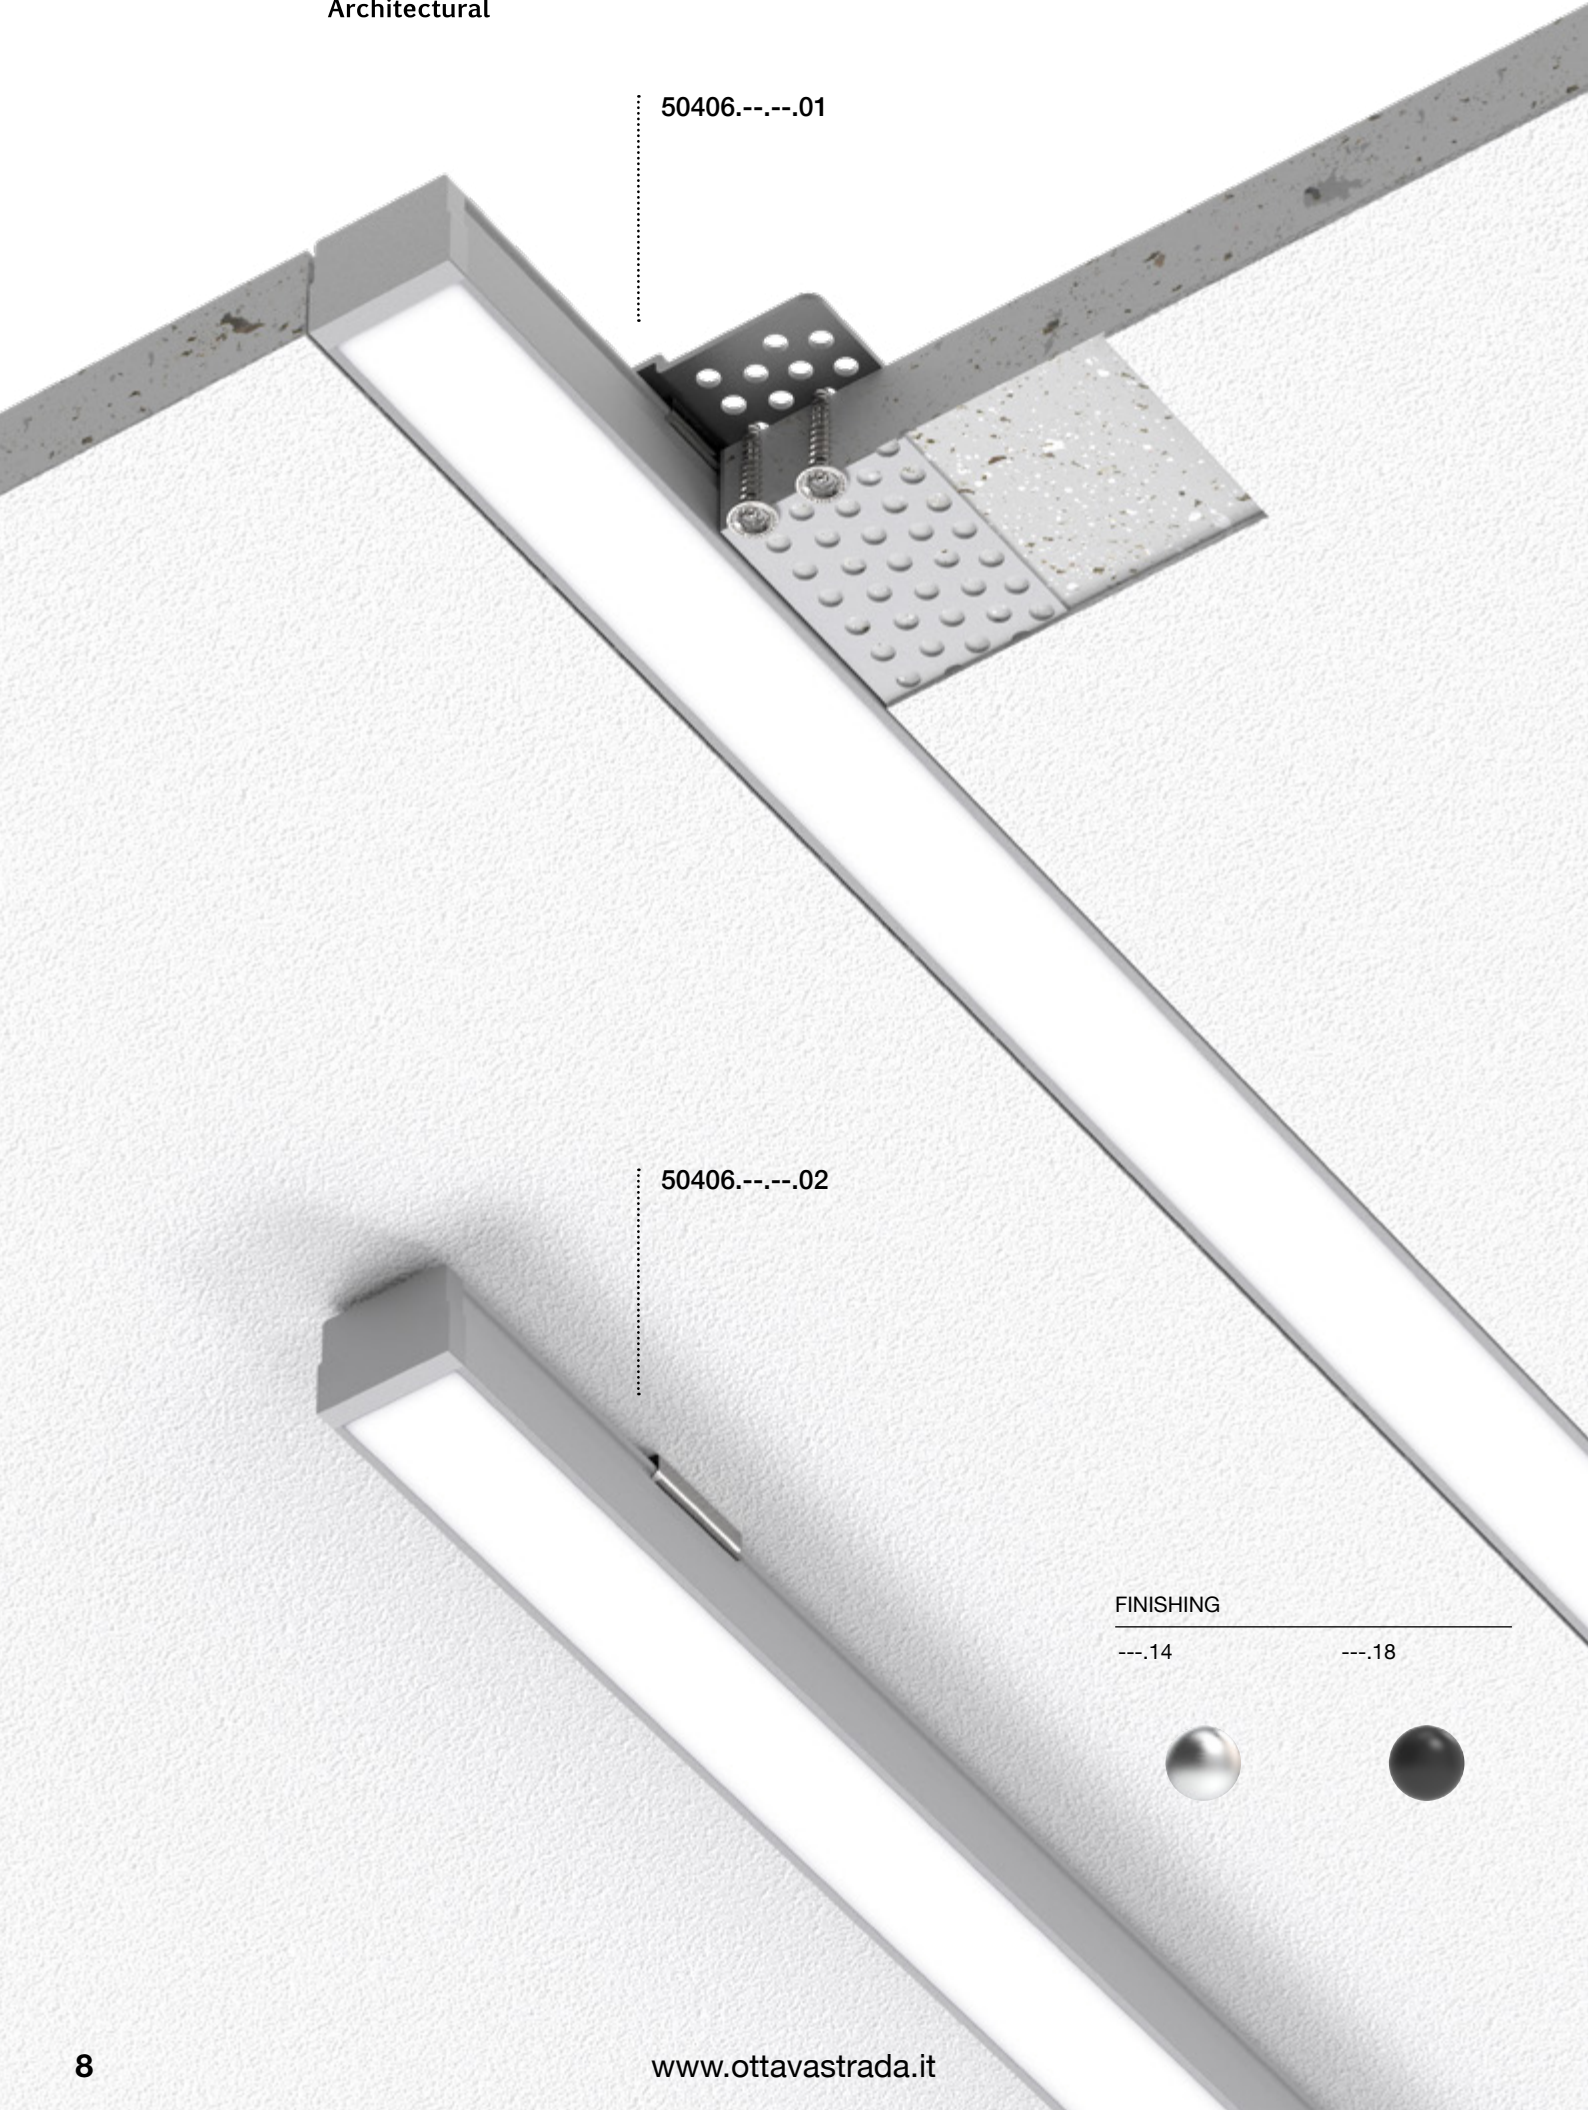

50406.--.--.01

50406.--.--.02

FINISHING
---.14 ---.18



CODE COMPOSITION: type + cover + finishing + color (+ more features) + xxxx mm
Tutti i parametri tecnici si riferiscono alla lampada nella sua lunghezza massima
All technical features refer to the lighting fixture in its maximum length

ROD 1 | 19,2 W | 24 V | 2900 Lm | CRI > 90

IP65 A++



TYPE
50404
 14 18
each lenght from 200 mm to 1000 mm

Cover	Finishing	Application	Color
Transp .1	Anod. Alum .14	Recessed .1	2700 K .EW
Opal .2	Anod. Black .18	Ceiling .2	3000 K .WW
			3500 K .LW
			4000 K .NW

Accessories



Kit fissaggio incluso
Fixing kit included

Driver remoto
Remote Driver
Pag. 454



ROD 2 | 28,8 W | 24 V | 4350 Lm | CRI > 90

IP65 A++



TYPE
50405
 14 18
each lenght from 1001 mm to 1500 mm

Cover	Finishing	Application	Color
Transp .1	Anod. Alum .14	Recessed .1	2700 K .EW
Opal .2	Anod. Black .18	Ceiling .2	3000 K .WW
			3500 K .LW
			4000 K .NW

Accessories



Kit fissaggio incluso
Fixing kit included

Driver remoto
Remote Driver
Pag. 454



ROD 3 | 38,4 W | 24 V | 5800 Lm | CRI > 90

IP65 A++



TYPE
50406
 14 18
each lenght from 1501 mm to 2000 mm

Cover	Finishing	Application	Color
Transp .1	Anod. Alum .14	Recessed .1	2700 K .EW
Opal .2	Anod. Black .18	Ceiling .2	3000 K .WW
			3500 K .LW
			4000 K .NW


Accessories



Kit fissaggio incluso
Fixing kit included

Driver remoto
Remote Driver
Pag. 454



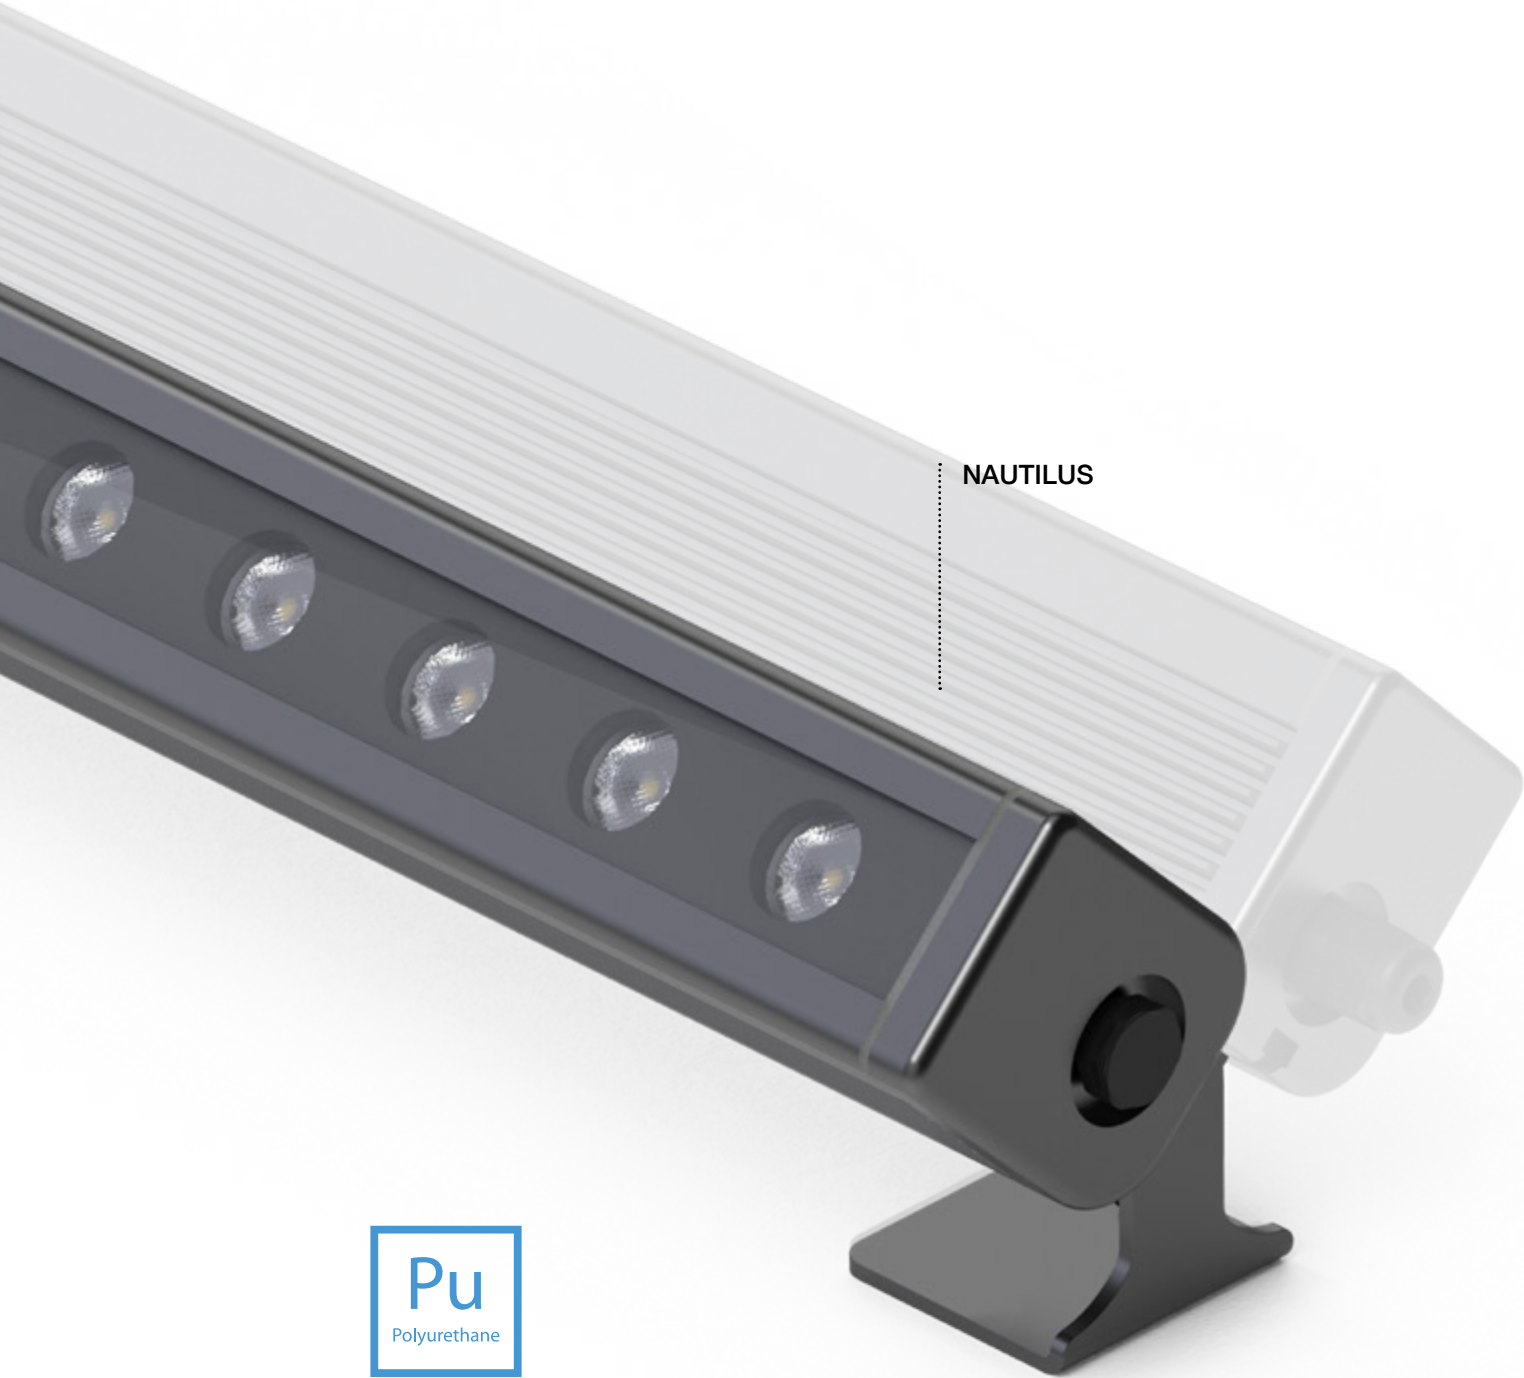

NAUTILUS

Pu
Polyurethane

FINISHING

---.14

---.15


CROMALINE

NAUTILUS 1 | 14 W | 230 V | 7 LED | 1540 Lm | CRI > 90

IP65



TYPE
Passo Step 40 mm 5051
50
65
110
260



Optic
10° 1
25° 2
40° 3
Ellittico Elliptic 4

Finishing
Anod. Alum. .14
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW
RGB Step 35 mm .RGB
RGBW Step 35 mm .RGBW

Driver integrato
Integrated driver

More features

CROMALINE

Pag. 014


Lunghezza personalizzata
Custom length

NAUTILUS 2 | 28 W | 230 V | 14 LED | 3080 Lm | CRI > 90

IP65



TYPE
Passo Step 40 mm 5052
50
65
110
520



Optic
10° 1
25° 2
40° 3
Ellittico Elliptic 4

Finishing
Anod. Alum. .14
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW
RGB Step 35 mm .RGB
RGBW Step 35 mm .RGBW

Driver integrato
Integrated driver

More features

CROMALINE

Pag. 014


Lunghezza personalizzata
Custom length

NAUTILUS 3 | 56 W | 230 V | 28 LED | 6160 Lm | CRI > 90

IP65



TYPE
Passo Step 40 mm 5053
50
65
110
1020



Optic
10° 1
25° 2
40° 3
Ellittico Elliptic 4

Finishing
Anod. Alum. .14
Anod. Black .18

Color
2700 K .EW
3000 K .WW
3500 K .LW
4000 K .NW
5000 K .CW
RGB Step 35 mm .RGB
RGBW Step 35 mm .RGBW

Driver integrato
Integrated driver

More features

CROMALINE

Pag. 014

Lunghezza personalizzata
Custom length

CODE COMPOSITION: type + optic + finishing + color



LOUD RE

FINISHING

---.18

CROMALINE

LOUD RE1 | 6 W | 3 LED | 24 V | 900 Lm | CRI > 90

IP67      A++



TYPE

D1.147

40

79

79

165

Optic

10°

01

25°

02

40°

03

Ellittico Elliptic

04

Finishing

Anod. Black

.18

2700 K

.EW

3000 K

.WW

3500 K

.LW

4000 K

.NW

5000 K

.CW

Accessories

Driver remoto
Remote Driver



Pag. 454

More features

DALI, 1-10 V, switch DIM

.44

CROMALINE

Pag. 014

Lunghezza personalizzata
Custom length

LOUD RE4 | 50 W | 25 LED | 24 V | 7500 Lm | CRI > 90

IP67      A++



TYPE

D4.147

40

79

79

1045

Optic

10°

01

25°

02

40°

03

Ellittico Elliptic

04

Finishing

Anod. Black

.18

2700 K

.EW

3000 K

.WW

3500 K

.LW

4000 K

.NW

5000 K

.CW

Accessories

Driver remoto
Remote Driver



Pag. 454

More features

DALI, 1-10 V, switch DIM

.44

CROMALINE

Pag. 014

Lunghezza personalizzata
Custom length

LOUD RE6 | 100 W | 50 LED | 24 V | 15000 Lm | CRI > 90

IP67      A++



TYPE

D6.147

40

79

79

2045

Optic

10°

01

25°

02

40°

03

Ellittico Elliptic

04

Finishing

Anod. Black

.18

2700 K

.EW

3000 K

.WW

3500 K

.LW

4000 K

.NW

5000 K

.CW

Accessories

Driver remoto
Remote Driver



Pag. 454

More features

DALI, 1-10 V, switch DIM

.44

CROMALINE

Pag. 014

Lunghezza personalizzata
Custom length

Ottavastrada
Architectural

Via Lavoratori Autobianchi, Strada numero 8, 22/N
c/o Polo Tecnologico Brianza
20832 DESIO (MB) ITALY
TEL : +39 0362 621115
MAIL : info@ottavastrada.it
WWW.OTTAVASTRADA.IT

Stealth Light s.r.l. si riserva di apportare ai propri prodotti qualsiasi modifica utile al miglioramento degli stessi. Foto, disegni, testi non hanno carattere contrattuale. Tutte le dimensioni, pesi, caratteristiche e colori dei prodotti di questo catalogo sono indicative e possono variare senza preavviso.
I valori del flusso luminoso sono forniti riferendosi a LED solo a $T_c=25^{\circ}\text{C}$.
Sono vietate riproduzioni sia parziali che totali senza autorizzazione scritta di Stealth Light S.r.l

Stealth Light s.r.l. reserves the right to make any changes to its products useful to the improvement. Photos, drawings, texts do not have a contractual nature. All dimensions, weights, features and colors of the products in this catalog are approximate and may change without notice.
Values of Luminous flux are provided talking about the LED only at $T_c=25^{\circ}\text{C}$.
Both partial and total reproductions are forbidden without the written authorization of Stealth Light S.r.l