

LIGHTING IS ON.

2022

PRODUCT CATALOGUE

宁波石上天际能源有限公司

Ningbo Skyzon Energy Co., Ltd.
Everlite LED Lighting Co., Limited

Add : No.166 Xinghai North Road, Ninghai, Ningbo, China.
Tel : +86 574 8353 0320
Fax : +86 574 8353 0330
E-mail: sales@everlite.cc
Web : www.everlite.cc



宁波石上天际能源有限公司

Ningbo Skyzon Energy Co., Ltd.
Everlite LED Lighting Co., Limited



ABOUT US

Ningbo Skyzon Energy Co., Ltd.



Founded in 2008, owning a subsidiary corporation Everlite LED Lighting Co., Limited(HK) for LED lighting business.



The company located in the Science and Technology Park of Ninghai, Ning-bo City which is honored as "The mold town and die-casting industry base of China"



More than 15 professional engineers in R&D team.
More than 200 employees in company.




Focusing on the industrial design, structural design, optical design, thermal design, mold design of road and street lights, sports /multiple purpose hall and arena lights and solar street lights



10+ cold chamber horizontal die casting machines from 200T to 2000T
20+ large CNC machines
automated electrostatic spraying lines
standard SMD light source patch lines



We specialized in providing one-stop service from product design, mold manufacturing, aluminum die casting parts to semi-finished housing and finished products.

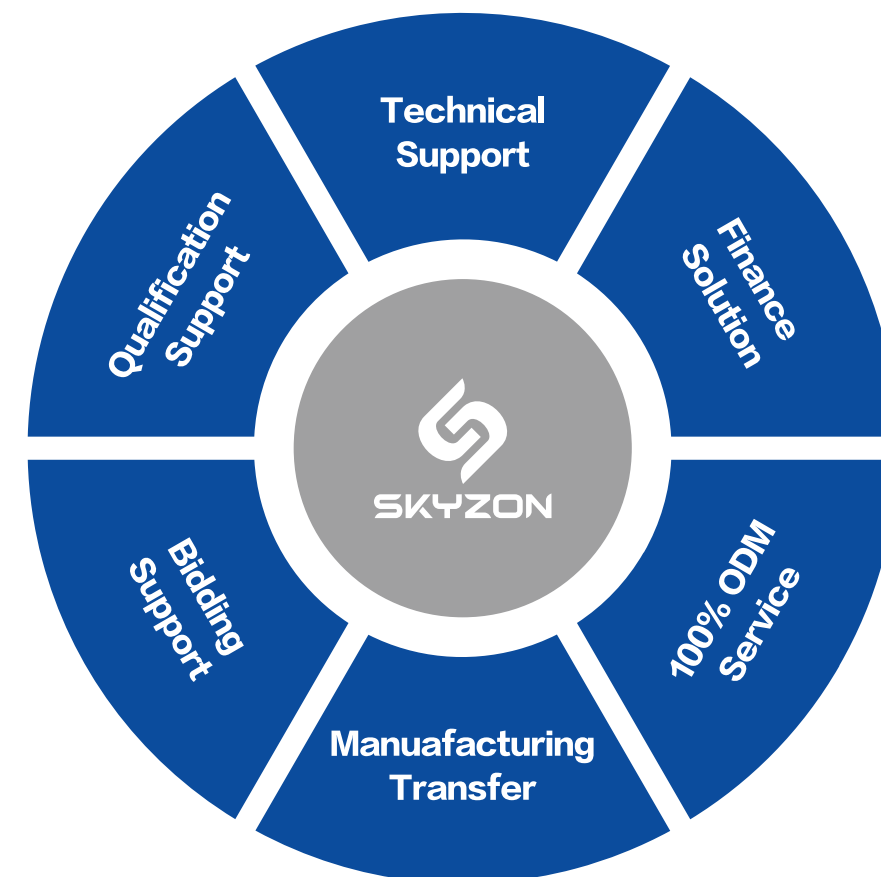

Since
2008


Employees
200+

Technical Staff
15%

Private Molds Series
20+


R&D Investments
2015-2021
USD 5,000,000

6 ADVANTAGES

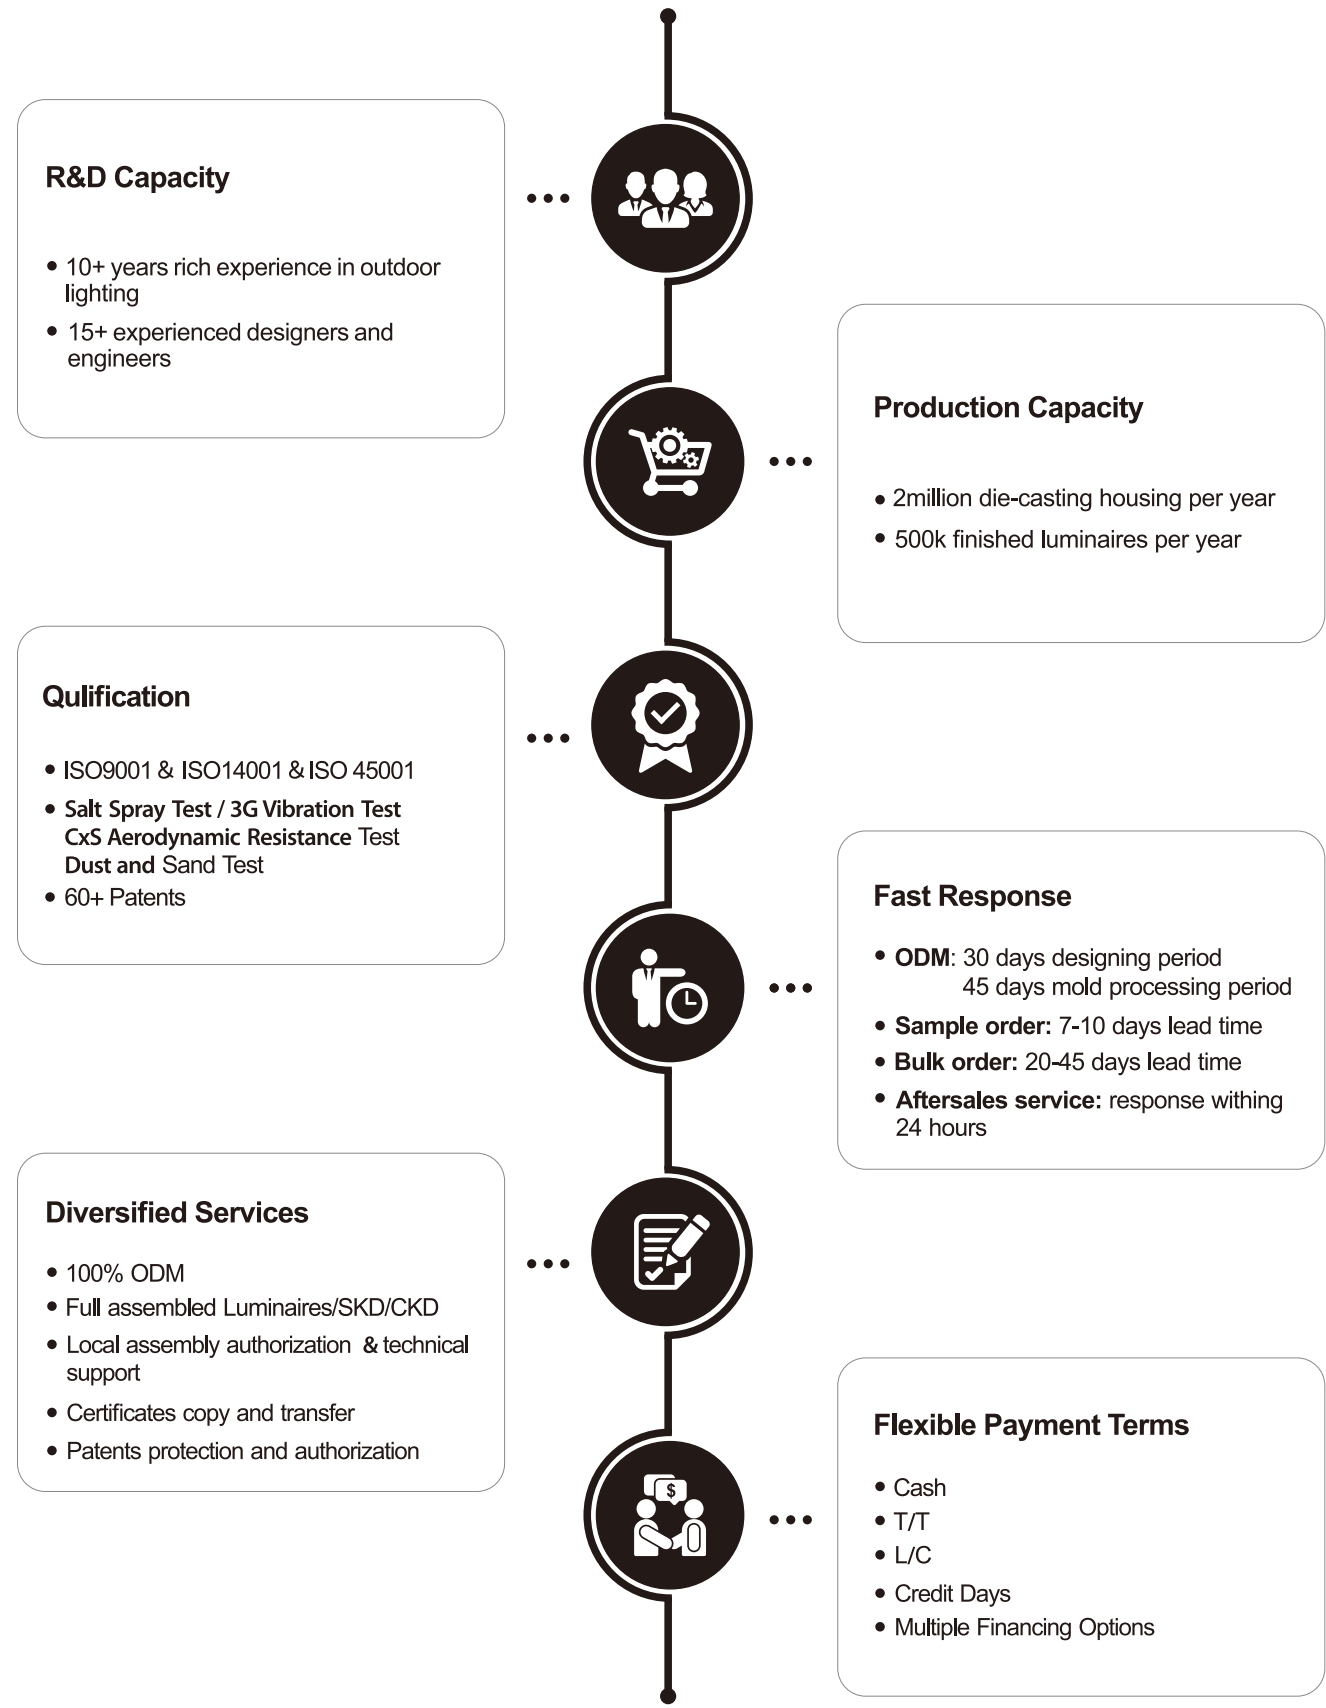

27 Appearance Patents 1 National Invention Patent 3 EUIPO Appearance Patents 11 Utility model Patents



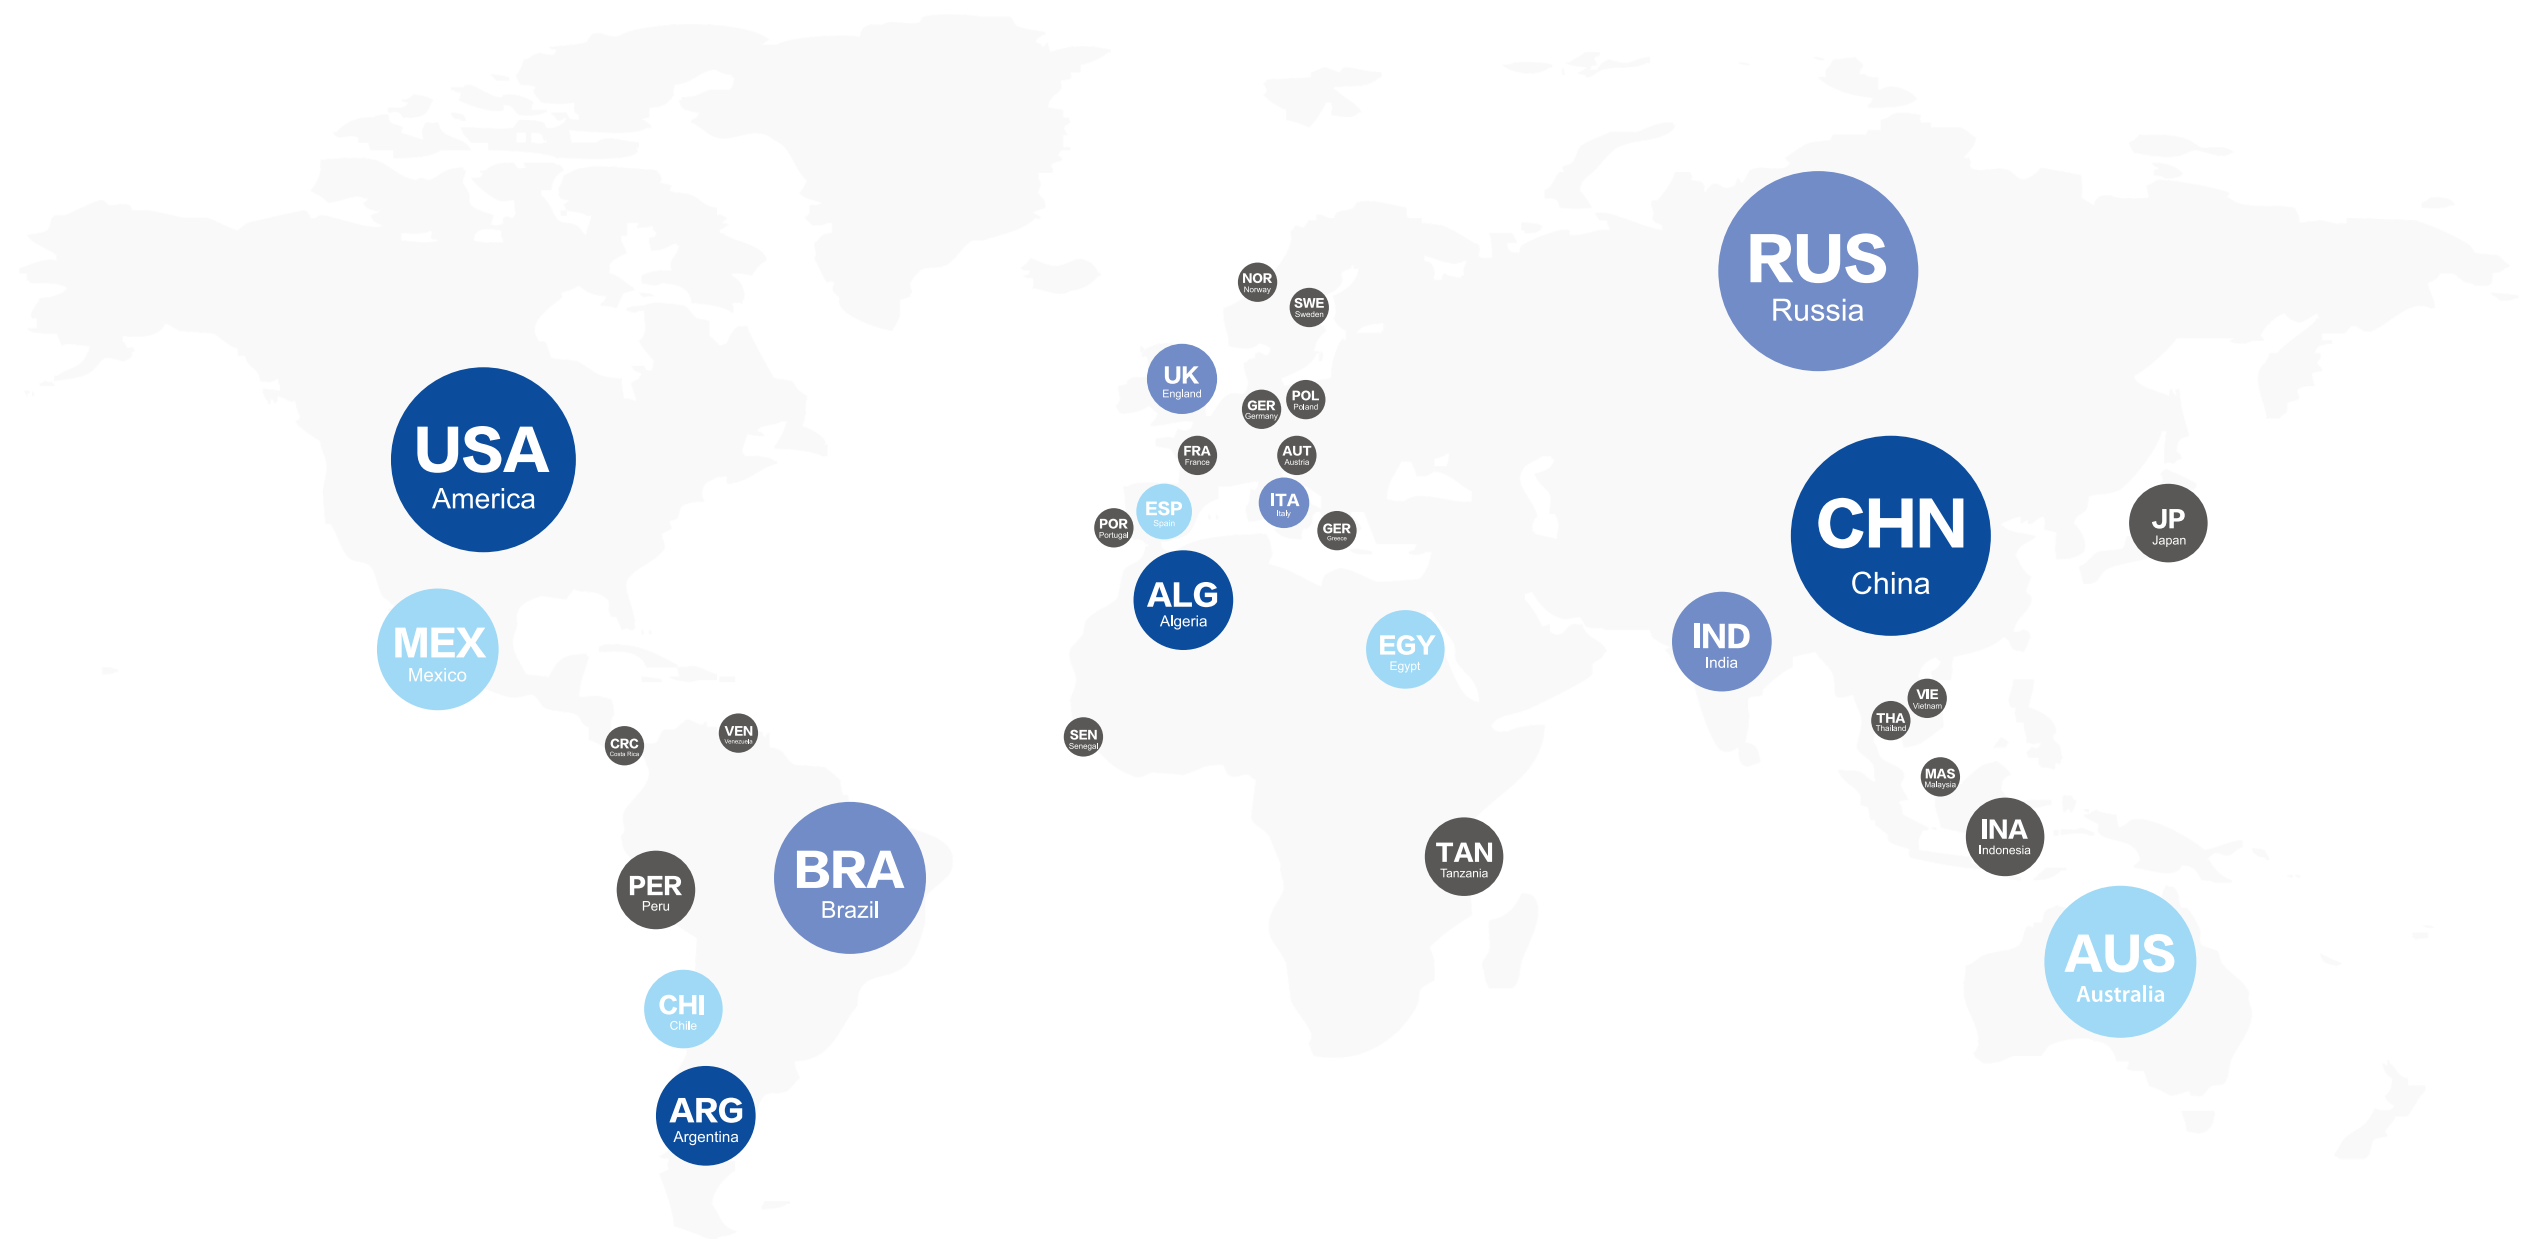

GLOBAL DISTRIBUTION NETWORK






LED road and street lights, sports /multiple purpose hall lights and solar street lights

- **HEAD QUARTER:**
Ningbo Skyzon Energy Co., Ltd in Ningbo, China
- We supply to manufacturers, importers, distributors and contractors .





R&D

to provide multi-directional technical support

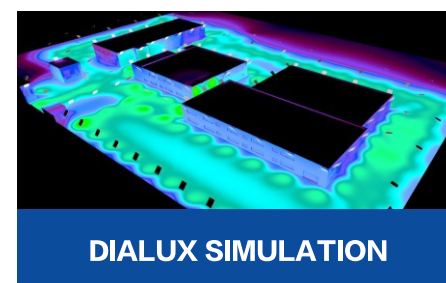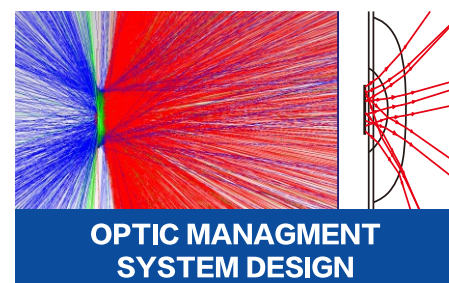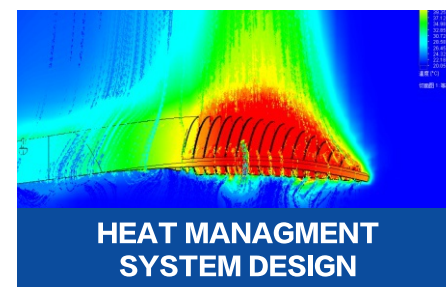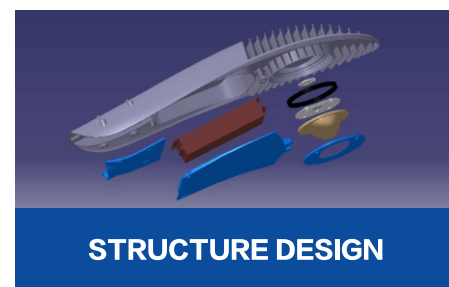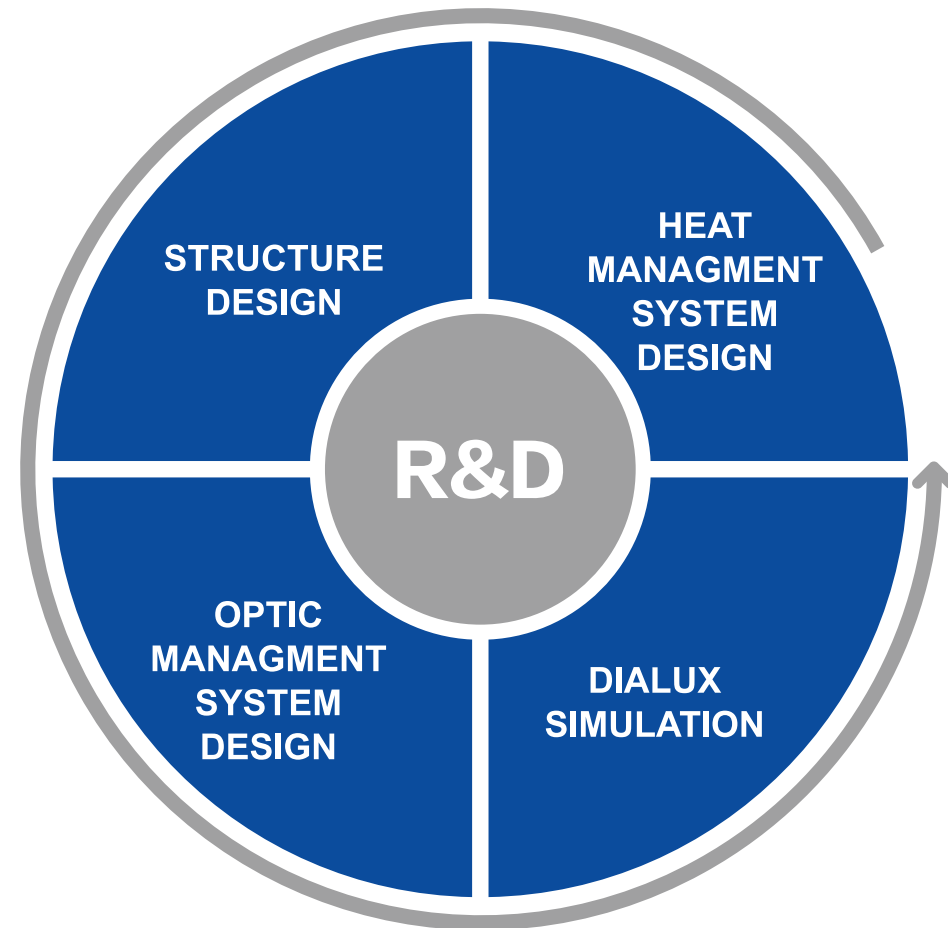

PRODUCTION

mold design, mold processing, die-casting parts manufacturing, CNC drilling processing, luminaire assembly

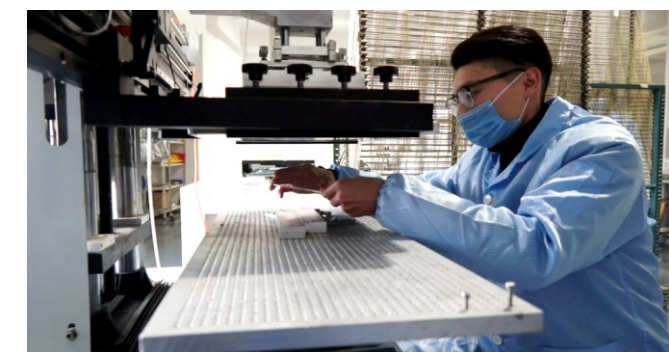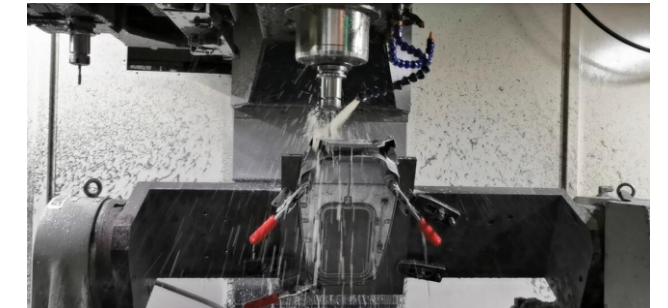

TESTING EQUIPMENT



Optoelectronics Test



Salt Spray Test



Thermal Test



Ground Resistance Test



Withstanding Test



AC Parameters Test




IES Test



Temperature Test



IK Test

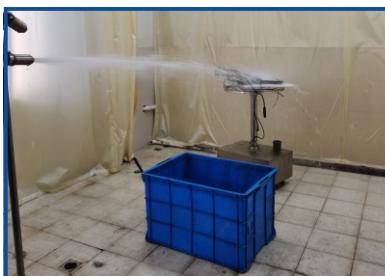

IP Test



PRODUCT CATALOGUE




EL-SL06(S)



IP66 IK09

LED: SMD3535/3030
N.W.: 4.02KG
G.W.: 5.02KG
QTY: 1PC




EL-SL06(M)



IP66 IK09

LED: SMD3535/3030
N.W.: 5.23KG
G.W.: 6.23KG
QTY: 1PC




EL-SL06(L)



IP66 IK09

LED: SMD3535/3030
N.W.: 6.82KG
G.W.: 7.82KG
QTY: 1PC




EL-SL12(M)

80-160W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 3.50KG
G.W.: 4.50KG
QTY: 1PC
CTN: 580x330x100mm




EL-SL98(MINI)

10W-40W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 4.00KG
G.W.: 5.60KG
QTY: 1PC
CTN: 495x280x190mm




EL-SL98(S)

50W-80W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 5.80KG
G.W.: 6.90KG
QTY: 1PC
CTN: 615x350x200mm




EL-SL06(X)



IP66 IK09

LED: SMD3535/3030
N.W.: 8.92KG
G.W.: 9.92KG
QTY: 1PC




EL-SL15(MINI)

20W-80W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 6.50KG
G.W.: 7.50KG
QTY: 1PC
CTN: 525x250x190mm




EL-SL15(M)

80W-120W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 8.50KG
G.W.: 9.50KG
QTY: 1PC
CTN: 630x330x220mm




EL-SL98(L)

160-320W




IP66 IK09

LED: SMD3030/3535/5050
N.W.: 12.50KG
G.W.: 14.10KG
QTY: 1PC
CTN: 950x490x200mm



EL-SL68(MINI)


20-40W



IP66 IK09

Driver box size: 193x170x50mm
Max driver size: 177x85x41mm

LED: SMD3030/3535/5050
N.W.: 3.22KG
G.W.: 4.42KG
QTY: 1PC
CTN: 580x285x170mm




EL-SL98(M)

90-150W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 7.50KG
G.W.: 8.80KG
QTY: 1PC
CTN: 730x380x210mm




EL-SL15(L)

120-220W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 12.0KG
G.W.: 13.0KG
QTY: 1PC
CTN: 780x380x220mm




EL-SL12(MINI)

20W-40W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 1.50KG
G.W.: 2.50KG
QTY: 1PC
CTN: 365x185x100mm




EL-SL12(S)

40W-80W



IP66 IK09

LED: SMD3030/3535/5050
N.W.: 2.50KG
G.W.: 3.50KG
QTY: 1PC
CTN: 445x240x100mm



EL-SL68(S)


50-90W



IP66 IK09

Driver box size: 235x202x50mm
Max driver size: 180x91x55mm

LED: SMD3030/3535/5050
N.W.: 5.20KG
G.W.: 6.86KG
QTY: 1PC
CTN: 695x325x170mm



EL-SL68(M)


100-120W



IP66 IK09

Driver box size: 235x208x50mm
Max driver size: 220x105x53mm

LED: SMD3030/3535/5050
N.W.: 6.92KG
G.W.: 8.77KG
QTY: 1PC
CTN: 740x345x185mm



EL-SL68(L)


150-200W



IP66 IK09

Driver box size: 294x225x50mm
Max driver size: 240x145x58mm

LED: SMD3030/3535/5050
N.W.: 9.16KG
G.W.: 13.04KG
QTY: 1PC
CTN: 860x390x175mm




EL-SL10(1)
30-80W



Driver box size: 209x151x50mm
Max driver size: 190x75x42mm

IP66 IK10

LED: COB
N.W.: 4.40KG
G.W.: 5.12KG
QTY: 1PC
CTN: 320X570X125mm




EL-SL10(2)
90-120W




Driver box size: 250x197x50mm
Max driver size: 240x99x45mm

IP66 IK10

LED: COB
N.W.: 5.80KG
G.W.: 6.71KG
QTY: 1PC
CTN: 380x625x125mm




EL-SL10(3)
150-200W



Driver box size: 302x206x50mm
Max driver size: 252x105x45mm

IP66 IK10

LED: COB
N.W.: 8.26KG
G.W.: 10.16KG
QTY: 1PC
CTN: 450x785x125mm




EL-SL20(L)
120-180W




Driver box size: 230x105x45mm
Max driver size: 230x100x45mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 9.50KG
G.W.: 11.20KG
QTY: 1PC
CTN: 915x420x190mm




EL-SL20A(S)
20-50W

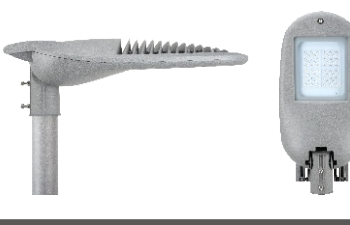

Driver box size: 171x70x37mm
Max driver size: 171x65x37mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 2.90KG
G.W.: 6.80KG
QTY: 2PCS
CTN: 520x250x210mm




EL-SL20A(M)
50-100W




Driver box size: 220x70x42mm
Max driver size: 220x70x42mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 4.50KG
G.W.: 5.20KG
QTY: 1PC
CTN: 675x315x155mm




EL-SL11(MINI)
20-40W

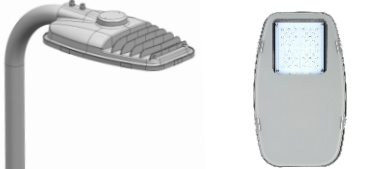


Driver box size: 171x116x36mm
Max driver size: 171x86x36mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 2.23KG
G.W.: 2.87KG
QTY: 1PC
CTN: 430x275x135mm




EL-SL11(S)
50-90W

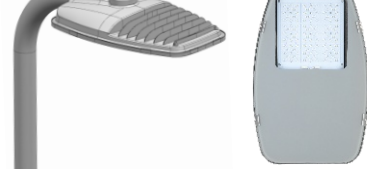


Driver box size: 195x116x38mm
Max driver size: 195x86x38mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 3.52KG
G.W.: 4.47KG
QTY: 1PC
CTN: 505x345x135mm




EL-SL11(M)
100-120W

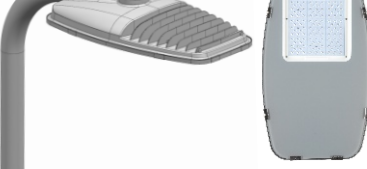

Driver box size: 220x139x42mm
Max driver size: 220x109x42mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 4.12KG
G.W.: 5.01KG
QTY: 1PC
CTN: 575x340x140mm




EL-SL20A(L)
100-200W



Driver box size: 276x100x46mm
Max driver size: 266x90x46mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 8.50KG
G.W.: 10.0KG
QTY: 1PC
CTN: 895x395x175mm




EL-SL18MA
20-100W



Driver box size: 171x70x37mm
Max driver size: 171x65x37mm

IP66 IK10

LED: SMD3030/3535/5050
N.W.: 6.00KG
G.W.: 7.00KG
QTY: 1PC
CTN: 820x325x160mm




EL-SL18LA
100-200W



Driver box size: 220x70x42mm
Max driver size: 220x70x42mm

IP66 IK10

LED: SMD3030/3535/5050
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 935x415x170mm




EL-SL11(L)
150-200W



Driver box size: 228x145x42mm
Max driver size: 228x115x42mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 5.74KG
G.W.: 6.98KG
QTY: 1PC
CTN: 660x395x145mm




EL-SL20(S)
20-50W



Driver box size: 122x72x36mm
Max driver size: 118x68x35mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 2.40KG
G.W.: 3.60KG
QTY: 1PC
CTN: 515x265x150mm




EL-SL20(M)
50-100W



Driver box size: 210x85x42mm
Max driver size: 210x70x42mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 5.20KG
G.W.: 6.30KG
QTY: 1PC
CTN: 700x350x165mm




EL-SL18MB
20-80W



Driver box size: 171x70x37mm
Max driver size: 171x65x37mm

IP66 IK10

LED: COB
N.W.: 6.00KG
G.W.: 7.00KG
QTY: 1PC
CTN: 820x325x160mm




EL-SL18LB
100-160W



Driver box size: 220x70x42mm
Max driver size: 220x70x42mm

IP66 IK10

LED: COB
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 935x415x170mm




EL-GL03



Driver box size: 220x70x42mm
Max driver size: 220x70x42mm

IP66 IK08

LED: SMD3535/3030
N.W.: 9.6KG
G.W.: 12KG
QTY: 1PC
CTN: 560x560x685mm




EL-SL58S-A
20-50W



IP65 IK08

LED: SMD3030/3535/5050
N.W.: 7.00KG
G.W.: 8.00KG
QTY: 1PC
CTN: 450x450x580mm




EL-SL58S-B
20-50W



IP65 IK08

LED: SMD3030/3535/5050
N.W.: 6.00KG
G.W.: 7.00KG
QTY: 1PC
CTN: 450x450x580mm




EL-SL58S-C
20-50W



IP65 IK08

LED: SMD3030/3535/5050
N.W.: 6.00KG
G.W.: 7.00KG
QTY: 1PC
CTN: 460x460x230mm




EL-SL58S-B
(With Photocell/3-pin/7-pin NEMA Socket/Zhaga Socket)
20-50W



IP65 IK08

LED: SMD3030/3535/5050
N.W.: 7.40KG
G.W.: 8.40KG
QTY: 1PC
CTN: 450x450x580mm




EL-SL58B
(With Photocell/3-pin/7-pin NEMA Socket/Zhaga Socket)
20-120W



IP65 IK08

LED: SMD3030/3535/5050
N.W.: 11.00KG
G.W.: 12.00KG
QTY: 1PC
CTN: 580x580x290mm




EL-GL01A (Diffuser)
20-100W



Villa LED IP66 IK08

LED: SMD3030/3535/5050
N.W.: 7.00KG
G.W.: 8.00KG
QTY: 1PC
CTN: 440x440x650mm




EL-SL58S-D
20-50W



IP65 IK08

LED: SMD3030/3535/5050
N.W.: 6.00KG
G.W.: 7.00KG
QTY: 1PC
CTN: 460x460x230mm




EL-SL58A
20-120W



IP66 IK08

LED: SMD3030/3535/5050
N.W.: 11.00KG
G.W.: 12.00KG
QTY: 1PC
CTN: 580x580x290mm




EL-SL58B
20-120W




IP66 IK08

LED: SMD3030/3535/5050
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 580x580x290mm




EL-GL01B (Drop-glass)
20-100W



Villa LED IP66 IK08

LED: SMD3030/3535/5050
N.W.: 7.00KG
G.W.: 8.00KG
QTY: 1PC
CTN: 440x440x650mm




EL-GL01C
20-100W




Villa LED IP66 IK08

LED: SMD3030/3535/5050
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 440x440x650mm




EL-GL01D
20-100W



Villa LED IP66 IK08

LED: SMD3030/3535/5050
N.W.: 7.00KG
G.W.: 8.00KG
QTY: 1PC
CTN: 440x440x650mm




EL-SL58C
20-120W



IP66 IK08

LED: SMD3030/3535/5050
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 580x580x290mm




EL-SL58D
20-120W



IP66 IK08

LED: SMD3030/3535/5050
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 580x580x290mm




EL-SL58E
20-120W



IP66 IK08

LED: SMD3030/3535/5050
N.W.: 10.00KG
G.W.: 11.00KG
QTY: 1PC
CTN: 580x580x290mm




EL-GL610A/B
20-180W



Villa LED IP66 IK08

LED: SMD3030/3535/5050
N.W.: 12.00KG
G.W.: 14.00KG
QTY: 1PC
CTN: 720x720x820mm




EL-GL607
20-90W



Villa LED IP66 IK08

LED: SMD3030/3535/5050
N.W.: 5.80KG
G.W.: 7.50KG
QTY: 1PC
CTN: 580x580x420mm




EL-CL30
60-150W



Canopy light IP65 IK08

LED: SMD3030/3535/5050
N.W.: 5.50KG
G.W.: 6.50KG
QTY: 1PC
CTN: 470x470x140mm




EL-SL08(1S)
20-50W



Driver box size: 200x85x45mm
Max driver size: 200x80x45mm

IP66 IK08

LED: COB
N.W.: 4.00KG
G.W.: 4.80KG
QTY: 1PC
CTN: 650x280x160mm




EL-SL08(1L)
50-80W



Driver box size: 200x85x45mm
Max driver size: 200x80x45mm

IP66 IK08

LED: COB
N.W.: 4.30KG
G.W.: 5.40KG
QTY: 1PC
CTN: 705x290x160mm




EL-SL08(2)
100-160W



Driver box size: 230x85x45mm
Max driver size: 225x82x45mm

IP66 IK08

LED: COB
N.W.: 6.70KG
G.W.: 8.00KG
QTY: 1PC
CTN: 860x330x160mm




EL-SL09(4)
180-240W



Driver box size: 275x150x50mm
Max driver size: 260x150x50mm

IP65 IK08

LED: COB
N.W.: 11.00KG
G.W.: 12.70KG
QTY: 1PC
CTN: 1150x450x175mm




EL-FL02(S)
100-200W



Driver box size: 250x116x44mm
Max driver size: 235x88x44mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 6.06KG
G.W.: 6.79KG
QTY: 2PCS
CTN: 590x270x410mm




EL-FL02(M)
250-400W



Driver box size: 340x116x50mm
Max driver size: 308x99x50mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 10.66KG
G.W.: 11.86KG
QTY: 1PC
CTN: 725x500x130mm




EL-SL08(3)
150-240W



Driver box size: 276x100x46mm
Max driver size: 266x90x46mm

IP66 IK08

LED: COB
N.W.: 10.50KG
G.W.: 12.50KG
QTY: 1PC
CTN: 1010x405x210mm




EL-SL09(MINI)
10-30W



Driver box size: 135x60x35mm
Max driver size: 130x60x35mm

IP65 IK08

LED: COB
N.W.: 0.90KG
G.W.: 2.25KG
QTY: 2PCS
CTN: 445x200x200mm




EL-SL09(1S)
30-50W



Driver box size: 175x75x38mm
Max driver size: 165x75x38mm

IP65 IK08

LED: COB
N.W.: 1.80KG
G.W.: 4.20KG
QTY: 2PCS
CTN: 545x230x225mm




EL-FL02(L)
500-650W



Driver box size: 518x157x55mm
Max driver size: 500x150x55mm

IP65 IK08

LED: SMD3030/3535/5050
N.W.: 20.20KG
G.W.: 23.13KG
QTY: 1PC
CTN: 865x700x165mm




EL-FL18(1M)
100-400W



Driver box size: 518x157x55mm
Max driver size: 500x150x55mm

Arena light IP66 IK08

LED: SMD3535/3030
N.W.: 18.00KG
G.W.: 21.00KG
QTY: 1PC
CTN: 850x400x215mm




EL-FL18(2M)
500-800W



Driver box size: 518x157x55mm
Max driver size: 500x150x55mm

Arena light IP66 IK08

LED: SMD3535/3030
N.W.: 23.20KG
G.W.: 25.20KG
QTY: 1PC
CTN: 900x620x250mm




EL-SL09(1L)
50-80W



Driver box size: 235x90x45mm
Max driver size: 210x90x45mm

IP65 IK08

LED: COB
N.W.: 2.80KG
G.W.: 3.60KG
QTY: 1PC
CTN: 665x300x145mm




EL-SL09(2)
100-120W



Driver box size: 235x90x45mm
Max driver size: 210x90x45mm

IP65 IK08

LED: COB
N.W.: 4.40KG
G.W.: 5.20KG
QTY: 1PC
CTN: 765x300x145mm




EL-SL09(3)
150-180W



Driver box size: 235x90x50mm
Max driver size: 220x90x50mm

IP65 IK08

LED: COB
N.W.: 6.20KG
G.W.: 7.00KG
QTY: 1PC
CTN: 930x360x145mm




EL-FL18(3M)
900-1200W



Driver box size: 235x90x50mm
Max driver size: 220x90x50mm

Arena light IP66 IK08

LED: SMD3535/3030
N.W.: 35.00KG
G.W.: 39.00KG
QTY: 1PC
CTN: 830x760x255mm




EL-FL18(1M)
100-400W With Glare Shield



Driver box size: 235x90x50mm
Max driver size: 220x90x50mm

Arena light IP66 IK08

LED: SMD3535/3030
N.W.: 18.00KG
G.W.: 21.00KG
QTY: 1PC
CTN: 850x400x215mm




EL-FL18(2M)
500-800W With Glare Shield



Driver box size: 235x90x50mm
Max driver size: 220x90x50mm

Arena light IP66 IK08

LED: SMD3535/3030
N.W.: 23.20KG
G.W.: 25.20KG
QTY: 1PC
CTN: 900x620x250mm




EL-FL18(3M)

900-1200W With Glare Shield



Arena light IP66 IK08

LED: SMD3535/3030
N.W.: 35.00KG
G.W.: 39.00KG
QTY: 1PC
CTN: 830x760x255mm




EL-FL58(3M)

1200-1500W



Arena light IP66 IK09

LED: CREE XP-L2
N.W.: 30.70KG
G.W.: 33.00KG
QTY: 1PC
CTN: 830x760x255mm




EL-FL58(2M)

600-1000W With Glare Shield



Arena light IP66 IK09

LED: CREE XP-L2
N.W.: 23.00KG
G.W.: 25.00KG
QTY: 1PC
CTN: 900x620x250mm




EL-HB12(S)

100W With Prismatic Refractor



45° 60° 90° 120° IP65 IK08

LED: SMD3030
N.W.: 2.50*2KG
G.W.: 5.60KG
QTY: 2PCS
CTN: 350x350x165mm




EL-HB12(M)

150W With Prismatic Refractor



60° 90° 120° IP65 IK08

LED: SMD3030
N.W.: 3.00*2KG
G.W.: 6.80KG
QTY: 2PCS
CTN: 370x370x165mm




EL-HB12(L)

200W With Prismatic Refractor



45° 60° 90° 120° IP65 IK08

LED: SMD3030
N.W.: 3.50*2KG
G.W.: 8.00KG
QTY: 2PCS
CTN: 410x410x185mm




EL-FL68

800-1500W



IP66 IK08

LED: CREE XP-L2
N.W.: 25.00KG
G.W.: 28.00KG
QTY: 1PC
CTN: 800x800x400mm




EL-HB06(S)

100-160W



**Driver box size: 255x80x50mm
Max driver size: 250x80x50mm IP65 IK08**

LED: SMD3030/3535/5050
N.W.: 5.60KG
G.W.: 6.70KG
QTY: 1PC
CTN: 450x450x215mm




EL-HB06(L)

180-250W



**Driver box size: 310x100x60mm
Max driver size: 300x100x60mm IP65 IK08**

LED: SMD3030/3535/5050
N.W.: 10.70KG
G.W.: 12.00KG
QTY: 1PC
CTN: 580x580x250mm




EL-ASL08(S)

10W All-in-one Solar Street Light



IP66 IK08

LED: SMD3030/3535/5050
Solar panel: 25Wp
Output Lumens: 1700lm
QTY: 1PC
CTN: 770x430x190mm




EL-ASL08(M)

20W All-in-one Solar Street Light



IP66 IK08

LED: SMD3030/3535/5050
Solar panel: 50Wp
Output Lumens: 3400lm
QTY: 1PC
CTN: 1220x430x190mm




EL-ASL08(L)

40W All-in-one Solar Street Light



IP66 IK08

LED: SMD3030/3535/5050
Solar panel: 50Wp*2
Output Lumens: 6800lm
QTY: 1PC
CTN: 1300x430x380mm




EL-HB12(S)

100W



45° 60° 90° 120° IP65 IK08

LED: SMD3030
N.W.: 2.50*2KG
G.W.: 5.60KG
QTY: 2PCS
CTN: 350x350x165mm




EL-HB12(M)

150W



60° 90° 120° IP65 IK08

LED: SMD3030
N.W.: 3.00*2KG
G.W.: 6.80KG
QTY: 2PCS
CTN: 370x370x165mm




EL-HB12(L)

200W




45° 60° 90° 120° IP65 IK08

LED: SMD3030
N.W.: 3.50*2KG
G.W.: 8.00KG
QTY: 2PCS
CTN: 410x410x185mm



EL-ASL10

60/100W
All-in-two
Solar Street Light



IP66 IK08

LED: COB/SMD
Solar panel: 150W/270Wp
Luminaire efficacy: Up to 150lm/W

PROJECT CASE

SPORTS
LIGHTING



EL-FL18
In Sweden



EL-FL18
In Poland




EL-SL08(Solar)
In Indonesia




EL-SL18
In Vietnam



EL-SL18
In Honduras

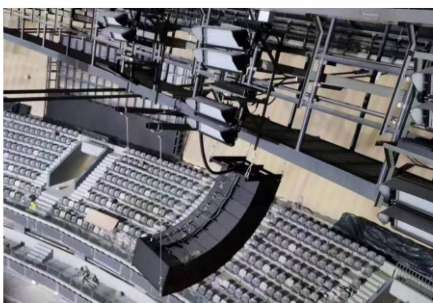

EL-FL18
In China

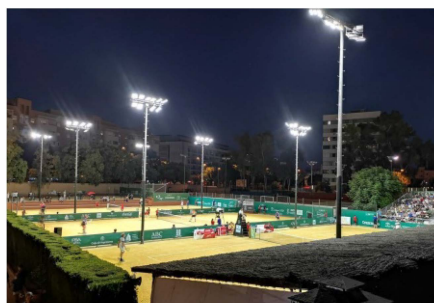


EL-FL02
In Spain



EL-SL68
In Spain



EL-SL68
In Spain

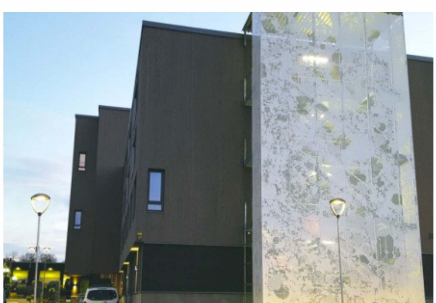


EL-SL58
In Norway

INDUSTRIAL
LIGHTING



EL-HB06
In Germany

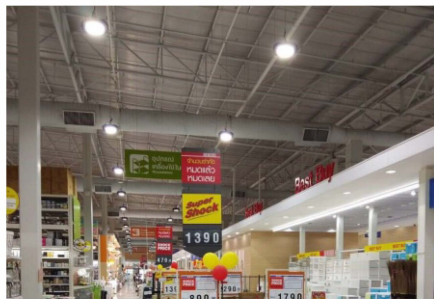

EL-HB06
In Thailand



EL-SL18
In Israel



EL-SL58
In Germany



EL-GL01(Solar)
In China

ROAD
LIGHTING



EL-SL18
In Vietnam



EL-SL08
In China



EL-SL68 (Solar)
In Vietnam



EL-SL08
In Algeria



EL-SL98
In Russia