


LED Linear Light

Create beautiful lighting in your office, residence, commercial building or industrial space with architectural and suspended LED lights. Our suspended LED lights are ideal for retail lighting since they provide a lovely diffused light to effectively highlight merchandise that is visually comfortable.

These fixtures are available in a variety of lengths and wattages, with up & down lighting mode, optional with diffuser, reflector, honeycomb, and can be dimmed to create the perfect atmosphere in any setting.

Suspended

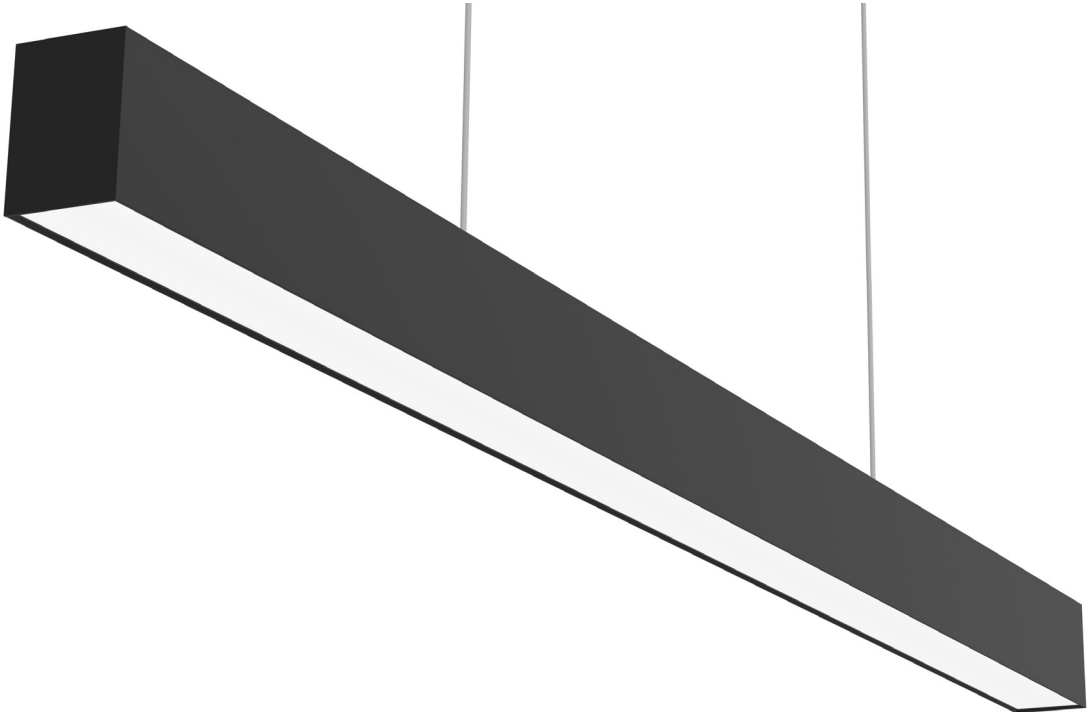

No Screw design on sides.



Up lighting light on the atmosphere. More soft and comfort.



3 Dip Switches


- 1 switch for up/both/down lighting mode selection
- 1 switch to control up lighting CCT
- 1 switch to control down lighting CCT





Aluminum profile with good heat dissipation.
Nice Matt Sandy Finishing.




Fast push kits connector. Easy cable connection.

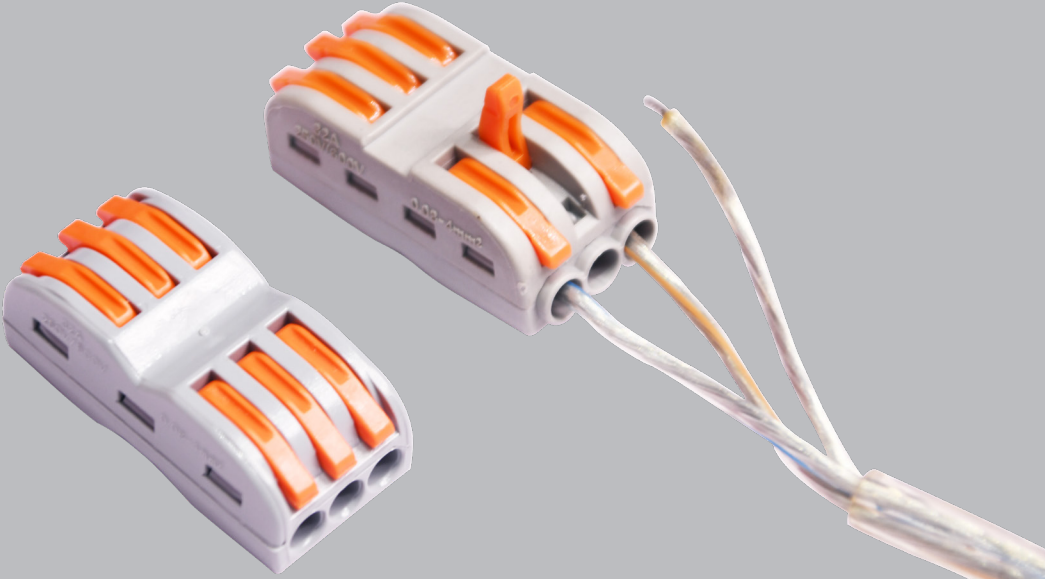

Linear Light Pro

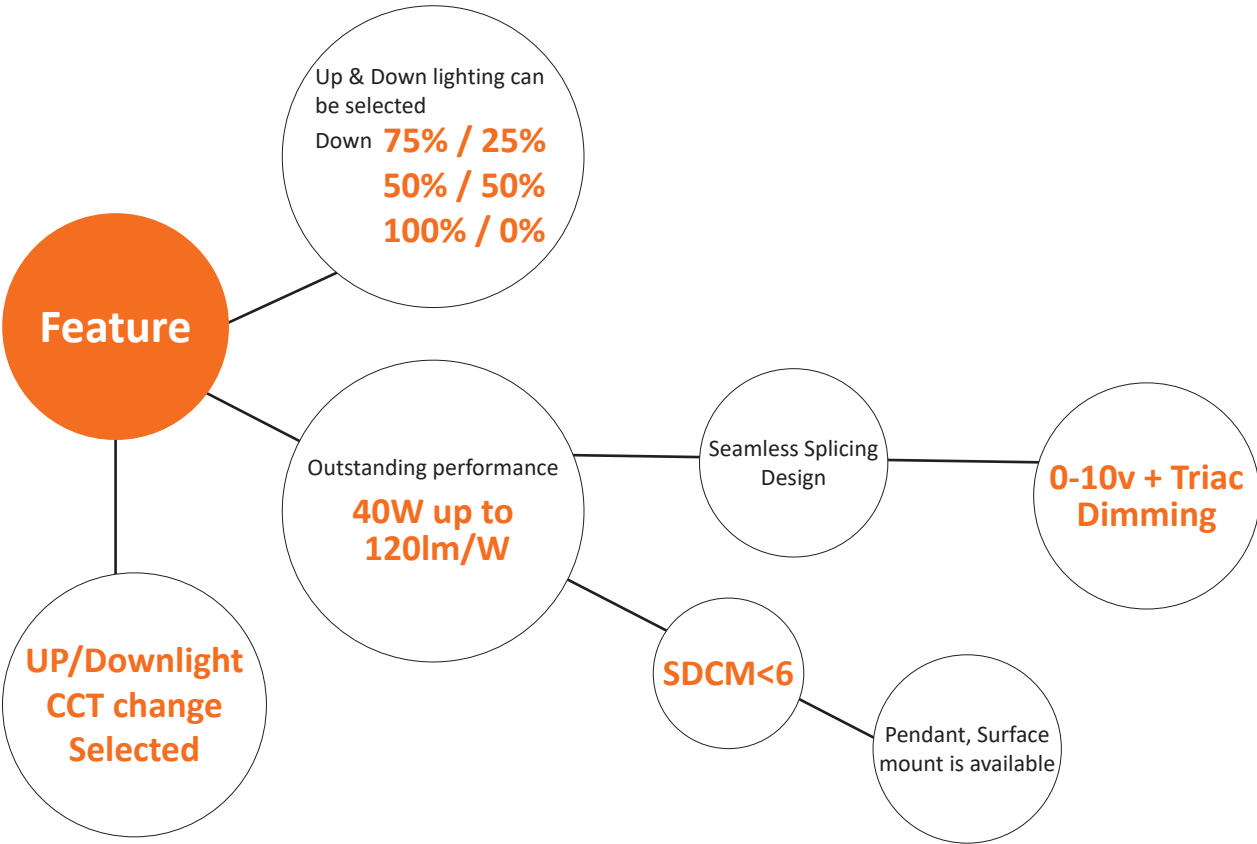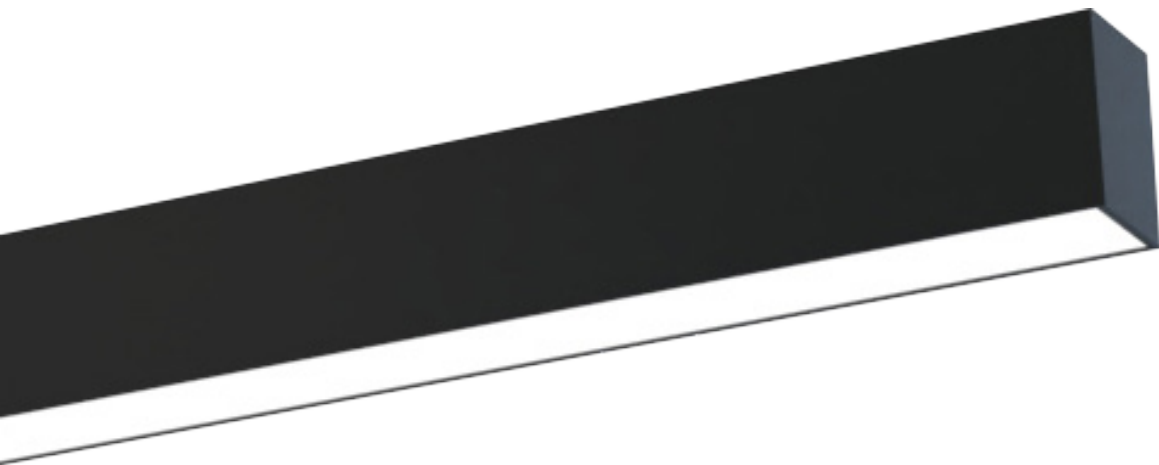


Model	RAVLN40F11
Power	40W
LED Lumen	120LM/W
Beam angle	100°
CCT Change	3000K/ 4000K/ 5000K
CRI	Ra>80
UGR	UGR<22
Optical	Diffuser
SDCM	SDCM <6
Lifespan	50,000hrs
Voltage	120-277VAC
Product size	60*83*1200mm
Dimmable option	0-10V Triac-dim,0-10V + Triac-dim
Flicker free	Flicker free
IP-class	IP20
Insulation Class	Class II
Material	Aluminum
Environment	Office,Showroom,Supermarket
Installation	Surface mounted,Pendent
Functions	Dual power/CCT change/Diming
Finishing	White

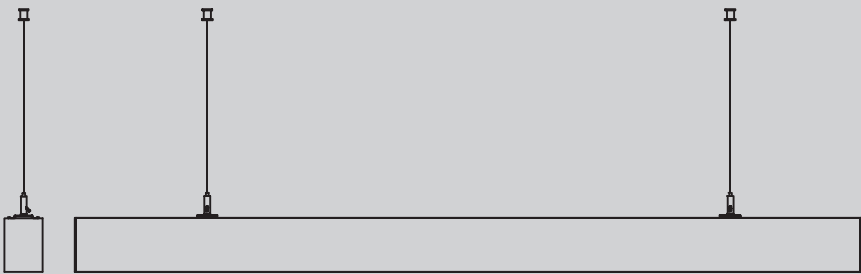


Size: 60*83*1200mm

Seamless Splicing Design, One Luminaire, Endless Possibilities.


Easy splicing by “I” shape, “L” shape, “T” shape & “+” shape Joiners, to offer your different kind of lighting style to your project.

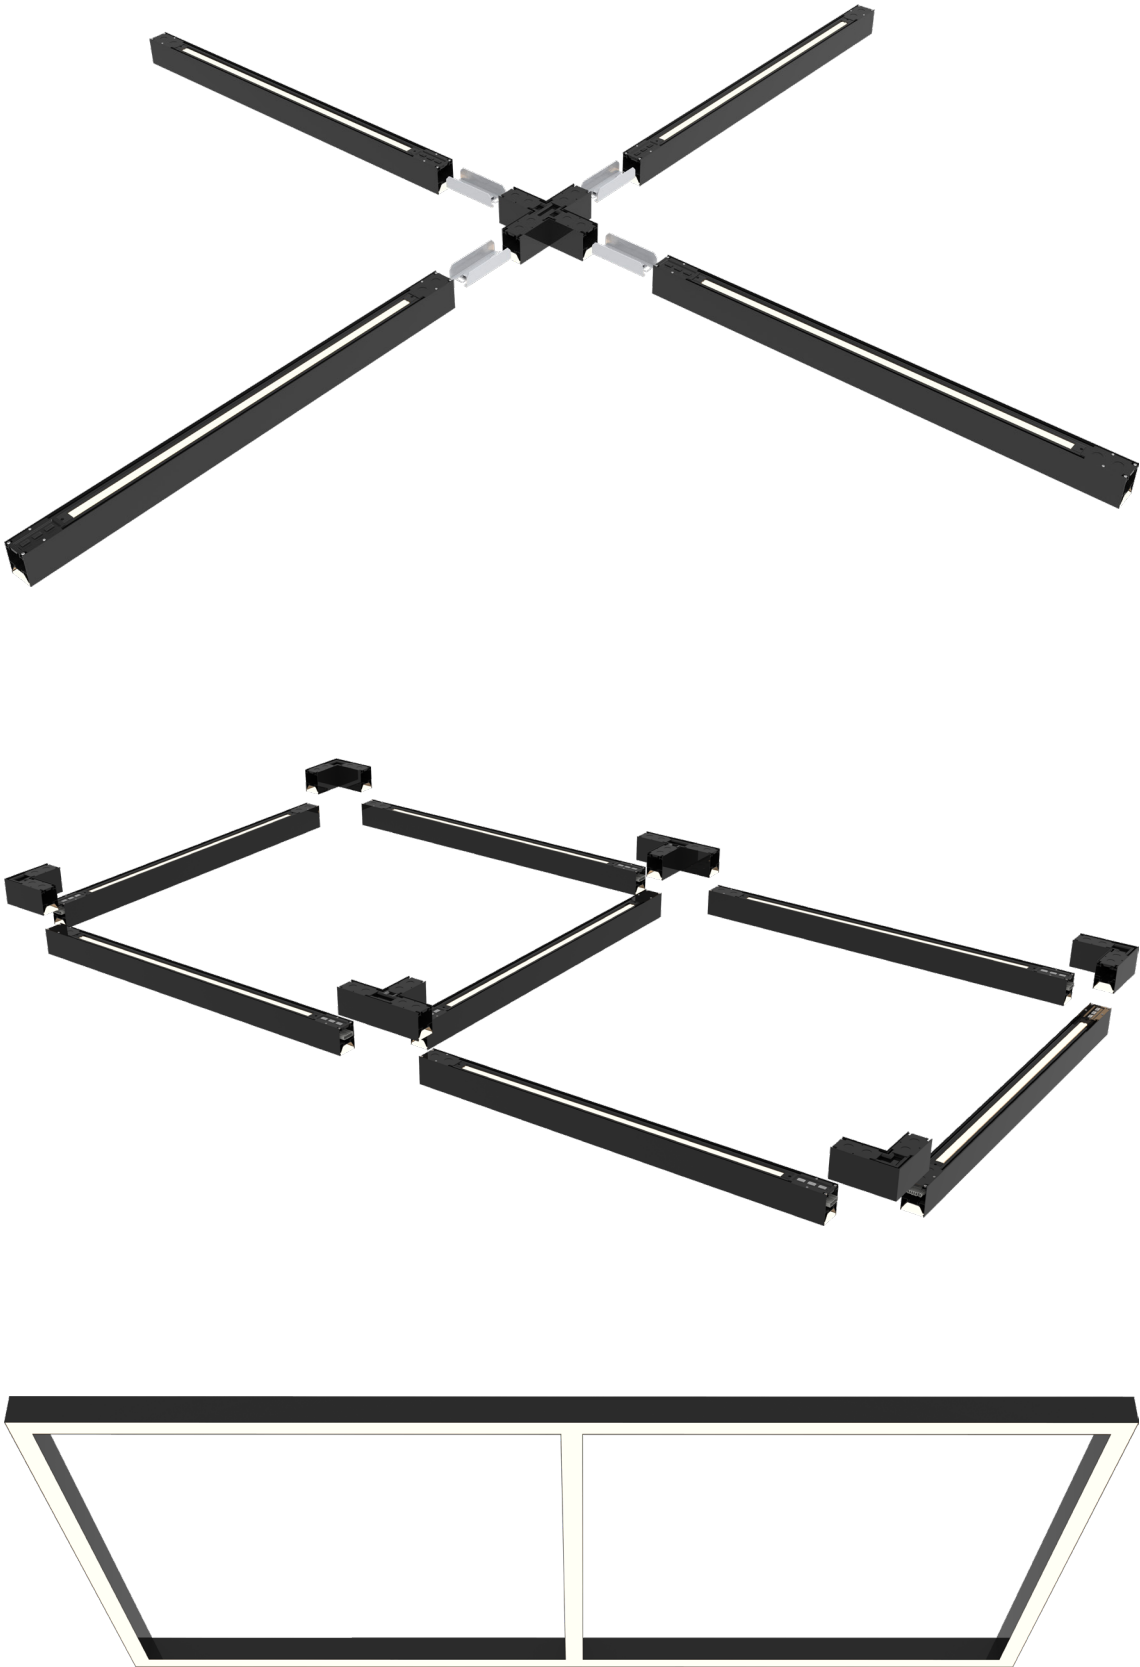

Linear Light Slim


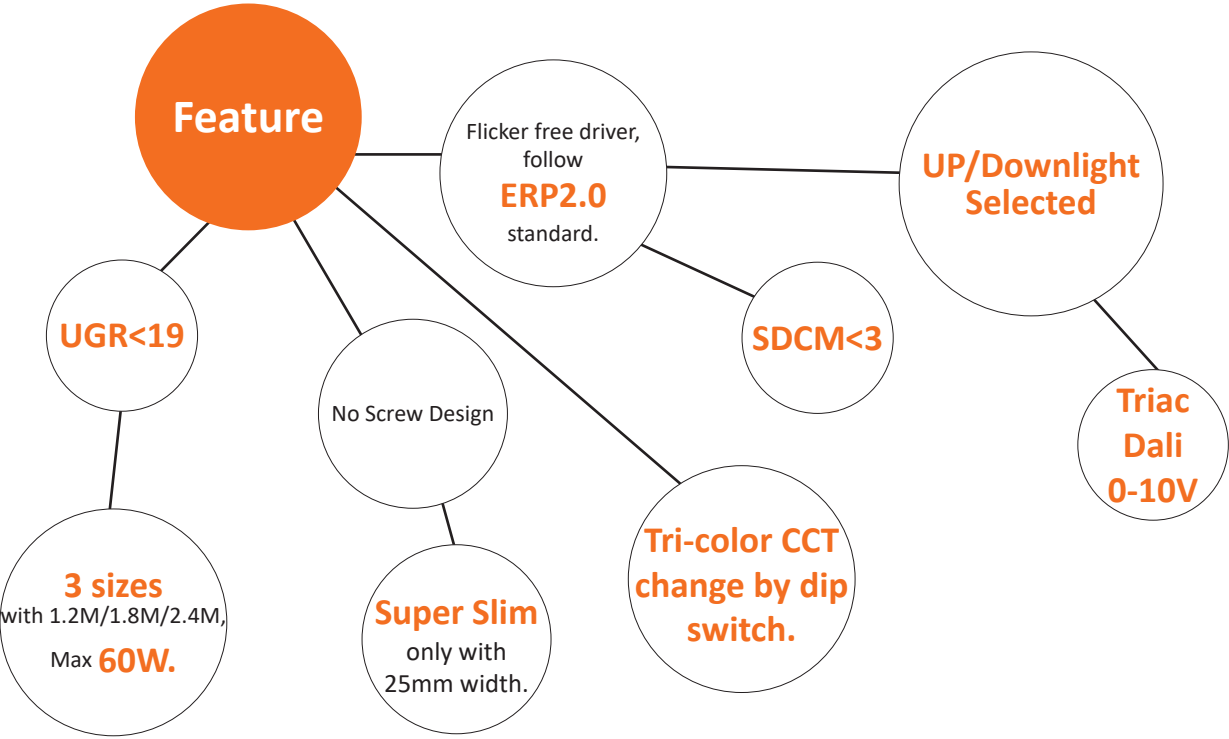


Model	RAV30LNA11	RAV50LNA11	RAV60LNA11
Power	30W	50W	60W
LED Lumen	>130LM/W		
Beam angle	36°/ 100°		
CCT Change	3000K/ 4000K/ 5000K dip switch		
CRI	Ra>80/90		
UGR	UGR<19 for honeycomb and grid version		
Optical	PC diffuser/Honeycomb/ Grid reflector		
SDCM	SDCM <3		
Lifespan	50,000hrs		
Voltage	220-240VAC		
Product size	1210*25*80mm	1860*25*80mm	2460*25*80mm
Dimmable option	Triac-dim/ 0-10V /DALI 2 control optional		
Flicker free	Yes, follow ERP2.0 standard		
IP-class	IP20		
Insulation Class	Class II		
Material	Aluminum & PC		
Environment	Indoors		
Installation	Surfaced mounted/ Suspended		
Functions	Up & down lighting, lighting mode selected by dip switch		
Finishing	White/ Black		
Accessory	Screw packs, 1.5M input cable/ suspension kits/ surfaced mounted kits/ combined kits		




Size: 1210*25*80mm
1860*25*80mm
2460*25*80mm

Linear Light Standard

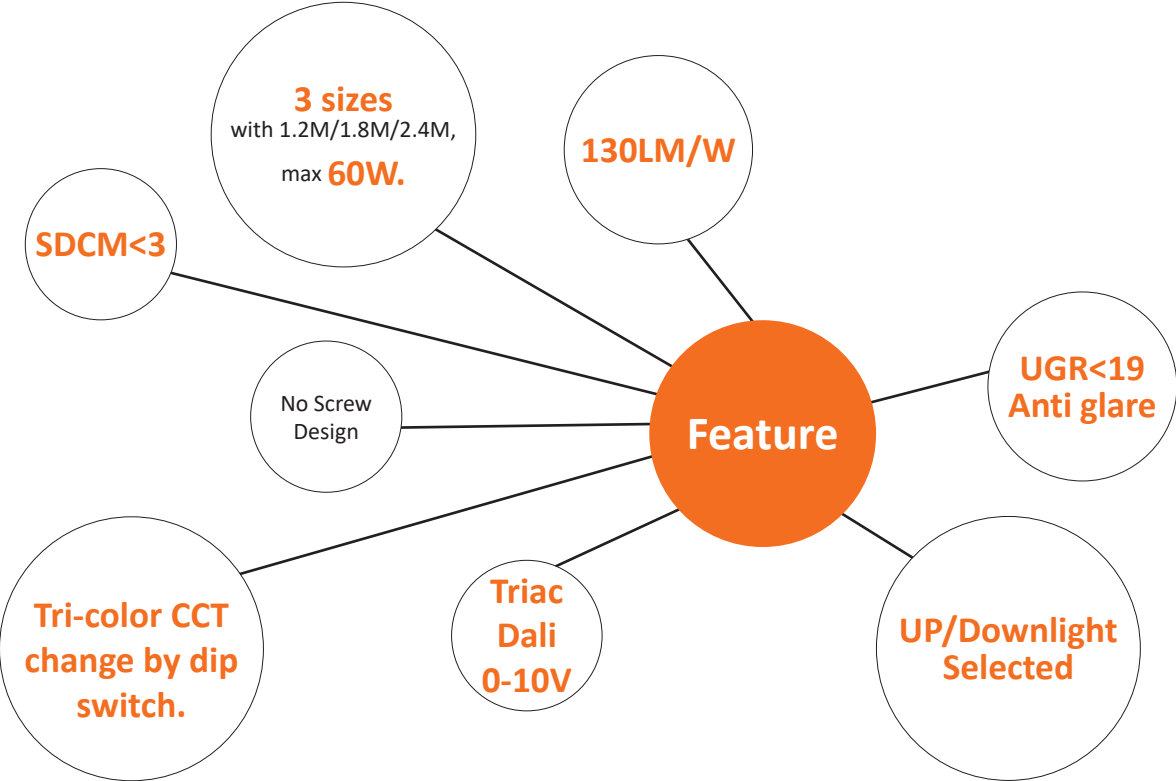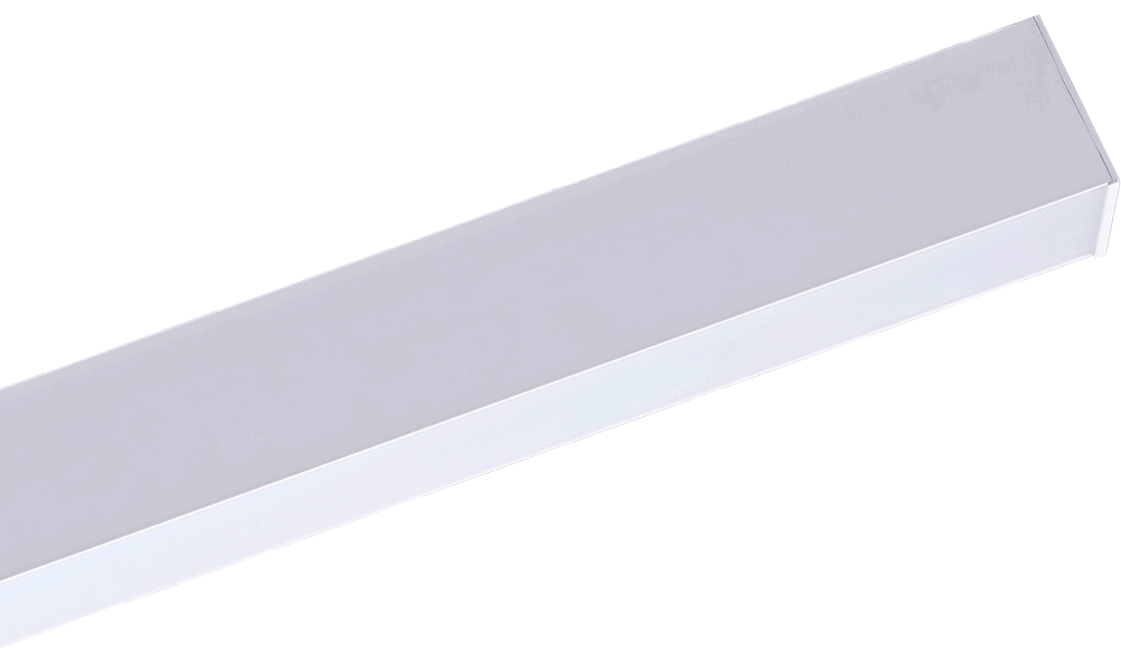

Model	RAV30LNB11	RAV50LNB11	RAV60LNB11
Power	30W	50W	60W
LED Lumen	>130LM/W		
Beam angle	100°		
CCT Change	3000K/ 4000K/ 5000K dip switch		
CRI	Ra>80/90		
UGR	UGR<19 with prismatic plate		
Optical	PC diffuser/ Prismatic plate		
SDCM	SDCM <3		
Lifespan	50,000hrs		
Voltage	220-240VAC		
Product size	1200*50*70mm	1800*50*70mm	2400*50*70mm
Dimmable option	Triac-dim/ 0-10V /DALI 2 control optional		
Flicker free	Yes, follow ERP2.0 standard		
IP-class	IP20		
Insulation Class	Class II		
Material	Aluminum & PC		
Environment	Indoors		
Installation	Suspended		
Functions	Up & down lighting, lighting mode selected by dip switch		
Finishing	White/ Black		
Accessory	Screw packs, 1.5M input cable/ suspension kits		



Size: 1200*50*70mm
1800*50*70mm
2400*50*70mm