

COB LED SRTIP LIGHT

PRODUCT SPECIFICATION



Key Feature

- ◆ LM-80 approved LED
- ◆ 50,000 hours Lifetime, 3 years warranty
- ◆ Multiple Color Option : 1800K ~ 6500K
- ◆ Light Spotless,flexible
- ◆ CRI Option: Ra>80,Ra>90,Ra>95 all available

1800 K	2100 K	2300 K	2500 K	2700 K	3000 K
3500 K	4000 K	5000 K	6000 K	6500 K	

Shenzhen Mingxue Optoelectronics Co., Ltd.

Address: 14 Floor,T3 Building, HIPAR technology building,Shiyan Town,
Bao'an District, Shenzhen,China.

Factory:Building 9 &10, WanYang park ,baoyong industry road No 8 ,
west area baoyong industry zone,longjiang town,Shunde District, Foshan city.

Tel: +86-755-27637866

Tel: +86-755-27638086


E-mail: info@mingxue.cn

Web: www.mingxueled.com

www.mingxueled.com



Drawing:

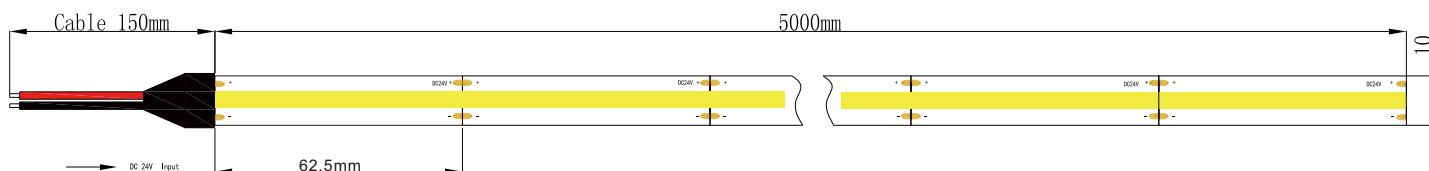

Notice:

Safety Input Voltage: DC 24V

Size of each section is 62.5mm and cutting at “scissors symbol” place.

LED Strip length's length tolerance is $\pm 0.2\%$ mm, width tolerance is ± 0.2 mm.

Optical

LED type:	Flip Chip
Color rendering index:	Ra>80 Ra>90
CCT Range:	2700K, 3000K, 4000K, 5000K, 6000K.
Irritation angle:	180°
Light Efficiency:	110 Lm/w
Lumen output/meter:	1100Lm/m

Electric (24V)

Input current/m:	0.5A/m
Input Voltage:	DC24V
Voltage Power/m:	12W/m
Static Electricity:	1000V(ESD)
LEDs/meter:	512LEDs/m
Size of section:	62.5mm
LEDs of section:	32LEDs





Others

Energy grade:	A+
Warranty:	3years
Working hour:	50,000hrs lifetime for Tc<70°C
Working temperature:	-20°C ~ +45°C
Working humidity:	40%-70%RH *W10mm (16.4ft*0.4in)
Measurement:	L5000
Waterproof Rate:	IP20

Descriptions:

- ◆ LED Strip can be used in many kinds of places as decorative lighting/backlight/, such as Ceiling trough, Staircase, Hall walkway, Billboard,
- ◆ 100% of the lamps will be tested and keep lighting for 24h testing its quality reliability, and we also test it temperature after 24 hours's lighting;
- ◆ We can provide with different Custom products, such as printing Customer LOGO on FPC, Custom Aluminum Foil Bag Custom carton box/connector/DC cable/, Customs FPC design/color/width etc.

Waterproof Rate :



IP Rate Description :

IP20 : Indoor use



IP54 Nano : No Color shift with high Color Consistency

IP65 PU : No Lead and mercury, Strong adhesion

IP65 Silicon : Anti-UV ability, never become yellow




IP67 : Lead-free and mercury-free, Strong adhesion

IP68 : Silicon glue with Anti-UV, never change color



Wiring diagram application :

◆ Single end power input for 5 meters

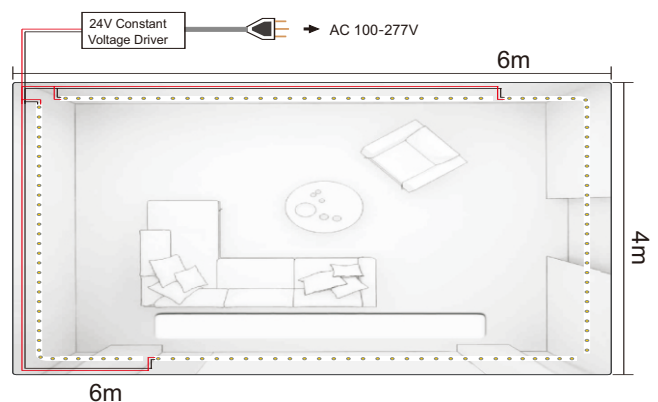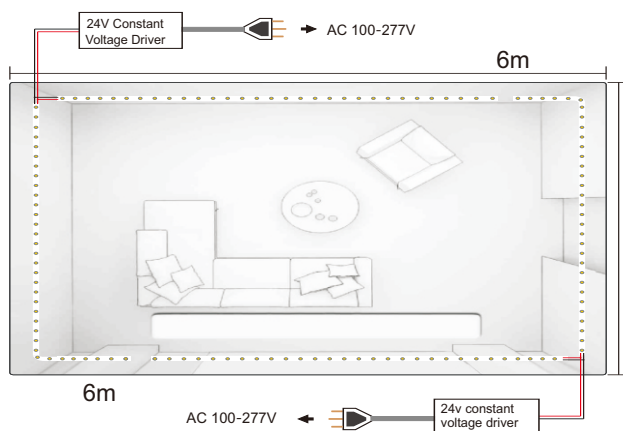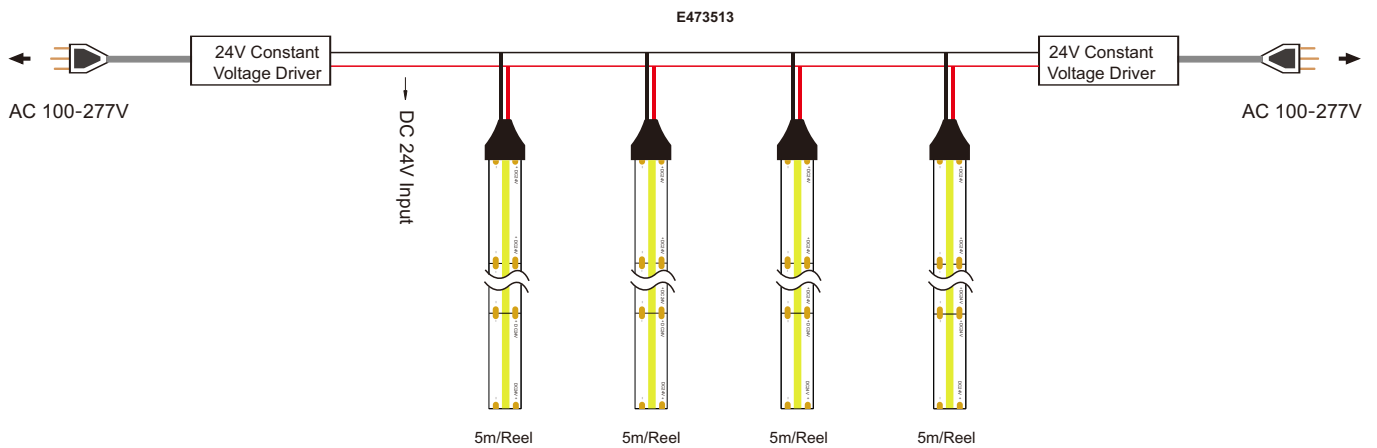

3M Adhesive Tape



3M 200 LSE Type
(Economy Type)




3M 300 LSE Type
(Mid-quality Type)




3M VHB RED
(High-quality Type)


Aluminium foil bag

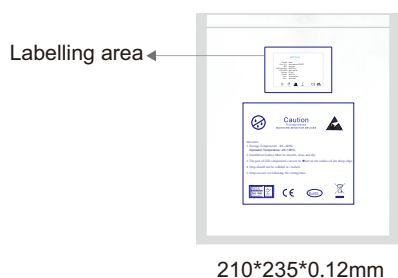

Plastic reel

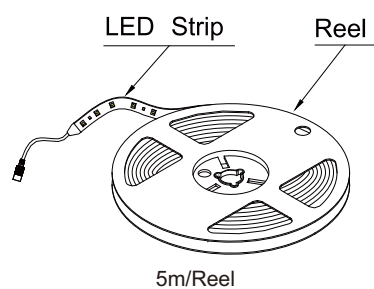


Carton box

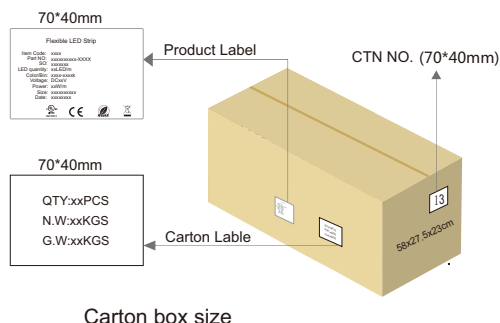

Packing Number

E41P513

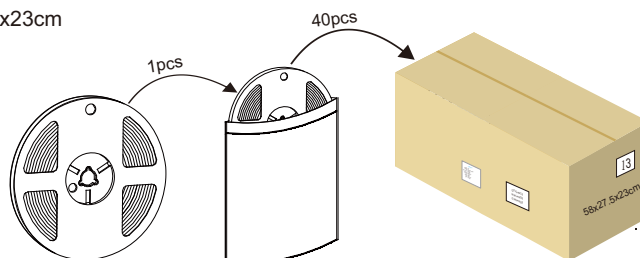


Strip Code :


Item code	LEDs/m	Voltage	Power (W/m)	CCT (K)	CRI (Ra)	Lumens Output (Lm/m)	IP Grade
MF309V512A90-D027A1A10132N	512LEDs	24V	12W	2700K	80+ 90+	1150Lm 960Lm	IP20
MF309V512A90-D030A1A10132N	512LEDs	24V	12W	3000K	80+ 90+	1180Lm 990Lm	IP20
MF309W512A90-D040A1A10132N	512LEDs	24V	12W	4000K	80+ 90+	1250Lm 1008Lm	IP20
MF309W512A90-D050A1A10132N	512LEDs	24V	12W	5000K	80+ 90+	1220Lm 995Lm	IP20
MF309W512A90-D060A1A10132N	512LEDs	24V	12W	6000K	80+ 90+	1225Lm 1000Lm	IP20

Cautions:

≤50 mm diameter of wrapped object prohibited

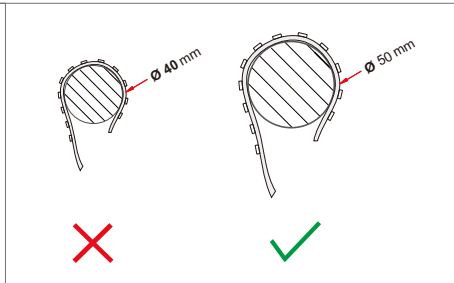

Touching LED, pls wear the electrostatic ring for avoiding ESD

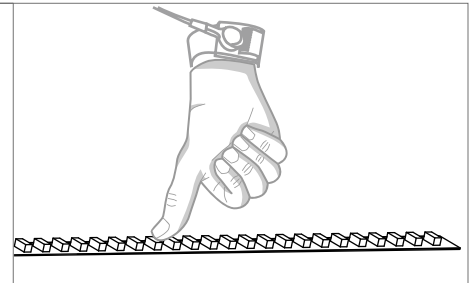

Safety Information

Application notes for led flexible strip

In order to drive LED flexible strip lights safely, it is absolutely necessary to operate them with an electronically stabilised power supply protecting against short circuits, overload and overheating.

To also ease the luminaire/installation approval, electronic control gear, power supply and all electronic accessories for LED or LED modules should carry "CE, or UL" mark and meet the latest safety standard.

- Please use 24VDC isolated power supply to drive the led strip, and the constant voltage source ripple less than 5%.
Can't step-down the power by resistance-capacitance and non-isolated power supply driver led strip, etc.
- To ensure the longevity and reliability of the strips, please do not bend the arc diameter 60mm or less, do not fold to avoid damaging the lamp beads or broken.
- To ensure the life and environment of lights, in the use of force can not pull the power cord to avoid damage to prohibit collision LED lights.
- During the installation of positive and negative attention to the power cord, do not pick the wrong voltage power supply and the product are the same, so as to avoid damage to the product.
- LED lights should be stored in dry sealed environment, the proposed storage period should not be too long before using unpacking, the working temperature: -20 ~ + 45 , Storage temperature: -0 ~ + 60 , not waterproof lights band indoor use, relative humidity not higher than 70%.
- In practical applications, the power supply should leave 20% margin (recommend using only 80% of the power) in order to ensure a sufficient amount of voltage drive products
- Do not use any acidic, alkaline adhesive securement products (including not limited to glass, plastic, etc.)