



ARCHITECTURAL



EDUCATION

VIP Service



Product
Customization



Marketing
Promotion



Dialux Design



Tech. Support

COOCO

LED LINE CONTINUOUS SYSTEM



SHOP



OFFICE



CooCo Limited

Add.: Building H2, Hongfa Tech. Park,
Songbai RD, Baoan District, Shenzhen.

Email: sales@cooco.cc

Tel: 0086-755-23225250



Web www.cooco.cc

Version 24.0



DLine Fixed

Low
UGR
VALUE

UP&DOWN
LIGHTING
DIRECTION

150
LUMINOUS
EFFICIENCY

Parameter





Dimension: H75 * W50 (mm)

4F: Down(17w/21w /26w/30w) / Upper(10w)

5F: Down(21w/27w/32w/37w) / Upper(12w)

150lm/w CRI>80(Optional: >90)

3000K
4000K
5000K
5700K
6500K

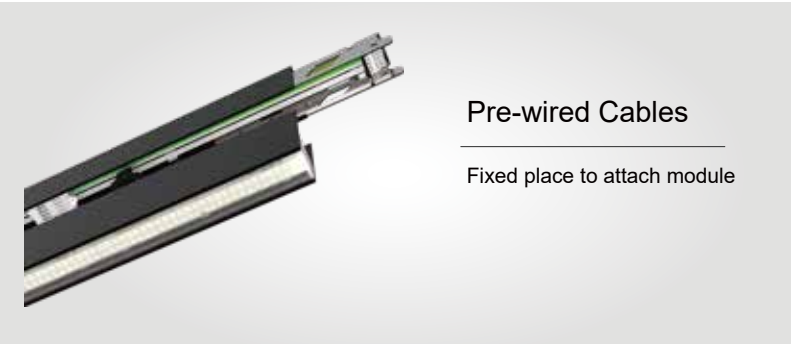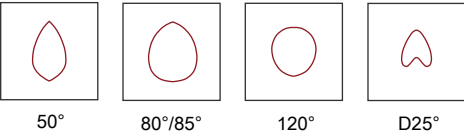


Pre-wired Cables

Fixed place to attach module




Through copper wires

Free to attach module, limitless

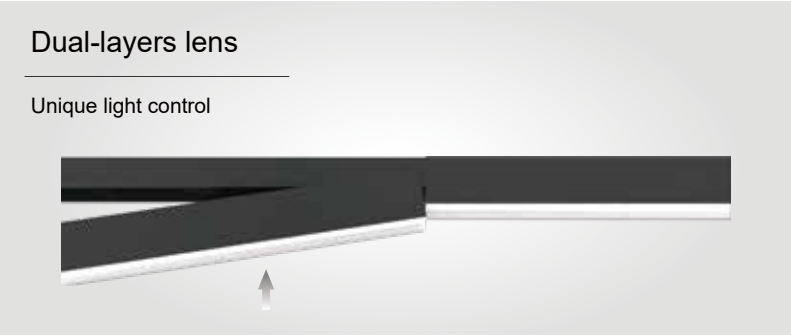

Dual-layers lens

Unique light control

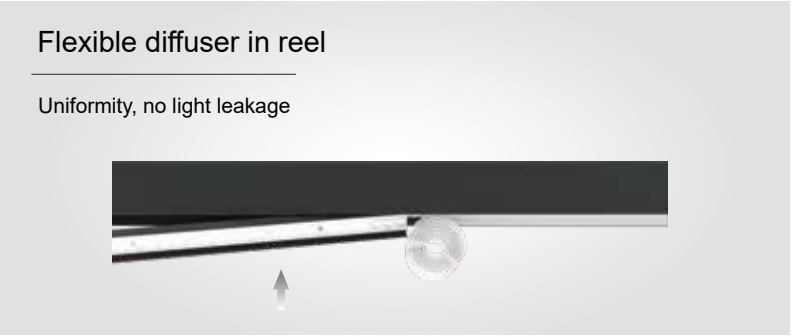

Flexible diffuser in reel

Uniformity, no light leakage

Features

Extensible modularization design

Fixed place to attach modules

Special trunking rail for up lighting

5/7 pre-wired through cables

Module covers trunking rail

Lens, diffuser, micro-prismatic, reflector covers

Ta
45°C
IP
50
IK
05

Features

Extensible modularization design

Free to attach modules in trunking rails

Universal Trunking rail, special up lighting module

Up to 9 copper wires

Trunking rail covers module, No light leakage

Flexible micro-prismatic diffuser in reel, lens

Accurate multiply length based on 281mm

Ta
45°C



DLine Flex

Low
UGR
VALUE

CCT
DIP
SELECTION

150
LUMINOUS
EFFICIENCY

Parameter



Dimension: H80 * W48 (mm)

4F: Down(17w/21w /26w/30w) / Upper(10w)

5F: Down(21w/27w/32w/37w) / Upper(12w)

150lm/w CRI>80(Optional: >90)

3000K
4000K
5000K
5700K
6500K

