




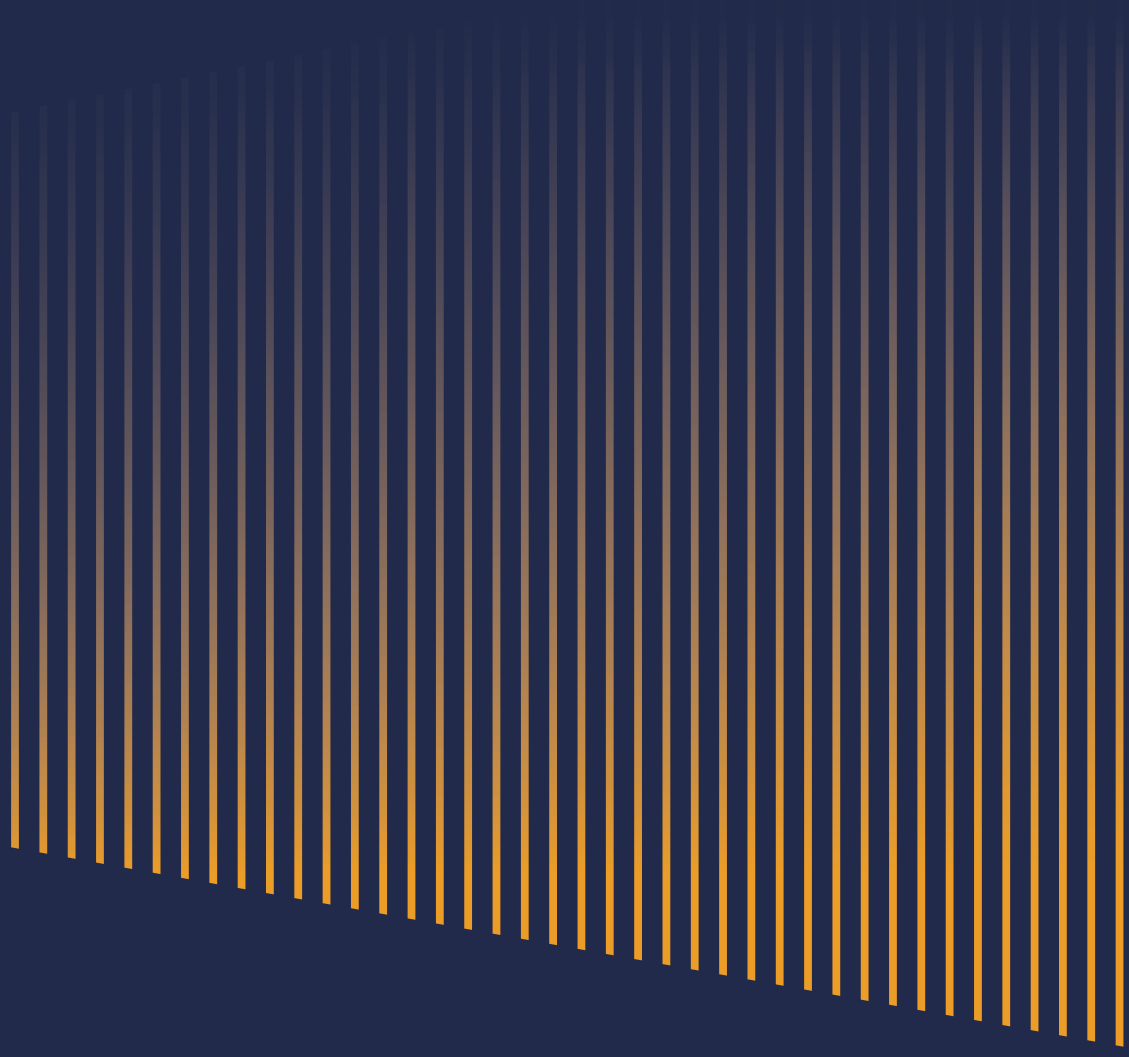

Archion은 오직 '건축화 조명'만을 위해 탄생한 전문 조명 브랜드입니다.

조명기구에 대한 디자인을 하기 이전에 우리가 우선적으로 고민하는 것은 바로 '건축'입니다. 건축의 환경이 어떠한지, 그에 따른 조명은 어떠해야 하는지에 대한 연구로부터 Archion의 디자인은 시작됩니다. Archion의 물리적, 전기적 디자인은 건축물과의 일체화를 추구하며, 광학적 디자인은 빛으로 인한 건축물의 변화를 만들어 냅니다.

Archion은 건축과 공간, 그리고 그에 적합한 빛에 대한 고민으로부터 탄생합니다.

Archion is a lighting brand which specializes in architectural lighting.

Architecture must be firstly served when we think of how to design lighting fixtures; 'Architecture before design'.

Archion's design begins from the research of how lighting can harmonize with the architectural environment would be.

Archion's physical and electrical design seeks for ways to melt into buildings. And its optical design gives a variety of looks on buildings with lights.

Archion begins with our commitment to come up with an idea of how to combine buildings and space with proper light.

P3

P3	02	CONTENTS
	04	TYPE
	08	LED
	10	SECONDARY OPTIC
	12	P3

P3 / W	14	ABOUT P3/W
	17	WHITE-HIGH
	18	WHITE-LOW
	19	TUNABLE WHITE
	20	RGB
	21	RGBW

P3 / P	22	ABOUT P3/P
	25	WHITE

26	SYSTEM SCHEMATIC
28	ORDER INFORMATION

P3 Type




IK10



IP68

IK10



IP


6

8





TRIMLESS TYPE

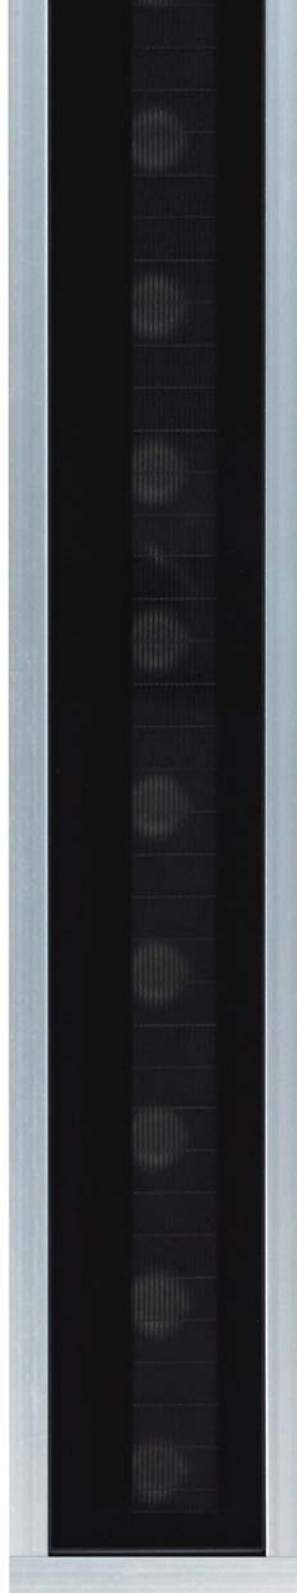

TRIM TYPE

P3 Type

TRIMLESS TYPE




**INSTALLATION
PROFILE**

LUMINAIRE

**BLANK
COVER**

DC, DC-D




DC, DC-D

INPUT : DC 24V
Through-wiring of up to
1200mm x 7ea




AC




AC

INPUT : AC 220/230V
Through-wiring of up to
1200mm x 20ea


TRIM TYPE

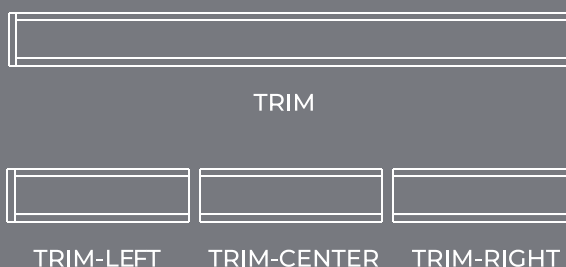

DC, DC-D



AC



P3 LED



L80>100,000hours Ta25°C

WHITE



2700K / 3000K / 4000K / 5000K / 6500K
HIGH POWER LEDS
CRI >80
3 SDCM STEP

TUNABLE WHITE



2700K ~ 6500K

RGB




FULL COLOR

RGBW




FULL COLOR +
REAL WHITE
(4000K or 6000K)


10°




20°




40°




10° x 60°





20° x 40°



40°



20° x 40°




MICRO LOUVER

마이크로 루버는 자체적으로 기울기가
있어서 수직면에서 40°이상의 빛을 차단합니다.

The micro louvers with their own tilt can block out light
above 40 degrees from the vertical plane.

P3 Secondary Optics

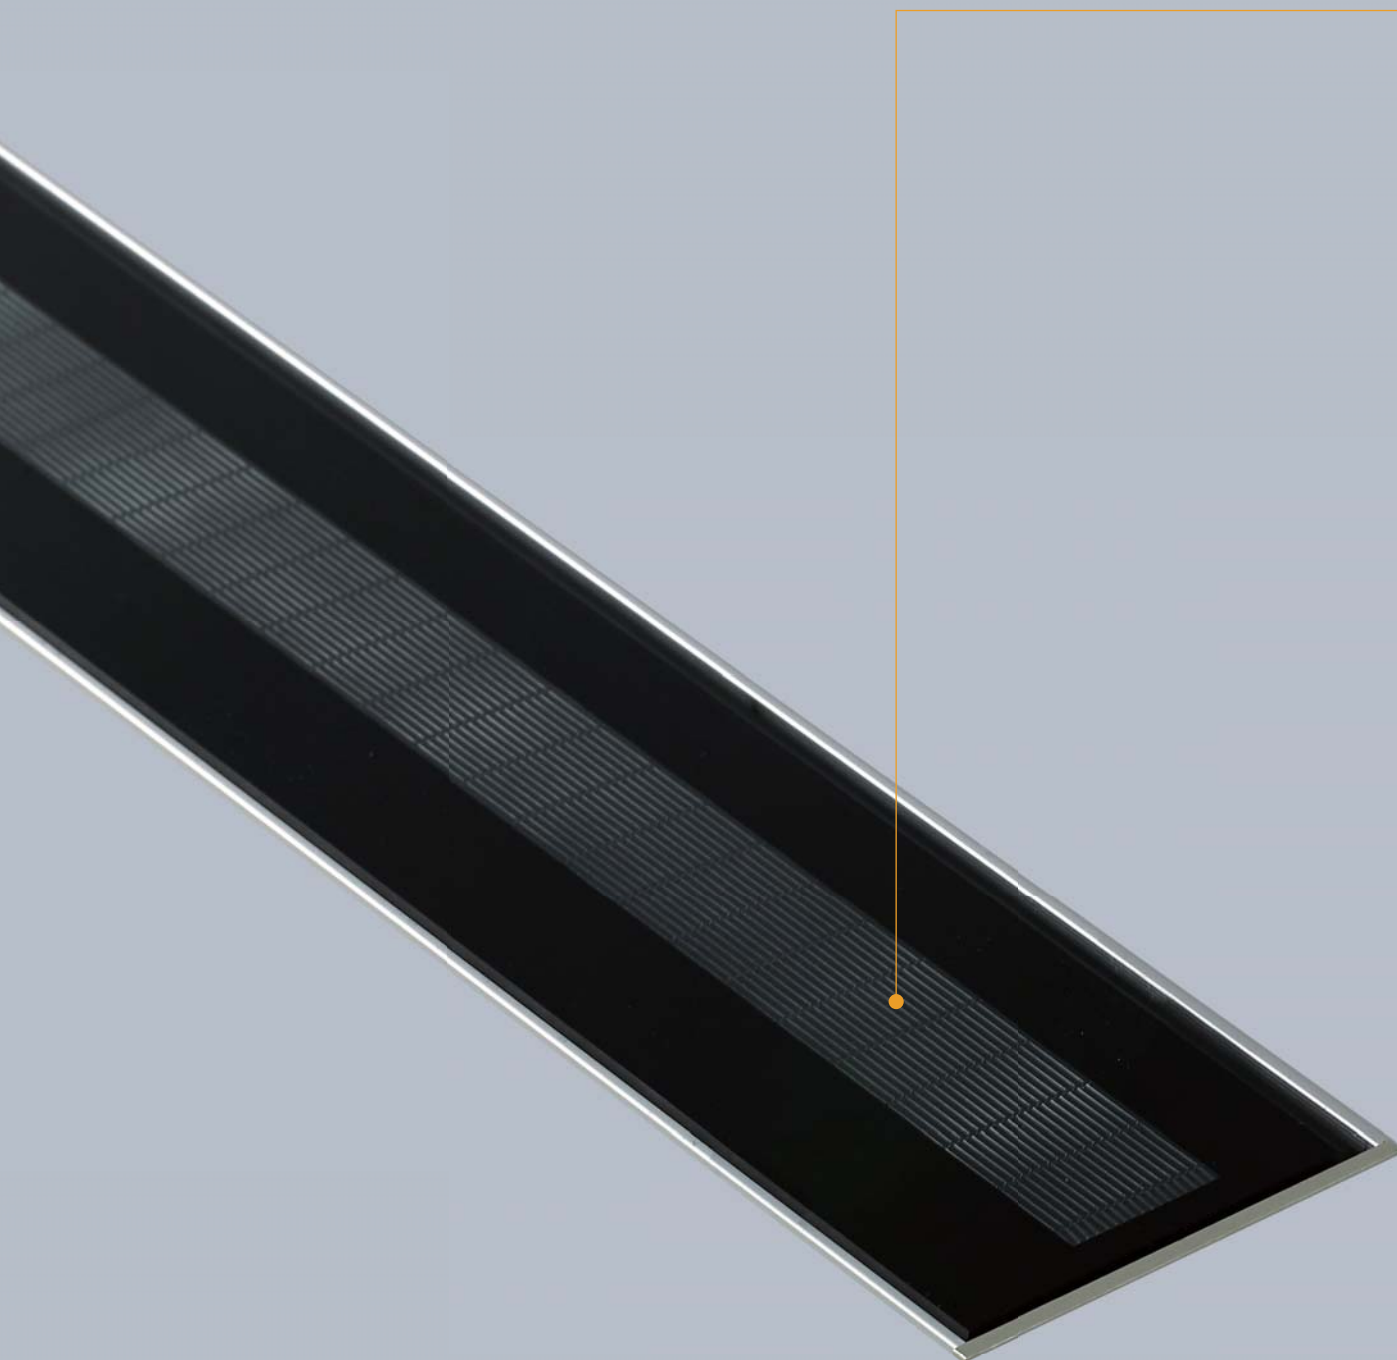

WIDE OPTIC



WIDE OPTIC을 사용하게 되면 좌우로 넓은 빛을 얻을 수 있습니다.





Using wide optic, you can get light widely from side to side.

ASYMMETRIC OPTIC



ASYMMETRIC OPTIC으로 빛을 수평상태에서 20도 정도 각도 조절한 효과를 얻을 수 있습니다.

Asymmetric optic enables to get an effect of 20-degree angle in its flat position.

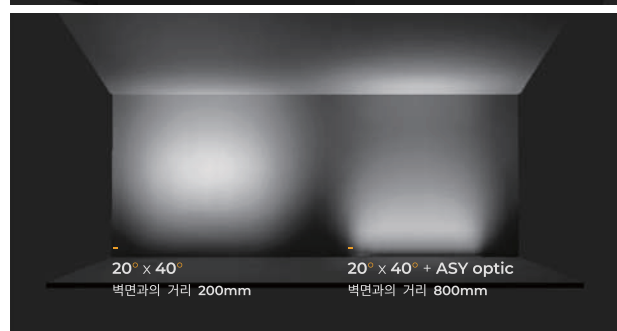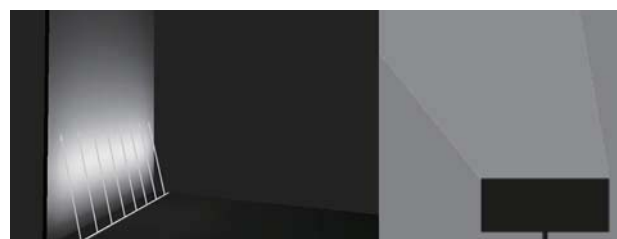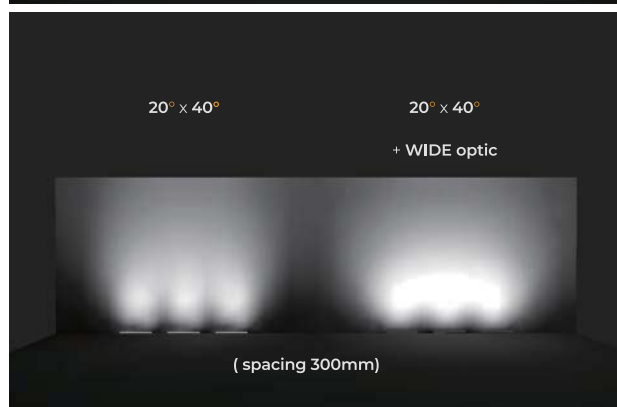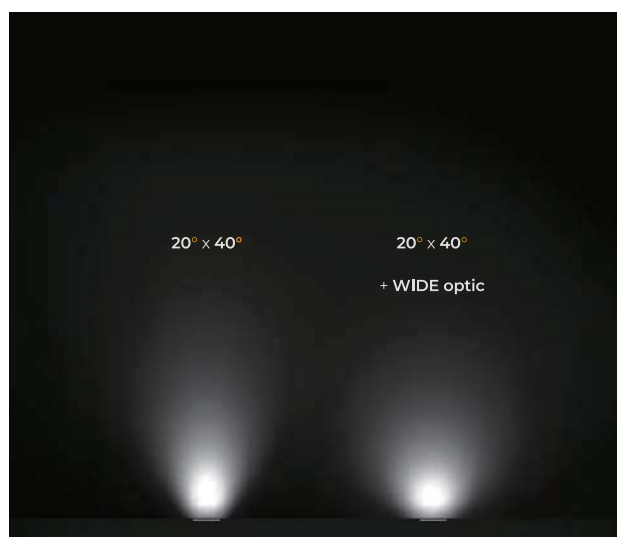

Glare control + Wall grazing





P3 /w

LED In-ground luminaire WALL WASHER

- | Excellent glare control
- | Flexible design for applications
- | IP68 / IK10 protection rating
- | Simple installation



P3/W



HIGH

| **COLOR** 2700K / 3000K / 4000K / 5000K / 6500K

| **CRI** 80+

| **SDCM STEP** 3

| **BEAM ANGLE** 10° / 20° / 40° / 10°x60° / 20°x40°

| **LED PITCH** 50mm

| **HOUSING** Anodized Aluminum body / Tempered glass cover

| **PROTECTION** IP68 / IK10

| **OPERATING TEMPERATURE** -20C to +50C°

DC-D INPUT / DC 24V

LENGTH	300mm	600mm	900mm	1200mm
POWER	15W	29.5W	44.5W	59W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	1130lm - 1670lm	2270lm - 3340lm	3410lm - 5020lm	4550lm - 6690lm
THROUGH-WIRING	max. 4.2m	max. 4.2m	max. 3.6m	max. 3.6m
CONTROL	DMX / RDM			

DC INPUT / DC 24V

LENGTH	300mm	600mm	900mm	1200mm
POWER	14.5W	29W	43.5W	58W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	1130lm - 1670lm	2270lm - 3340lm	3410lm - 5020lm	4550lm - 6690lm
THROUGH-WIRING	max. 4.2m	max. 4.2m	max. 3.6m	max. 3.6m
CONTROL	PWM DIMMING			


AC INPUT / AC 220/230V

LENGTH	300mm	600mm	900mm	1200mm
POWER	16.5W	32.5W	50W	65W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	1130lm - 1670lm	2270lm - 3340lm	3410lm - 5020lm	4550lm - 6690lm
THROUGH-WIRING	max. 20ea	max. 20ea	max. 20ea	max. 20ea
CONTROL	DMX / RDM, ON / OFF			


TRIMLESS



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

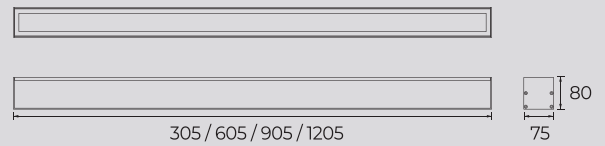


AC INPUT / AC 220/230V Fixture + profile Dimension

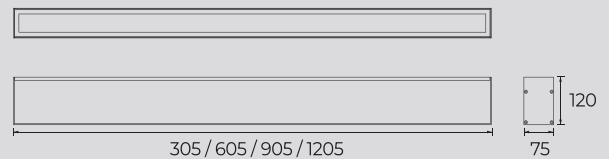


TRIM



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

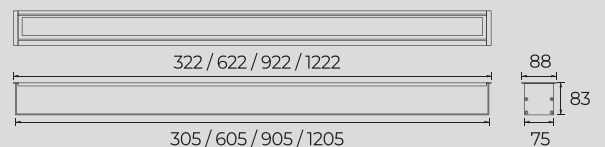

AC INPUT / AC 220/230V Fixture + profile Dimension

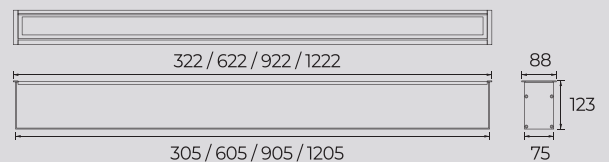

※ 사전 예고 없이 제품의 사양 및 크기는 변경 될 수 있습니다.

※ The specification and size of the products can be modified without prior notice.

LOW

COLOR	2700K / 3000K / 4000K / 5000K / 6500K
CRI	80+
SDCM STEP	3
BEAM ANGLE	10° / 20° / 40° / 10°x60° / 20°x40°
LED PITCH	50mm
HOUSING	Anodized Aluminum body / Tempered glass cover
PROTECTION	IP68 / IK10
OPERATING TEMPERATURE	-20C to +50C°

DC-D INPUT / DC 12V

LENGTH	300mm	600mm	900mm	1200mm
POWER	8W	15.5W	23.5W	31W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	550lm - 820lm	1100lm - 1650lm	1650lm - 2480lm	2210lm - 3310lm
THROUGH-WIRING	max. 6.9m	max. 7.2m	max. 7.2m	max. 7.2m
CONTROL	DMX / RDM			

DC INPUT / DC 12V

LENGTH	300mm	600mm	900mm	1200mm
POWER	7.5W	15W	22.5W	30W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	550lm - 820lm	1100lm - 1650lm	1650lm - 2480lm	2210lm - 3310lm
THROUGH-WIRING	max. 6.9m	max. 7.2m	max. 7.2m	max. 7.2m
CONTROL	PWM DIMMING			

AC INPUT / AC 220/230V

LENGTH	300mm	600mm	900mm	1200mm
POWER	9.5W	18.5W	28W	37W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	550lm - 820lm	1100lm - 1650lm	1650lm - 2480lm	2210lm - 3310lm
THROUGH-WIRING	max. 20ea	max. 20ea	max. 20ea	max. 20ea
CONTROL	DMX / RDM, ON / OFF			


TRIMLESS



DC, DC-D INPUT / DC 24V Fixture + profile Dimension




AC INPUT / AC 220/230V Fixture + profile Dimension

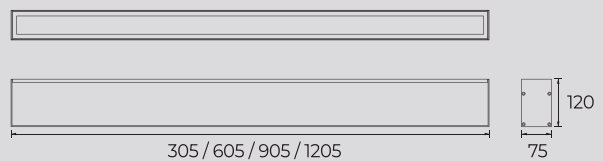


TRIM



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

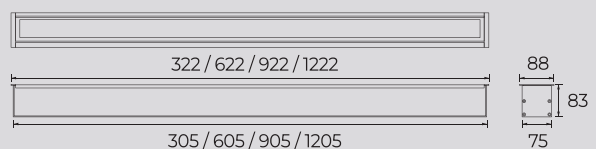

AC INPUT / AC 220/230V Fixture + profile Dimension

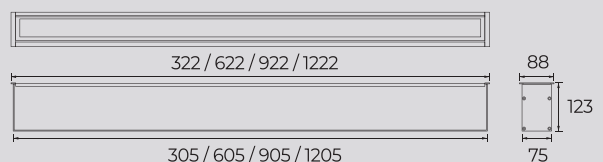

TUNABLE WHITE

| COLOR 2700K - 6500K

| CRI 80+

| BEAM ANGLE 10° / 20° / 40° / 10°x60° / 20°x40°

| LED PITCH 75mm

| HOUSING Anodized Aluminum body / Tempered glass cover

| PROTECTION IP68 / IK10

| OPERATING TEMPERATURE -20C to +50C°

DC-D INPUT / DC 24V

LENGTH	300mm	600mm	900mm	1200mm
POWER	14W	27.5W	41.5W	55W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	1120lm - 1670lm	2240lm - 3340lm	3360lm - 5020lm	4480lm - 6690lm
THROUGH-WIRING	max. 4.5m	max. 4.2m	max. 4.5m	max. 4.8m
CONTROL	DMX / RDM			

DC INPUT / DC 24V

LENGTH	300mm	600mm	900mm	1200mm
POWER	13.5W	27W	40.5W	54W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	1120lm - 1670lm	2240lm - 3340lm	3360lm - 5020lm	4480lm - 6690lm
THROUGH-WIRING	max. 4.5m	max. 4.2m	max. 4.5m	max. 4.8m
CONTROL	PWM DIMMING			


AC INPUT / AC 220/230V

LENGTH	300mm	600mm	900mm	1200mm
POWER	15.5W	30.5W	46W	61W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	1120lm - 1670lm	2240lm - 3340lm	3360lm - 5020lm	4480lm - 6690lm
THROUGH-WIRING	max. 20ea	max. 20ea	max. 20ea	max. 20ea
CONTROL	DMX / RDM, ON / OFF			


TRIMLESS



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

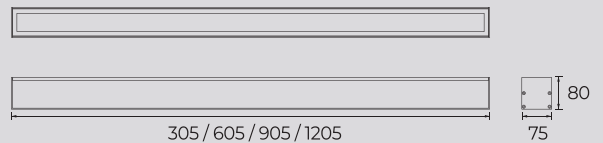


AC INPUT / AC 220/230V Fixture + profile Dimension

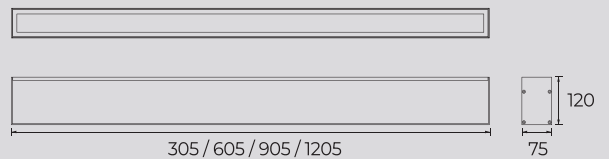


TRIM



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

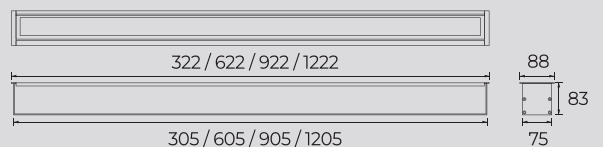

AC INPUT / AC 220/230V Fixture + profile Dimension

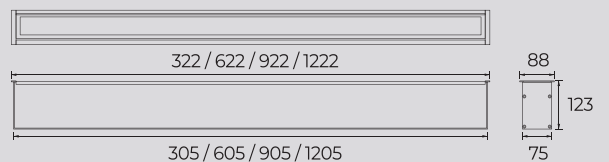

※ 사전 예고 없이 제품의 사양 및 크기는 변경 될 수 있습니다.

※ The specification and size of the products can be modified without prior notice.

RGB

COLOR	R,G,B
BEAM ANGLE	10° / 20° / 40° / 10°x60° / 20°x40°
LED PITCH	100mm
HOUSING	Anodized Aluminum body / Tempered glass cover
PROTECTION	IP68 / IK10
OPERATING TEMPERATURE	-20C to +50C°

DC-D INPUT / DC 12V

LENGTH	300mm	600mm	900mm	1200mm
POWER	13.5W	26.5W	40W	53W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	480lm - 730lm	970lm - 1460lm	1460lm - 2190lm	1950lm - 2920lm
THROUGH-WIRING	max. 4.5m	max. 4.8m	max. 4.5m	max. 4.8m
CONTROL	DMX / RDM			

DC INPUT / DC 12V

LENGTH	300mm	600mm	900mm	1200mm
POWER	13W	26W	39W	52W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	480lm - 730lm	1630lm - 2410lm	1460lm - 2190lm	1950lm - 2920lm
THROUGH-WIRING	max. 4.5m	max. 4.8m	max. 4.5m	max. 4.8m
CONTROL	PWM DIMMING			

AC INPUT / AC 220/230V

LENGTH	300mm	600mm	900mm	1200mm
POWER	15W	29.5W	44.5W	59W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	480lm - 730lm	970lm - 1460lm	1460lm - 2190lm	1950lm - 2920lm
THROUGH-WIRING	max. 20ea	max. 20ea	max. 20ea	max. 20ea
CONTROL	DMX / RDM, ON / OFF			


TRIMLESS



DC, DC-D INPUT / DC 12V Fixture + profile Dimension




AC INPUT / AC 220/230V Fixture + profile Dimension

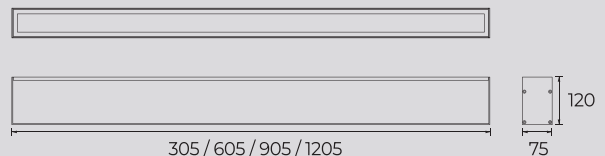


TRIM



DC, DC-D INPUT / DC 12V Fixture + profile Dimension

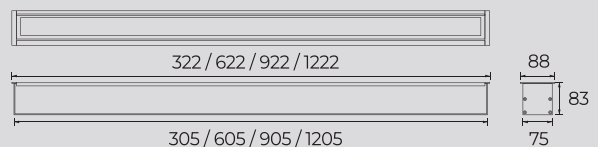

AC INPUT / AC 220/230V Fixture + profile Dimension

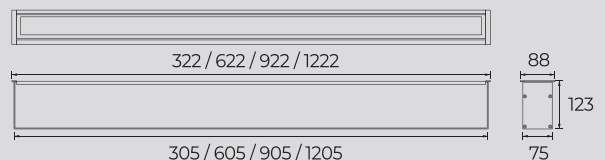

RGBW

COLOR R,G,B,W (4000K/6000K)

BEAM ANGLE 40° / 20°x40°

LED PITCH 50mm

HOUSING Anodized Aluminum body / Tempered glass cover

PROTECTION IP68 / IK10

OPERATING TEMPERATURE -20C to +50C°

DC-D INPUT / DC 24V

LENGTH	300mm	600mm	900mm	1200mm
POWER	14.5W	29W	43.5W	57.5W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	520lm - 600lm	1040lm - 1200lm	1560lm - 1800lm	2080lm - 2400lm
THROUGH-WIRING	max. 4.2m	max. 4.2m	max. 3.6m	max. 3.6m
CONTROL	DMX / RDM			

DC INPUT / DC 24V

LENGTH	300mm	600mm	900mm	1200mm
POWER	14W	28.5W	42.5W	56.5W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	520lm - 600lm	1040lm - 1200lm	1560lm - 1800lm	2080lm - 2400lm
THROUGH-WIRING	max. 4.2m	max. 4.2m	max. 3.6m	max. 3.6m
CONTROL	PWM DIMMING			


AC INPUT / AC 220/230V

LENGTH	300mm	600mm	900mm	1200mm
POWER	16W	32W	48W	63.5W
LEDs	6LEDs	12LEDs	18LEDs	24LEDs
LUMINOUS FLUX	520lm - 600lm	1040lm - 1200lm	1560lm - 1800lm	2080lm - 2400lm
THROUGH-WIRING	max. 20ea	max. 20ea	max. 20ea	max. 20ea
CONTROL	DMX / RDM, ON / OFF			


TRIMLESS



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

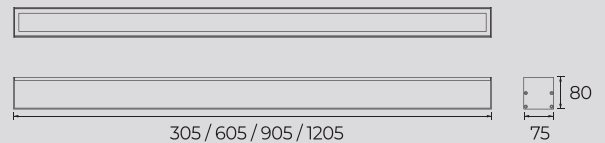


AC INPUT / AC 220/230V Fixture + profile Dimension

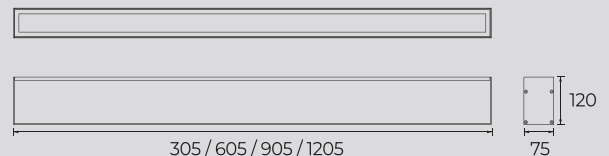


TRIM



DC, DC-D INPUT / DC 24V Fixture + profile Dimension

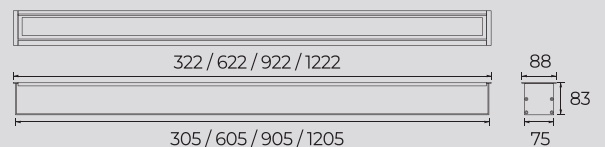

AC INPUT / AC 220/230V Fixture + profile Dimension

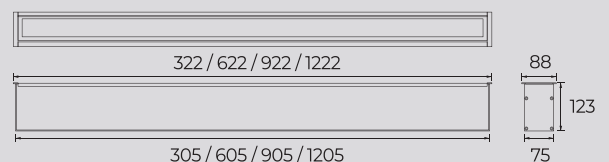

※ 사전 예고 없이 제품의 사양 및 크기는 변경 될 수 있습니다.

※ The specification and size of the products can be modified without prior notice.

P3 / P

LED In-ground luminaire POINT LIGHT

- | Tiny but powerful
- | IP68 / IK10 protection rating
- | Simple installation



P3/P




WHITE


COLOR	2700K / 3000K / 4000K / 5000K / 6500K
CRI	80+
BEAM ANGLE	10° / 20° / 40° / 10°x60° / 20°x40°
LED	High Power LEDs
HOUSING	Anodized Aluminum body / Tempered glass cover
PROTECTION	IP68 / IK10
OPERATING TEMPERATURE	-20C to +50C°

DC INPUT / DC 24V	
LENGTH	120mm
POWER	14.5W
LEDs	6LEDs
LUMINOUS FLUX	400lm - 580lm
THROUGH-WIRING	max. 10ea
CONTROL	ON / OFF, PWM DIMMING


TRIMLESS

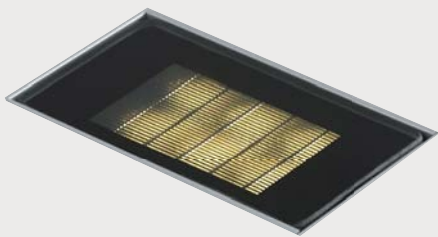


DC, DC-D INPUT / DC 24V Fixture + profile Dimension



TRIM

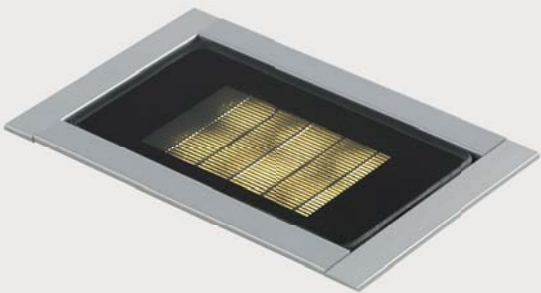

DC, DC-D INPUT / DC 24V Fixture + profile Dimension




※ 사전 예고 없이 제품의 사양 및 크기는 변경 될 수 있습니다.
※ The specification and size of the products can be modified without prior notice.

P3 SYSTEM SCHEMATIC

DC/DC-D model

DC, DC-D TYPE P3 Maximum Connection


WHITE - HIGH : max. 4.2m WHITE - LOW : max. 7.2m TUNABLE WHITE : max. 4.8m
 RGB : max. 4.8m RGBW : max. 4.2m

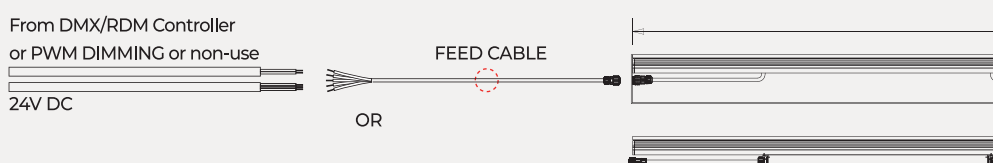

AC model

AC TYPE P3 Maximum Connection

max. 20EA

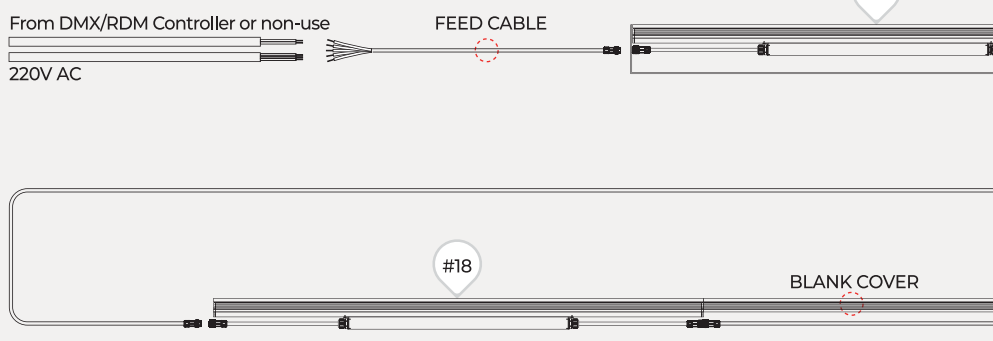

P3/AC or DC & DMX/RDM

P3은 DMX/RDM 방식을 지원합니다. 하나의 라인에 데이터 체인 형태로 최대 20개의 기구를 연속으로 연결 가능하며, DMX/RDM 방식으로 손쉽게 제어가 가능합니다. 또한 실내에 적합하고 타 기구들과 동시에 제어가 매우 쉬우며 위와 같은 구성이 가능합니다.


P3 supports DMX/RDM control. The Daisy Chain method can connect up to DMX/RDM luminaries per line and it is easy to control by using DMX/RDM. Also, it matches well with the interior, it is easy to control and can be installed in the same exact way as shown on the image above.

FEED CABLE

피드 케이블의 최대 길이는 3m입니다. 단, 현장 상황에 따라 달라질 수 있습니다.
 The maximum length of the feed cable is 3 meters.
 However, the length of the feed cable depends on each project.

DMX/RDM CABLE

PWM DIMMING CABLE

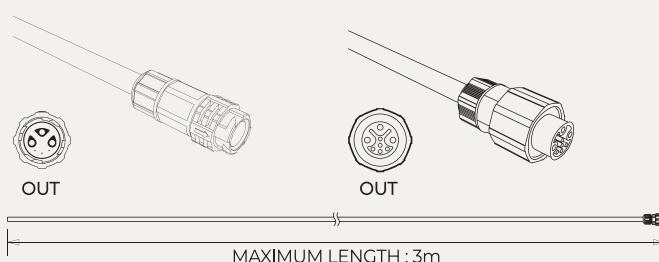




INTER CABLE

최대 3m까지 지원합니다. 인터케이블은 AC, DC 전원과 DMX/RDM 통신선으로 이루어져 있습니다.
하나의 케이블은 최대 3m 길이를 초과할 수 없습니다.

Possible maximum length - 3m

Inter cable includes : AC,DC power cable and DMX/RDM connection cable.
The length of each cable can not exceed 3m

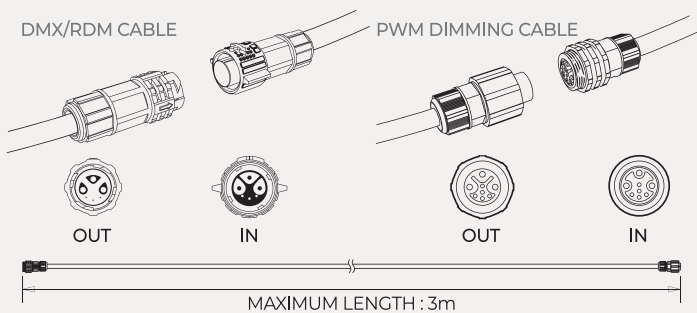

P3

Order Information

P3/W - WHITE - HIGH

▼ Please contact us if you have a color temperature that is not on the list below.

SERIES	TYPE	LENGTH	WHITE CCT	OUTPUT	BEAM ANGLE	OPTION	CONTROL	TRIM
P3/W	DC (DC 24V)	300	W27K 2700K	HIGH	L10	ASY ASYMMETRIC OPTIC	DMX/RDM	TL
	DC-D (DC 24V)	600	W30K 3000K		L20	WID WIDE OPTIC	ON/OFF	TM
	AC (AC 220V)	900	W40K 4000K		L40	MLV MICRO LOUVER	PWM DIMMING	TML
		1200	W50K 5000K		L1060			TMC
			W65K 6500K		L2040			TMR

▲ LENGTH = 'mm'

DC-D MODEL Only DMX/RDM, DC MODEL Only PWM DIMMING ▲

P3/W - WHITE - LOW

▼ Please contact us if you have a color temperature that is not on the list below.

SERIES	TYPE	LENGTH	WHITE CCT	OUTPUT	BEAM ANGLE	OPTION	CONTROL	TRIM
P3/W	DC (DC 12V)	300	W27K 2700K	LOW	L10	ASY ASYMMETRIC OPTIC	DMX/RDM	TL
	DC-D (DC 12V)	600	W30K 3000K		L20	WID WIDE OPTIC	ON/OFF	TM
	AC (AC 220V)	900	W40K 4000K		L40	MLV MICRO LOUVER	PWM DIMMING	TML
		1200	W50K 5000K		L1060			TMC
			W65K 6500K		L2040			TMR

▲ LENGTH = 'mm'

DC-D MODEL Only DMX/RDM, DC MODEL Only PWM DIMMING ▲

P3/W - TUNABLE WHITE

▼ Please contact us if you have a color temperature that is not on the list below.

SERIES	TYPE	LENGTH	TW	BEAM ANGLE	OPTION	CONTROL	TRIM
P3/W	DC (DC 24V)	300	TW 2700K - 6500K	L10	ASY ASYMMETRIC OPTIC	DMX/RDM	TL
	DC-D(DC 24V)	600		L20	WID WIDE OPTIC	PWM DIMMING	TM
	AC (AC 220V)	900		L40	MLV MICRO LOUVER		TML
		1200		L1060			TMC
				L2040			TMR

▲ LENGTH = 'mm'

DC-D MODEL Only DMX/RDM, DC MODEL Only PWM DIMMING ▲

P3/W - RGB

SERIES	TYPE	LENGTH	RGB	BEAM ANGLE	OPTION	CONTROL	TRIM
P3/W	DC (DC 12V)	300	RGB	L10	ASY ASYMMETRIC OPTIC	DMX/RDM	TL
	DC-D(DC 12V)	600		L20	WID WIDE OPTIC	PWM DIMMING	TM
	AC (AC 220V)	900		L40	MLV MICRO LOUVER		TML
		1200		L1060			TMC
				L2040			TMR

▲ LENGTH = 'mm'

DC-D MODEL Only DMX/RDM, DC MODEL Only PWM DIMMING ▲

P3/W - RGBW

SERIES	TYPE	LENGTH	RGBW	BEAM ANGLE	OPTION	CONTROL	TRIM
P3/W	DC (DC 24V)	300	RGBW30K W : 3000K	L40	ASY ASYMMETRIC OPTIC	DMX/RDM	TL
	DC-D(DC 24V)	600	RGBW40K W : 4000K	L2040	WID WIDE OPTIC	PWM DIMMING	TM
	AC (AC 220V)	900	RGBW60K W : 6000K		MLV MICRO LOUVER		TML
		1200					TMC
							TMR

▲ LENGTH = 'mm'

DC-D MODEL Only DMX/RDM, DC MODEL Only PWM DIMMING ▲

P3/P - WHITE

▼ Please contact us if you have a color temperature that is not on the list below.

SERIES	TYPE	WHITE CCT	BEAM ANGLE	OPTION	CONTROL	TRIM
P3/P	DC (DC 24V)	W27K 2700K	L10	ASY ASYMMETRIC OPTIC	PWM DIMMING	TL
		W30K 3000K	L20	WID WIDE OPTIC		TM
		W40K 4000K	L40	MLV MICRO LOUVER		TML
		W50K 5000K	L1060			TMC
		W65K 6500K	L2040			TMR

DC MODEL Only PWM DIMMING ▲

P3 - ACCESSORIES

PART #	DESCRIPTION
P3AFDC-1	P3 - A TYPE DMX/RDM(ON/OFF) FEED CABLE - 1M
P3AFDC-2	P3 - A TYPE DMX/RDM(ON/OFF) FEED CABLE - 2M
P3AFDC-3	P3 - A TYPE DMX/RDM(ON/OFF) FEED CABLE - 3M
P3B1FDC-1	P3 - B TYPE WHITE PWM FEED CABLE - 1M
P3B1FDC-2	P3 - B TYPE WHITE PWM FEED CABLE - 2M
P3B1FDC-3	P3 - B TYPE WHITE PWM FEED CABLE - 3M
P3B2FDC-1	P3 - B TYPE TUNABLE WHITE PWM FEED CABLE - 1M
P3B2FDC-2	P3 - B TYPE TUNABLE WHITE PWM FEED CABLE - 2M
P3B2FDC-3	P3 - B TYPE TUNABLE WHITE PWM FEED CABLE - 3M
P3B3FDC-1	P3 - B TYPE RGB PWM FEED CABLE - 1M
P3B3FDC-2	P3 - B TYPE RGB PWM FEED CABLE - 2M
P3B3FDC-3	P3 - B TYPE RGB PWM FEED CABLE - 3M
P3B4FDC-1	P3 - B TYPE RGBW PWM FEED CABLE - 1M
P3B4FDC-2	P3 - B TYPE RGBW PWM FEED CABLE - 2M
P3B4FDC-3	P3 - B TYPE RGBW PWM FEED CABLE - 3M

PART #	DESCRIPTION
P3AEDC	P3 - A TYPE DMX/RDM(ON/OFF) CABLE END CAP
P3BEDC	P3 - B TYPE PWM CABLE END CAP

PART #	DESCRIPTION
P3A1TC-1	P3 - A TYPE DMX/RDM(ON/OFF) INTER CABLE - 1M
P3A1TC-2	P3 - A TYPE DMX/RDM(ON/OFF) INTER CABLE - 2M
P3A1TC-3	P3 - A TYPE DMX/RDM(ON/OFF) INTER CABLE - 3M
P3B11TC-1	P3 - B TYPE WHITE PWM INTER CABLE - 1M
P3B11TC-2	P3 - B TYPE WHITE PWM INTER CABLE - 2M
P3B11TC-3	P3 - B TYPE WHITE PWM INTER CABLE - 3M
P3B21TC-1	P3 - B TYPE TUNABLE WHITE PWM INTER CABLE - 1M
P3B21TC-2	P3 - B TYPE TUNABLE WHITE PWM INTER CABLE - 2M
P3B21TC-3	P3 - B TYPE TUNABLE WHITE PWM INTER CABLE - 3M
P3B31TC-1	P3 - B TYPE RGB PWM INTER CABLE - 1M
P3B31TC-2	P3 - B TYPE RGB PWM INTER CABLE - 2M
P3B31TC-3	P3 - B TYPE RGB PWM INTER CABLE - 3M
P3B41TC-1	P3 - B TYPE RGBW PWM INTER CABLE - 1M
P3B41TC-2	P3 - B TYPE RGBW PWM INTER CABLE - 2M
P3B41TC-3	P3 - B TYPE RGBW PWM INTER CABLE - 3M

PART #	DESCRIPTION
P3TMLK - mm	P3 - TRIM BLANK COVER - ("mm" Fill it out)
P3TLBLK - mm	P3 - TRIMLESS BLANK COVER - ("mm" Fill it out)

Can use blank cover of the length from 100mm to 2000mm.

P3 - INSTALLATION PROFILE

PART #	DESCRIPTION
P3AINSPF - mm	P3 - AC TYPE INSTALLATION PROFILE - ("mm" Fill it out)
P3BINSPF - mm	P3 - DC TYPE INSTALLATION PROFILE - ("mm" Fill it out)
P3AISC	P3 - AC TYPE INSTALLATION PROFILE SIDE CAP
P3BISC	P3 - DC TYPE INSTALLATION PROFILE SIDE CAP

TRIM GUIDE



