

KWT[®]
KING WATT LIGHTING

**Professional
Super-excellent
Commercial
LED Lighting Manufacturer**

2023-2024 Ver.

KWT[®]
SHENZHEN KING WATT OPTO-ELECTRONICS CO.,LTD

Shenzhen company address:

Room 1203, Building 2#A, Skyworth Innovation Valley, Songbai Road,
Shiyan, Bao'an District, Shenzhen, China 518108

Dongguan company address:

5th Floor, No. 21 Industrial Park, DiTangLing Road, DaTang Village,
DaLingShan Town, DongGuan City, China. 523820

Tel: +86-755-86062259

Mobile: +86 18576409138 Fax: +86-755-86062219

E-mail: sale06@kwtled.com

Web: www.kwtled.com



NO QUALITY CONTROL AND CREDIT
NO BRIGHT FUTURE

BRAND CULTURE

Enterprise Mission

Design and manufacture perfect LED lamps
to improve human being's environment

Enterprise Forecast

To be a leading LED commercial lighting enterprise
satisfying customers' demand in market orientation

Core Value

Customer first, sincerity, responsibility and
innovation

Enterprise Spirit

Confidence, teamwork, responsibility and tolerance

Business Philosophy


Honesty, practice and efficiency

Strategy Core

Quality First, Innovation and Breakthrough

Customer Service Philosophy

To be customers' reliable partner

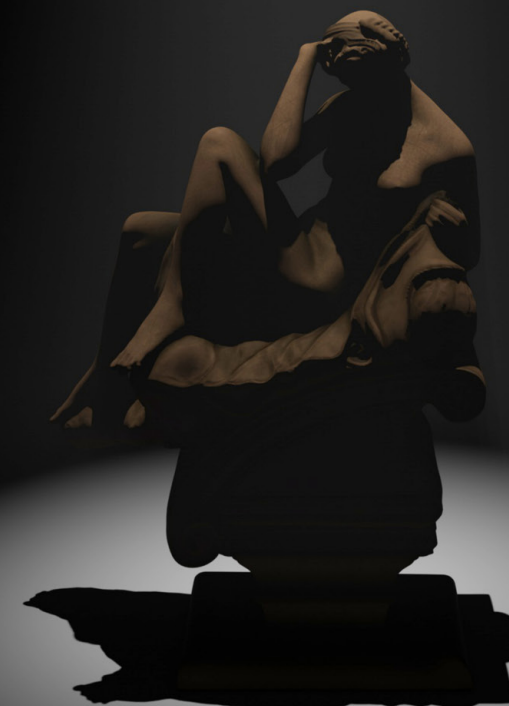



爷爷
于12:45授权远程临时密码



22:25门锁异常，是否启动报警模式



LIGHTING
is one part of the smart home

LED Digital PWM Dimming



Flicker Free | Dimming minimum to 0.01% | Smooth Dimming | Soft Lighting

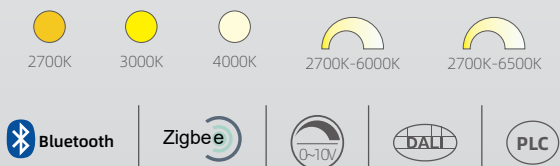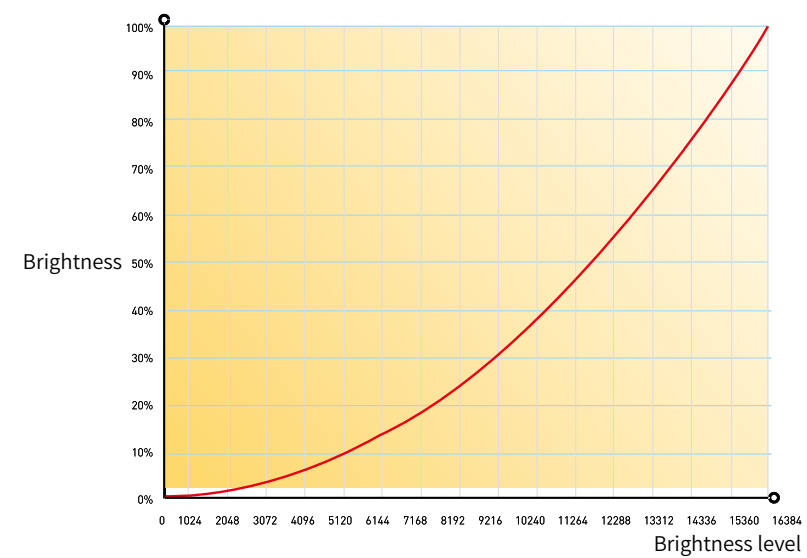

The PWM dimming driver matches all known brand wireless systems perfectly

DEEPLY ANTI GLARE


The both Optical lens and reflectors are designed by KWT ,
They help to achieve smooth and soft lighting , and deeply anti-glare .

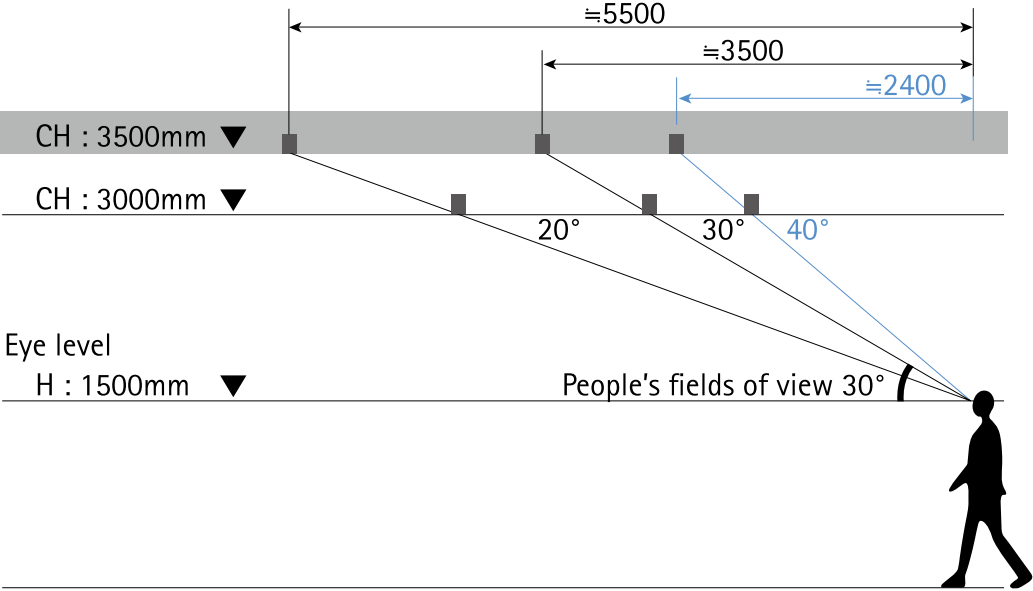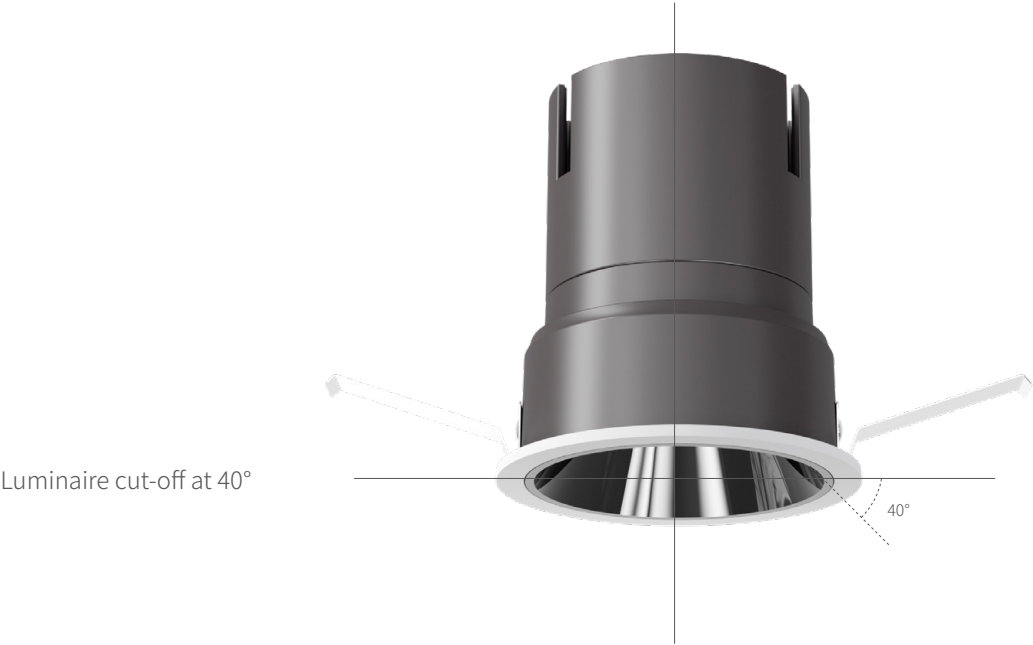


LONG LIFE- SPAN

After mock testing in the special enviroment , we get the result of the light life-span over
40,000 hours

The relationship between LED life time and temperature

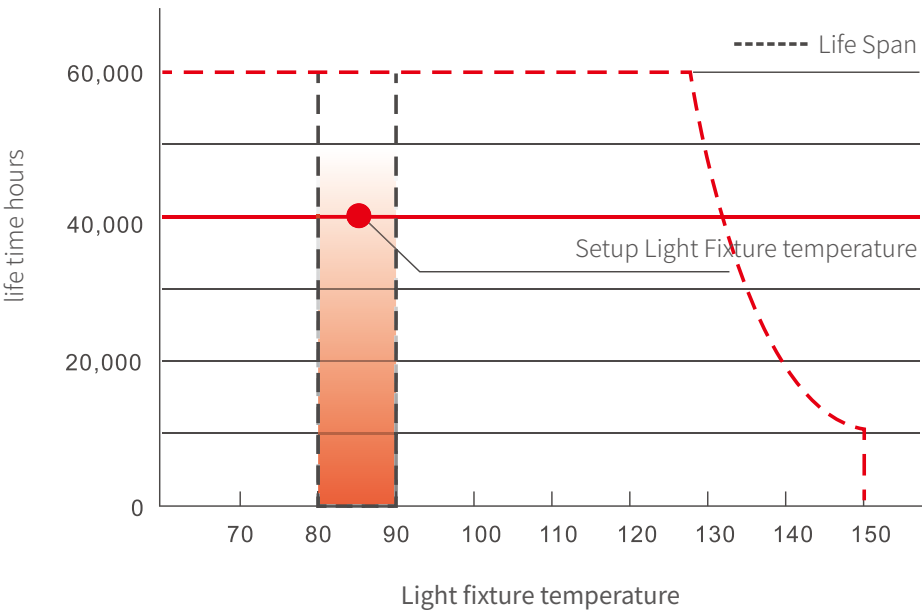

Brightness maintenance rate High brightness maintenance rate , ensure the high lumens of light fixure under life-span

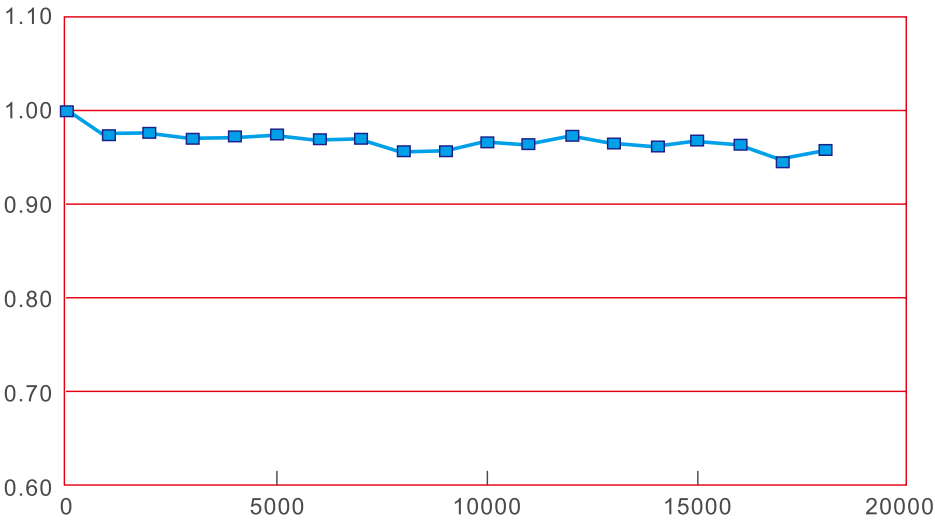

HEAT DISSIPATION


How long the light fixture's life-span ,it depend on the performance of heat dissipatation . We found a best solution to improve the heat dissipated away faster after mock testing , So the brightness reduction less 6% after 40000 hours .

SOLUTION OF FLICKER FREE DRIVER


The driver frenquency flicker causes people feel uncomfortable , such as eyes' tired ,headach , have a break down etc .So the flicker free driver is the most important for lighting

Frenquency Flicker

Flicker Free

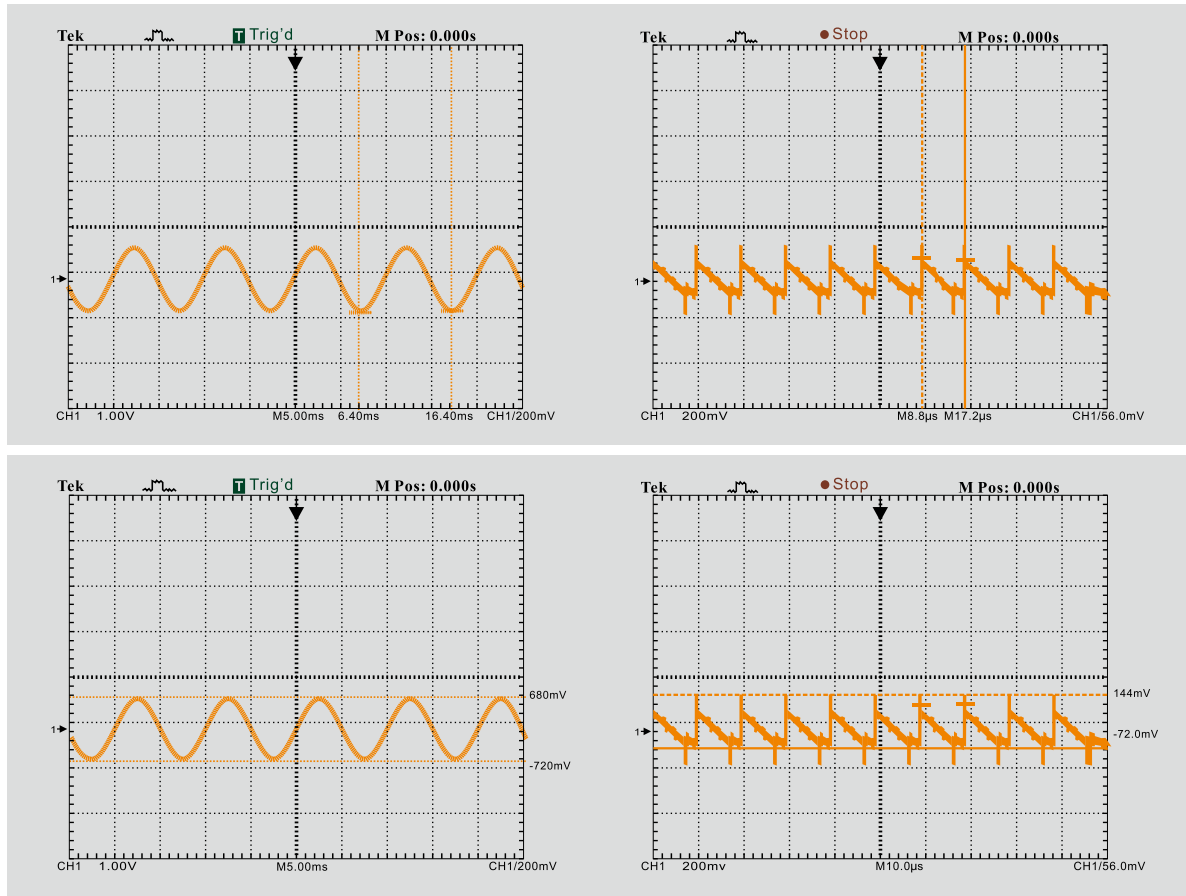

Mock testing the light fixture works how long hours under highest temperature

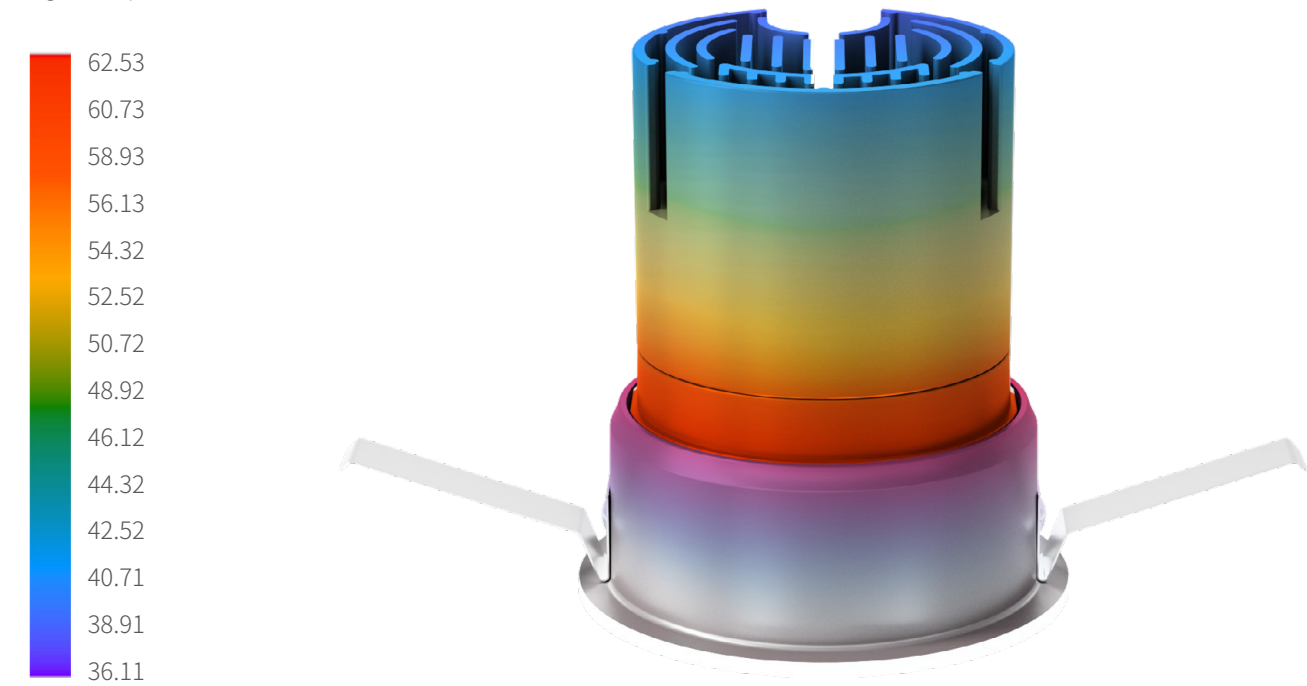


Solid Temperature[°C]

Color Rendering

A color rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with a natural or standard light source. Light sources with a high CRI are desirable in color-critical applications such as neonatal care and art restoration.

Color rendering, as defined by the International Commission on Illumination (CIE), is the effect of an illuminant on the color appearance of objects by conscious or subconscious comparison with their color appearance under a reference or standard illuminant

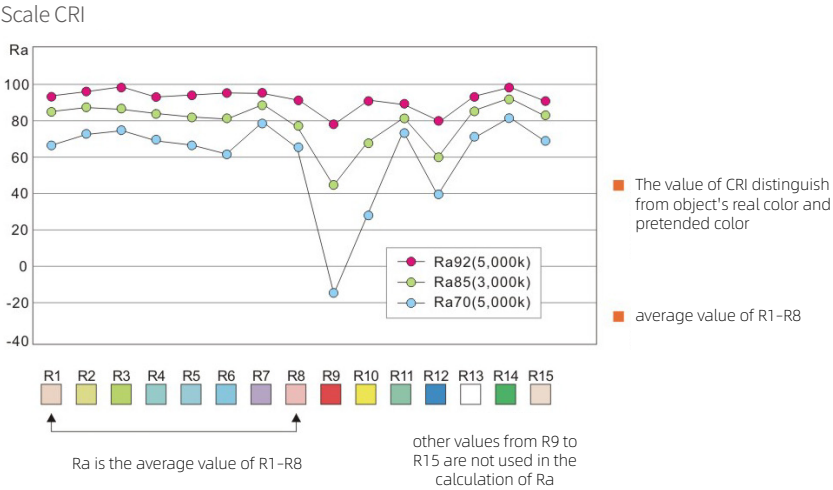


Terminogy	Interpretation
Luminous Flux	Luminous flux is a measure of the power of visible light produced by a light source or light fitting. It is measured in lumens (lm).
Luminous Efficacy	It is the ratio of luminous flux to power, measured in lumens per watt (lm/w) in the International System of Units (SI)
Illuminance	the action of supplying or brightening with light or the resulting state.
Colour Temperature	Color temperature is a way to describe the light appearance provided by a light bulb. It is measured in degrees of Kelvin (K) on a scale from 1,000 to 10,000. Typically, Kelvin temperatures for commercial and residential lighting applications fall somewhere on a scale from 2000K to 6500K.
Junction Temperature	the junction temperature, which is short for transistor junction temperature (semiconductor), is the maximum operating temperature of the actual semiconductor in use in the electronic device. During operation, it is higher than the temperature of the part's exterior and the case temperature

CONTENT

WYNDHAM RECESSED DOWNLIGHT SERIES

P12-P29

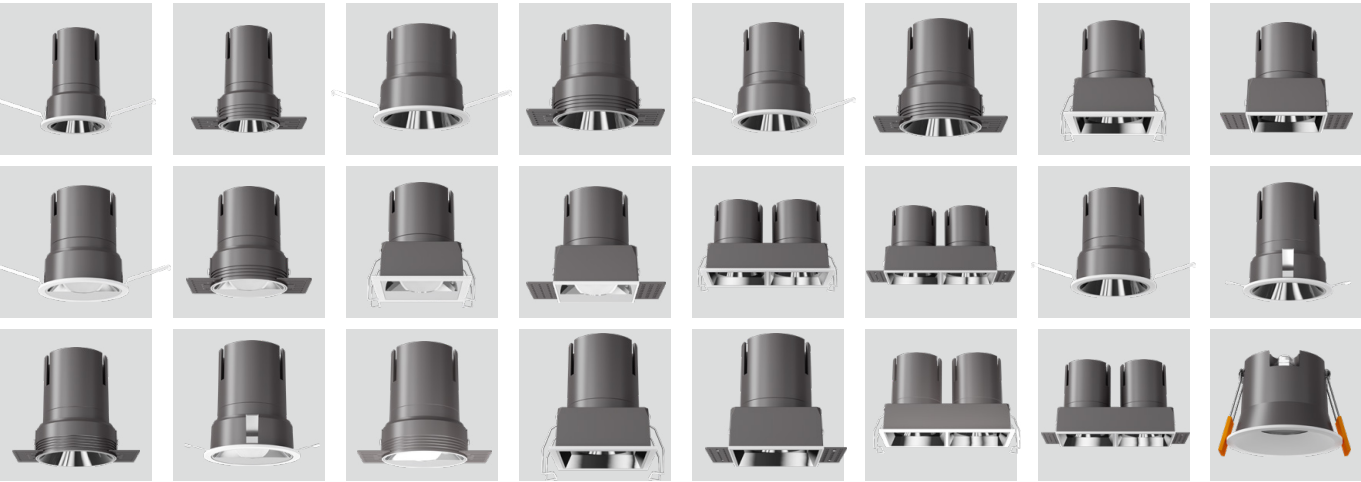

HDM MINI RECESSED DONLIGHT SERIES

P30-P32



BULGARI RECESSED DOWNLIGHT SERIES

P33-P41



MGM RCESED DOWNLIGHT SERIES

P42



DLC RECESSED DOWNLIGHT SERIES

P43-P48



DLD RECESSED DOWNLIGHT SERIES

P49-P54



DLG RECESSED DOWNLIGHT SERIES

P55



DLW & DLS RECESSED DOWNLIGHT SERIES

P56



SURFACE MOUNTED DOWNLIGHT SERIES

P57-P59



PENDANT LAMP SERIES

P60-P61



AR111 & GRILLE LIGHT SERIES

P62-P65



LED TRACK LIGHT SERIES

P66-P74



RC RECESSED SPOTLIGHT SERIES

P75



RM SURFACE MOUNTED SPOTLIGHT SERIES

P76-P77



PULL OUT SPOTLIGHT SERIES

P78-P83



MAGNETIC SYSTEM V3.0

P84-P90




MAGNETIC SYSTEM V4.0

P91-P109



MAGNETIC SYSTEM V5.0

P110-P113

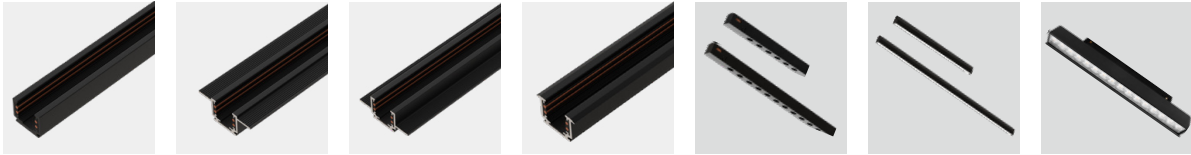


CURVE MAGNETIC SYSTEM V6.0

P113-P114



ARMANI RECESSED LINEAR SERIES

P115-P117

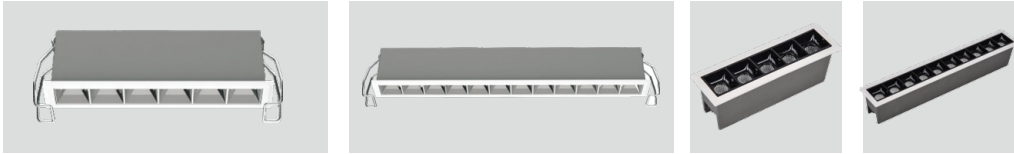

OMEGA RECESSED WALL WASHER LINEAR SERIES

P118



LED FLEXIBLE STRIP SERIES

P119-P122




LINEAR PROFILE SERIES

P123-P131




STEP LIGHT SERIES

P132-P133




OFFICE LINEAR LIGHT SERIES

P134-P136

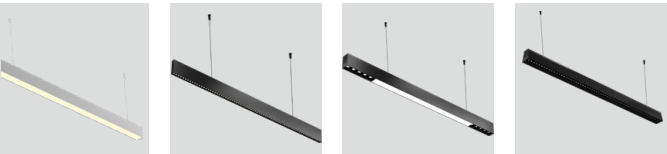


CLASSROOM LIGHT, PANEL LIGHT, HIGHBAY AND STADIUM LIGHT SERIES


P137-P140

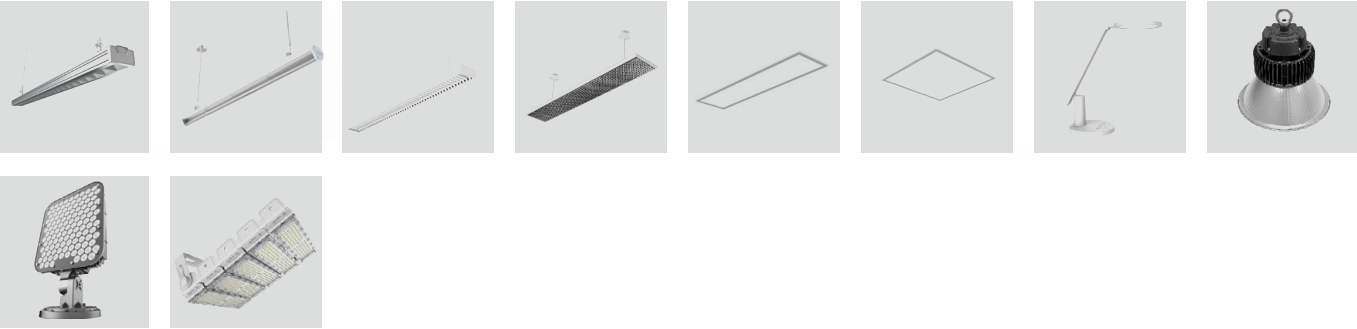

WYNDHAM RECESSED DOWNLIGHT SERIES

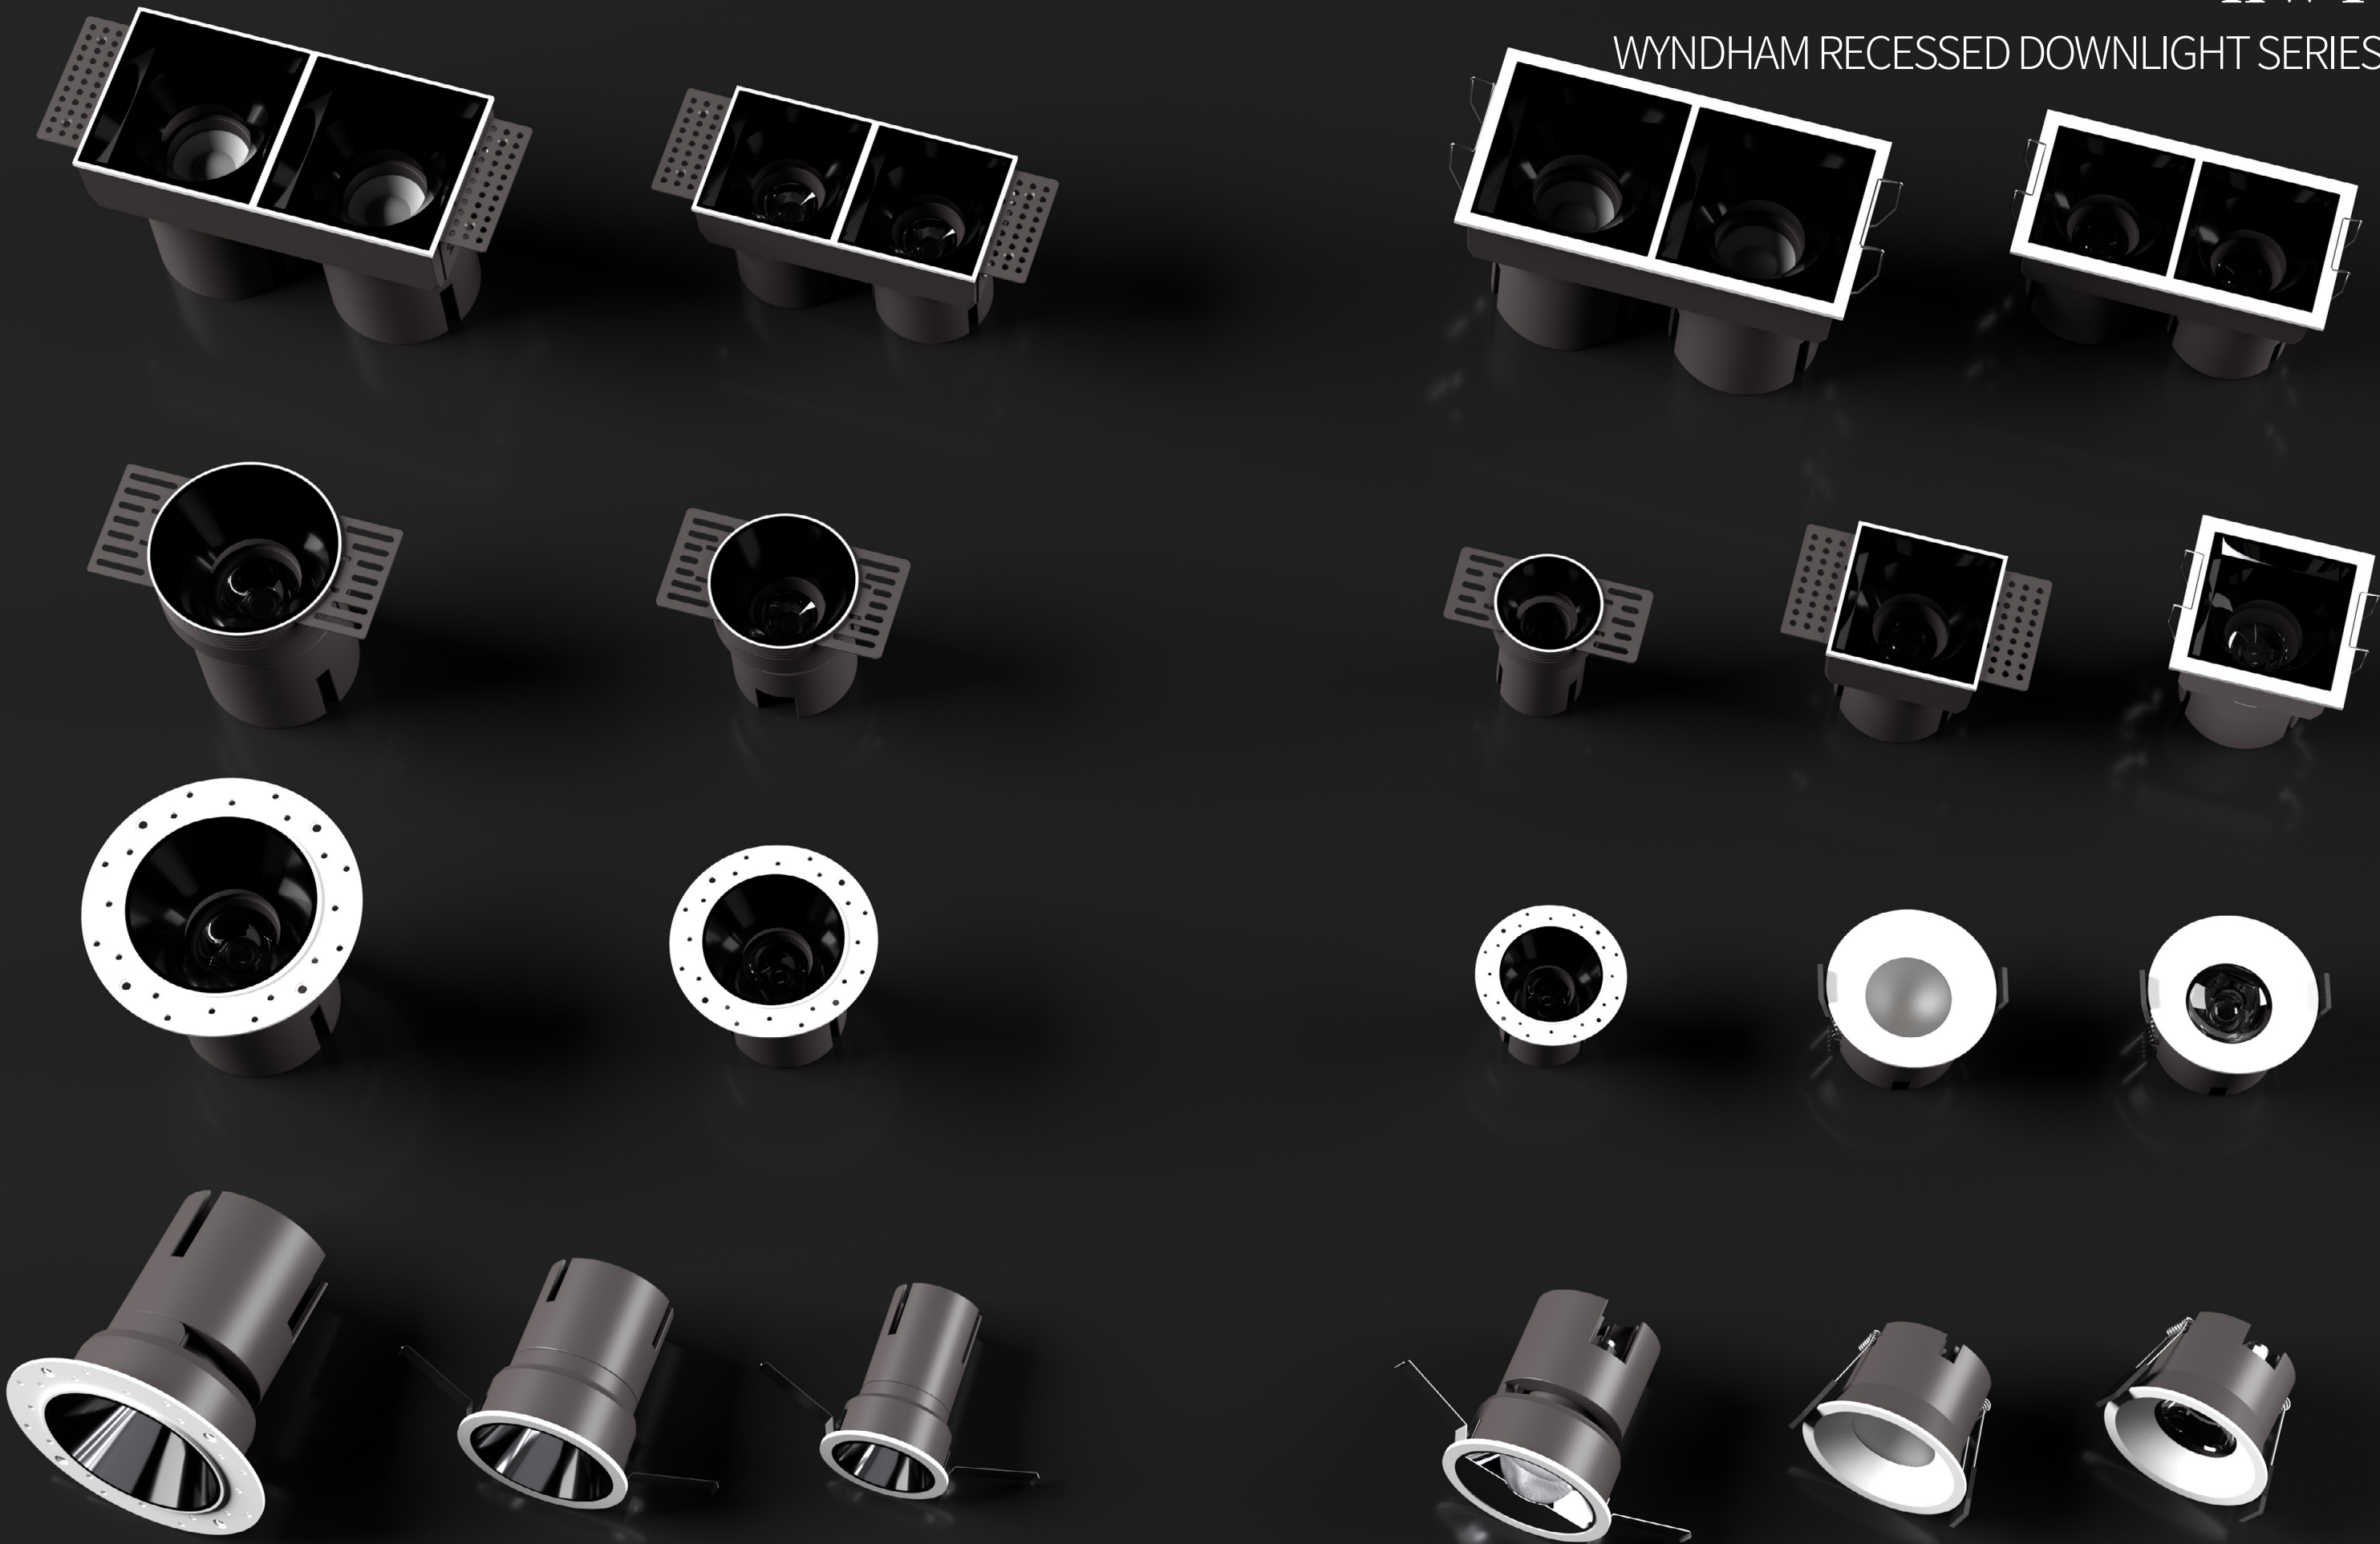

HDL DEEPLY ANTI-GLARE



UGR<11
Autonomous anti-glare
Patented optical design



Indoor
application



Deep anti
dizziness



Accurate
light control



Flicker
free



High light
efficiency



High CRI



IP
20/65
protection
grade



fireproof



long
life



Anti-Glare



Low Light
decay



Perfect heat
dissipation





different
sizes




Multiple light
distribution




MODULAR DESIGN
multiple Funcation and effects

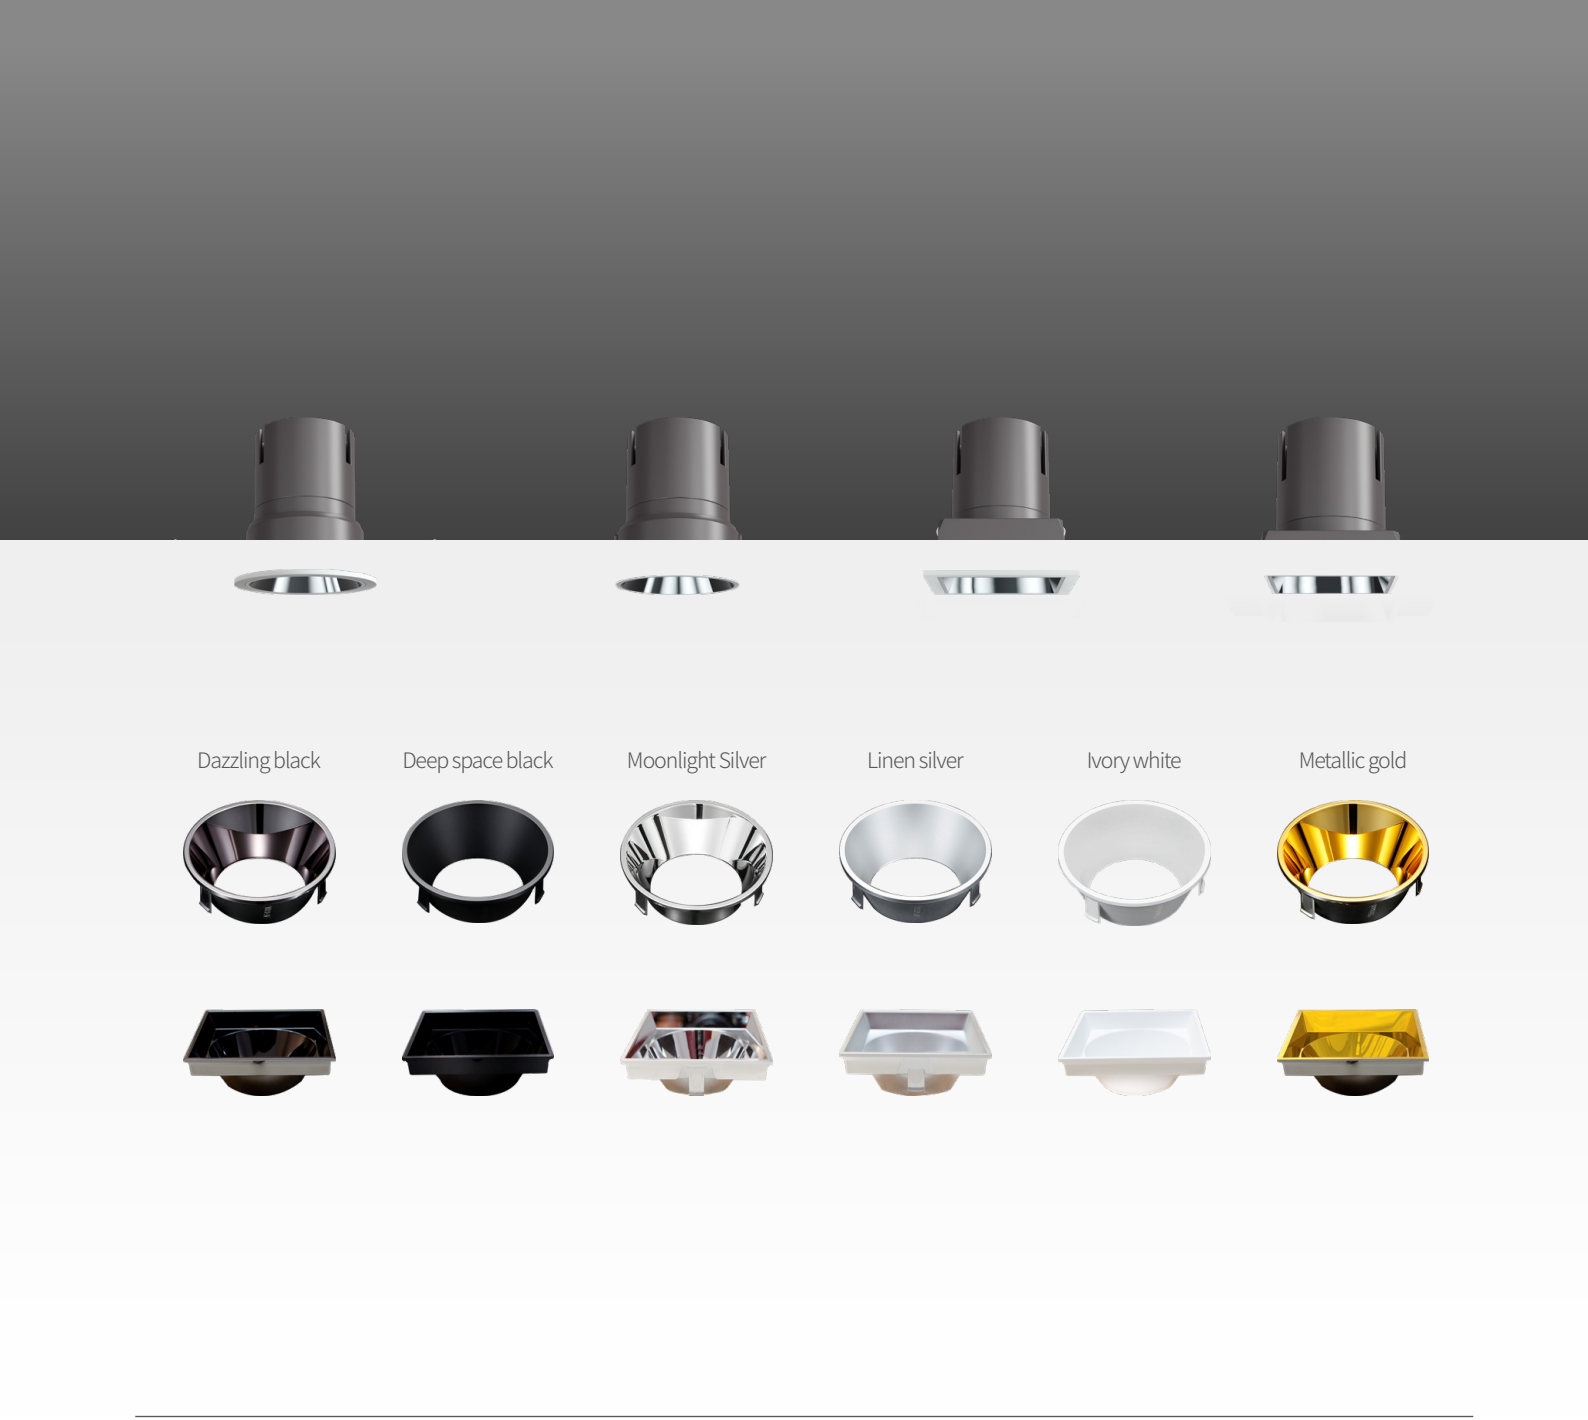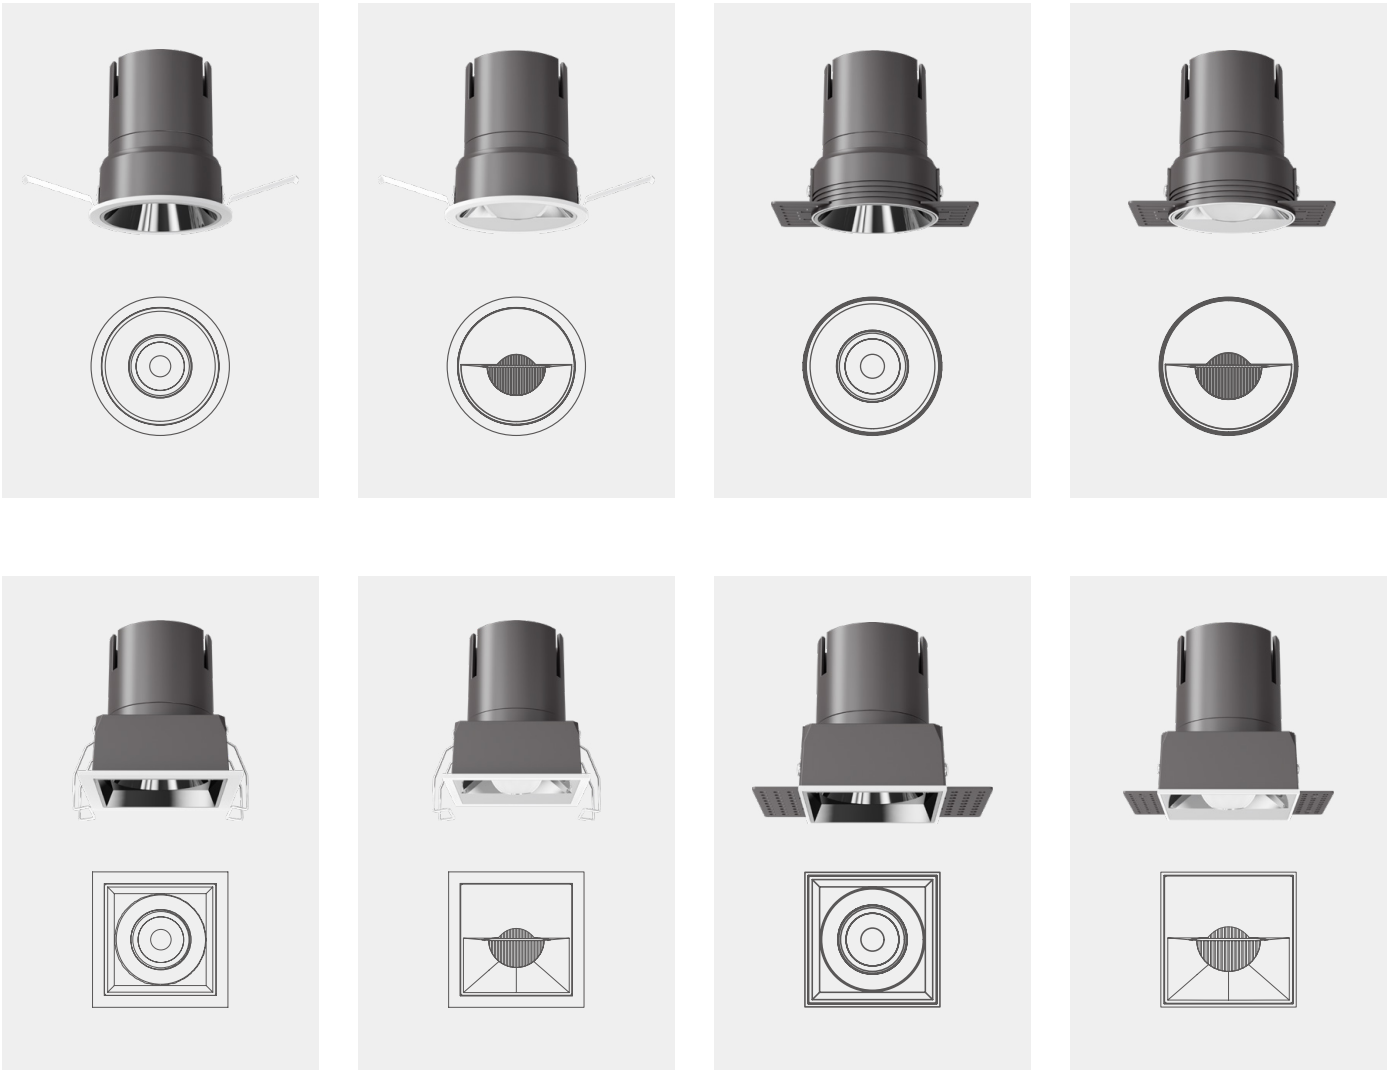


Direct Lighting

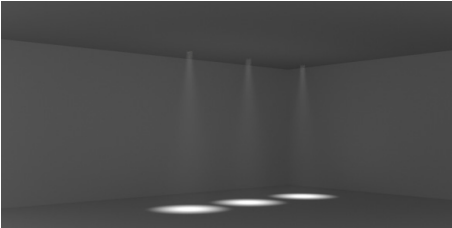

Adjustable Fixture

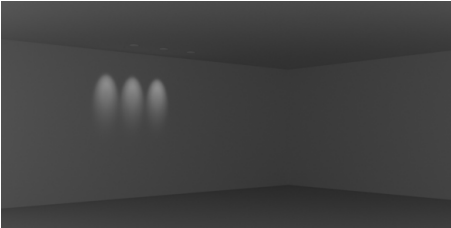


Wall Washer Lighting

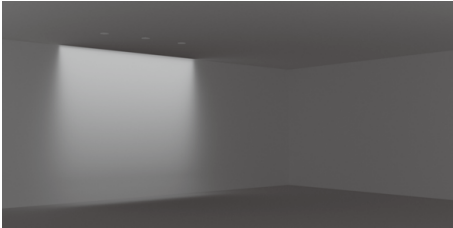

circular wall
wash cover



Square wall
wash cover




honeycomb




Soft light optical
diffuser

WYNDHAM RECESSED
DOWNLIGHT SERIES



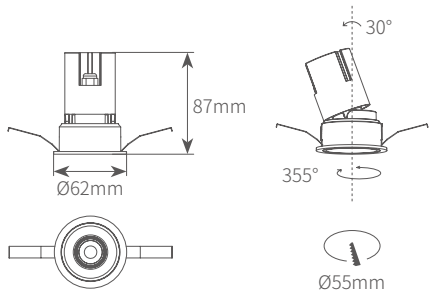

HDL5507

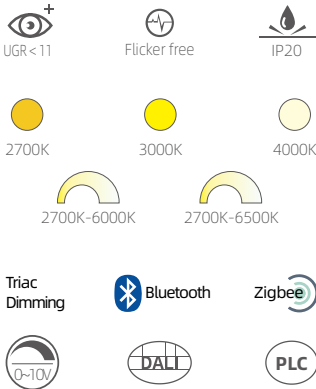


Product information

Power	7W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

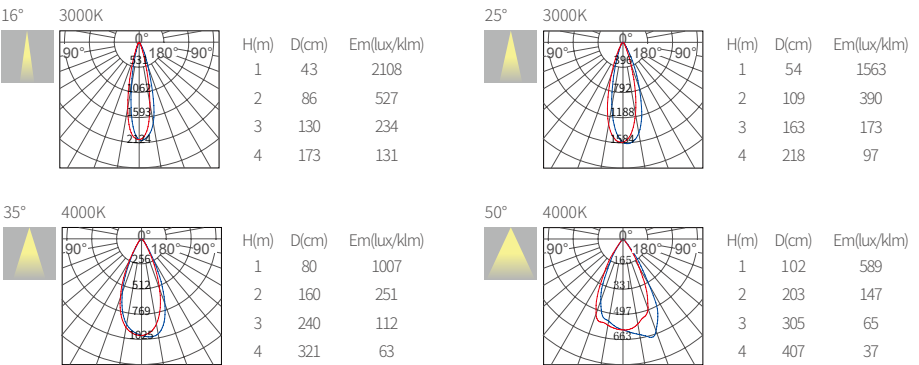


Optional anti glare cover color



Optional Accessories

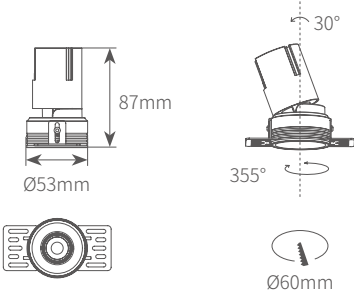

HDL5507-TR

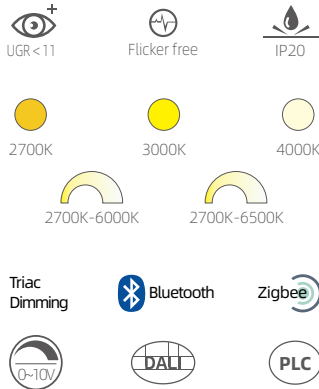


Product information

Power	7W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

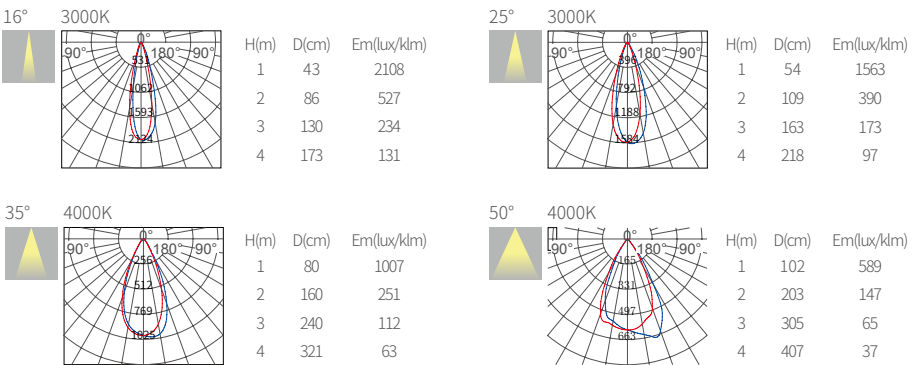


Optional anti glare cover color




Optional Accessories





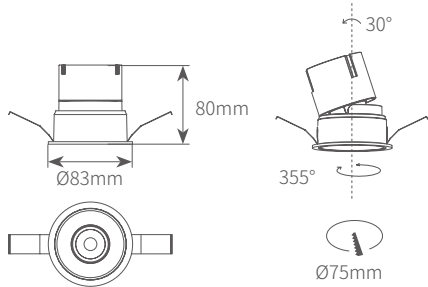


HDL7508

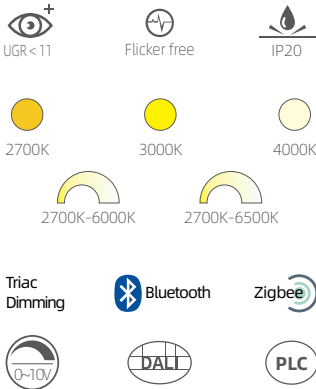

Product information	
Power	8W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

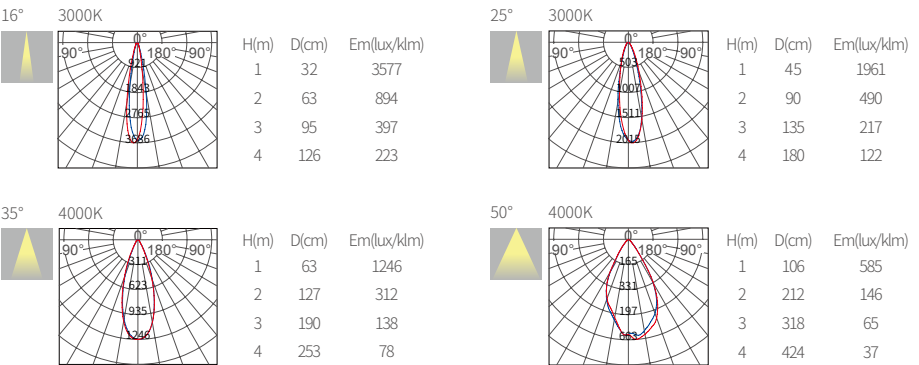


Optional anti glare cover color



Optional Accessories

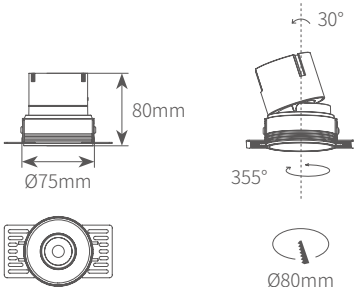


HDL7508-TR

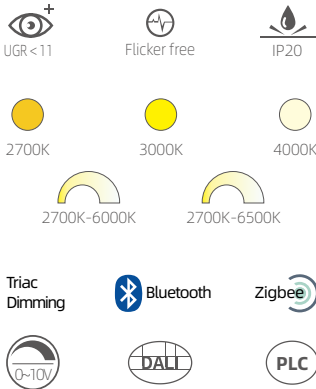

Product information	
Power	8W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

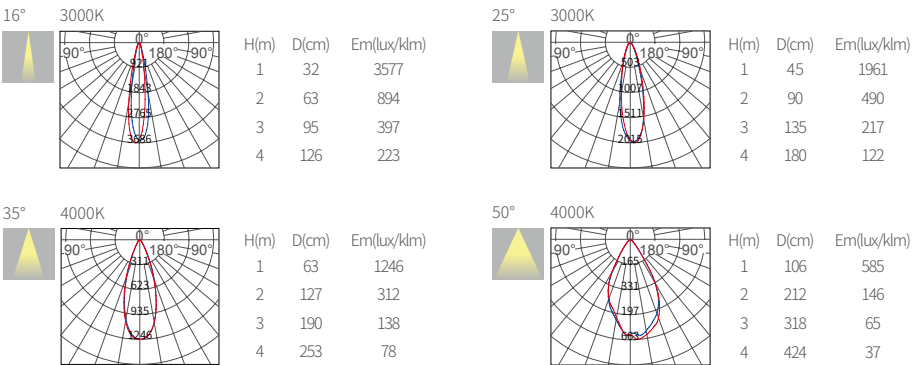


Optional anti glare cover color




Optional Accessories



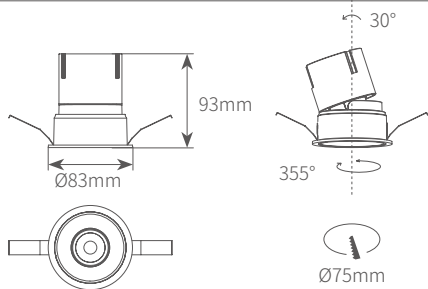

HDL7512

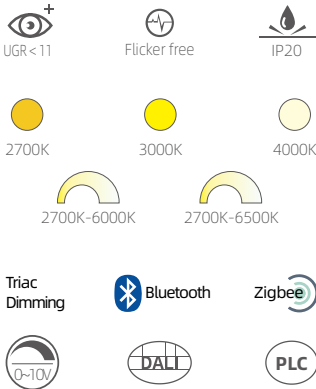


Product information

Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

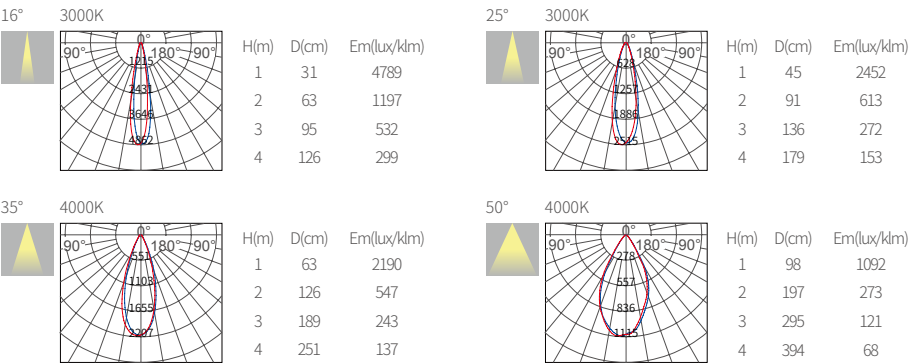


Optional anti glare cover color



Optional Accessories

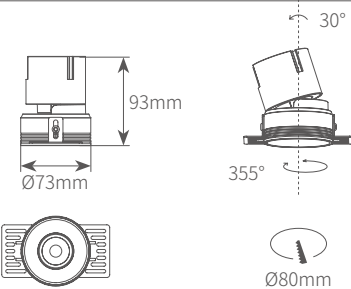

HDL7512-TR

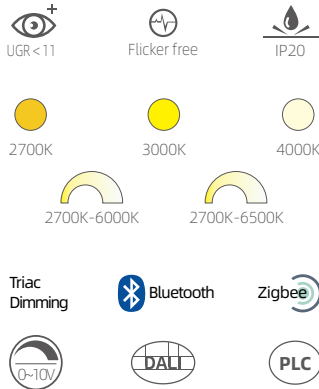


Product information

Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

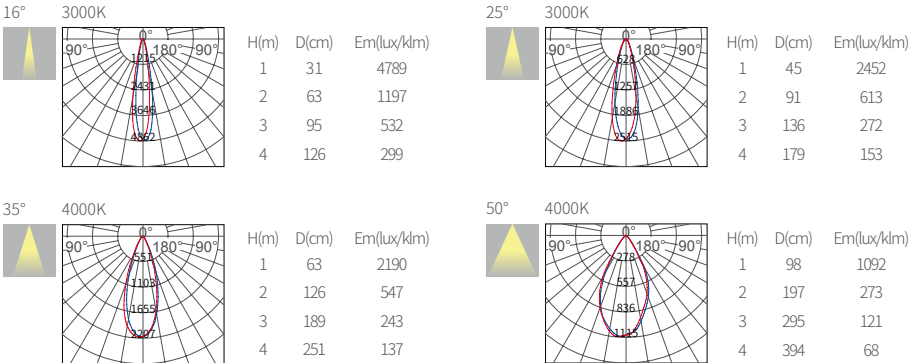


Optional anti glare cover color




Optional Accessories



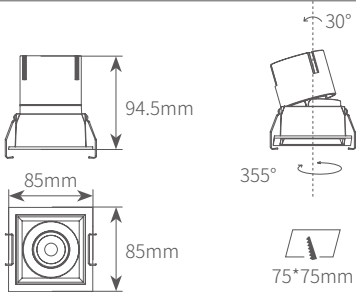

HDLS7512

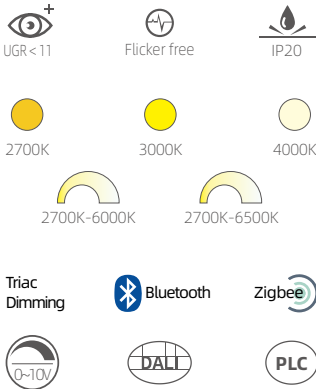


Product information

Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

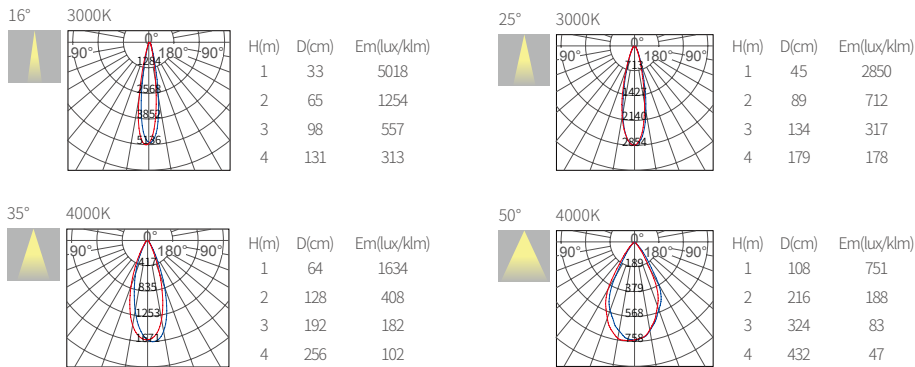


Optional anti glare cover color



Optional Accessories

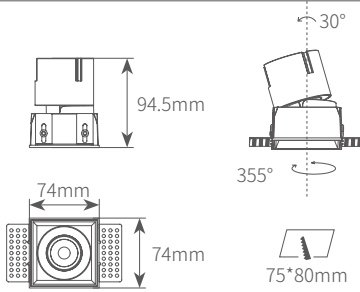

HDLS7512-TR

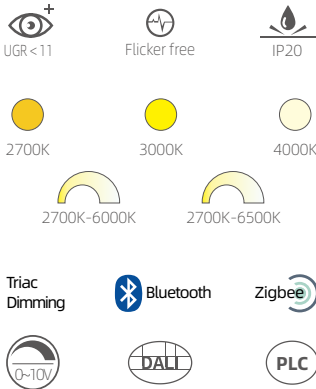


Product information

Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

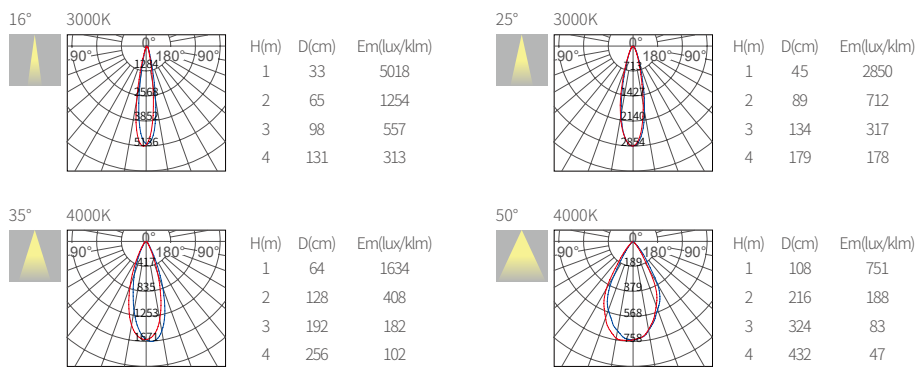


Optional anti glare cover color




Optional Accessories



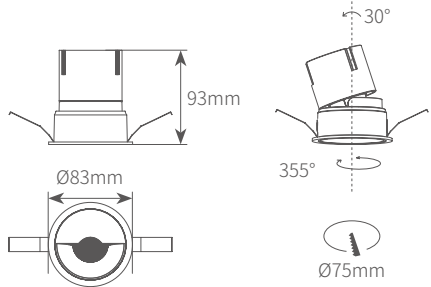



HDL7512-W

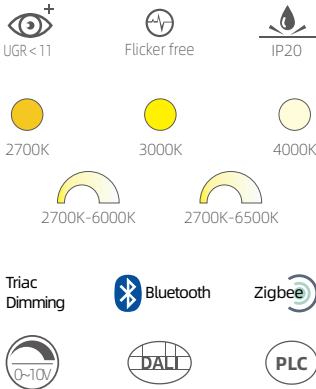

Product information	
Power	12W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

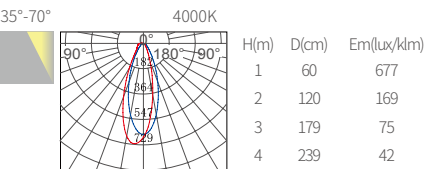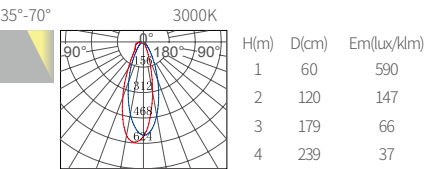


Optional anti glare cover color




Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white

Optional Accessories

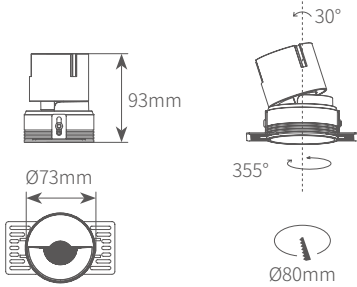



HDL7512-TR-W

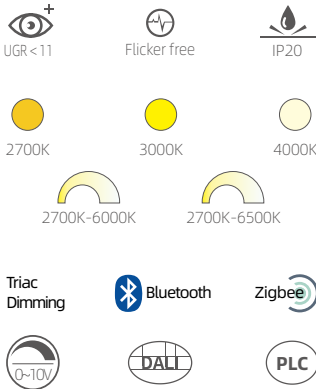

Product information	
Power	12W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

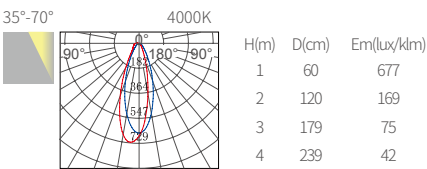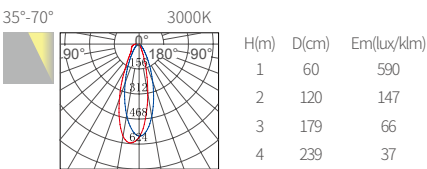



Optional anti glare cover color




Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white

Optional Accessories



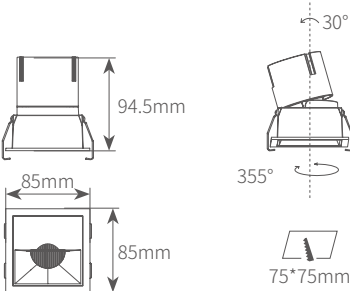



HDLS7512-W

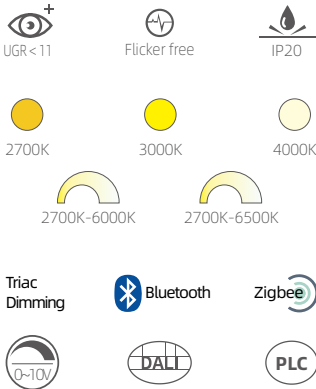

Product information	
Power	12W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

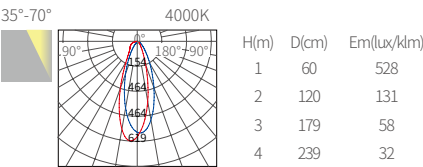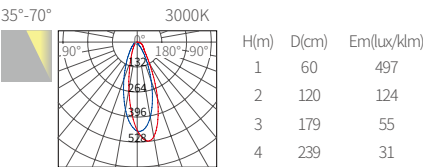


Optional anti glare cover color




Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white

Optional Accessories

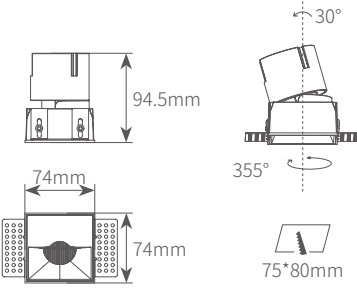



HDLS7512-TR-W

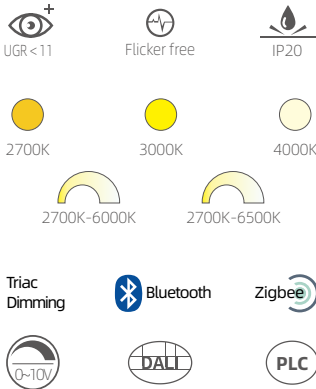

Product information	
Power	12W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

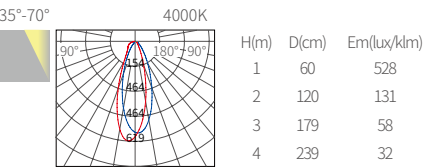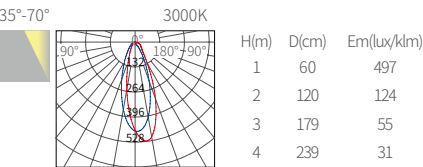


Optional anti glare cover color




Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white

Optional Accessories



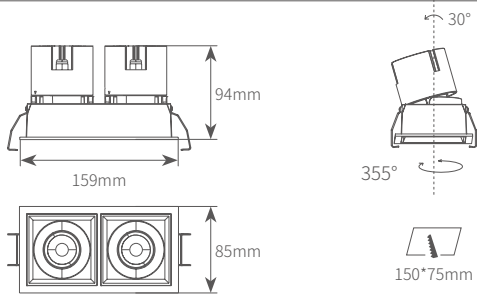


HDLS15075

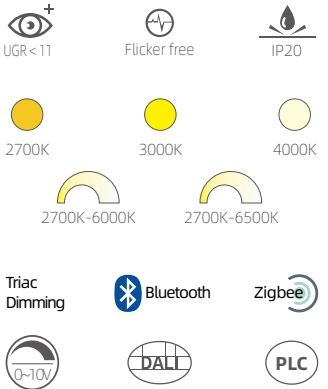

Product information	
Power	12W*2
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

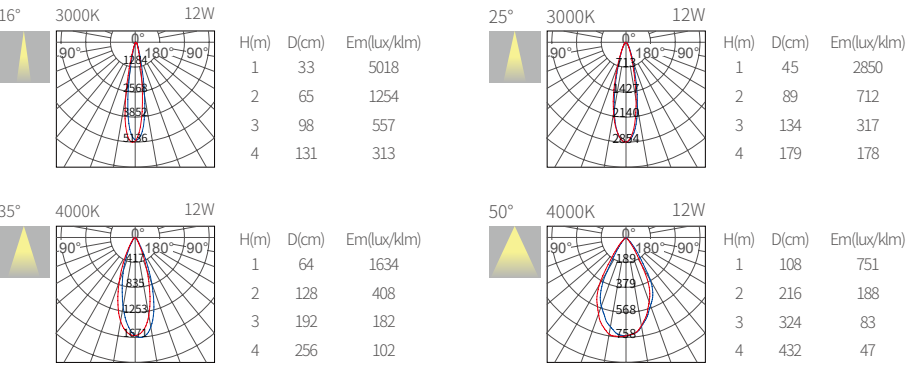

Optional anti glare cover color

Optional Accessories

Dazzling black

Deep space black

Moonlight Silver


Linen silver

Ivory white


Metallic gold

honeycomb

Soft light optical diffuser

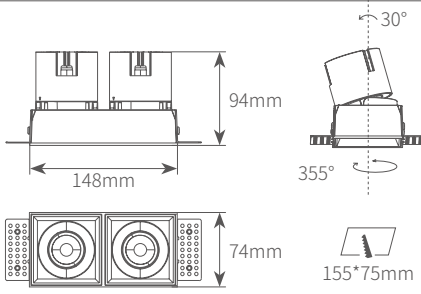


HDLS15075-TR

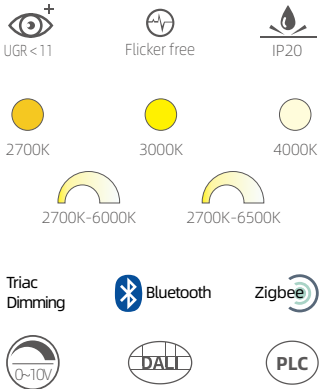

Product information	
Power	12W*2
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

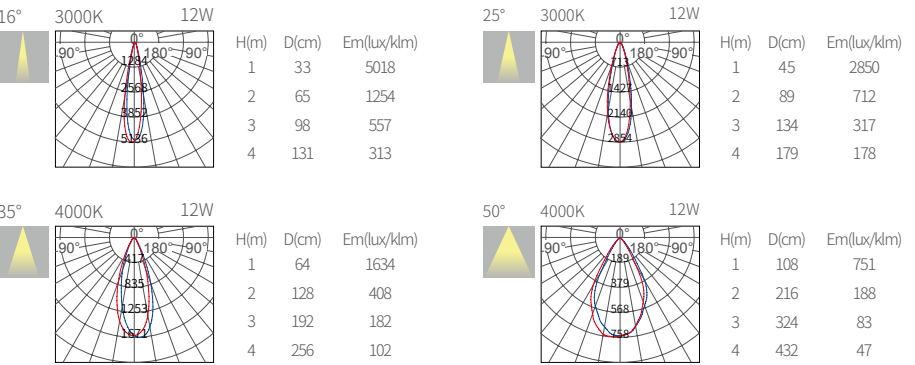

Optional anti glare cover color

Optional Accessories

Dazzling black

Deep space black

Moonlight Silver


Linen silver

Ivory white

Metallic gold


honeycomb

Soft light optical diffuser

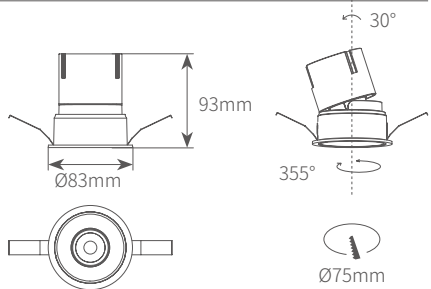

HDL7512-RGB-CW

Color Effect




Product information

Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

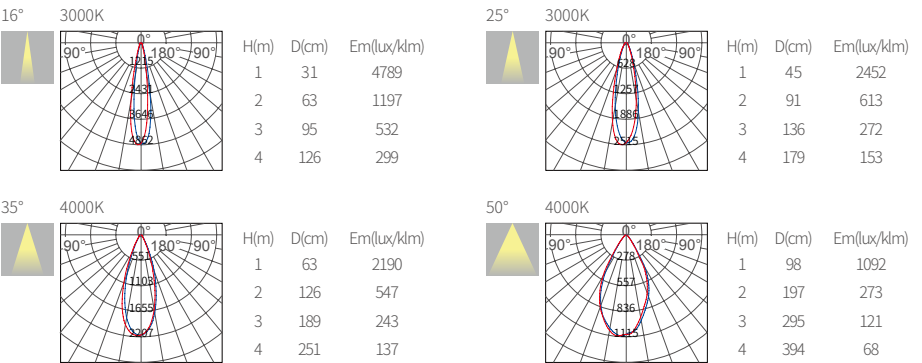


Optional anti glare cover color



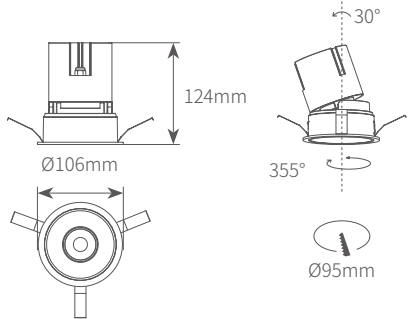


HDL9520

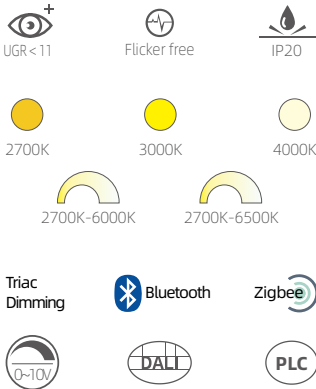

Product information	
Power	20W
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

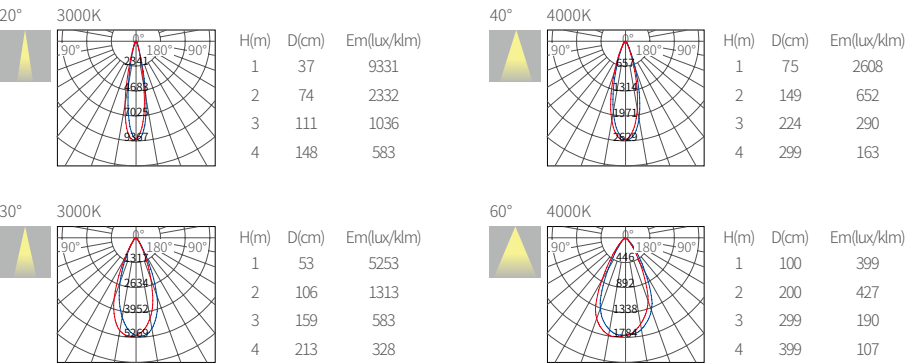


Optional anti glare cover color



Optional Accessories

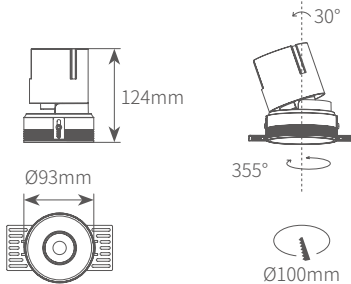


HDL9520-TR

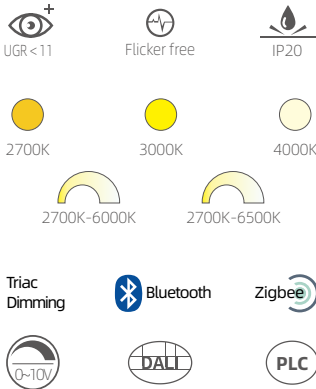

Product information	
Power	20W
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

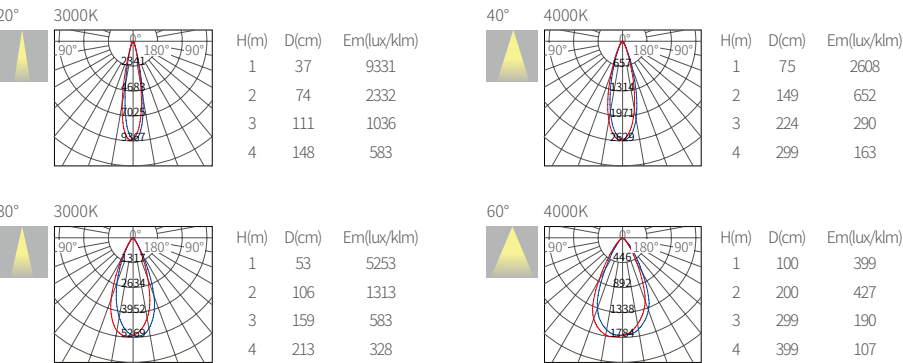


Optional anti glare cover color




Optional Accessories



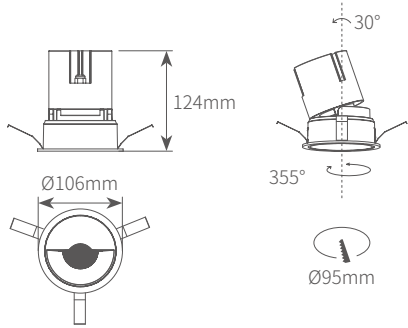


HDL9520-W

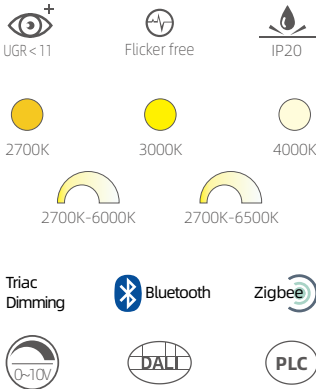

Product information	
Power	20W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

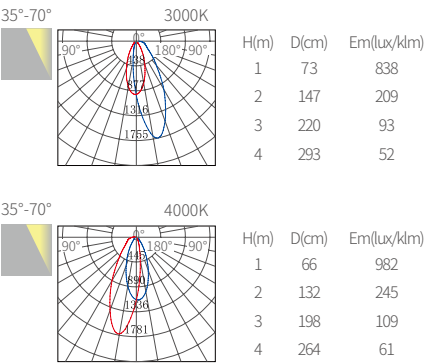


Optional anti glare cover color



Optional Accessories

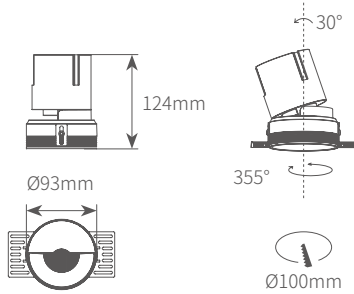


HDL9520-TR-W

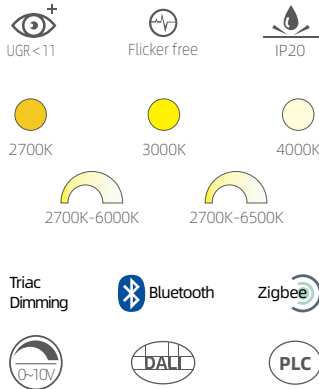

Product information	
Power	20W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

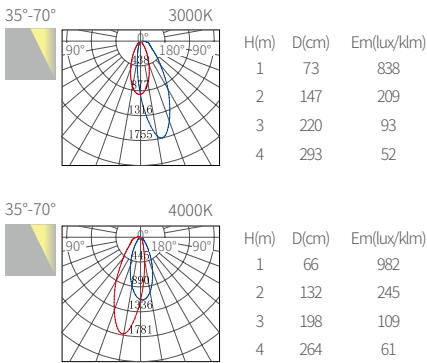


Optional anti glare cover color




Optional Accessories



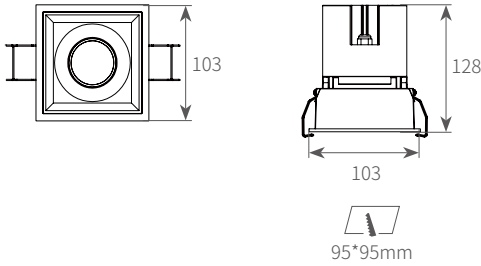


HDLS9520

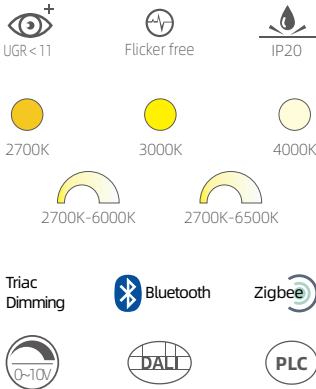

Product information	
Power	20W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

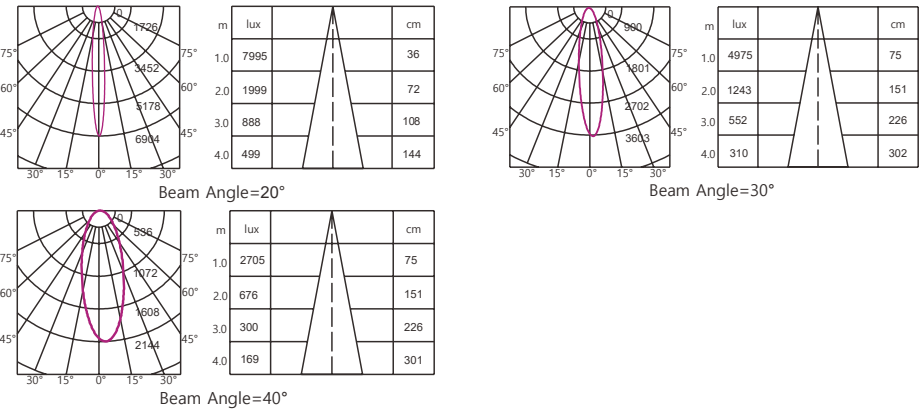


Optional anti glare cover color



Optional Accessories

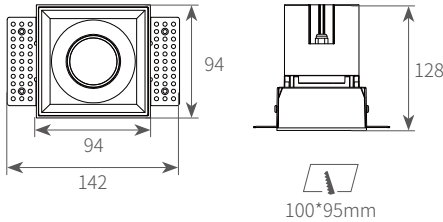


HDLS9520-TR

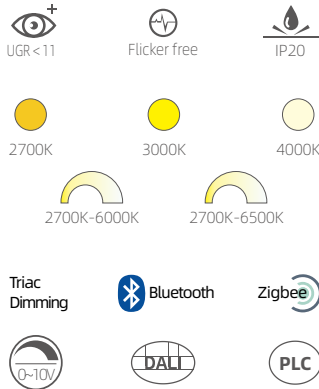

Product information	
Power	20W
Beam angle	35°-70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

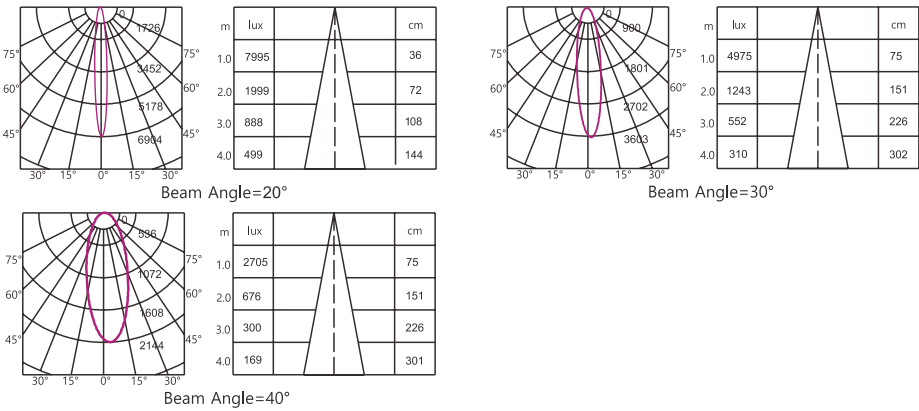


Optional anti glare cover color




Optional Accessories



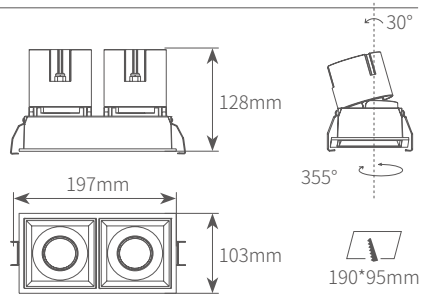

HDLS19095

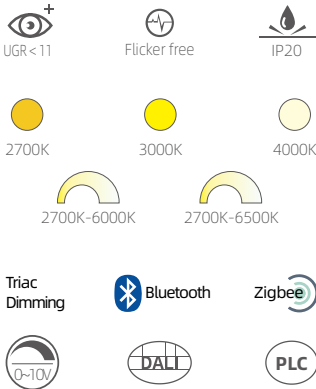


Product information

Power	20W*2
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

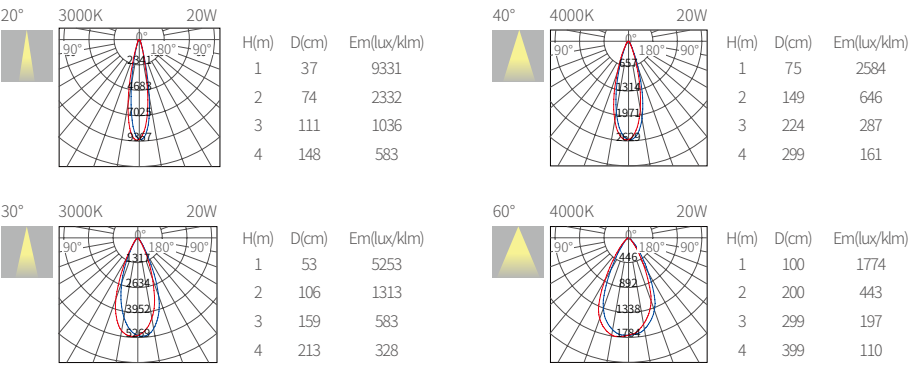


Optional anti glare cover color



Optional Accessories

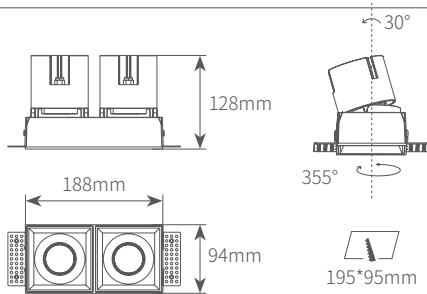

HDLS19095-TR

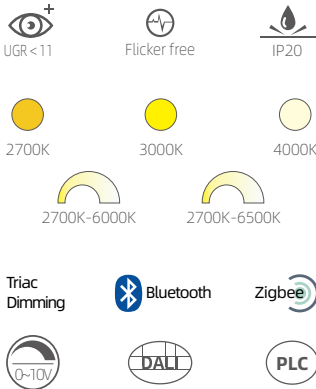


Product information

Power	20W*2
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

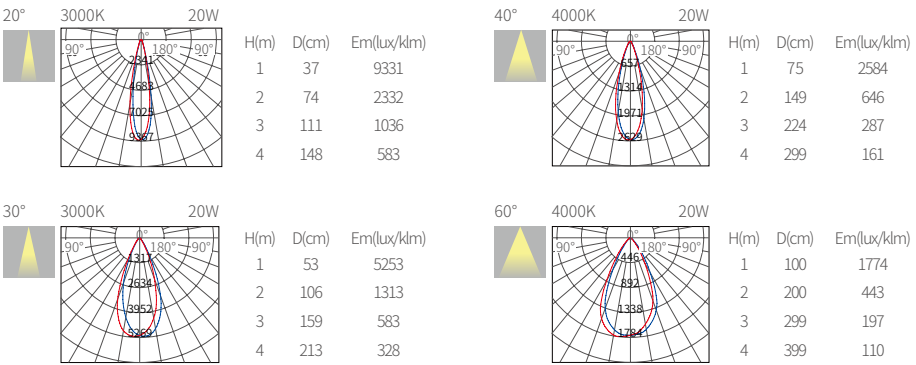

Optional anti glare cover color



Optional Accessories





UGR < 11

Flicker free

IP54

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V

DALI

PLC



UGR < 11

Flicker free

IP54

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming


Bluetooth

Zigbee

0-10V

DALI


PLC

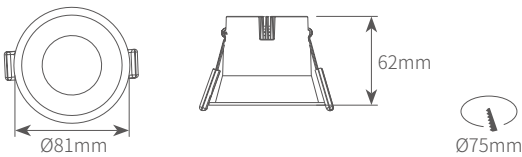

HDL7512FR

Product information	
Power	12W
Beam angle	80°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	75Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

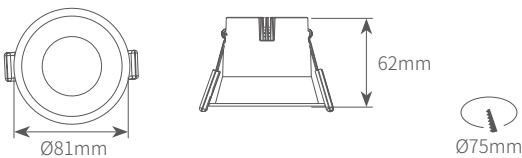


HDL7512FL

Product information	
Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	75Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed




HDM Deep Deeply-Glare



UGR<11

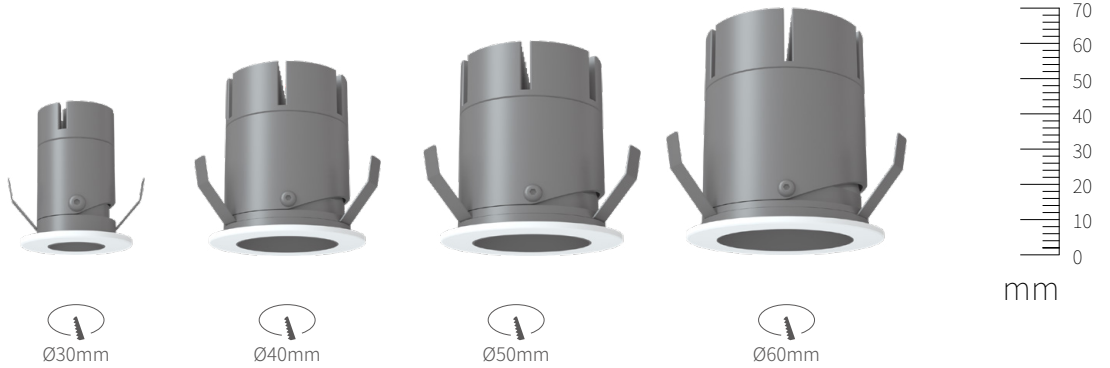


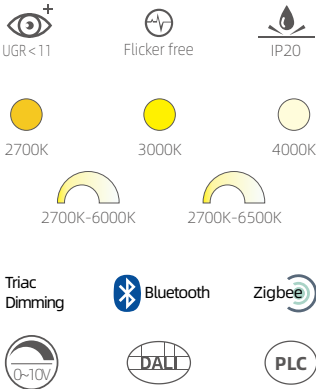


HDM3001G

Product information	
Power	1W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

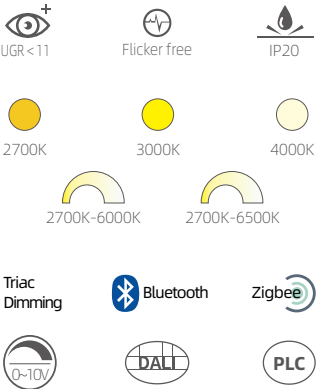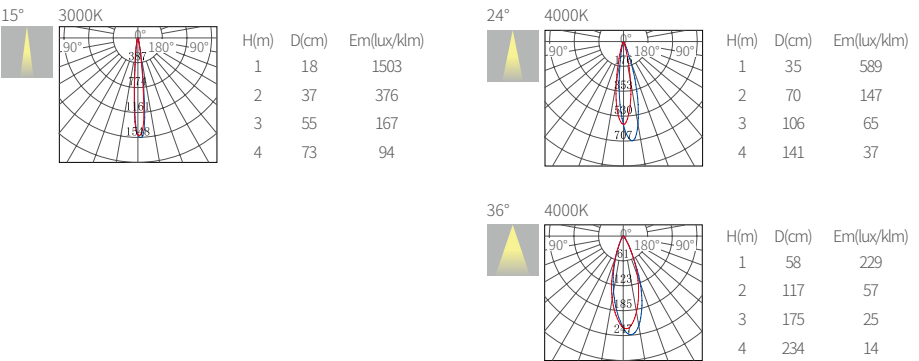



HDM4003G

Product information	
Power	3W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

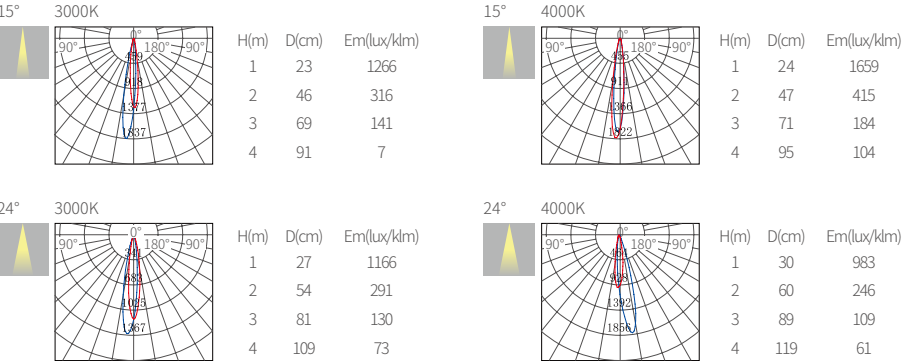

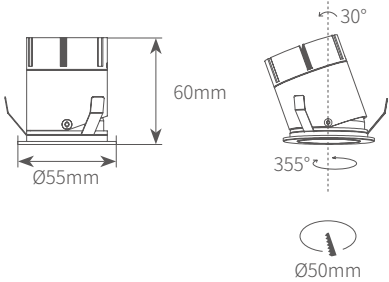



HDM5005G

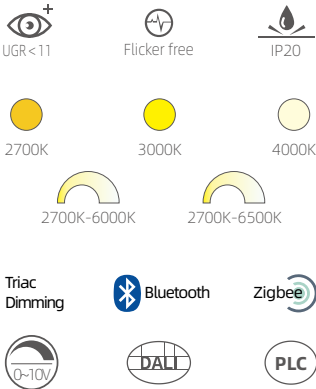


Product information	
Power	5W
Beam angle	35°/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

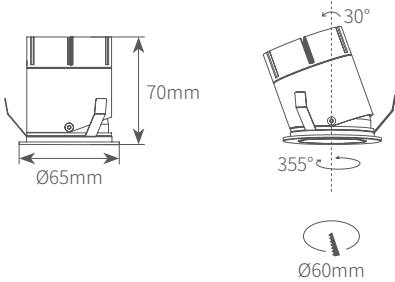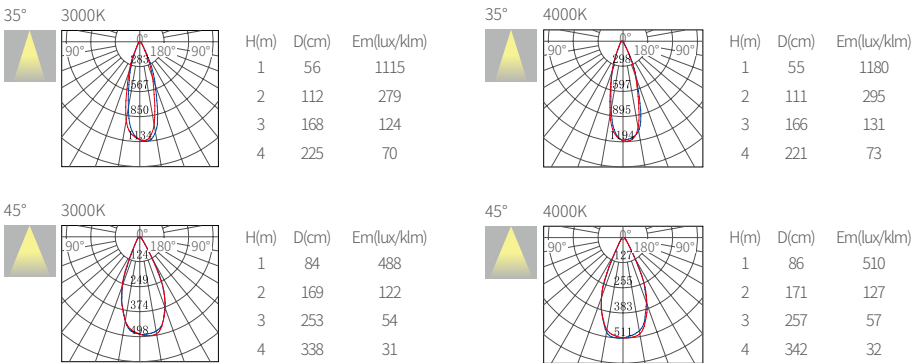


HDM6007G

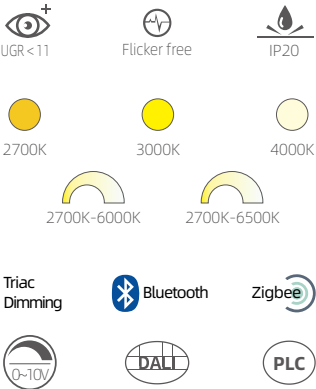

Product information	
Power	7W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

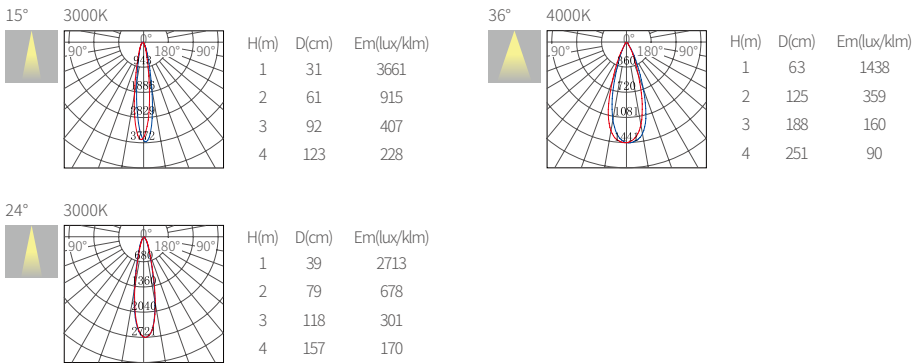


BULGARI RECESSED
DOWNLIGHT SERIES



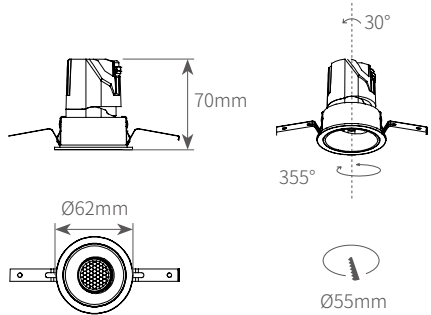


BDL5507

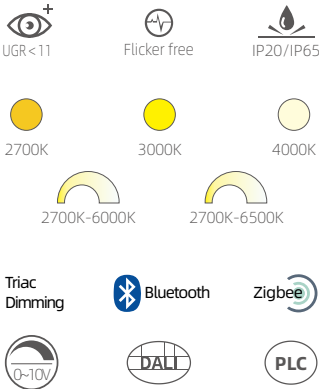

Product information	
Power	7W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

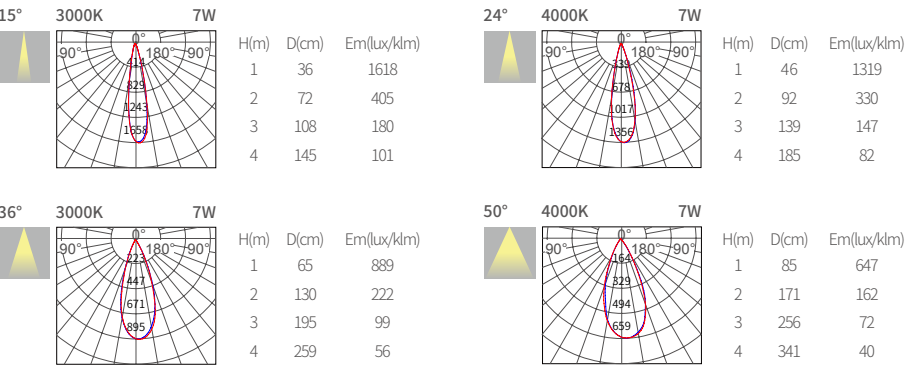


Optional anti glare cover color

Optional Accessories




BDLS5507

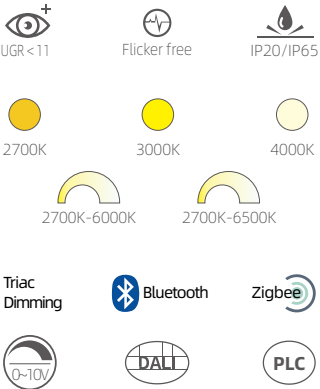

Product information	
Power	7W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

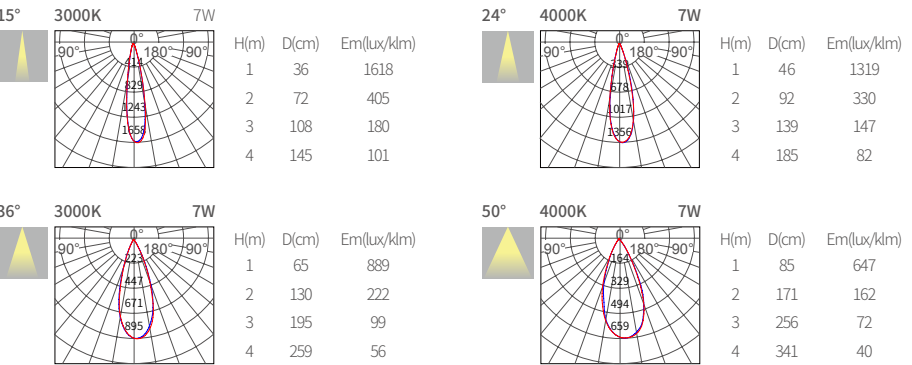


Optional anti glare cover color

Optional Accessories



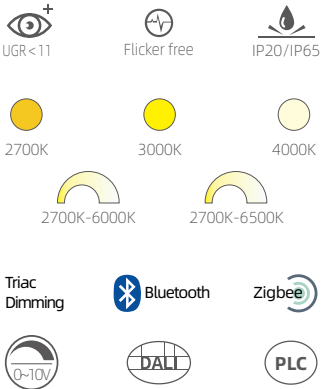

BDL5507-TR

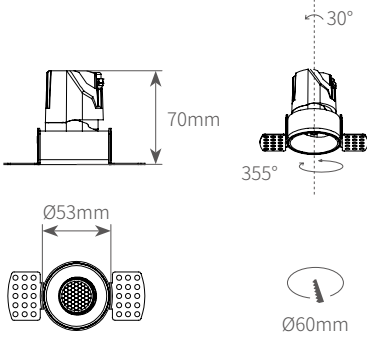


Product information

Power	7W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

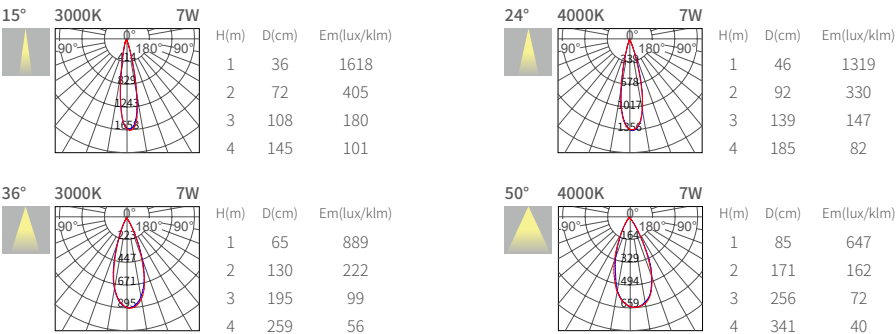


Optional anti glare cover color



Optional Accessories

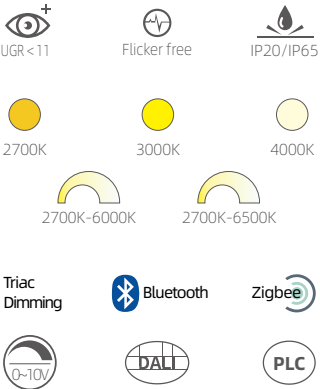

BDL5507-TR-B

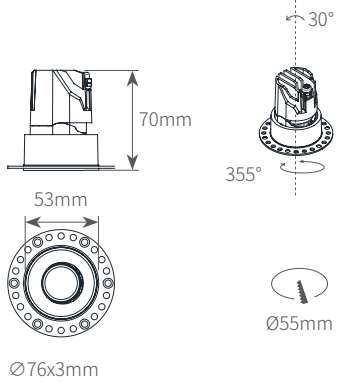


Product information

Power	7W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

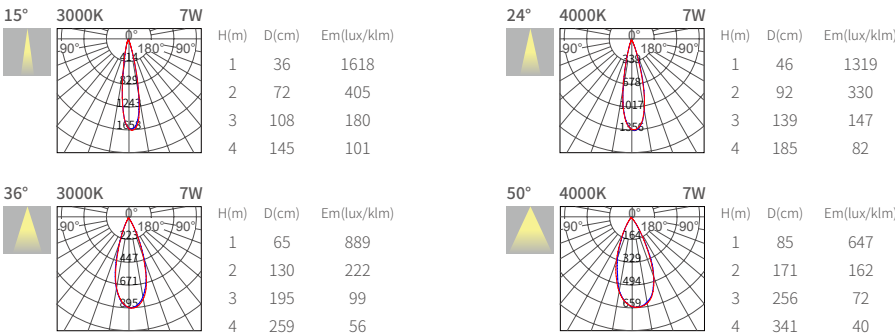


Optional anti glare cover color




Optional Accessories



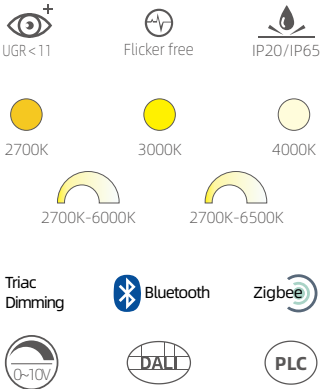


BDL7512

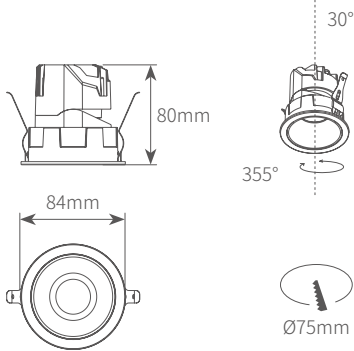


Product information	
Power	12W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium
Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

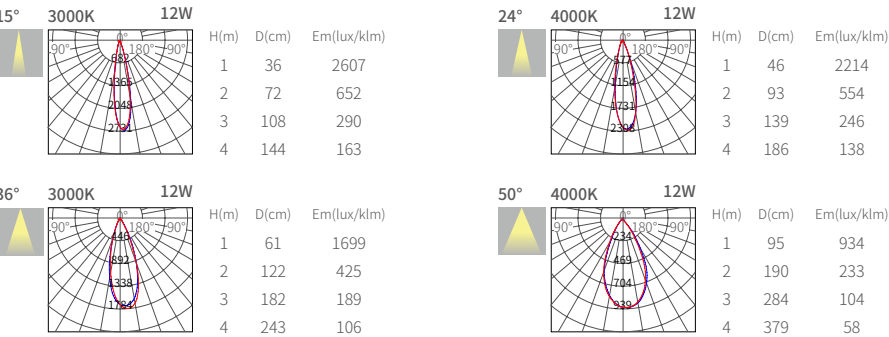


Optional anti glare cover color



Optional Accessories

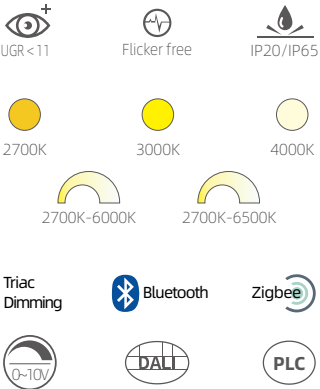


BDL7512-TR

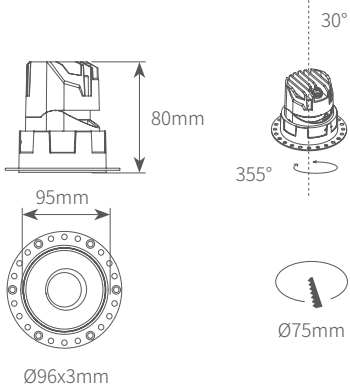

Product information	
Power	12W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium
Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

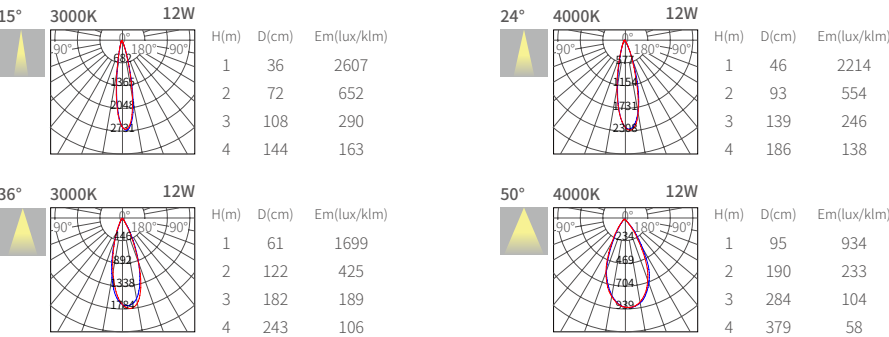


Optional anti glare cover color




Optional Accessories



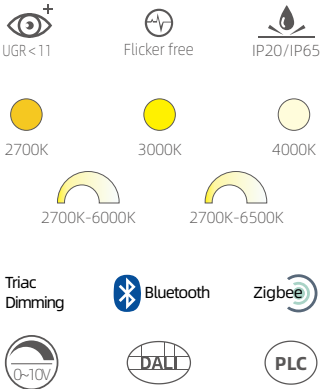





BDLS7512



Product information	
Power	12W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

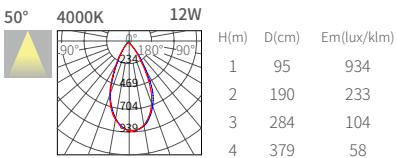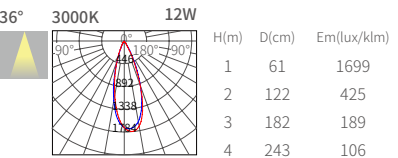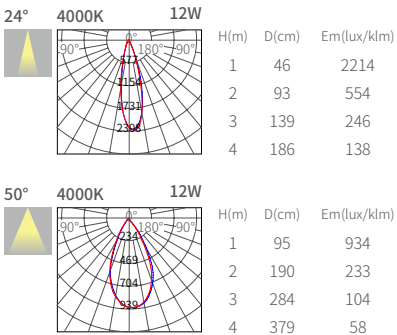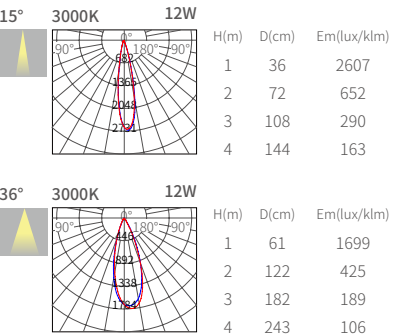


Optional anti glare cover color



Optional Accessories

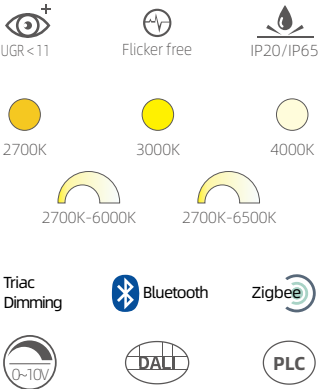





BDLS7512-TR

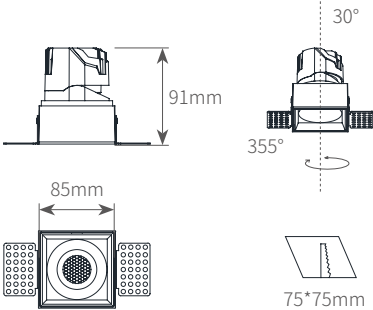

Product information	
Power	12W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

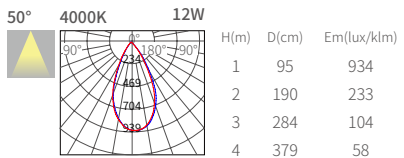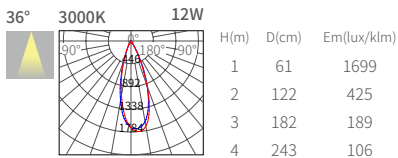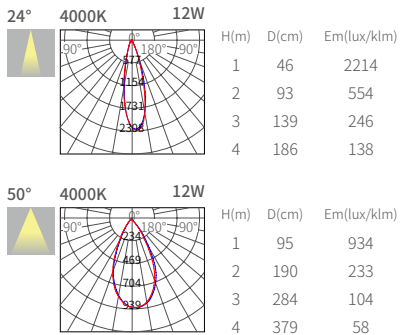
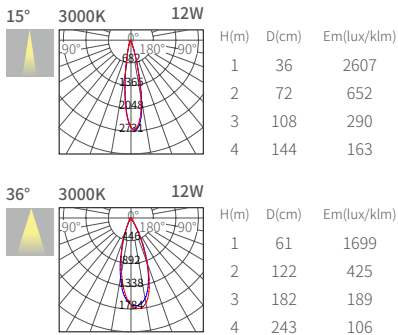


Optional anti glare cover color




Optional Accessories



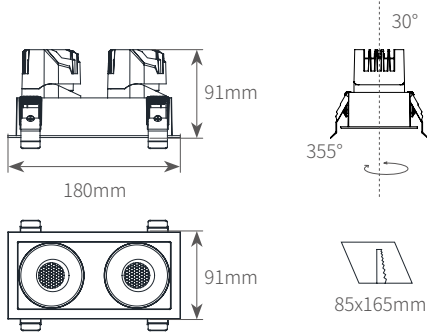


BDLS1507524

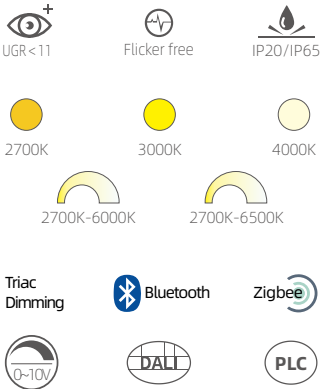

Product information	
Power	12W*2
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

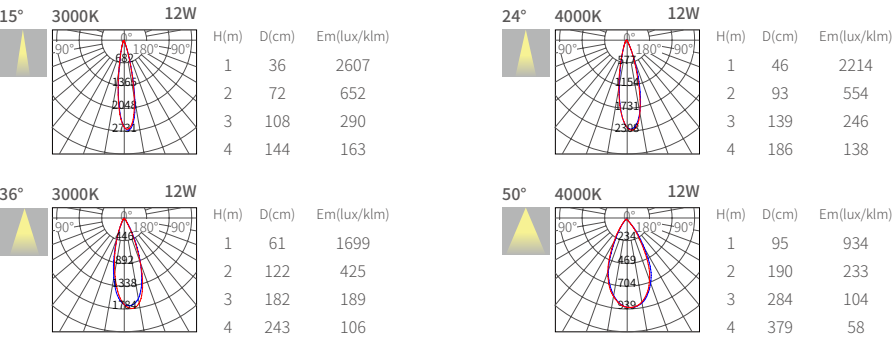


Optional anti glare cover color



Optional Accessories

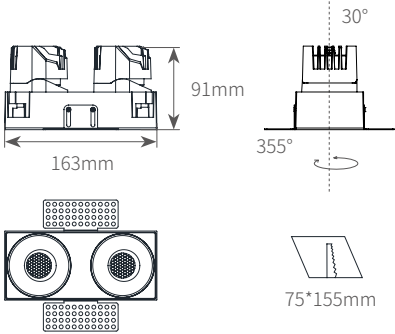


BDLS1507524-TR

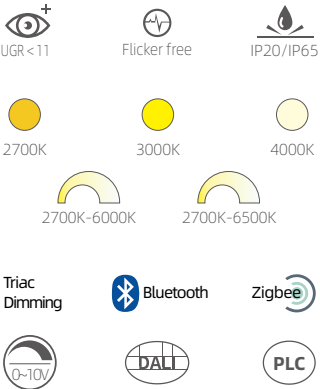

Product information	
Power	12W*2
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

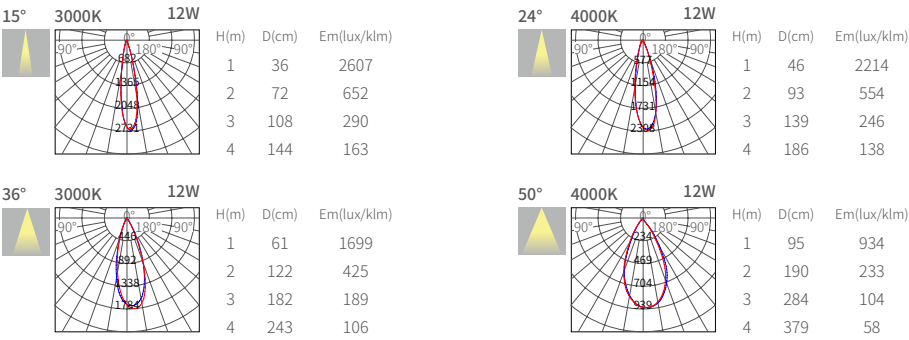


Optional anti glare cover color




Optional Accessories



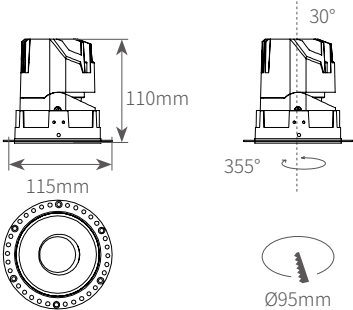

BDL9520-TR

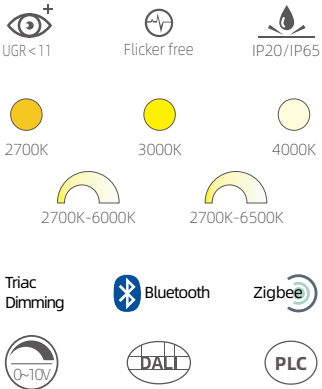


Product information

Power	20W
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404



H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187





H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128


Optional anti glare cover color



Optional Accessories

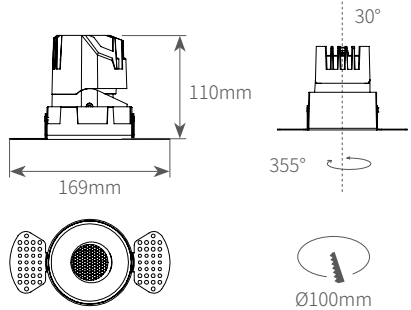

BDLS9520-TR

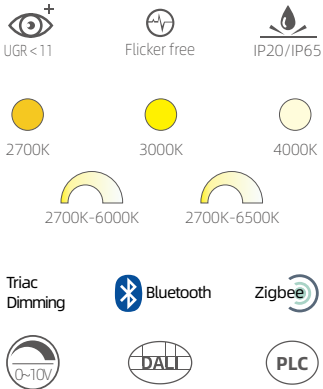


Product information

Power	20W
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404



H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187





H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color




Optional Accessories



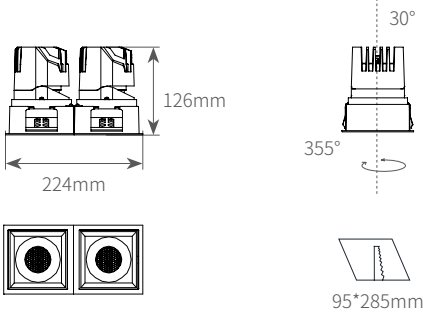


BDLS19095

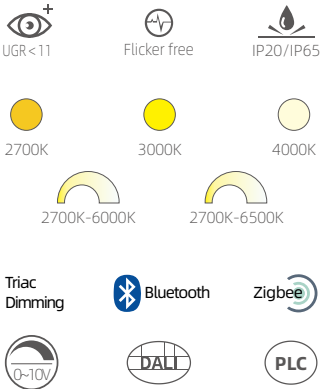

Product information	
Power	20W*2
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

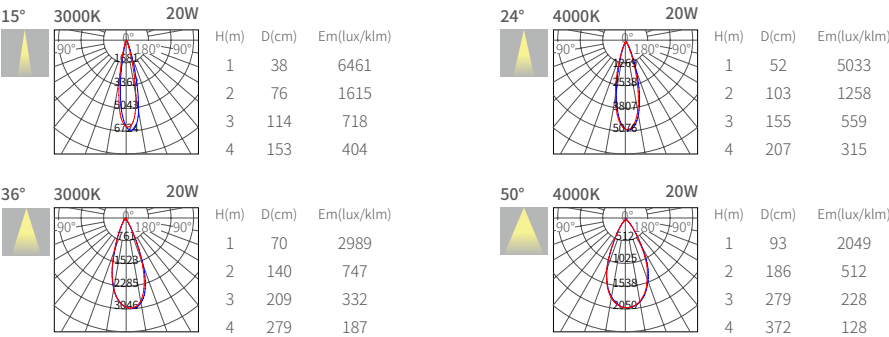


Optional anti glare cover color

Optional Accessories

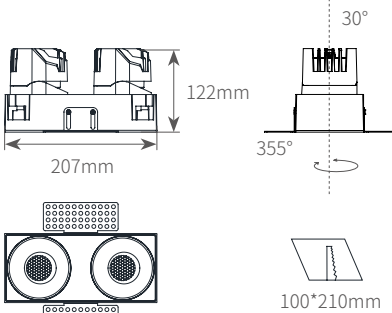


BDLS19095-TR

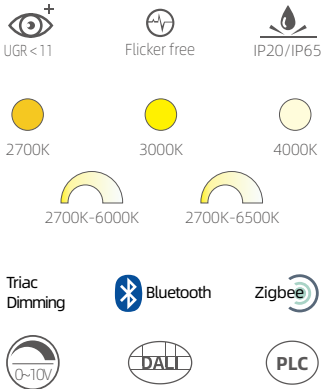

Product information	
Power	20W*2
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

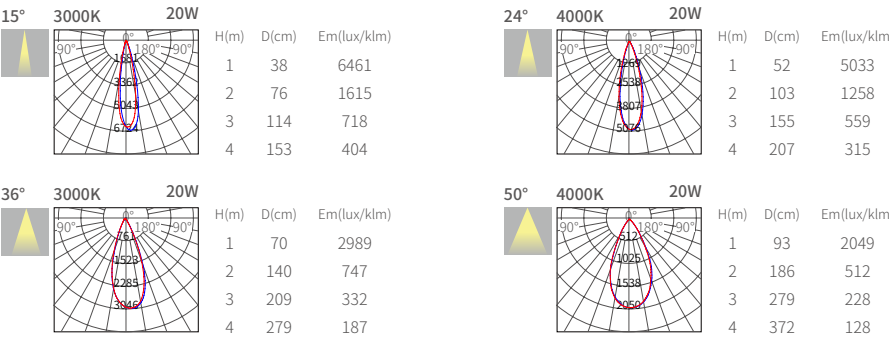


Optional anti glare cover color

Optional Accessories

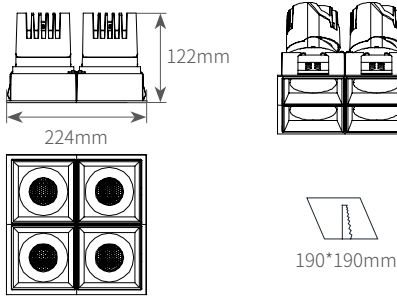


BDLS11011028-TR

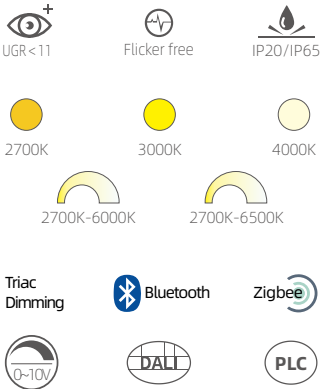

Product information	
Power	20W*4
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



Light distribution parameters

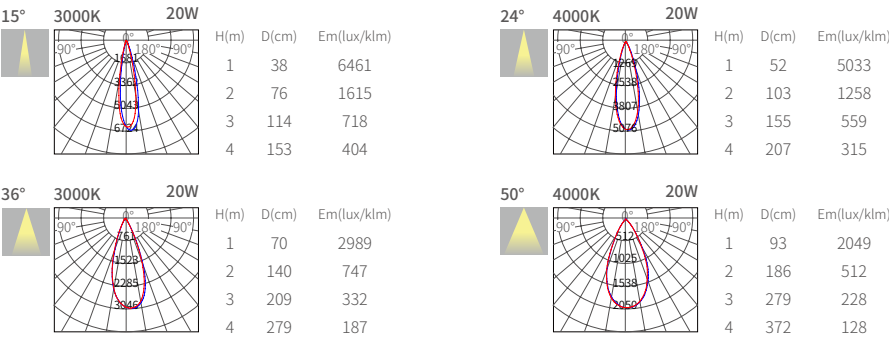


Optional anti glare cover color



Optional Accessories

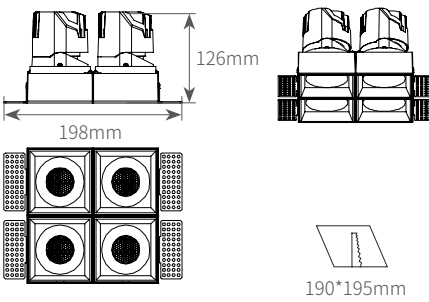


BDLS11011028-TR

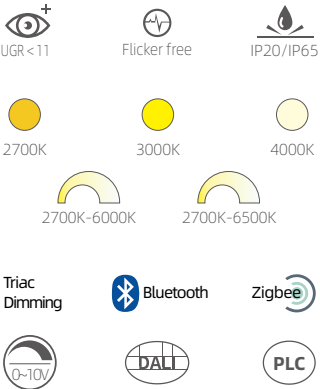

Product information	
Power	20W*4
Beam angle	15° /24°/36°/ 50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	67Lm/w
CRI	Ra>90/97
Finish color	Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

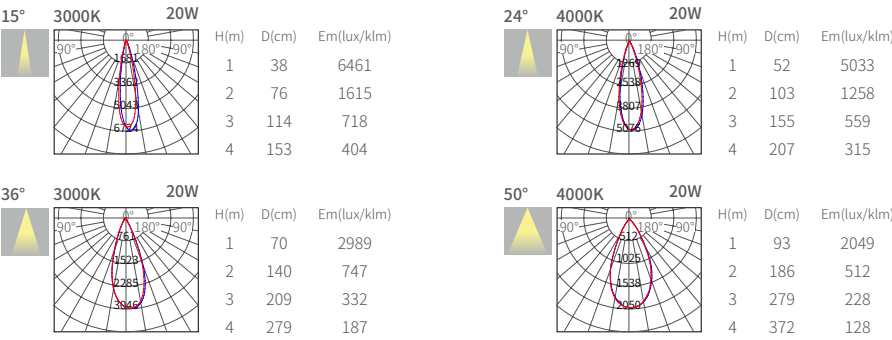


Optional anti glare cover color




Optional Accessories



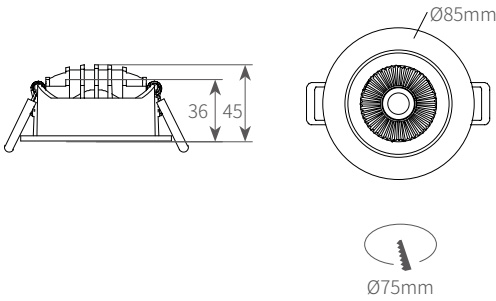




MGM7507-A

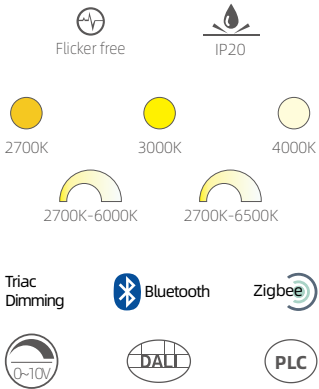


Product information	
Power	7W
Beam angle	24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	95lm/W
CRI	Ra>92
Finish color	Ivory white

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	die-casting aluminum
Installation	Recessed

Light distribution parameters

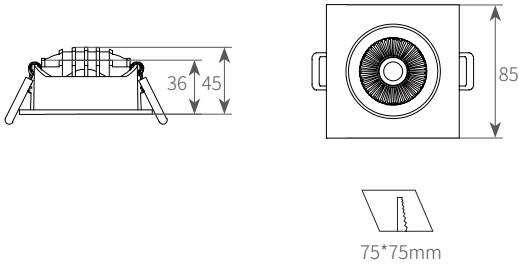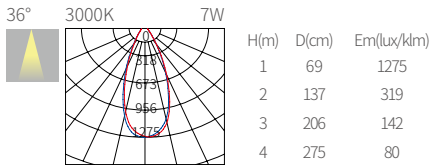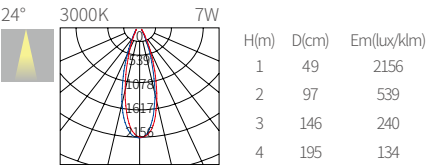



MGMS7507-A

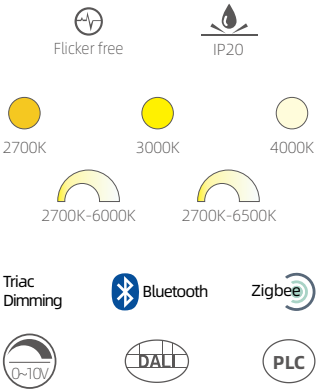


Product information	
Power	7W
Beam angle	24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	95lm/W
CRI	Ra>92
Finish color	Ivory white

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	die-casting aluminum
Installation	Recessed

Light distribution parameters

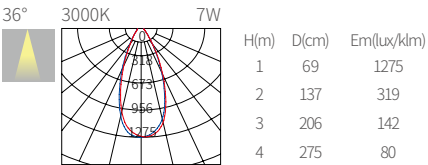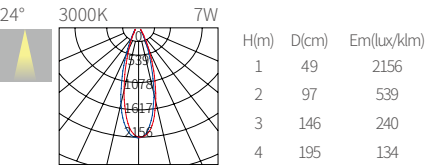




DLC04-A


Product information	
Power	15/20/25/30/35/40/55W
Beam angle	30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	94lm/W
CRI	Ra>90
Finish color	white/black

Mode			
DLC0415A-930XY	15W	DLC0430A-930XY	30W
DLC0415A-940XY		DLC0430A-940XY	
DLC0420A-930XY	20W	DLC0435A-930XY	35W
DLC0420A-940XY		DLC0435A-940XY	
DLC0425A-930XY	25W	DLC0440A-930XY	40W
DLC0425A-940XY		DLC0440A-940XY	


Light distribution parameters

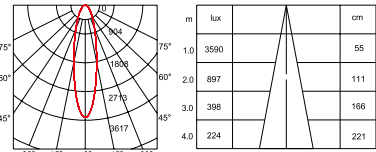


15W 30°3000K CRI>80

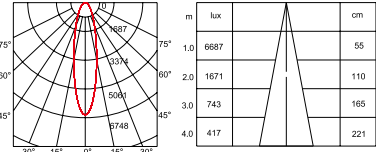



30W 30°3000K CRI>80

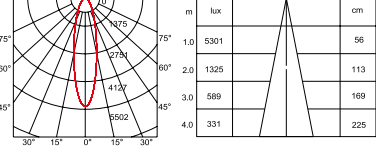


25W 30°3000K CRI>80

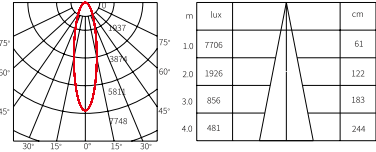


40W 24°3000K CRI>80

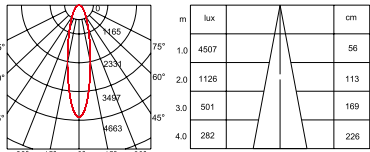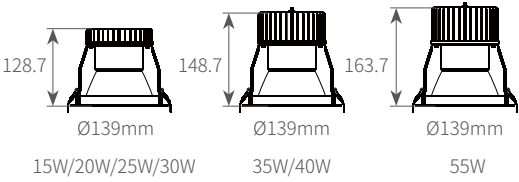


20W 30°3000K CRI>80

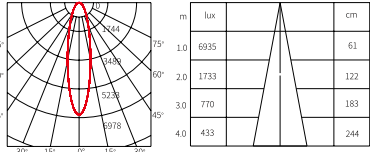

35W 30°3000K CRI>80

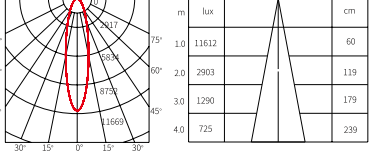

55W 30°3000K CRI>80




DLC04-B


Product information	
Power	15/20/25/30/35/40/55W
Beam angle	15°/24°/36°/50°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	99lm/W
CRI	Ra>90
Finish color	white/black

Mode			
DLC0415B-930XY	15W	DLC0430B-930XY	30W
DLC0415B-940XY		DLC0430B-940XY	
DLC0420B-930XY	20W	DLC0435B-930XY	35W
DLC0420B-940XY		DLC0435B-940XY	
DLC0425B-930XY	25W	DLC0440B-930XY	40W
DLC0425B-940XY		DLC0440B-940XY	


Light distribution parameters

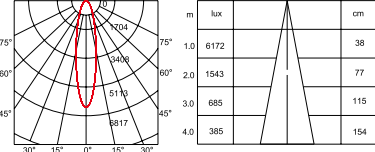


15W 24°3000K CRI>80

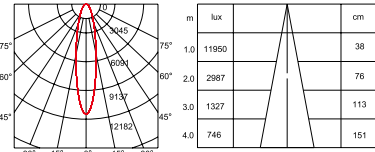


30W 24°3000K CRI>80

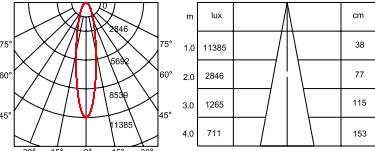


25W 24°3000K CRI>80

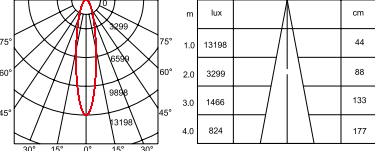


40W 24°3000K CRI>80

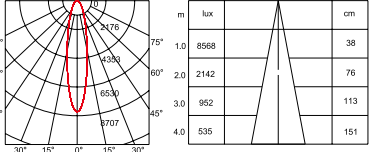


20W 24°3000K CRI>80


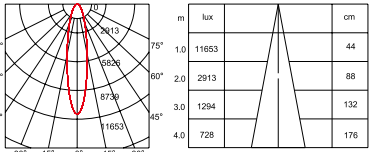


35W 24°3000K CRI>80

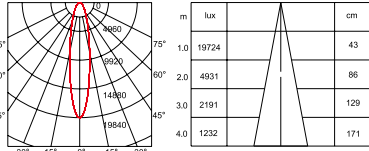

55W 24°3000K CRI>80

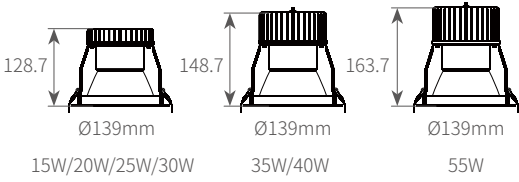

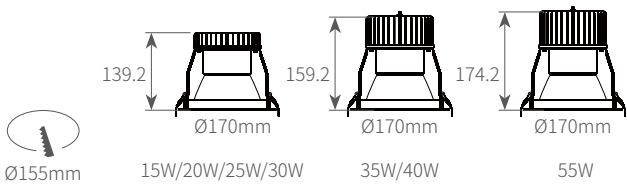


DLC05-A


Product information	
Power	15/20/25/30/35/40/55W
Beam angle	45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	105lm/W
CRI	Ra>90
Finish color	white/black

Mode			
DLC0515A-930XY	15W	DLC0530A-930XY	30W
DLC0515A-940XY		DLC0530A-940XY	
DLC0520A-930XY	20W	DLC0535A-930XY	35W
DLC0520A-940XY		DLC0535A-940XY	
DLC0525A-930XY	25W	DLC0540A-930XY	40W
DLC0525A-940XY		DLC0540A-940XY	


Light distribution parameters

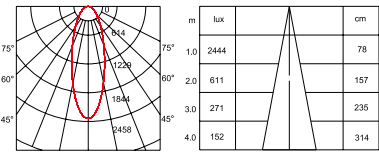


15W 55°3000K CRI>80

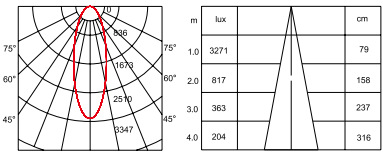


20W 55°3000K CRI>80

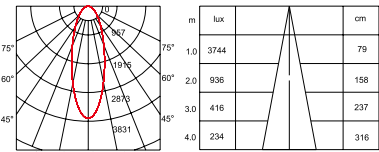


30W 30°3000K CRI>80

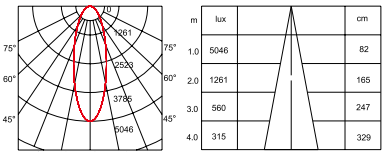


35W 55°3000K CRI>80

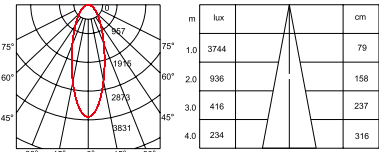



25W 55°3000K CRI>80

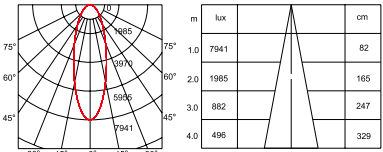

55W 55°3000K CRI>80

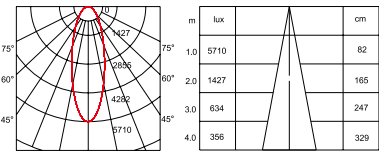

40W 55°3000K CRI>80

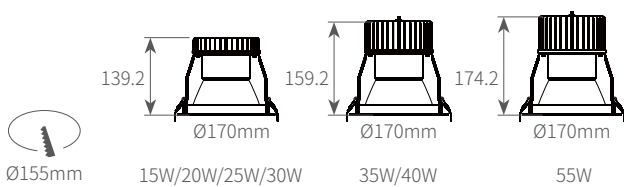


DLC05-B


Product information	
Power	15/20/25/30/35/40/55W
Beam angle	15°/24°/36°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	115lm/W
CRI	Ra>90
Finish color	white/black

Mode			
DLC0515B-930XY	15W	DLC0530B-930XY	30W
DLC0515B-940XY		DLC0530B-940XY	
DLC0520B-930XY	20W	DLC0535B-930XY	35W
DLC0520B-940XY		DLC0535B-940XY	
DLC0525B-930XY	25W	DLC0540B-930XY	40W
DLC0525B-940XY		DLC0540B-940XY	


Light distribution parameters

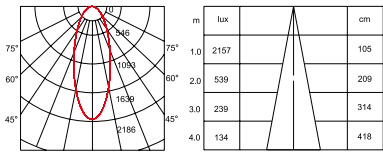


15W 55°3000K CRI>80

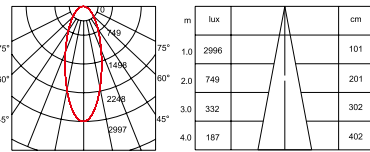


20W 55°3000K CRI>80

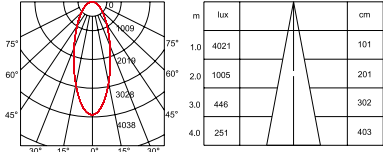


30W 30°3000K CRI>80

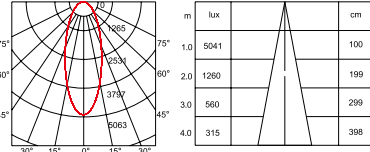


35W 55°3000K CRI>80

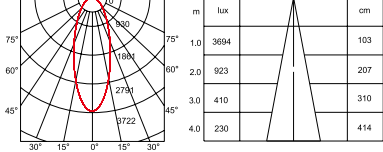



25W 55°3000K CRI>80

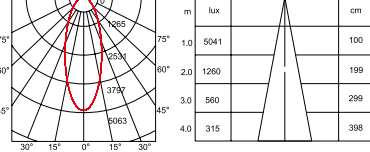

55W 55°3000K CRI>80

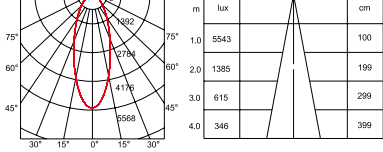

40W 55°3000K CRI>80


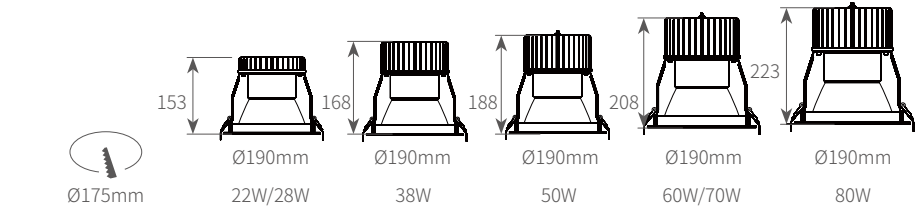



DLC06-A

Product information	
Power	22W/28W/38W/50W/60W/70W/80W
Beam angle	30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	109lm/W
CRI	Ra>90
Finish color	white/black

Mode			
DLC0622A-930XY	22W	DLC0650A-930XY	50W
DLC0622A-930XY		DLC0650A-930XY	
DLC0628A-930XY	28W	DLC0660A-930XY	60W
DLC0628A-930XY		DLC0660A-930XY	
DLC0638A-930XY	38W	DLC0670A-930XY	70W
DLC0638A-930XY		DLC0670A-930XY	

Light distribution parameters

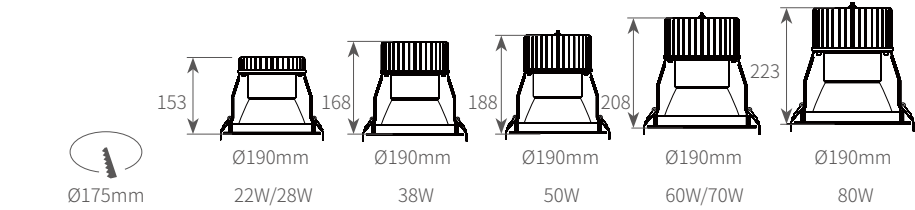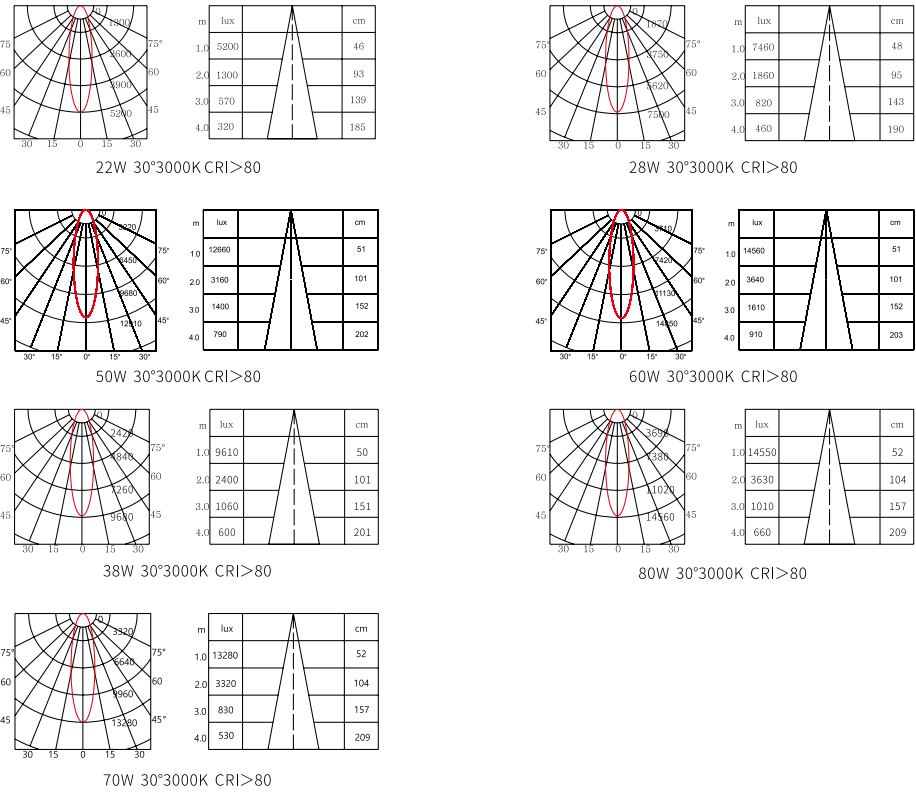




DLC06-B

Product information	
Power	22W/28W/38W/50W/60W/70W/80W
Beam angle	25°/32°/45°/50°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	122lm/W
CRI	Ra>90
Finish color	white/black

Mode			
DLC0622B-930XY	22W	DLC0650B-930XY	50W
DLC0622B-940XY		DLC0650B-940XY	
DLC0628B-930XY	28W	DLC0660B-930XY	60W
DLC0628B-940XY		DLC0660B-940XY	
DLC0638B-930XY	38W	DLC0670B-930XY	70W
DLC0638B-940XY		DLC0670B-940XY	

Light distribution parameters

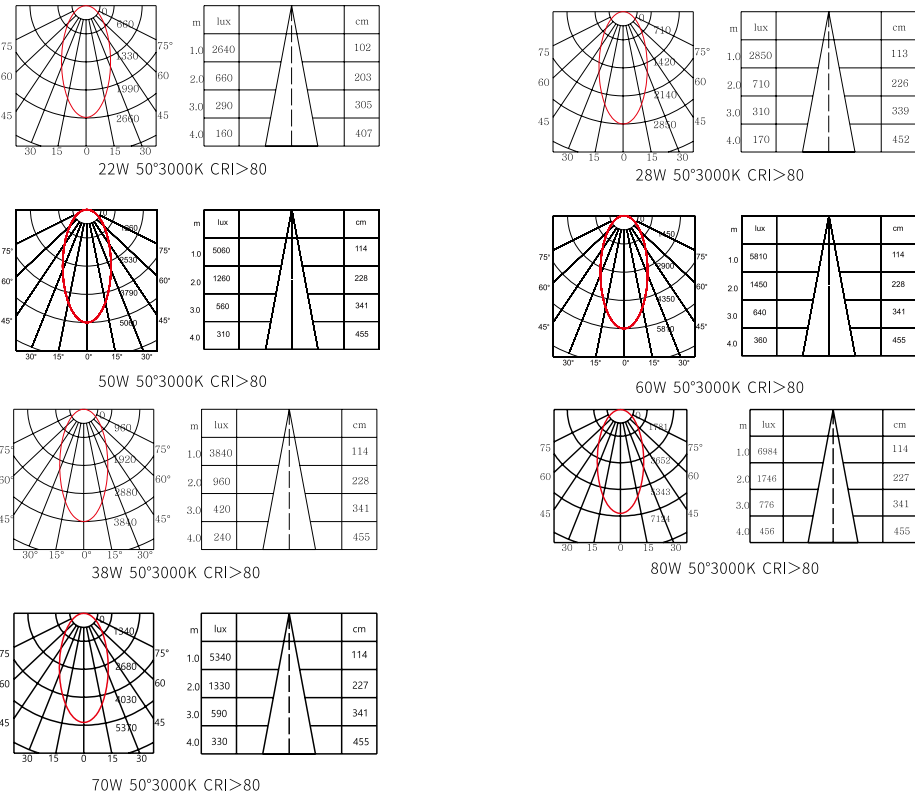


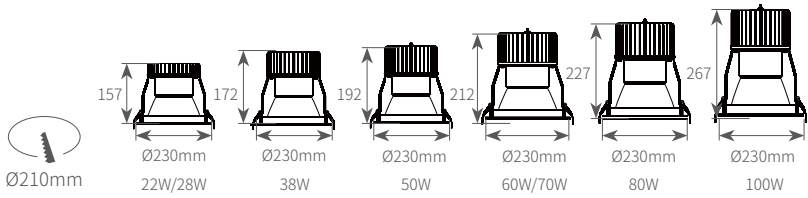



DLC08-A

Product information	
Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	115lm/W
CRI	Ra>90
Finish color	white/black

Mode		
DLC0822A-930XY	22W	DLC0850A-930XY
DLC0822A-940XY		DLC0850A-940XY
DLC0828A-930XY	28W	DLC0860A-930XY
DLC0828A-940XY		DLC0860A-940XY
DLC0838A-930XY	38W	DLC0870A-930XY
DLC0838A-940XY		DLC0870A-940XY
		DLC0880A-930XY
		DLC0880A-940XY
		DLC08100A-930XY
		DLC08100A-940XY

Light distribution parameters

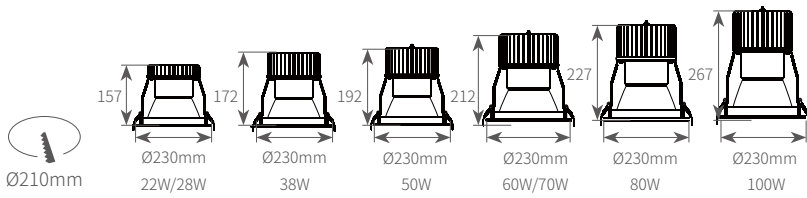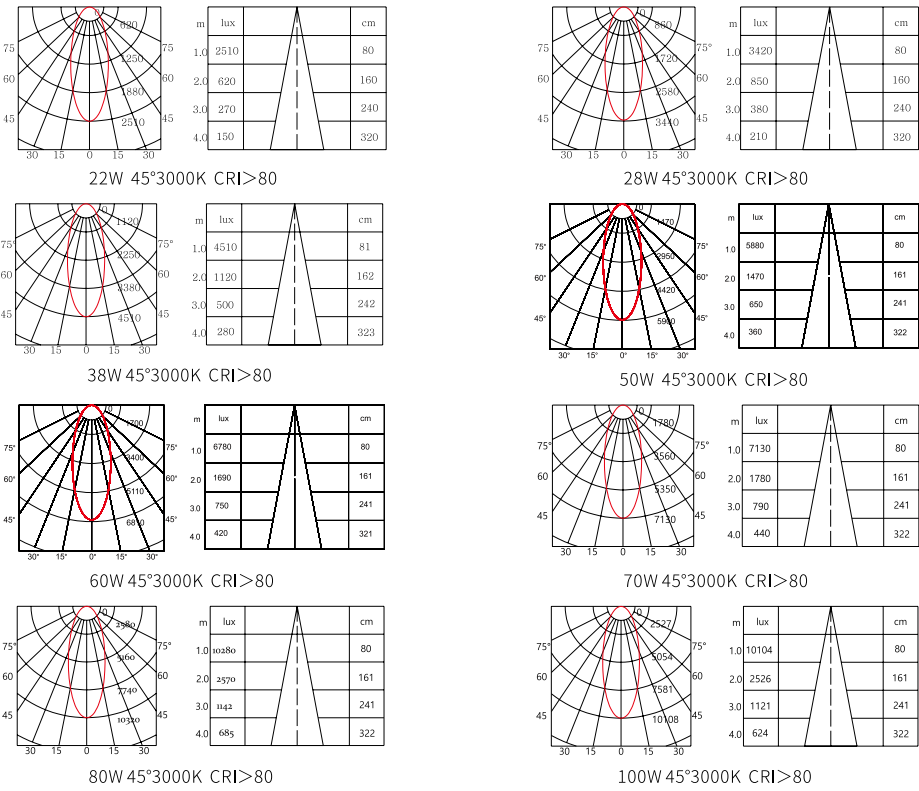



DLC08-B

Product information	
Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	25°/36°/45°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	100lm/W
CRI	Ra>90
Finish color	white/black

Mode		
DLC0822B-930XY	22W	DLC0850B-930XY
DLC0822B-940XY		DLC0850B-940XY
DLC0828B-930XY	28W	DLC0860B-930XY
DLC0828B-940XY		DLC0860B-940XY
DLC0838B-930XY	38W	DLC0870B-930XY
DLC0838B-940XY		DLC0870B-940XY
		DLC0880B-930XY
		DLC0880B-940XY
		DLC08100B-930XY
		DLC08100B-940XY

Light distribution parameters

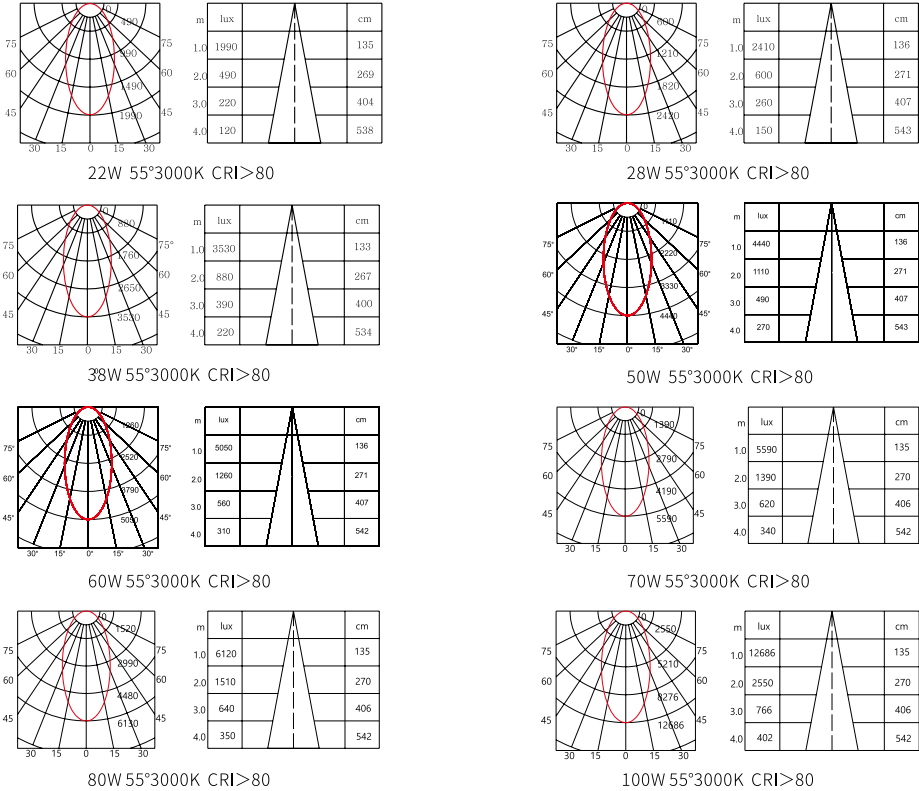

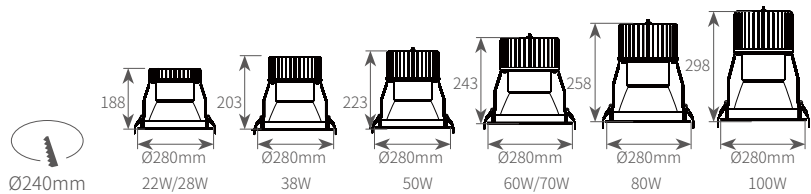

DLC10-A



Product information

Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	94lm/W
CRI	Ra>90
Finish color	white/black

Mode

DLC1022A-930XY	22W	DLC1050A-930XY	50W	DLC1080A-930XY	80W
DLC1022A-940XY		DLC1050A-940XY		DLC1080A-940XY	
DLC1028A-930XY	28W	DLC1060A-930XY	60W	DLC10100A-930XY	100W
DLC1028A-940XY		DLC1060A-940XY		DLC10100A-940XY	
DLC1038A-930XY	38W	DLC1070A-930XY	70W		
DLC1038A-940XY		DLC1070A-940XY			

Light distribution parameters

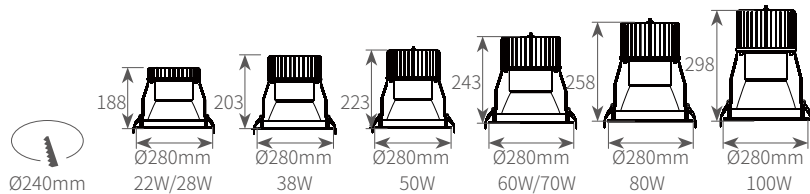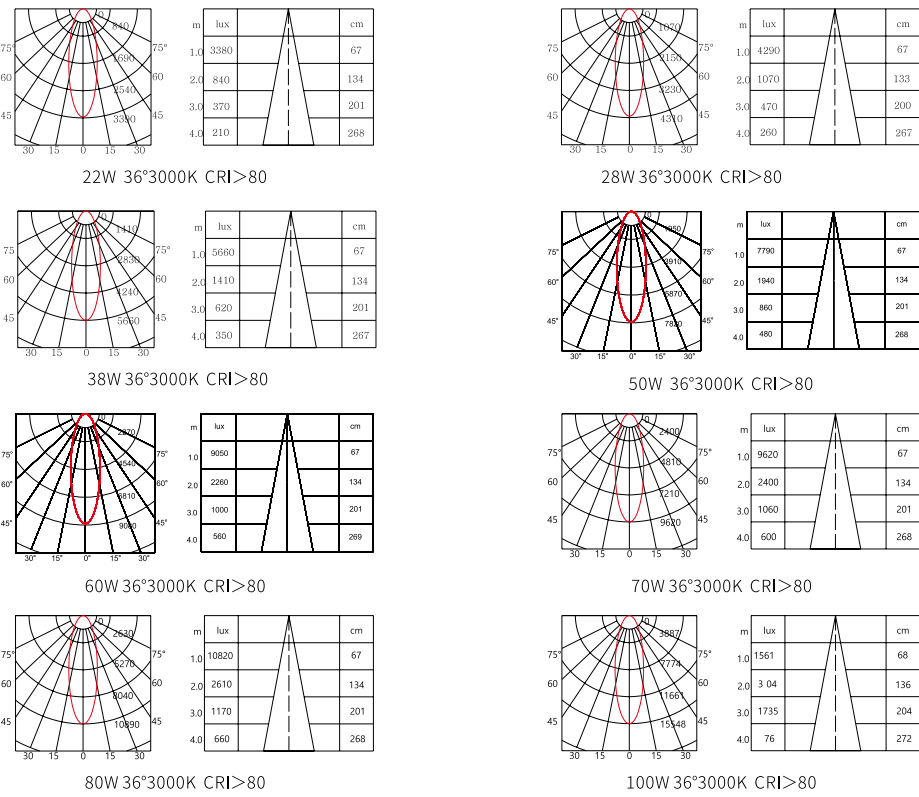

DLC10-B


Product information


Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	25°/32°/40°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	104lm/W
CRI	Ra>90
Finish color	white/black

Mode

DLC1022B-930XY	22W	DLC1050B-930XY	50W	DLC1080B-930XY	80W
DLC1022B-940XY		DLC1050B-940XY		DLC1080B-940XY	
DLC1028B-930XY	28W	DLC1060B-930XY	60W	DLC10100B-930XY	100W
DLC1028B-940XY		DLC1060B-940XY		DLC10100B-940XY	
DLC1038B-930XY	38W	DLC1070B-930XY	70W		
DLC1038B-940XY		DLC1070B-940XY			

Light distribution parameters

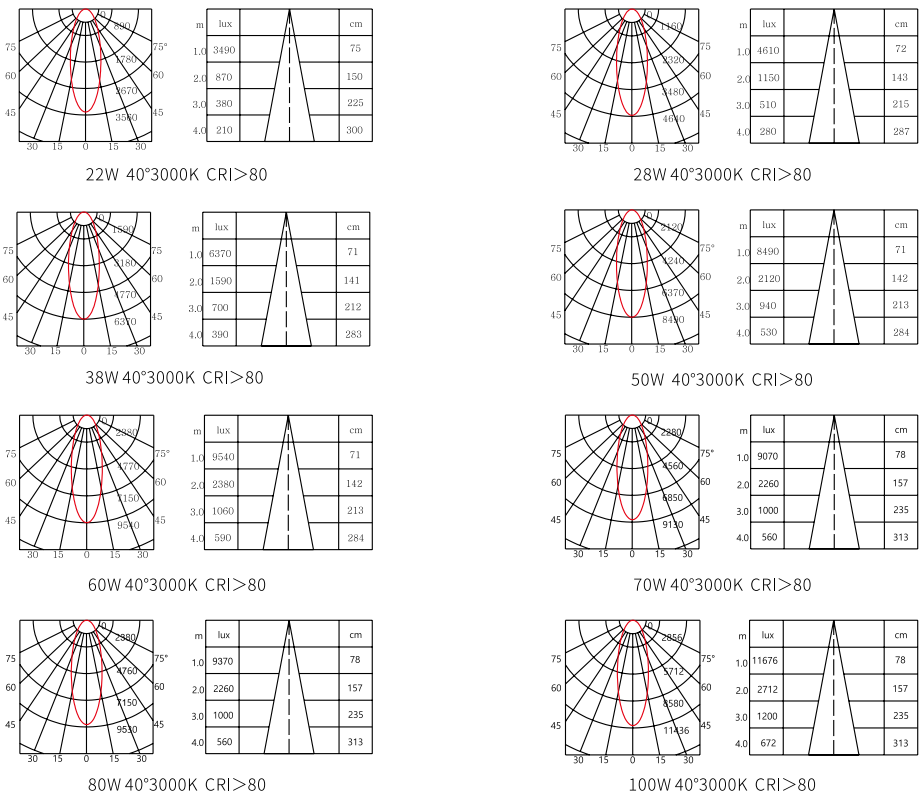

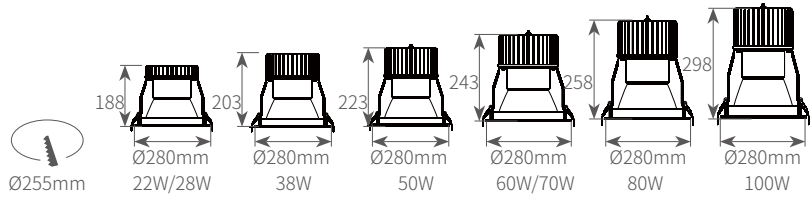

DLC10-D


Product information

Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	25°/45°/80°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	110lm/W
CRI	Ra>90
Finish color	white/black


Mode

DLC1022D-930XY	22W	DLC1050D-930XY	50W	DLC1080D-930XY	80W
DLC1022D-940XY		DLC1050D-940XY		DLC1080D-940XY	
DLC1028D-930XY	28W	DLC1060D-930XY	60W	DLC10100D-930XY	100W
DLC1028D-940XY		DLC1060D-940XY		DLC10100D-940XY	
DLC1038D-930XY	38W	DLC1070D-930XY	70W		
DLC1038D-940XY		DLC1070D-940XY			


Light distribution parameters




22W 45°3000K CRI>80




28W 45°3000K CRI>80




38W 45°3000K CRI>80




50W 45°3000K CRI>80




60W 45°3000K CRI>80



70W 45°3000K CRI>80



80W 45°3000K CRI>80




100W 45°3000K CRI>80




DLD RECESSED DOWNLIGHT
SERIES



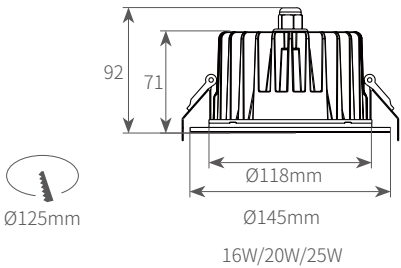



DLD04-A

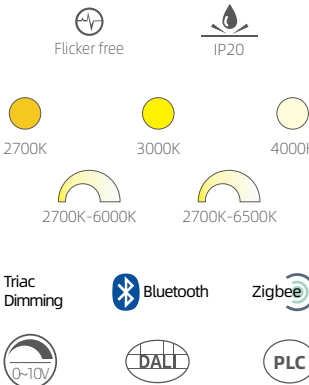


Product information	
Power	16W/20W/25W
Beam angle	87°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	96lm/W
CRI	Ra>90
Finish color	white/black

Mode	
DLD0416A-930XY	16W
DLD0416A-940XY	
DLD0420A-930XY	20W
DLD0420A-940XY	
DLD0425A-930XY	25W
DLD0425A-940XY	

Light distribution parameters

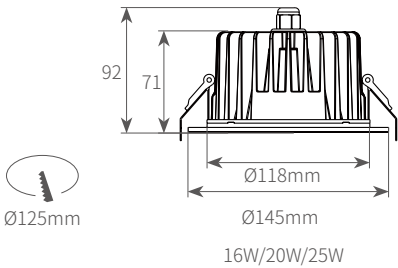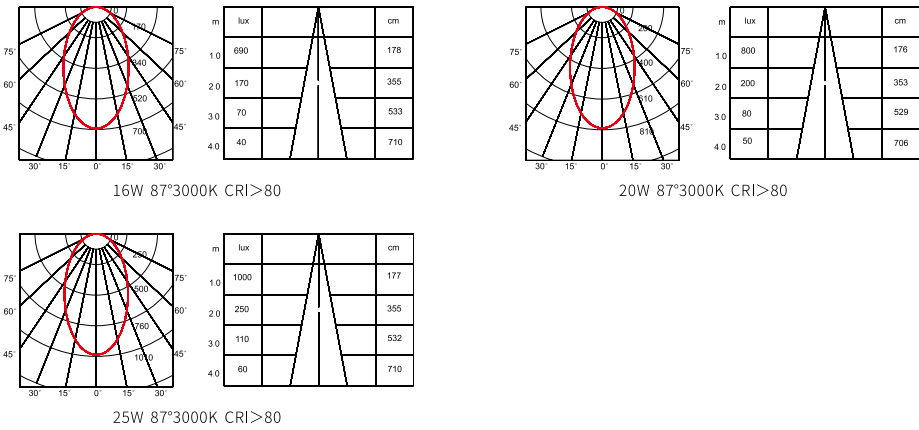


DLD04-B

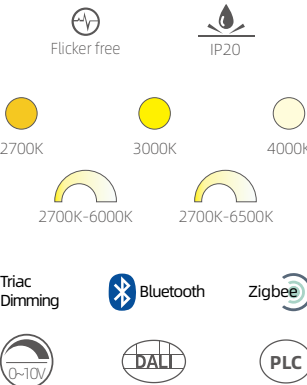


Product information	
Power	16W/20W/25W
Beam angle	84°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	89lm/W
CRI	Ra>90
Finish color	white/black


Mode	
DLD0416B-930XY	16W
DLD0416B-940XY	
DLD0420B-930XY	20W
DLD0420B-940XY	
DLD0425B-930XY	25W
DLD0425B-940XY	

Light distribution parameters

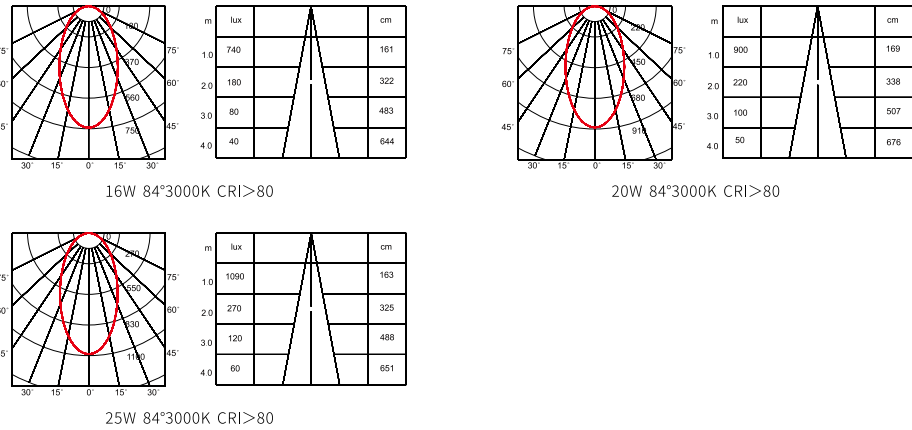

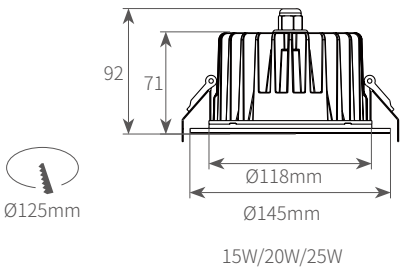


DLD04-C

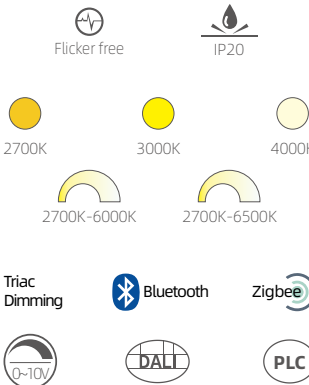


Product information	
Power	15W/20W/25W
Beam angle	27°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	106lm/W
CRI	Ra>90
Finish color	white/black

Mode	
DLD0415C-930XY	15W
DLD0415C-940XY	
DLD0420C-930XY	20W
DLD0420C-940XY	
DLD0425C-930XY	25W
DLD0425C-940XY	


Light distribution parameters

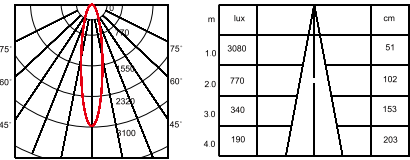


15W 27°3000K CRI>80

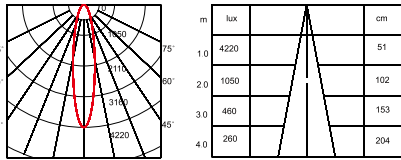


20W 27°3000K CRI>80

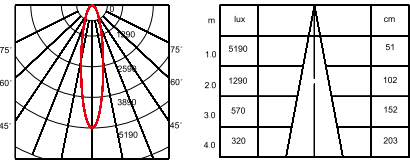

25W 27°3000K CRI>80

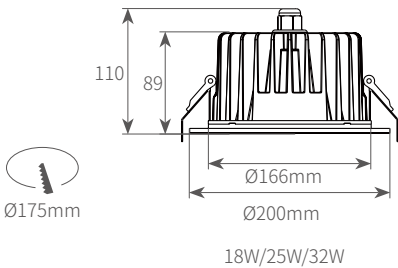


DLD06-A

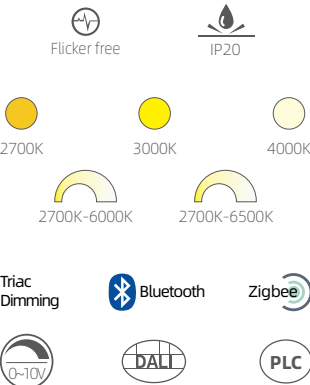


Product information	
Power	18W/25W/32W
Beam angle	87°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	100lm/W
CRI	Ra>90
Finish color	white/black

Mode	
DLD0618A-930XY	18W
DLD0618A-940XY	
DLD0625A-930XY	25W
DLD0625A-940XY	
DLD0632A-930XY	32W
DLD0632A-940XY	


Light distribution parameters

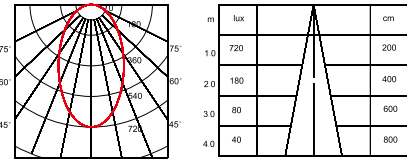


18W 87°3000K CRI>80

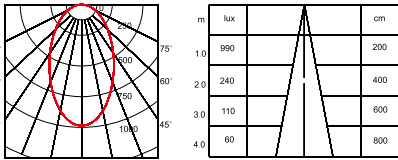


25W 87°3000K CRI>80

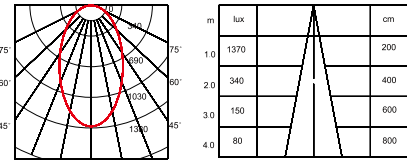

32W 87°3000K CRI>80

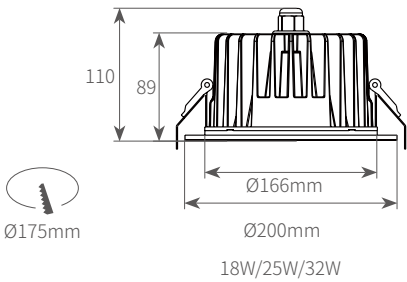



DLD06-B

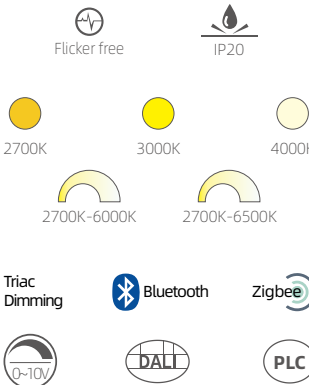


Product information	
Power	18W/25W/32W
Beam angle	84°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	92lm/W
CRI	Ra>90
Finish color	white/black

Mode	
DLD0618B-930XY	18W
DLD0618B-940XY	
DLD0625B-930XY	25W
DLD0625B-940XY	
DLD0632B-930XY	32W
DLD0632B-940XY	

Light distribution parameters

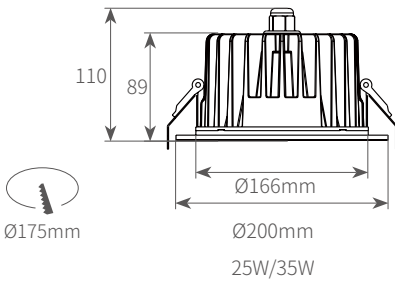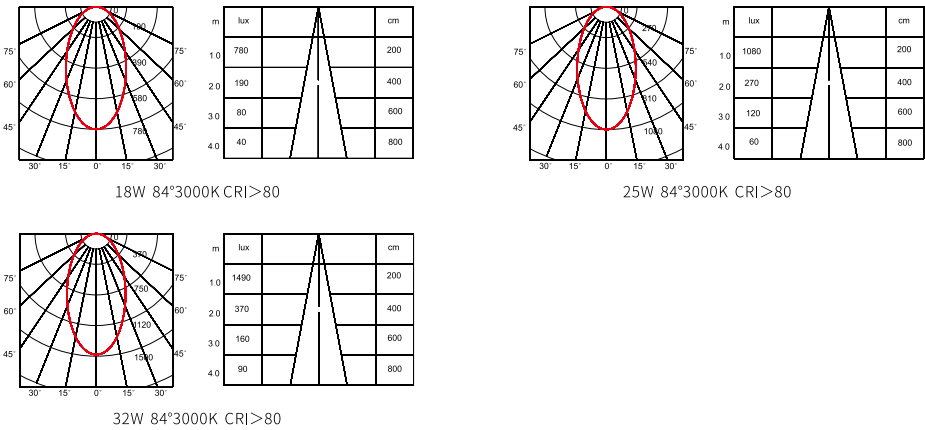


DLD06-C

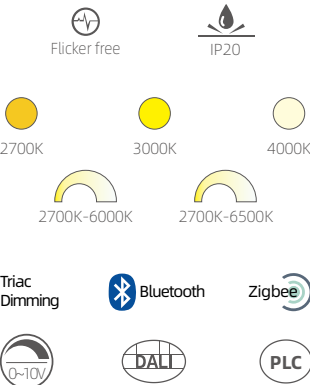


Product information	
Power	25W/35W
Beam angle	27°/45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	110lm/W
CRI	Ra>90
Finish color	white/black


Mode	
DLD0625C-930XY	25W
DLD0625C-940XY	
DLD0635C-930XY	35W
DLD0635C-940XY	

Light distribution parameters

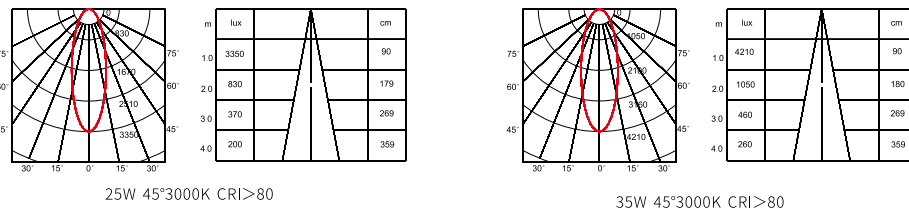

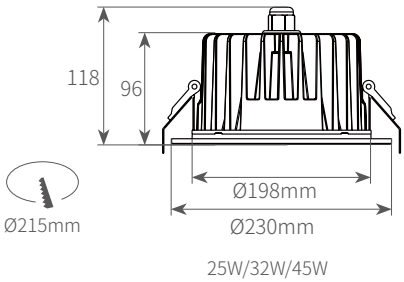



DLD08-A

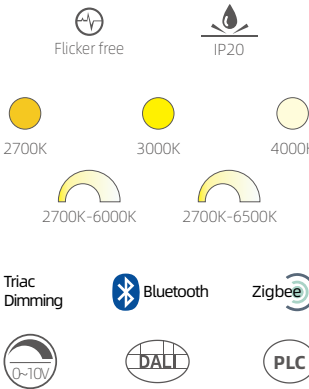


Product information	
Power	25W/32W/45W
Beam angle	87°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	102lm/W
CRI	Ra>90
Finish color	white/black

Mode	
DLD0825A-930XY	25W
DLD0825A-940XY	
DLD0832A-930XY	32W
DLD0832A-940XY	
DLD0845A-930XY	45W
DLD0845A-940XY	

Light distribution parameters

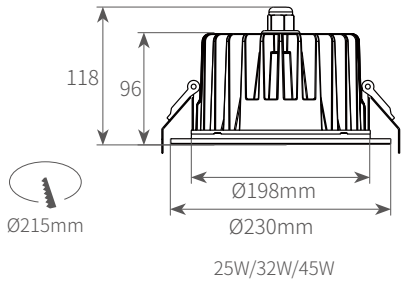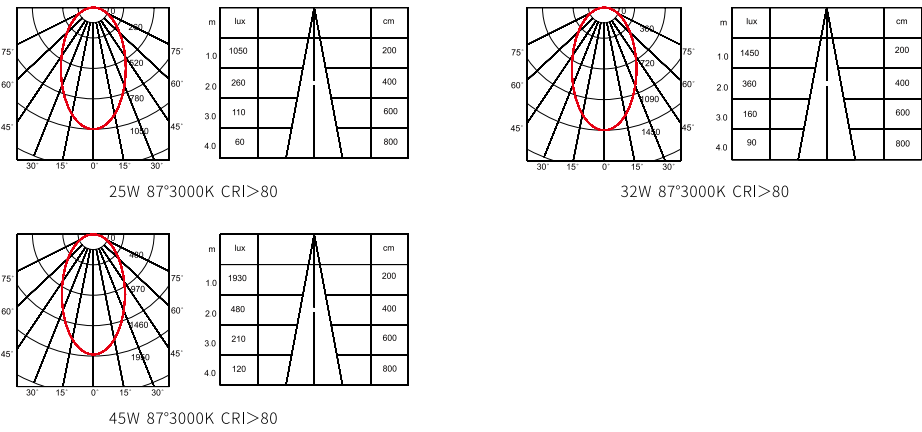


DLD08-B

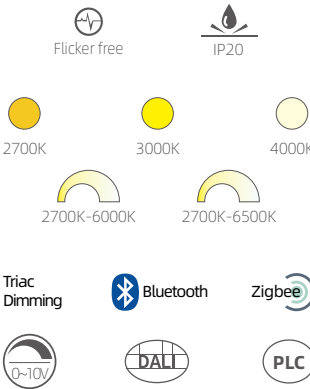


Product information	
Power	25W/32W/45W
Beam angle	84°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	96lm/W
CRI	Ra>90
Finish color	white/black

Mode	
DLD0825B-930XY	25W
DLD0825B-940XY	
DLD0832B-930XY	32W
DLD0832B-940XY	
DLD0845B-930XY	45W
DLD0845B-940XY	

Light distribution parameters

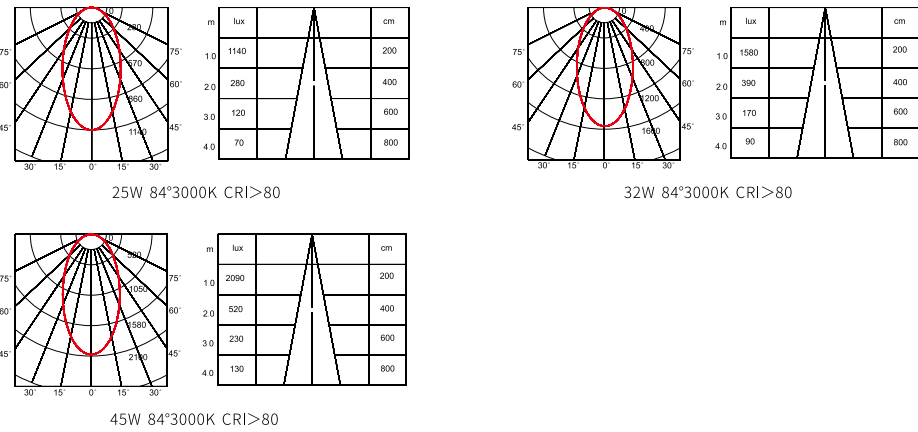

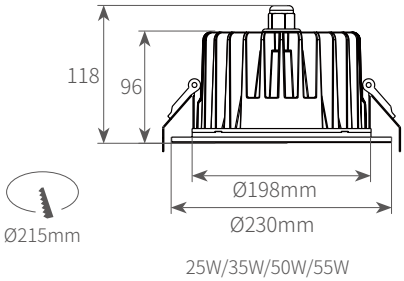

DLD08-C

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V

DALI

PLC


Product information

Power	25W/35W/50W/55W
Beam angle	27°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	124lm/W
CRI	Ra>90
Finish color	white/black


Mode

DLD0825C-930XY	25W	DLD0850C-930XY	50W
DLD0825C-940XY		DLD0850C-940XY	
DLD0835C-930XY	35W	DLD0855C-930XY	55W
DLD0835C-940XY		DLD0855C-940XY	


Light distribution parameters

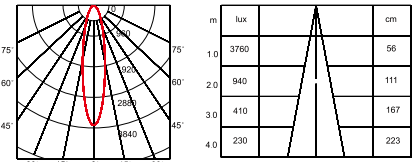


25W 27°3000K CRI>80

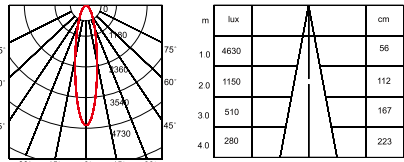

35W 27°3000K CRI>80


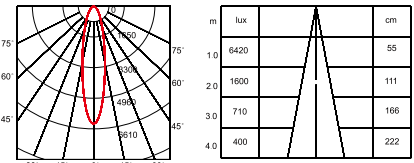


50W 27°3000K CRI>80

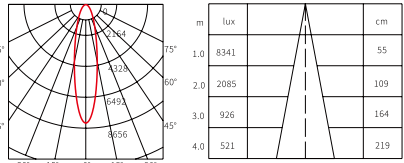

55W 27°3000K CRI>80



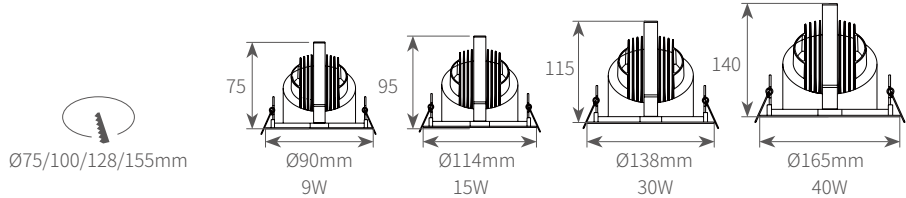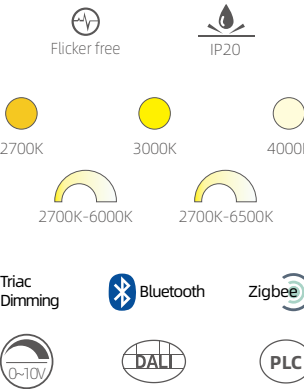


DLG


Product information	
Power	9W/15W/30W/40W
Beam angle	15°/24°/38°/45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	115lm/W
CRI	Ra>90
Finish color	white/black

Mode		
DLG7509-C930XY	9W	DLG13030-C930XY
DLG7509-C940XY		DLG13030-C940XY
DLG10015-C930XY	15W	DLG15540-C930XY
DLG10015-C940XY		DLG15540-C940XY


Light distribution parameters

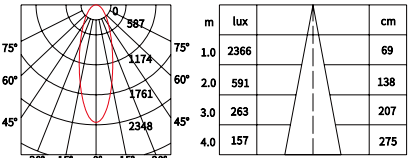


9W 24°3000K CRI>80

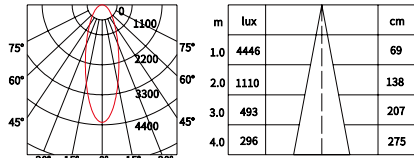



15W 24°3000K CRI>80

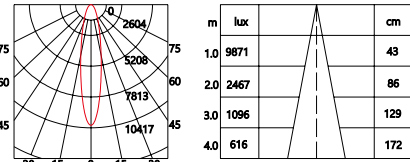


30W 24°3000K CRI>80

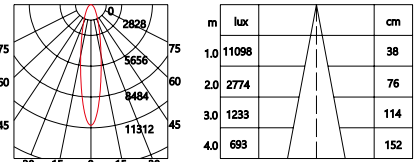

40W 24°3000K CRI>80

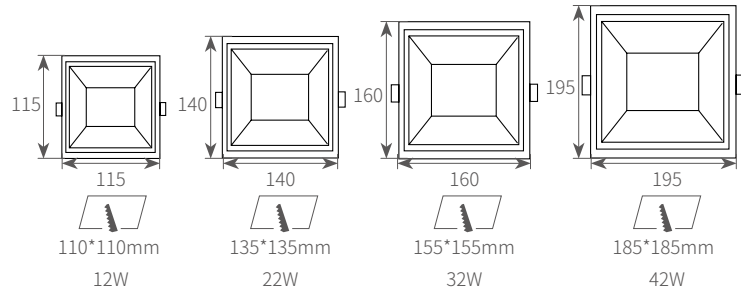

DLS

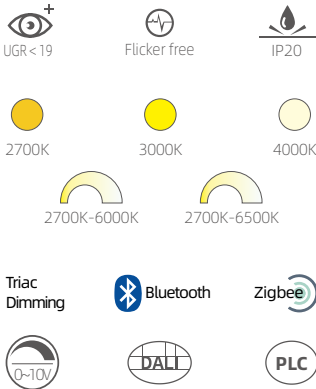




Product information

Power	12W/22W/32W/42W
Beam angle	55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	104lm/W
CRI	Ra>90
Finish color	white/black


Mode

DLS0412C-930XY		DLS0632C-930XY
DLS0412C-940XY	12W	DLS0632C-940XY
DLS0412C-950XY		DLS0632C-950XY
DLS0522C-930XY		DLS0842C-930XY
DLS0522C-940XY	22W	DLS0842C-940XY
DLS0522C-950XY		DLS0842C-950XY

Light distribution parameters

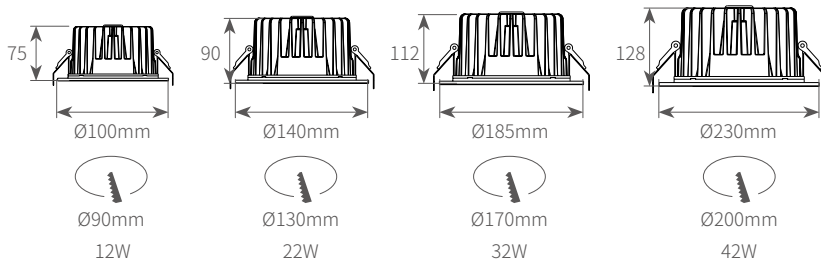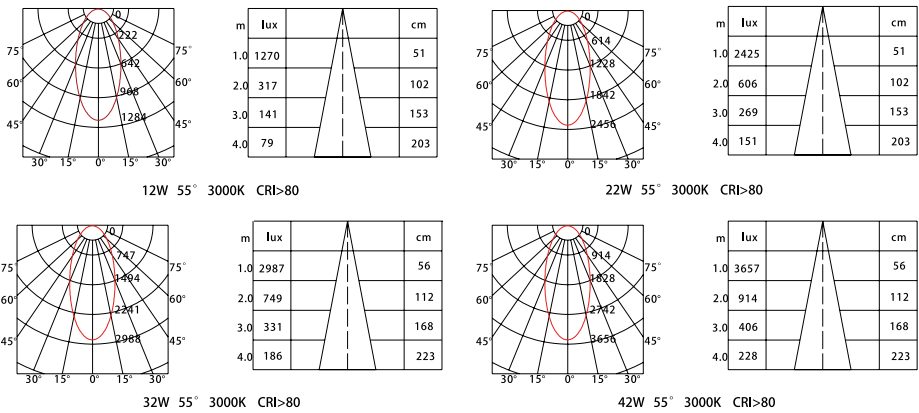

DLW

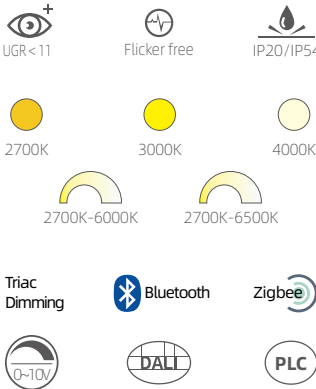


Product information


Power	12W/22W/32W/42W
Beam angle	45°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	84lm/W
CRI	Ra>90
Finish color	white/black

Mode


DLW0412C-930XY		DLW0632C-930XY
DLW0412C-940XY	12W	DLW0632C-940XY
DLW0412C-950XY		DLW0632C-950XY
DLW0522C-930XY		DLW0842C-930XY
DLW0522C-940XY	22W	DLW0842C-940XY
DLW0522C-950XY		DLW0842C-950XY

Light distribution parameters

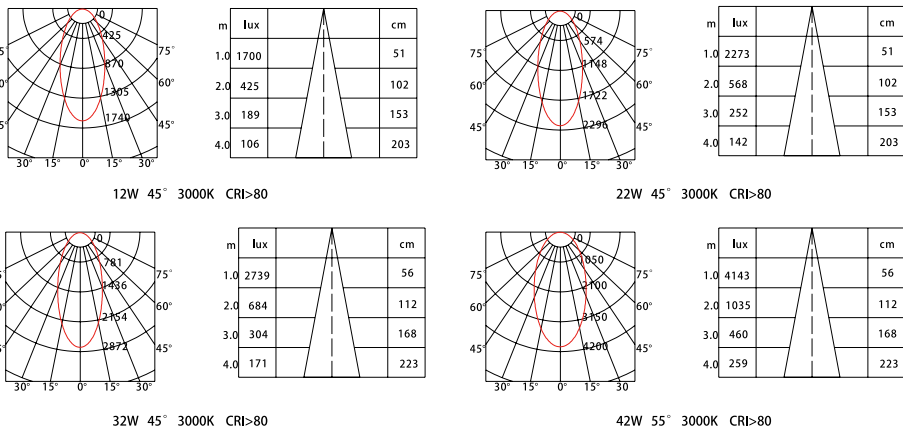

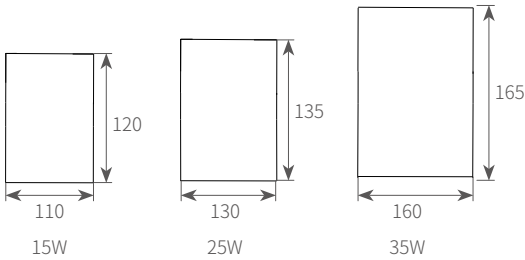



SMS0415/SMS0525/SMS0635

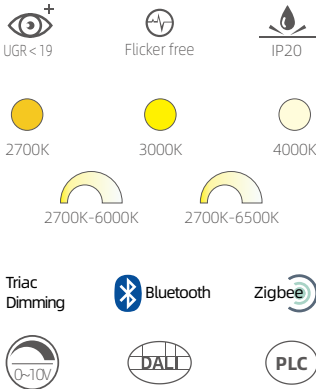


Product information	
Power	15W/25W/35W
Beam angle	60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	89lm/W
CRI	Ra>90
Finish color	white/black

Mode	
SMS0415-C930	15W
SMS0415-C940	
SMS0525-C940	25W
SMS0525-C930	
SMS0635-C940	35W
SMS0635-C930	

Light distribution parameters

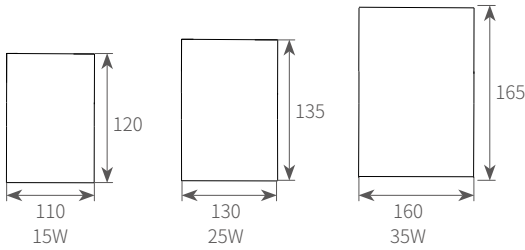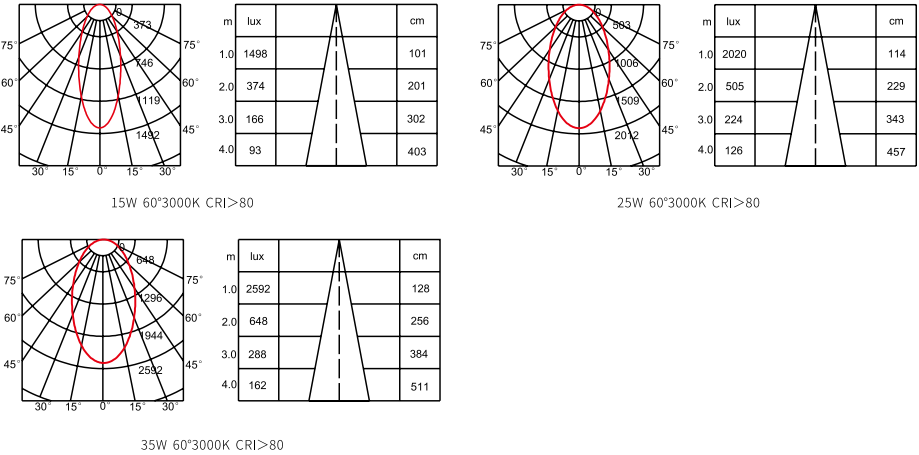


SMR0415/SMR0525/SMR0635

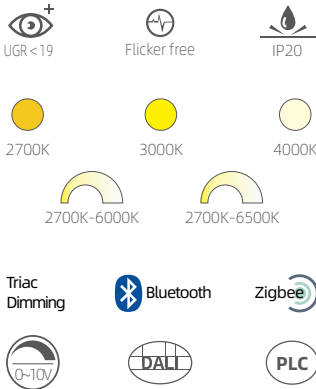


Product information	
Power	15W/25W/35W
Beam angle	70°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	99lm/W
CRI	Ra>90
Finish color	white/black


Mode	
SMR0415-C930	15W
SMR0415-C940	
SMR0525-C940	25W
SMR0525-C930	
SMR0635-C940	35W
SMR0635-C930	

Light distribution parameters

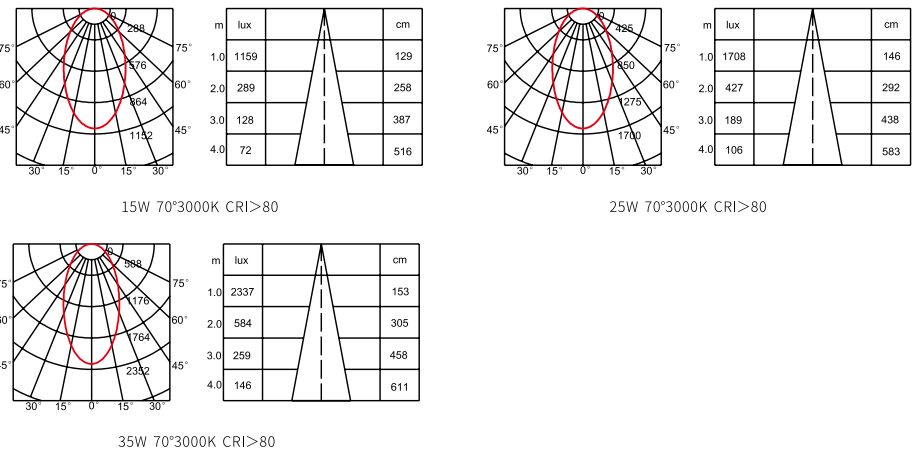

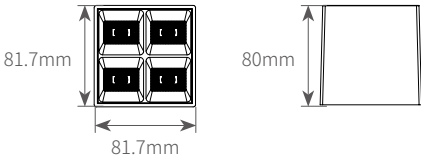

BB0415

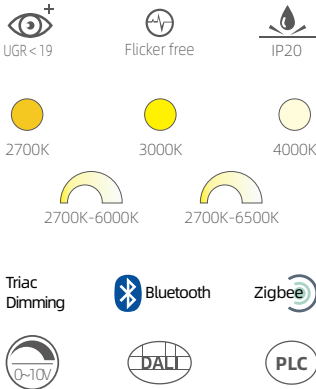


Product information

Power	15W
Beam angle	15°/24°/36°/50°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	Ra>90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

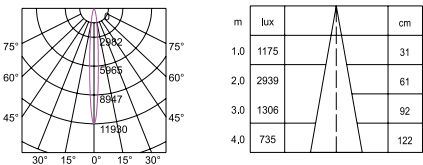


Beam Angle=15°

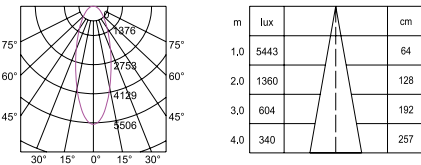


Beam Angle=36°

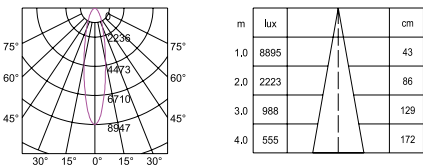


Beam Angle=24°

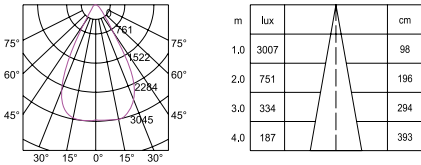

Beam Angle=50°

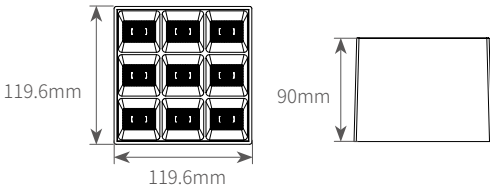

BLD0936

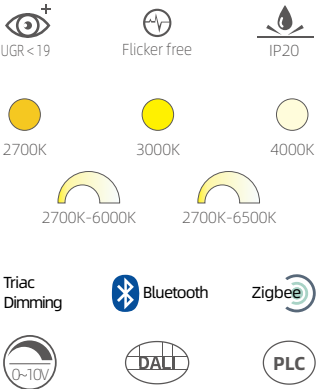


Product information

Power	36W
Beam angle	15°/24°/36°/50°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	Ra>90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

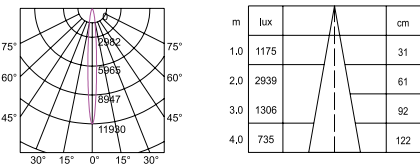


Beam Angle=15°

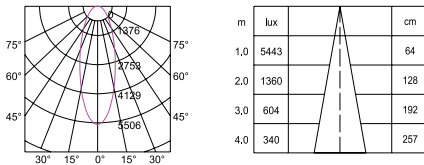



Beam Angle=36°

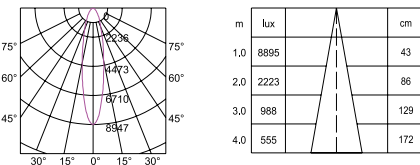

Beam Angle=24°

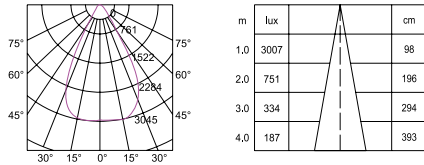

Beam Angle=50°

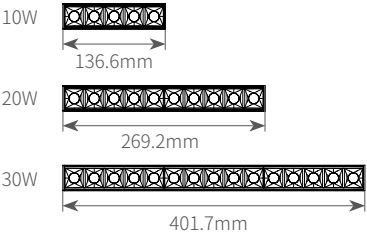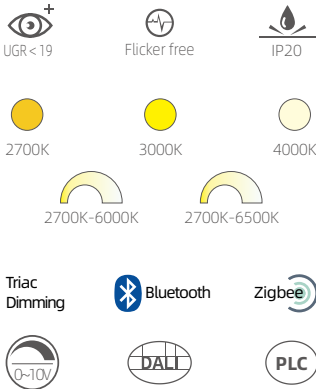




BLD0510/BLD1020/BLD1530

Product information	
Power	10W/20W/30W
Beam angle	15°/24°/36°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	111lm/W
CRI	Ra>90
Finish color	white/black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

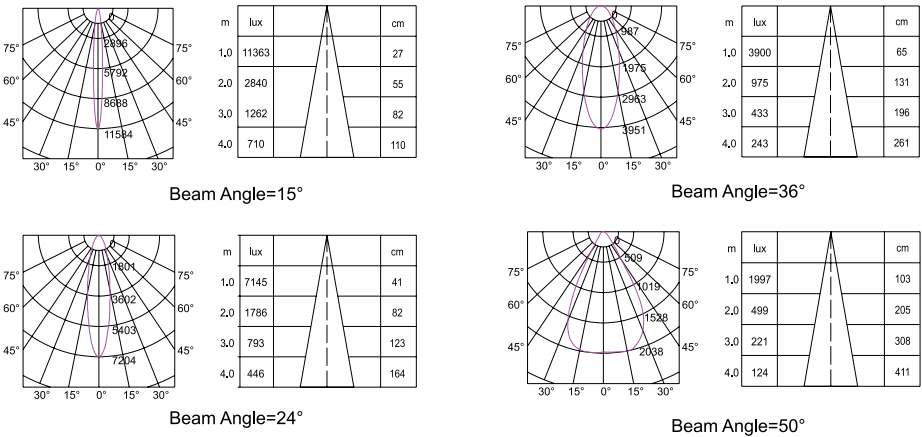

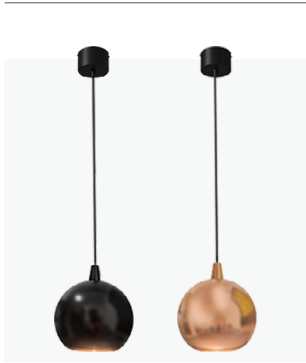




SMP8005

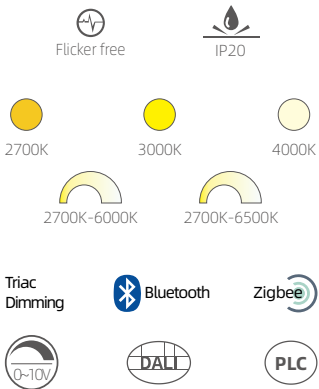


Product information	
Power	5W
Beam angle	75°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	60Lm/w
CRI	>90/97
Finish color	rose gold / Pearl black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

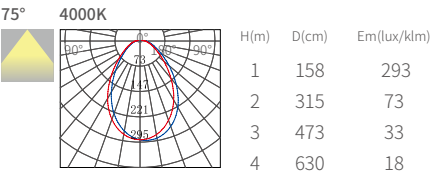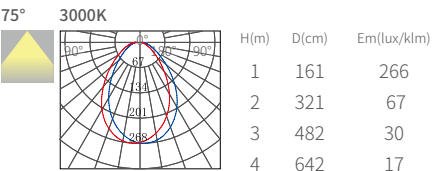



SMP13006

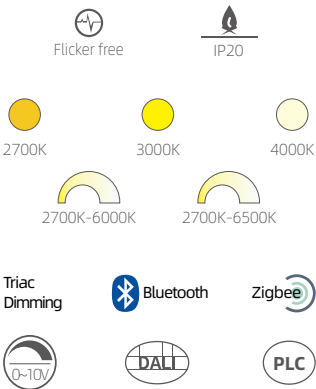


Product information	
Power	6W
Beam angle	220°
Input voltage	AC100-240/220-240V
Input frequency	50/60hz
System Luminous flux	60Lm/w
CRI	>90/97
Finish color	Cloud white

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

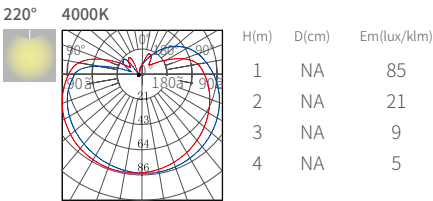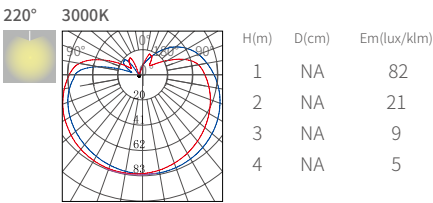

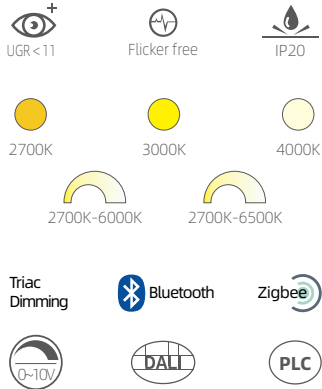

RP5008 /RP5015







Product information

Power	8W/15W
Beam angle	15°/30°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60hz
System Luminous flux	70Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

15° 3000K			H(m)	D(cm)	Em(lux/klm)
			1	36	3173
			2	72	793
			3	108	353
			4	144	198
15° 4000K			H(m)	D(cm)	Em(lux/klm)
			1	39	4029
			2	77	1007
			3	116	448
			4	193	252
30° 3000K			H(m)	D(cm)	Em(lux/klm)
			1	46	2478
			2	92	590
			3	138	275
			4	184	155
30° 4000K			H(m)	D(cm)	Em(lux/klm)
			1	45	3151
			2	90	788
			3	135	350
			4	180	197
36° 3000K			H(m)	D(cm)	Em(lux/klm)
			1	65	1475
			2	129	368
			3	194	164
			4	258	92
36° 4000K			H(m)	D(cm)	Em(lux/klm)
			1	61	1942
			2	123	486
			3	184	216
			4	245	121



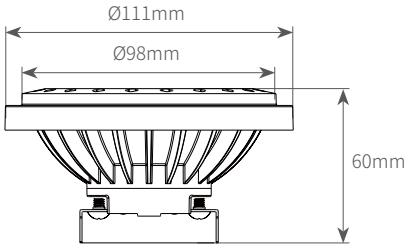


AR111-A

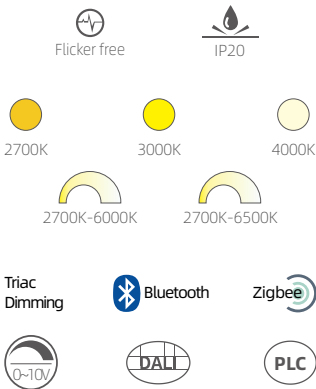


Product information	
Power	10W/12W/16W
Beam angle	15°/30°
Input voltage	AC/DC 12V
Input frequency	50/60Hz
System Luminous flux	117lm/W
CRI	Ra>90
Finish color	Silver

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	G53


Light distribution parameters

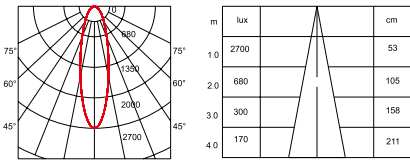


10W 30°3000K CRI>90

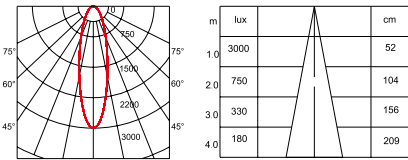


12W 30°3000K CRI>90

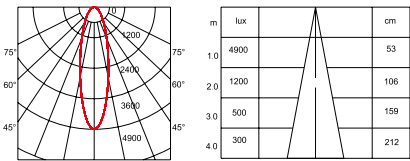

16W 30°3000K CRI>90




AR111-B

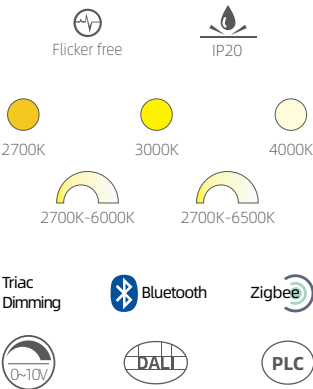


Product information	
Power	10W/12W/16W
Beam angle	15°/30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	117lm/W
CRI	Ra>90
Finish color	Silver

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

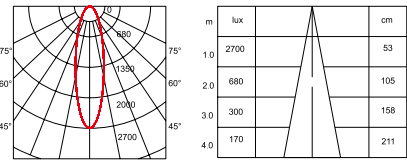


10W 30°3000K CRI>90

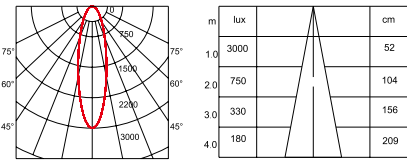


12W 30°3000K CRI>90

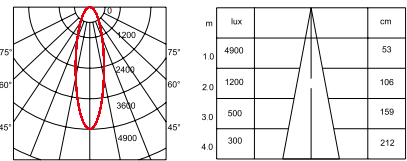

16W 30°3000K CRI>90

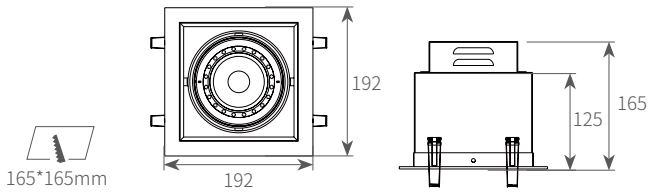



AR02-1

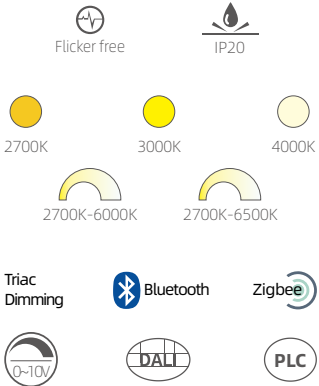


Product information	
Power	10W/12W/16W
Beam angle	15°/30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	117lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

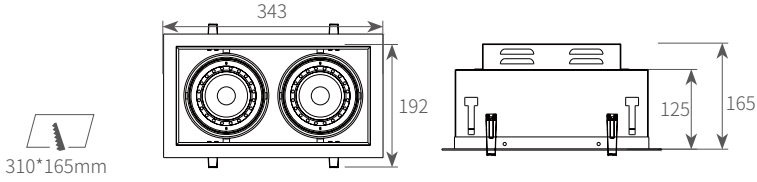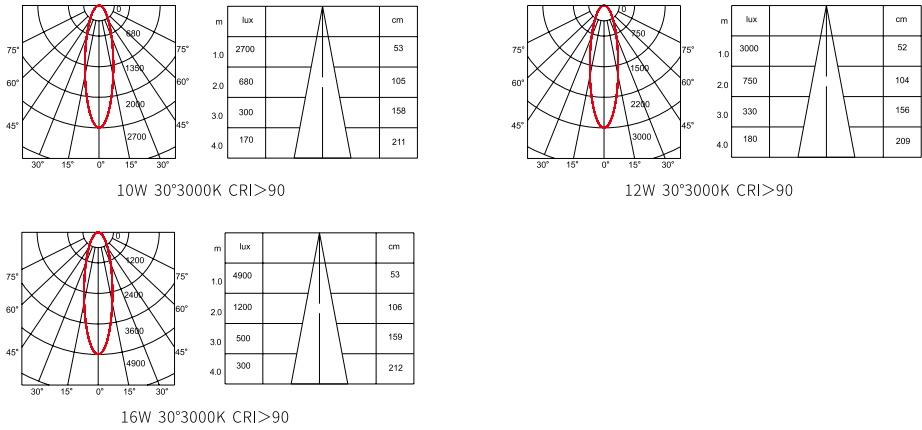


AR02-2

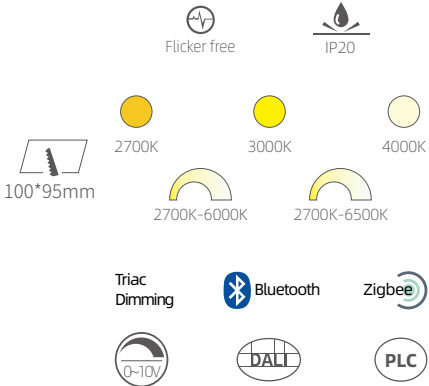


Product information	
Power	10W*2/12W*2/16W*2
Beam angle	15°/30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	91lm/W
CRI	Ra>90
Finish color	white/black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

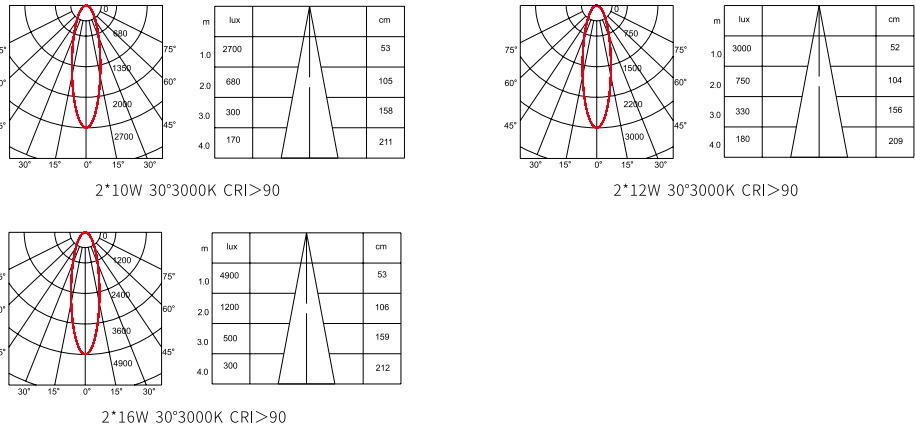

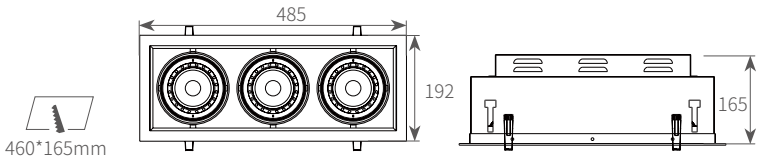


AR02-3

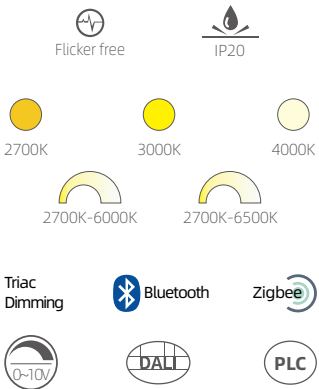


Product information	
Power	10W*3/12W*3/16W*3
Beam angle	15°/30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	91lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

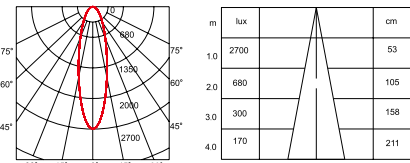


3*10W 30°3000K CRI>90

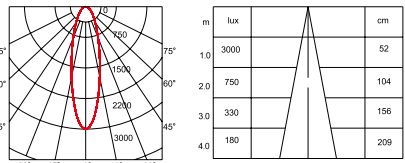


3*12W 30°3000K CRI>90

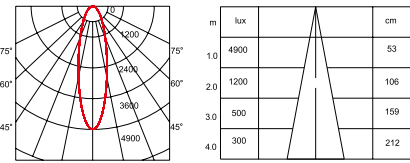

3*16W 30°3000K CRI>90

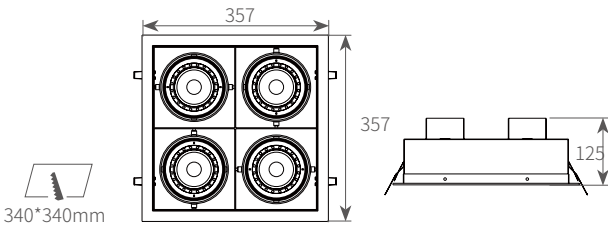


AR02-4

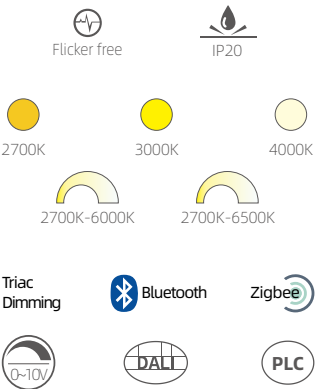


Product information	
Power	10W*4/12W*4/16W*4
Beam angle	15°/30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	91lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

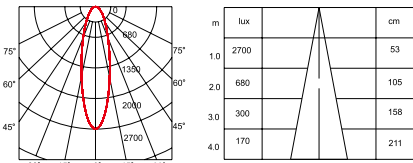

10W*4 30°3000K CRI>90

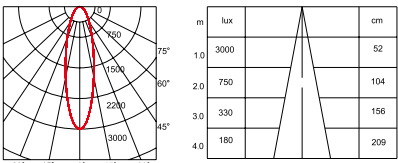


12W*4 30°3000K CRI>90

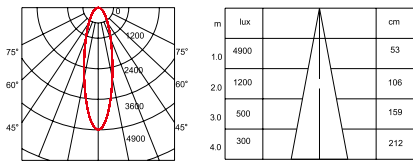


16W*4 30°3000K CRI>90

LED TRACK
LIGHT SERIES



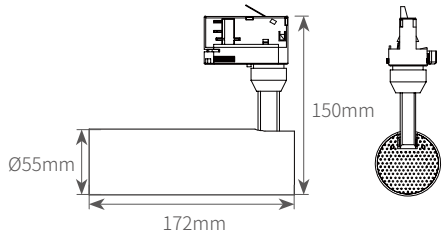



RT55-AL

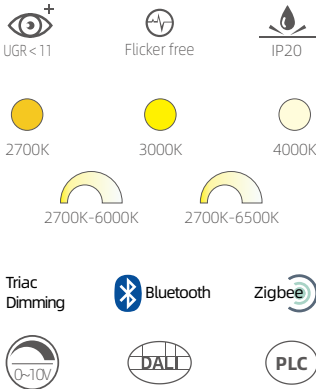


Product information	
Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	82lm/W
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

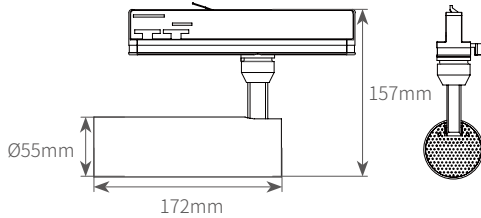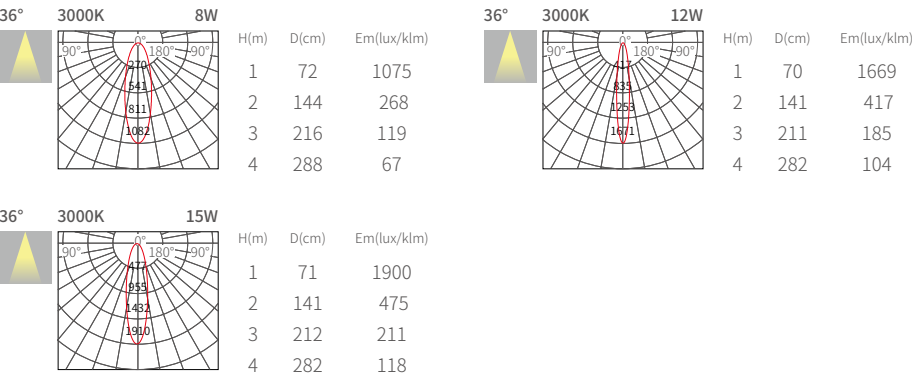


RT55-BL

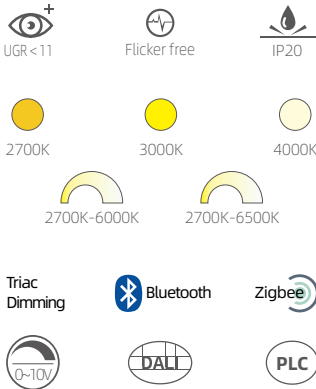


Product information	
Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	82lm/W
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

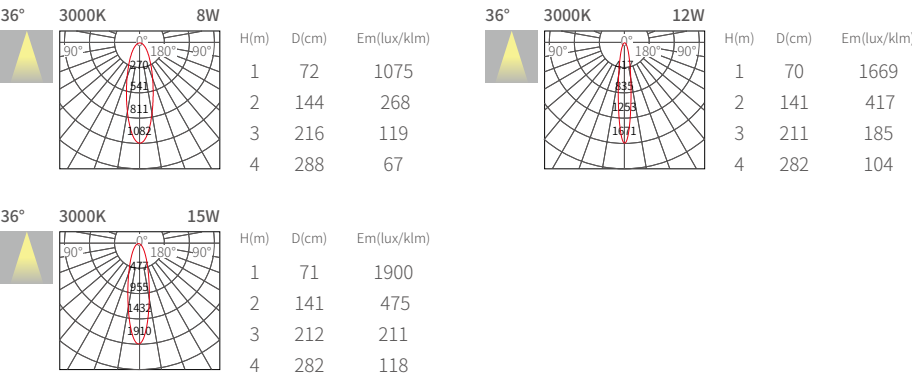

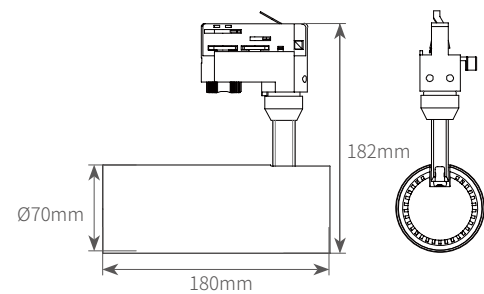

RT69-AL/RT69-AD





| Product information

Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	>90/97
Finish color	Sand white / sand black

| Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

| Light distribution parameters

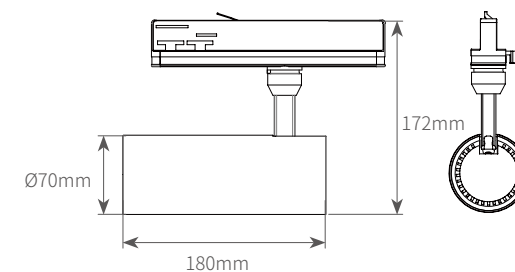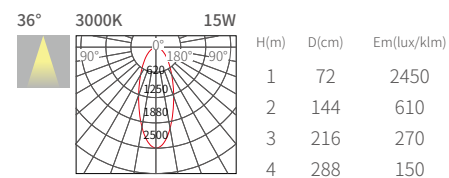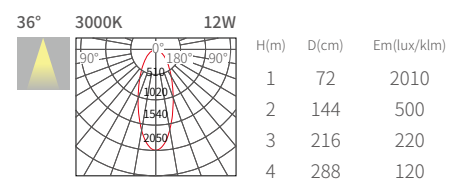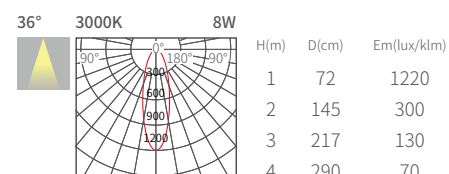

RT69-BL/RT69-BD




| Product information


Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	>90/97
Finish color	Sand white / sand black

| Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

| Light distribution parameters

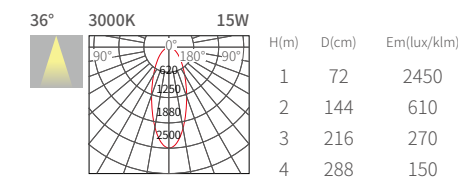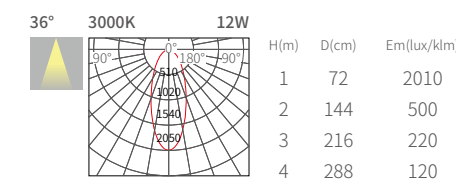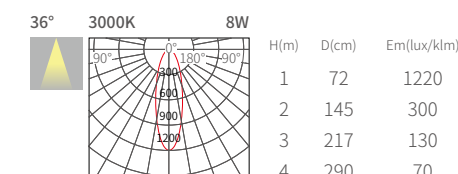

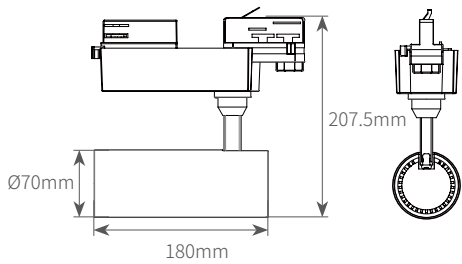



RT69-CL/RT69-CD

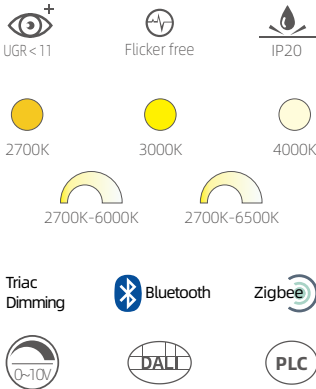


Product information	
Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

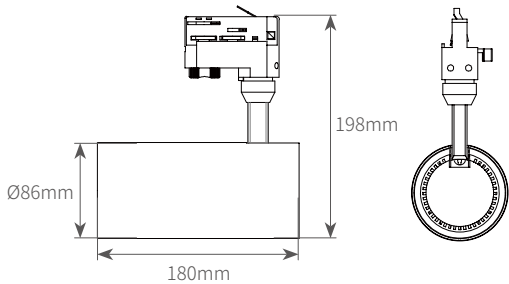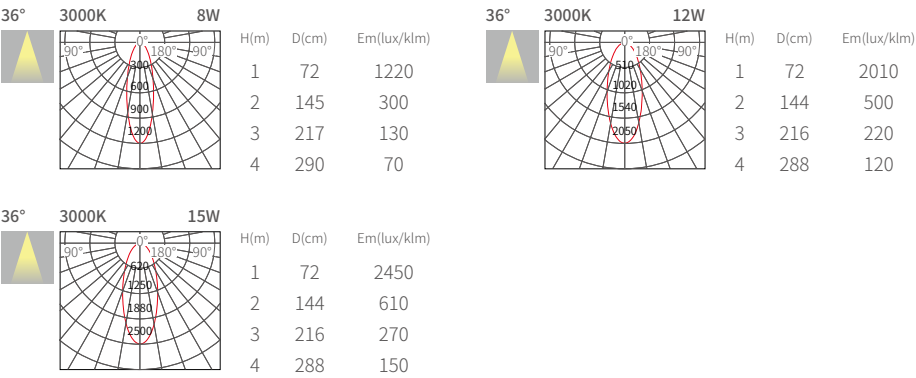


RT86-AL/RT86-AD

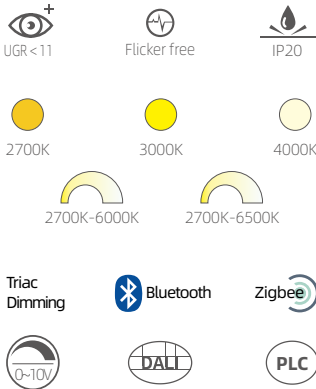


Product information	
Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	80lm/W
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

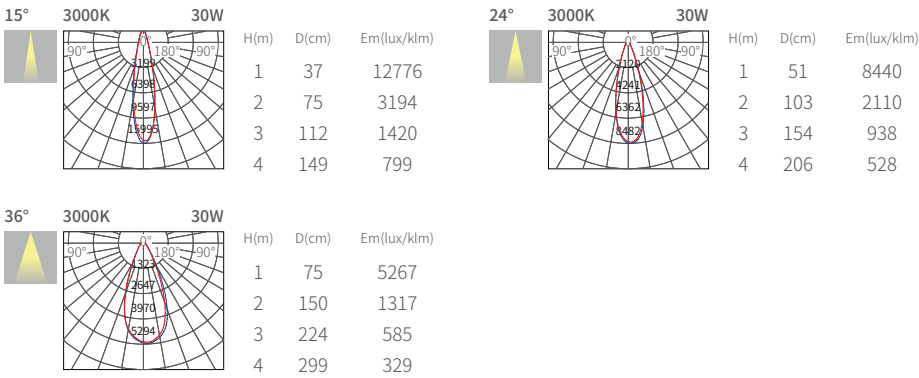

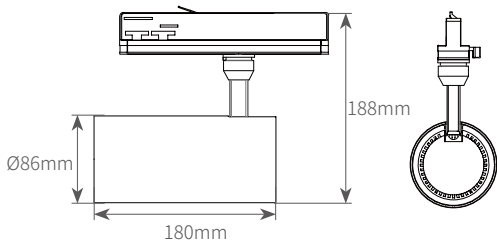



RT86-BL/RT86-BD

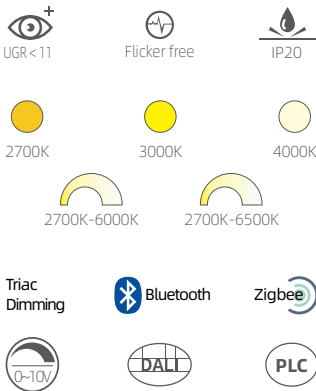


Product information	
Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	80lm/W
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

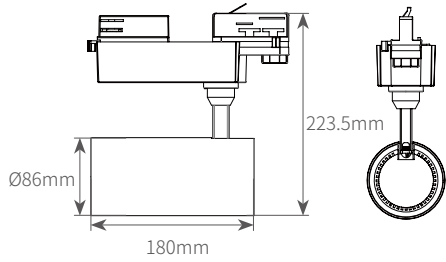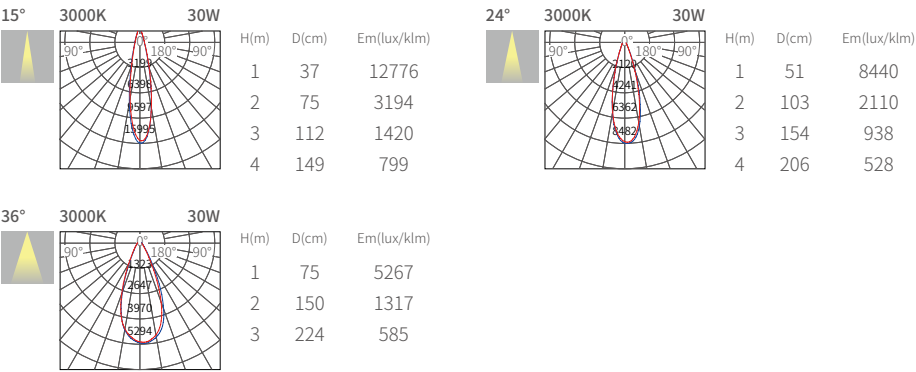


RT86-CL/RT86-CD

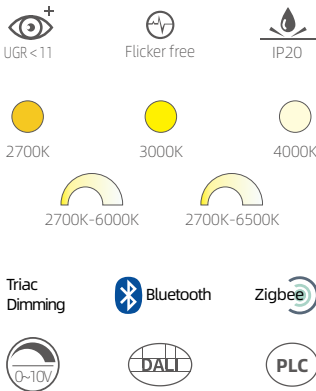


Product information	
Power	8W/12W/15W
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	80lm/W
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

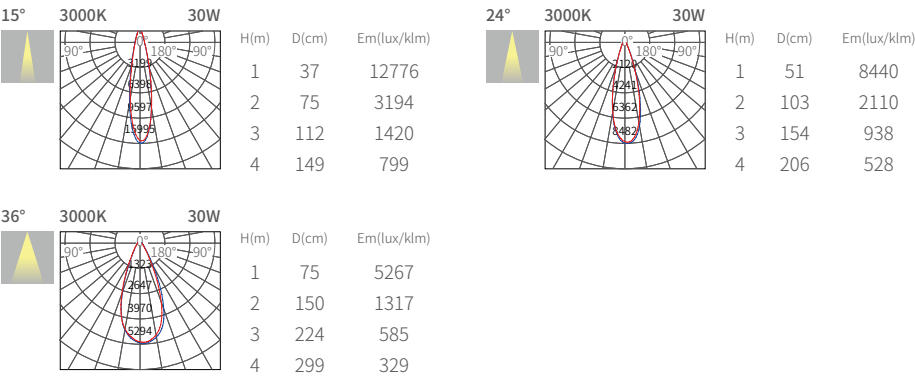

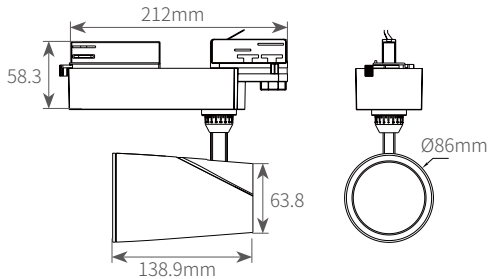


RT80

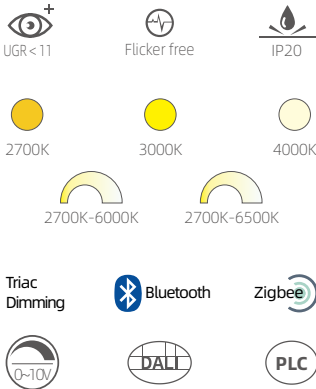


Product information	
Power	15W/20W/28W
Beam angle	12°/22°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	74lm/W
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

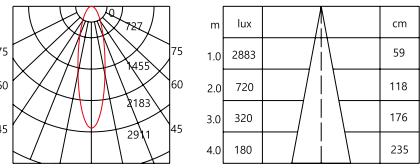


15W 36°3000K CRI>90

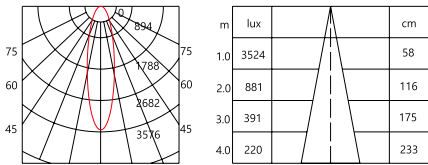


20W 36°3000K CRI>90

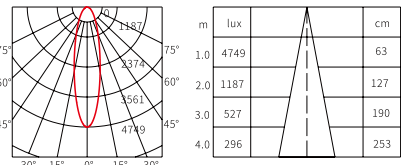

28W 36°3000K CRI>90

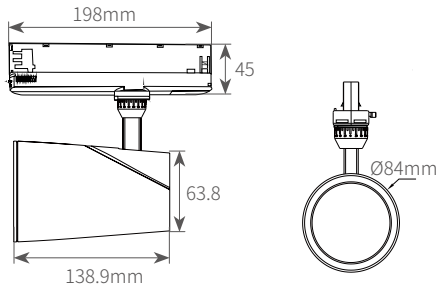


RT80P

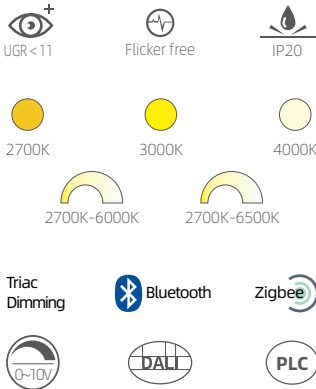


Product information	
Power	15W/20W/28W
Beam angle	12°/22°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	74lm/W
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

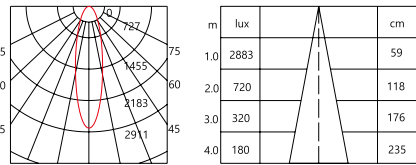


15W 36°3000K CRI>90

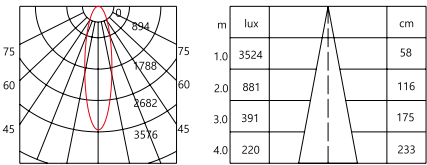

20W 36°3000K CRI>90

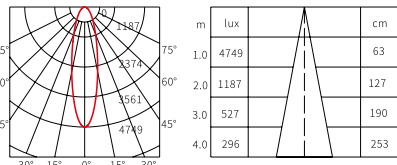

28W 36°3000K CRI>90

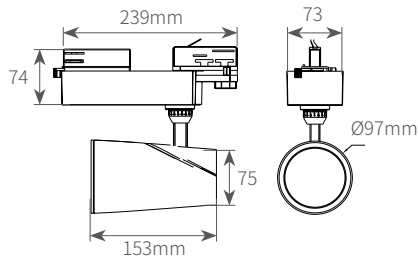

RT95

UGR < 19

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V


DALI


PLC

Product information	
Power	30W/35W/40W
Beam angle	12°/22°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	90lm/W
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

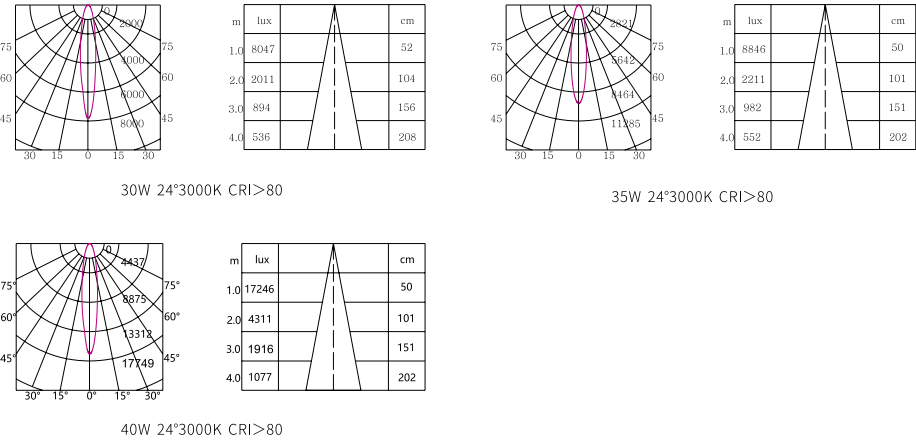

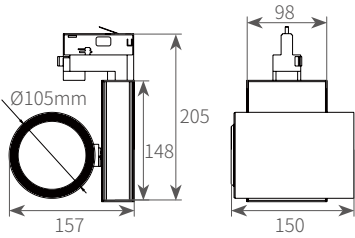






RT105-A

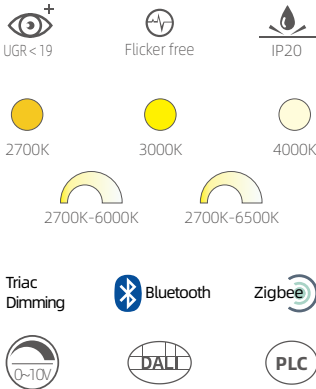


Product information	
Power	30W/35W/45W/56W
Beam angle	12°/24°/40°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	100lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

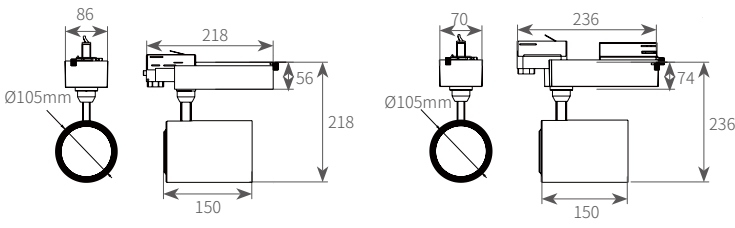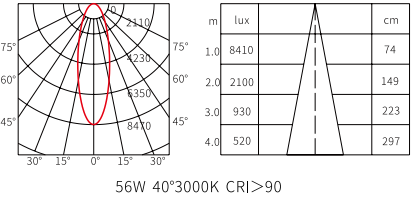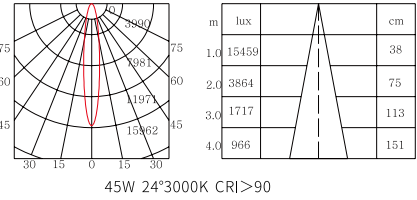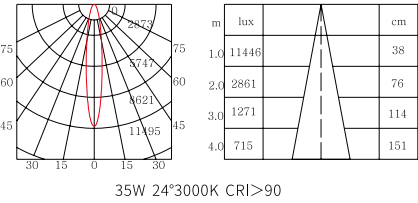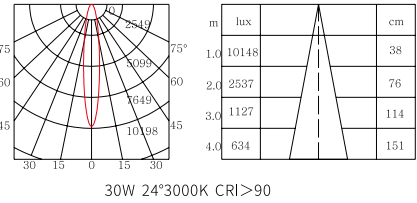





RT105-B

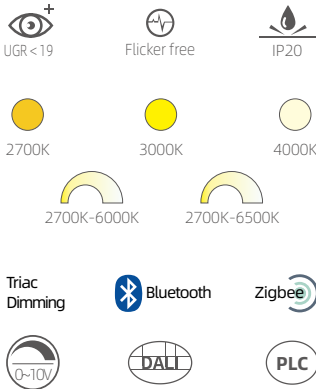


Product information	
Power	30W/35W/45W/56W
Beam angle	12°/24°/40°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	100lm/W
CRI	>90
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

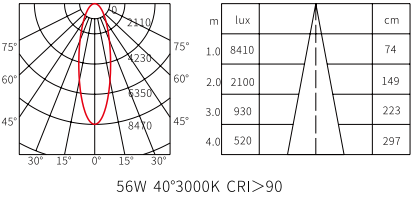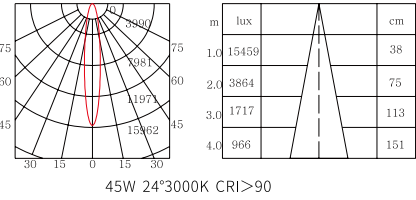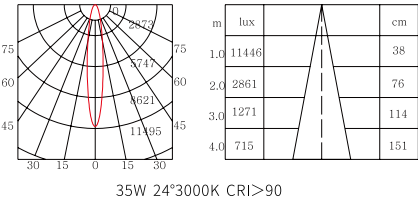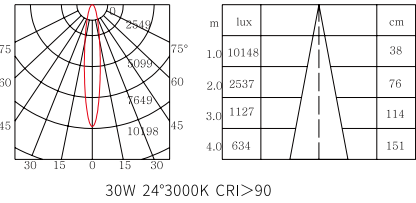

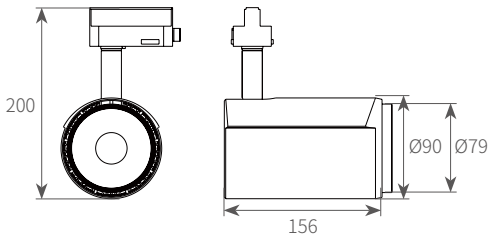



RT90

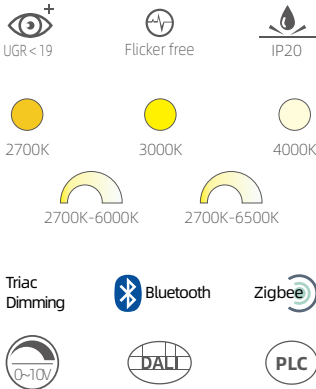


Product information	
Power	20W/25W/30W/35W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	97lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

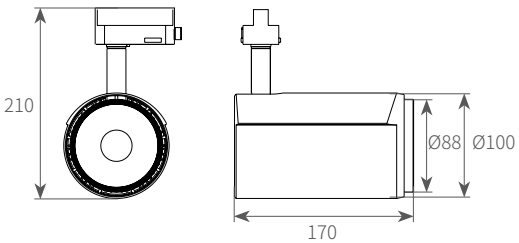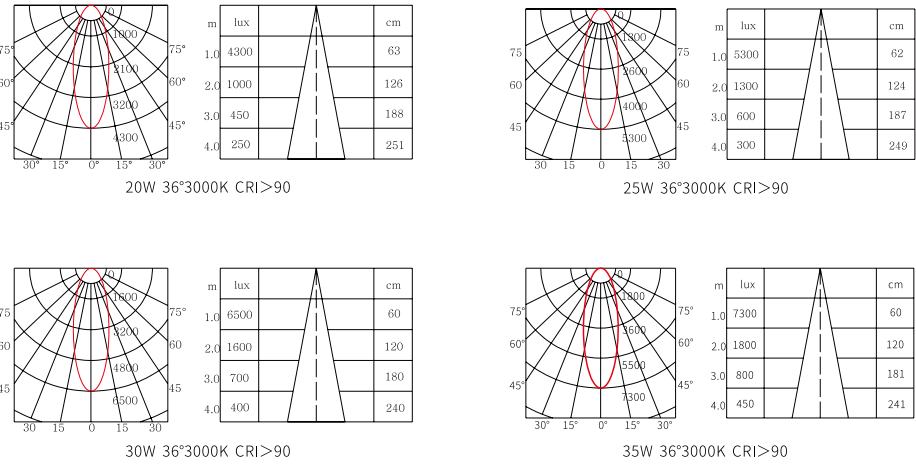


RT100

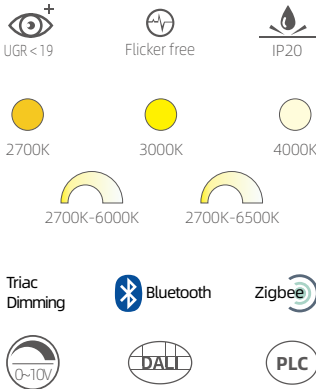


Product information	
Power	40W/45W
Beam angle	15°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	103lm/W
CRI	>90
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

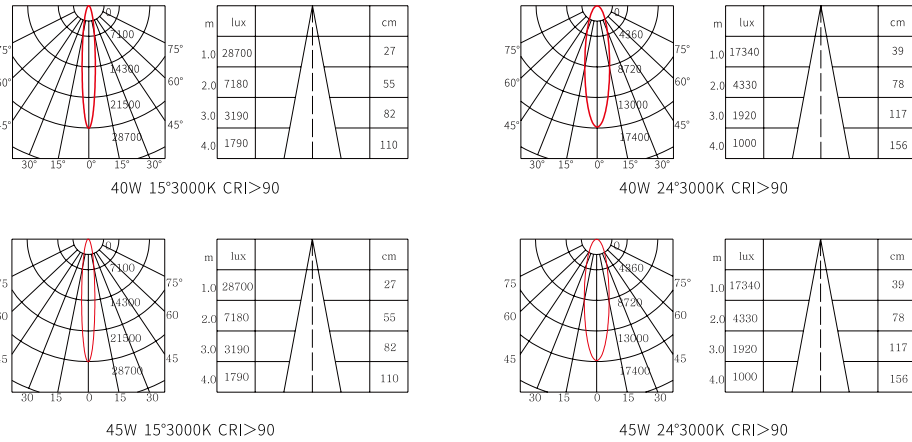





RC55

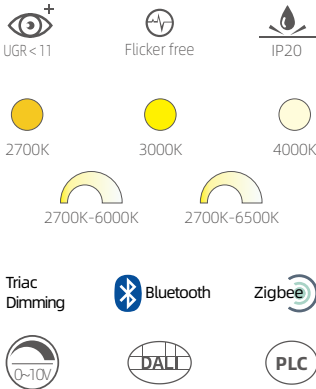


Product information	
Power	8W/15W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	82lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

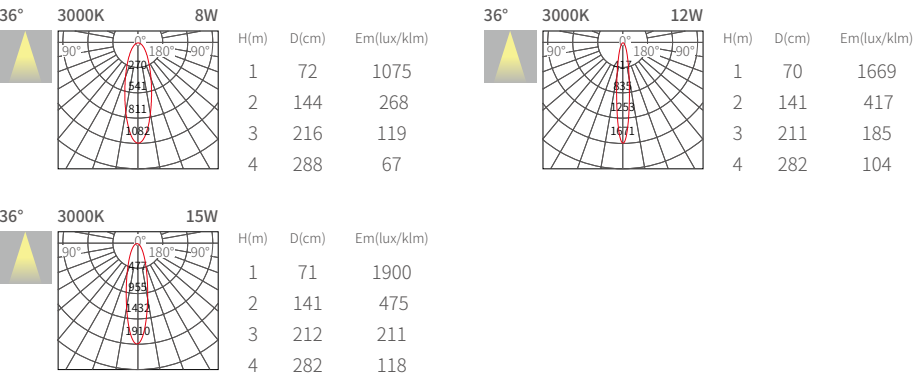


RC69

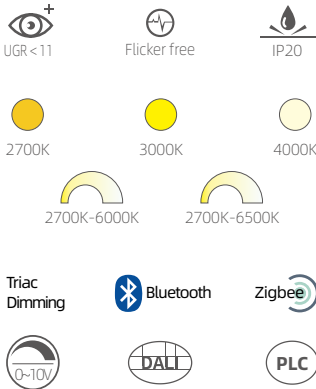


Product information	
Power	8W/15W/20W/25W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	>90
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

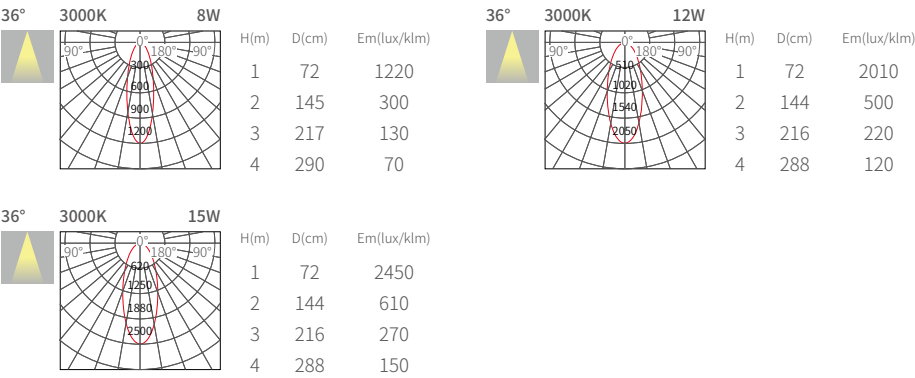



RC86

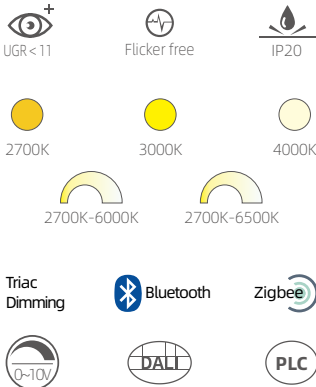



Product information

Power	30W/35W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	80lm/W
CRI	>90
Finish color	Sand white / sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

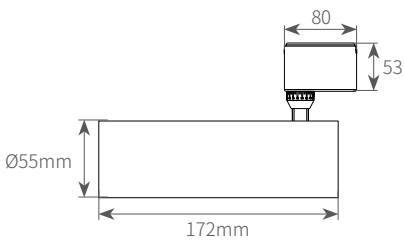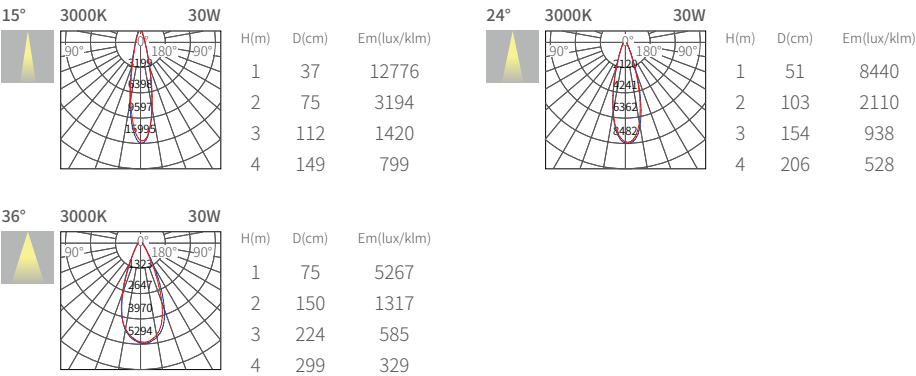

RM55

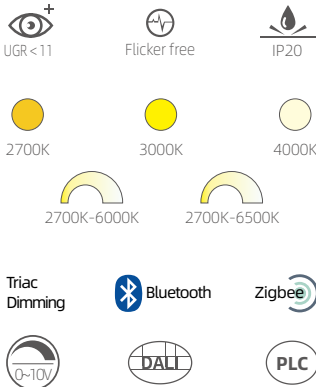


Product information


Power	8W/15W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	82lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

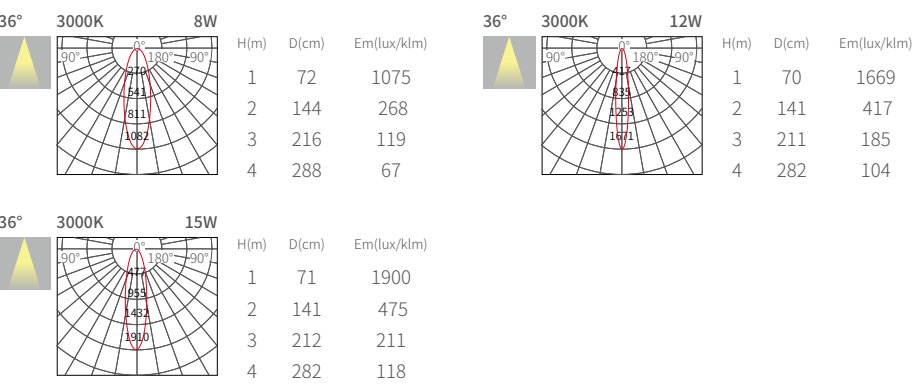

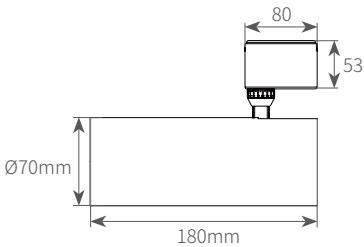



RM69

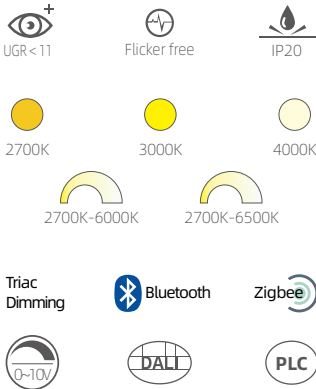


Product information	
Power	8W/15W/20W/25W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

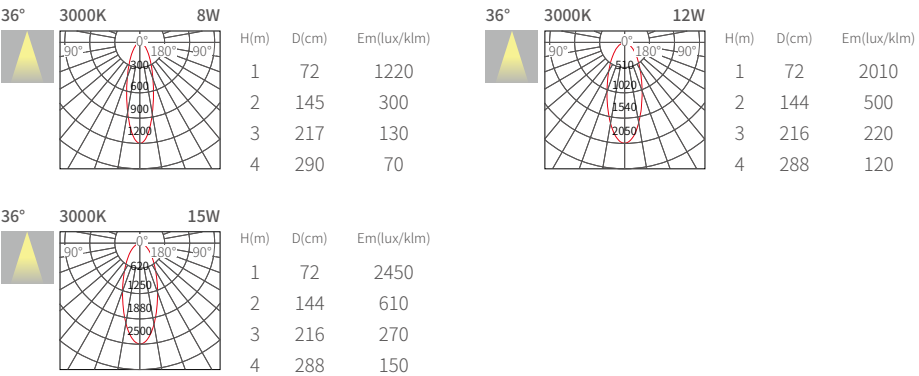


RM86

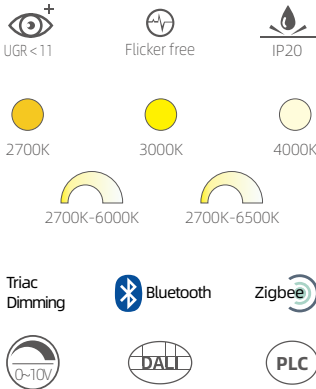


Product information	
Power	30W/35W
Beam angle	12°/24°/36°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	80lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

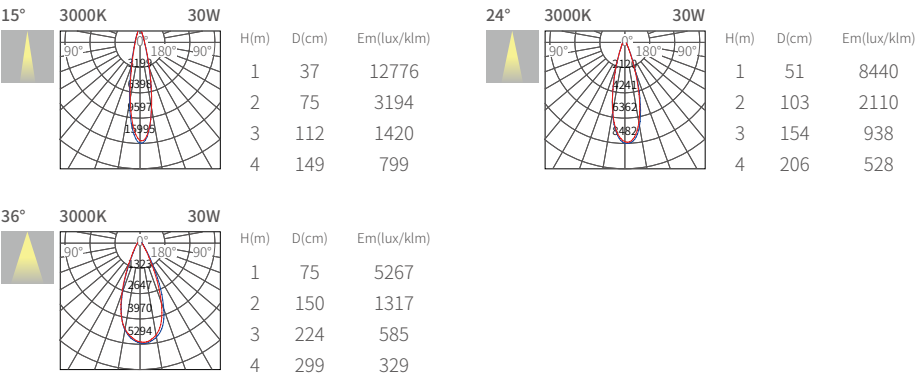



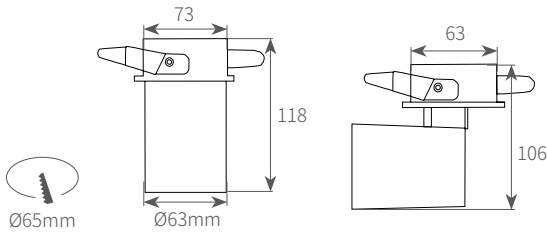



PORC7312

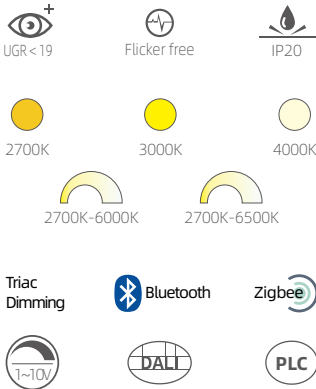


Product information	
Power	12W
Beam angle	(Lens) : 12°/24°/36° (Reflector): 15°/24°/38°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	98lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Light distribution parameters

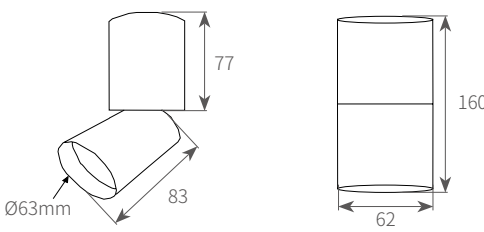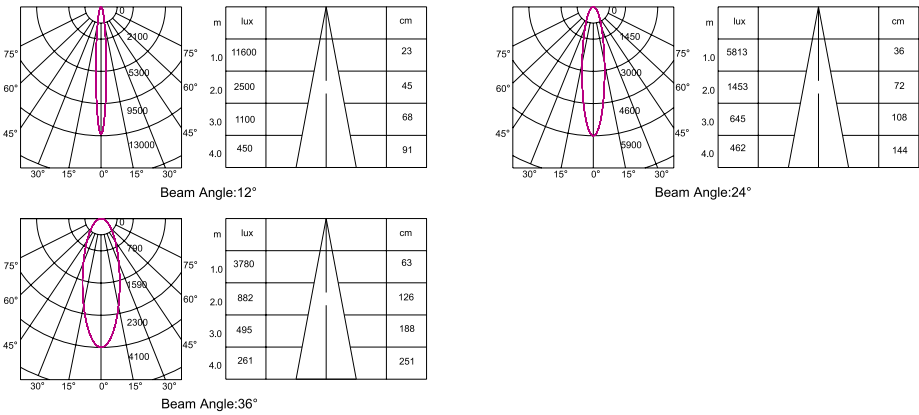


PORM6212

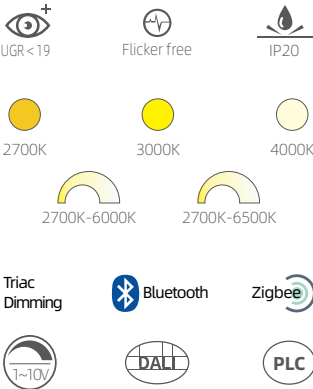


Product information	
Power	12W
Beam angle	(Lens) : 12°/24°/36° (Reflector): 15°/24°/38°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	98lm/W
CRI	Ra>90
Finish color	white/black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

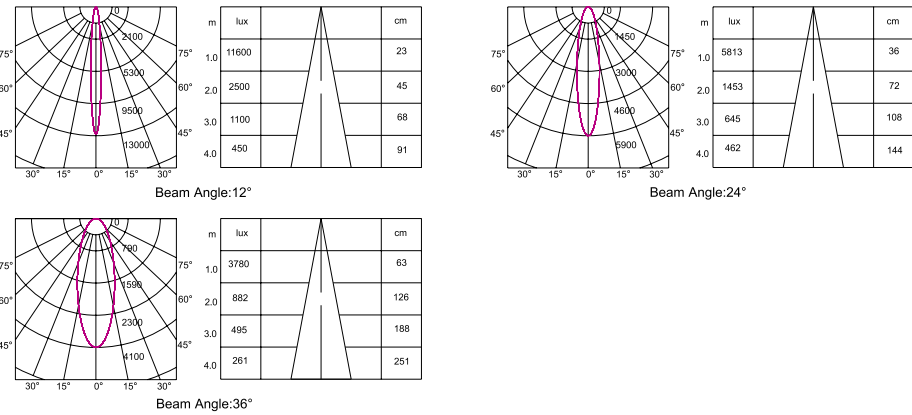

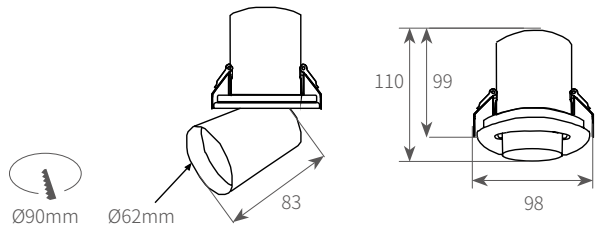


POR9812

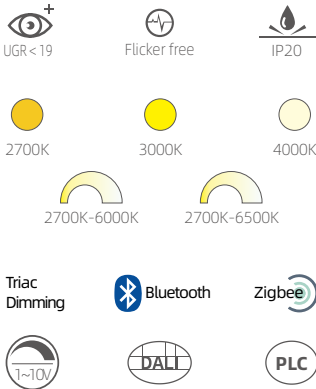


Product information	
Power	12W
Beam angle	(Lens) : 12°/24°/36° (Reflector): 15°/24°/38°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	98lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

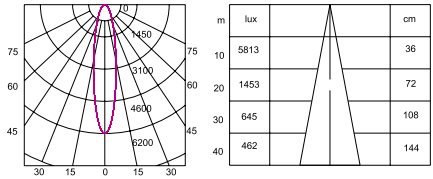


12W 24°3000K CRI>90

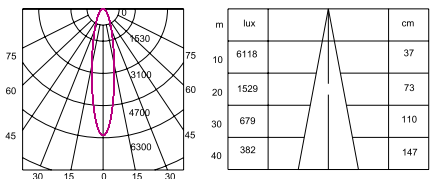

12W 24°4000K CRI>90

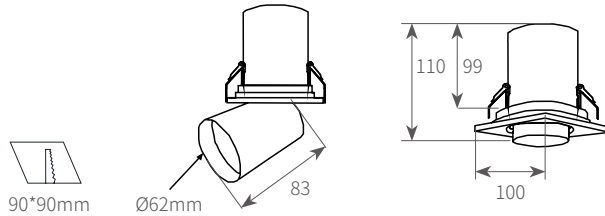


POS10012

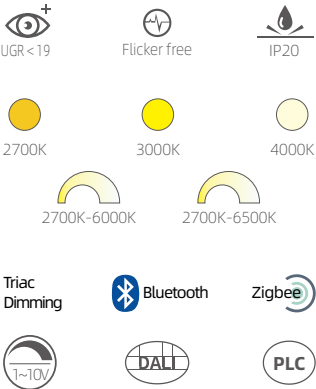


Product information	
Power	12W
Beam angle	(Lens) : 12°/24°/36° (Reflector): 15°/24°/38°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	95lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

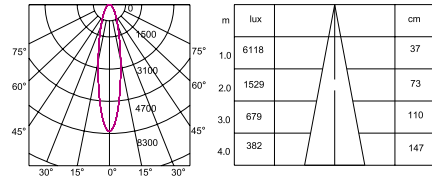


12W 24°3000K CRI>90

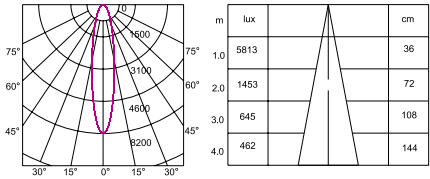

12W 24°4000K CRI>90

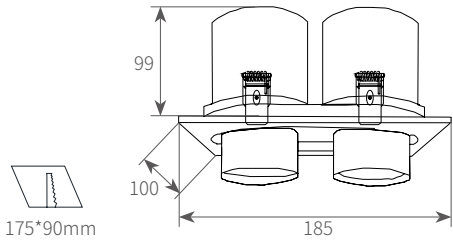


POD100-2*12

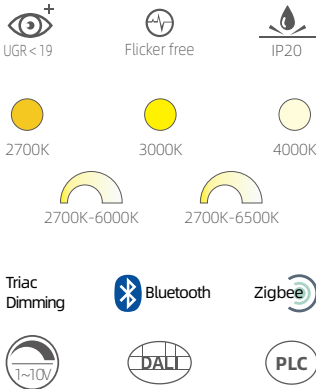


Product information	
Power	2*12W
Beam angle	(Lens) : 12°/24°/36° (Reflector): 15°/24°/38°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	120lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

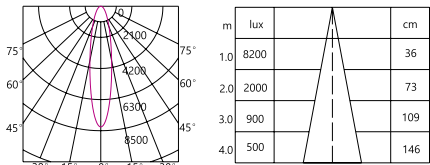


2*12W 24°3000K CRI>90

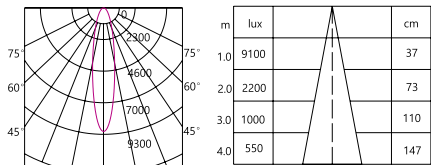

2*12W 24°4000K CRI>90

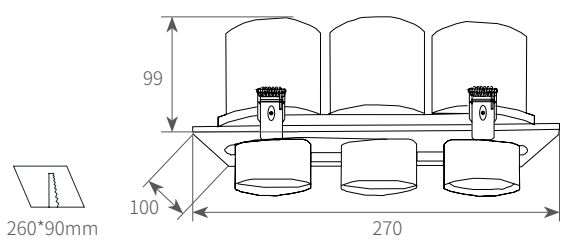


POT100-3*12

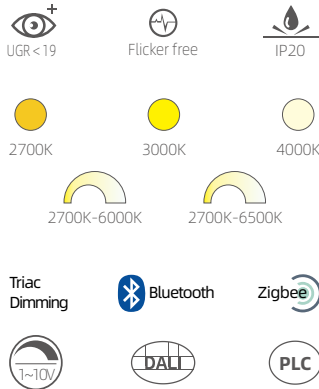


Product information	
Power	3*12W
Beam angle	(Lens) : 12°/24°/36° (Reflector): 15°/24°/38°/60°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	97lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

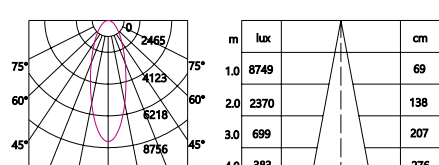


3*12W 36°2700K CRI>90

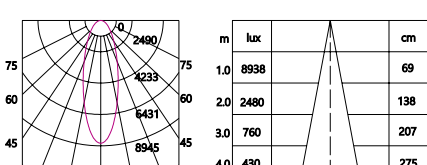

3*12W 36°3000K CRI>90

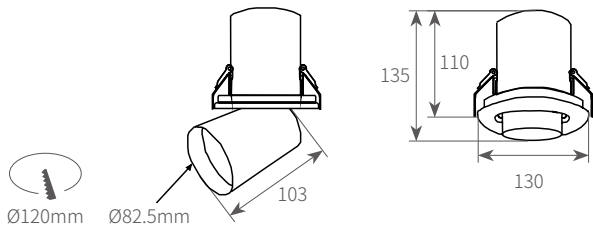


POR13025

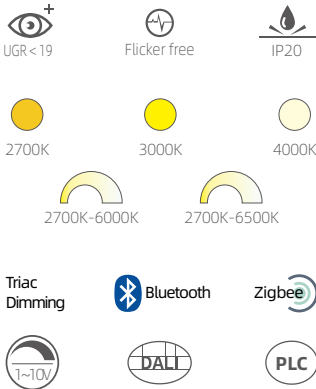


Product information	
Power	25W
Beam angle	15°/24°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	94lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

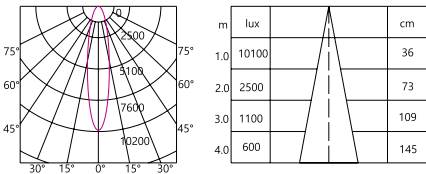


25W 24°2700K CRI>90

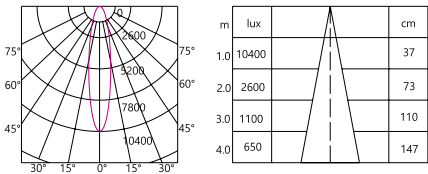

25W 24°3000K CRI>90

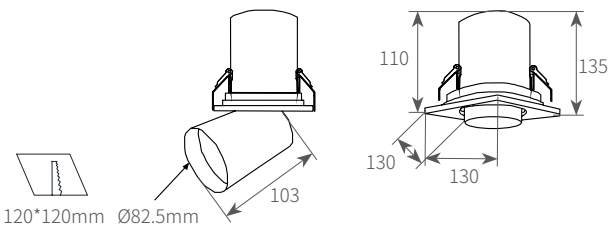


POS13025

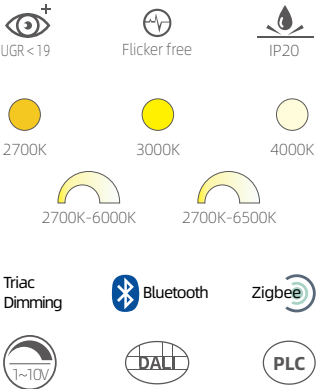


Product information	
Power	25W
Beam angle	15°/24°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	98lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

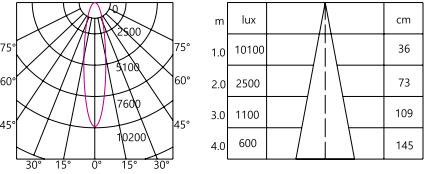


25W 24°2700K CRI>90

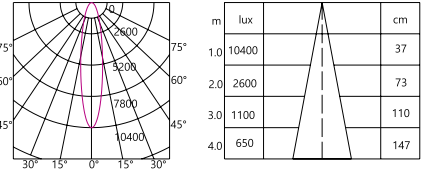

25W 24°3000K CRI>90

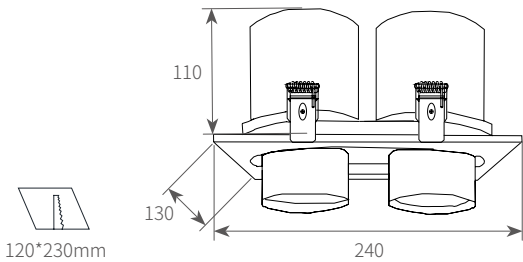


POD130-2*25

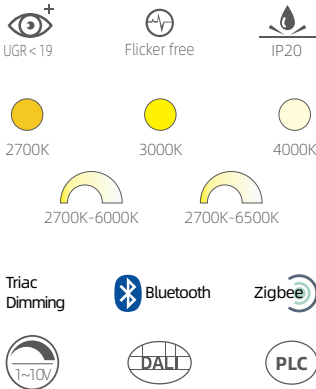


Product information	
Power	2*25W
Beam angle	15°/24°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	103lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

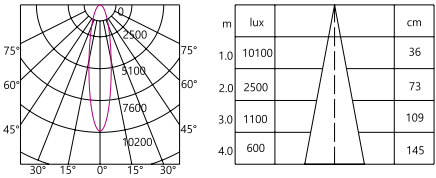


2*25W 24°2700K CRI>90

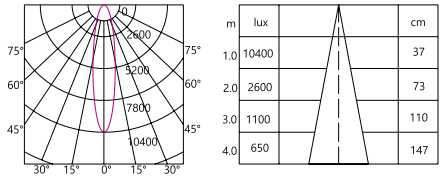

2*25W 24°3000K CRI>90

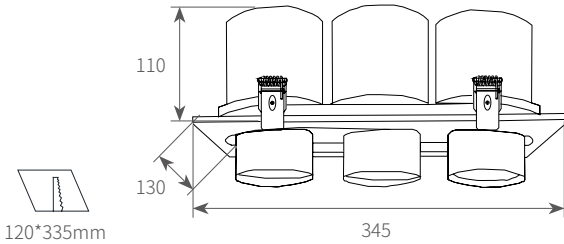


POT130-3*25

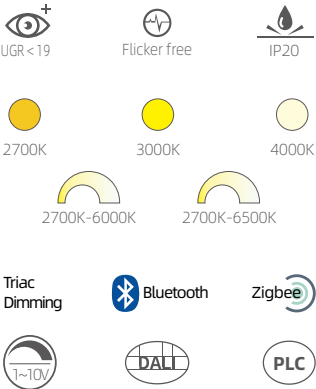


Product information	
Power	3*25W
Beam angle	15°/24°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	91lm/W
CRI	Ra>90
Finish color	white/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

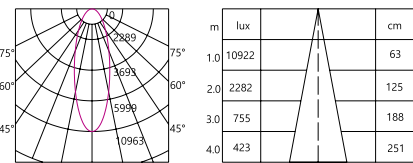

3*25W 36°2700K CRI>90

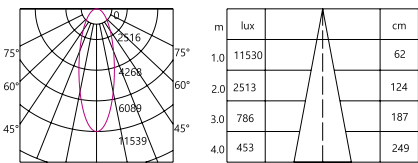

3*25W 36°3000K CRI>90





RC500 / RC1000 / RC1500 / RC2000

Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Recessed

Accessories

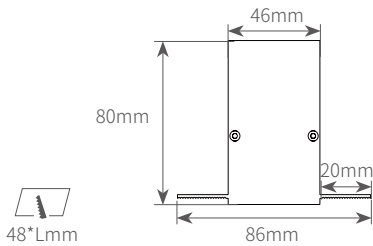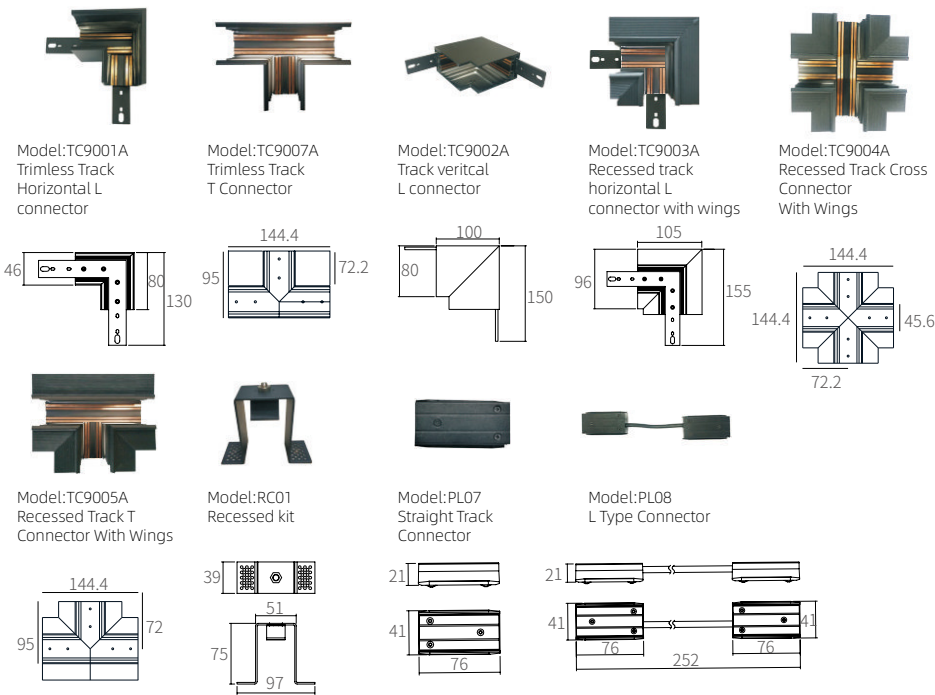



RC500S / RC1000S / RC1500S / RC2000S

Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Recessed

Accessories

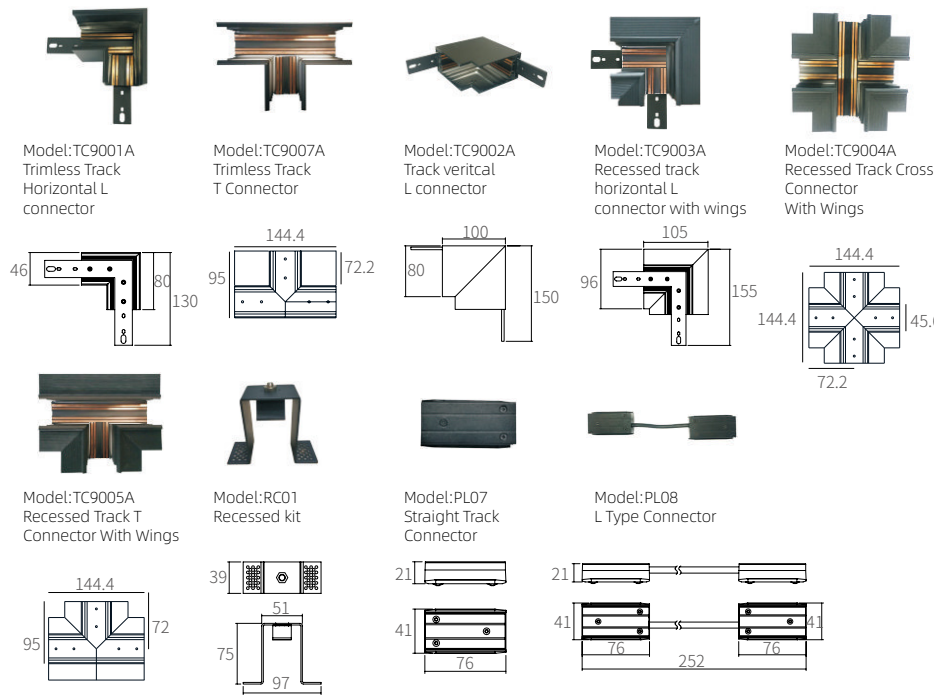



SP500 / SP1000 / SP1500 / SP2000

Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Pendant

Accessories




Model: TC9001A
Trimless Track
Horizontal L
connector




Model: TC9006A
Trimless Track
Cross Connector





Model: C9007A
Trimless Track
T Connector




Model: TC9002A
Track vertical L
connector











Model: MS01
Suspension wires




Model: MS02-06
suspension rod






Model: PL07
Straight Track
Connector



Model: PL08
L Type Connector







SM500 / SM1000 / SM1500 / SM2000

Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Surface Mounted

Accessories




Model: TC9001A
Trimless Track
Horizontal L
connector




Model: TC9006A
Trimless Track
Cross Connector





Model: C9007A
Trimless Track
T Connector




Model: TC9002A
Track vertical L
connector














Model: PL07
Straight Track
Connector




Model: PL08
L Type Connector





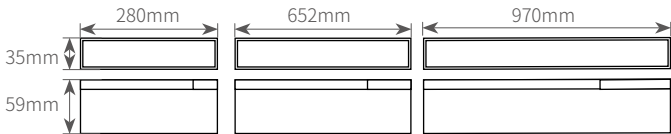

MLL300/MLL640/MLL960

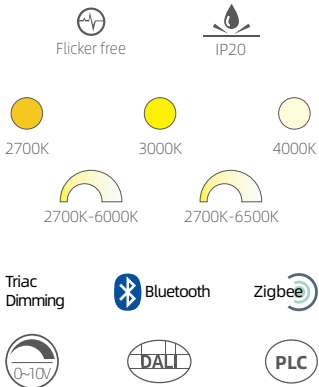


Product information

Power	10W/20W/30W
Beam angle	110°
Input voltage	DC24V
Input frequency	/
System Luminous flux	90lm/W
CRI	>90
Finish color	Sand white / sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

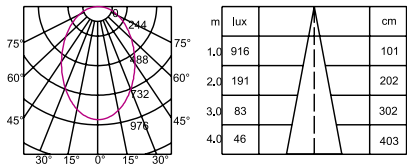


MLL300 10W 3000K CRI>90 110°

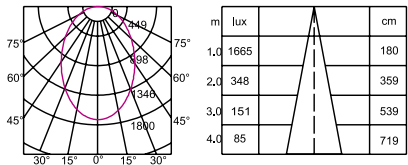


MLL300 10W 4000K CRI>90 110°

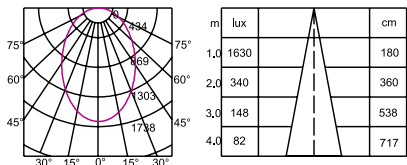


MLL640 20W 3000K CRI>90 110°

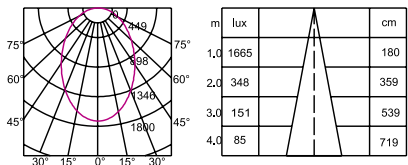


MLL640 20W 4000K CRI>90 110°

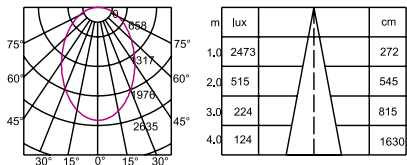


MLL960 30W 3000K CRI>90 110°

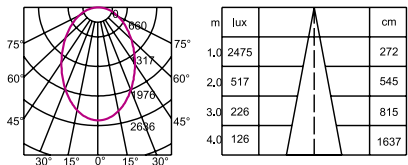

MLL960 30W 4000K CRI>90 110°

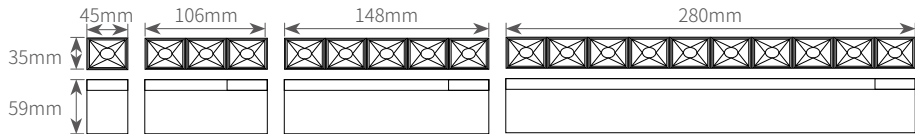

MLS01/MLS03/MLS05/MLS10

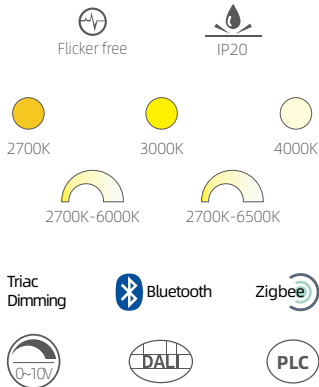


Product information

Power	1*1W/3*1W/5*1W/10*1W/ 3*2W/5*2W/10*2W
Beam angle	15°/30°/45°
Input voltage	DC24V
Input frequency	/
System Luminous flux	83lm/W
CRI	>90
Finish color	Sand white / sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

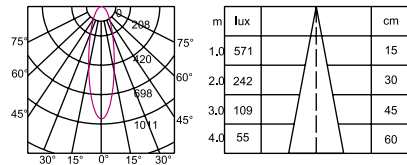


MLS01 1W 3000K CRI>90 30°

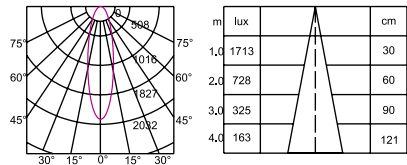


MLS03 3W 3000K CRI>90 30°

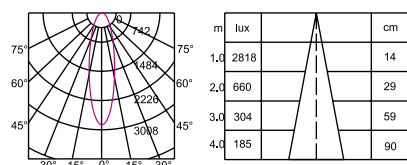


MLS05 5W 3000K CRI>90 30°

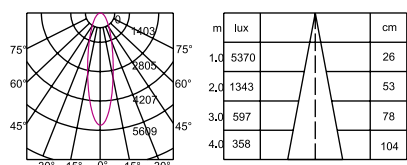

MLS10 10W 3000K CRI>90 30°




MW05/MW10/MW20

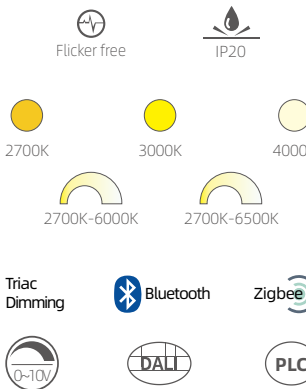


Product information	
Power	5W/10W,10W/20W, 20W/30W
Beam angle	90°
Input voltage	DC24V
Input frequency	/
System Luminous flux	80lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

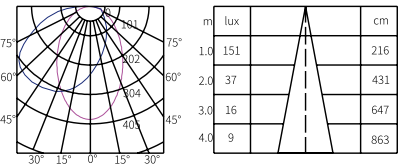


MW0510 10W 3000K CRI>90 90°

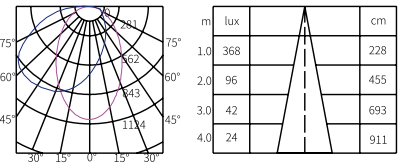


MW1020 20W 3000K CRI>90 90°

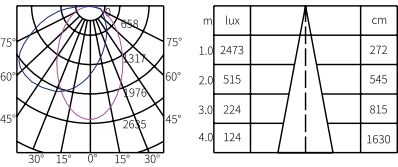

MW2030 30W 3000K CRI>90 90°

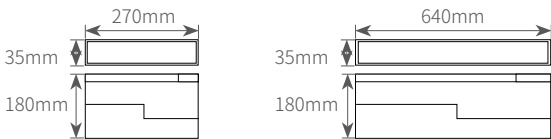


MGL300/MGL640

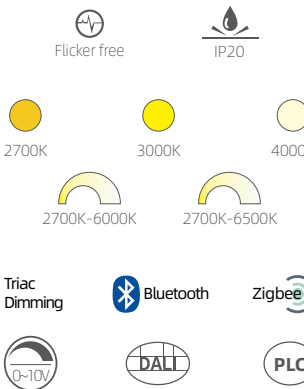


Product information	
Power	10W/20W
Beam angle	120°
Input voltage	DC24V
Input frequency	/
System Luminous flux	103lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

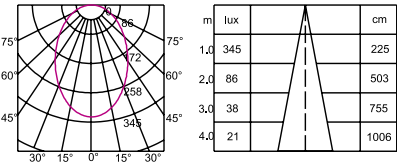


MGL300 10W 3000K CRI>90 110°

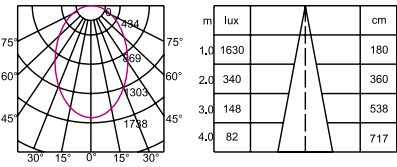


MLL640 20W 3000K CRI>90 110°

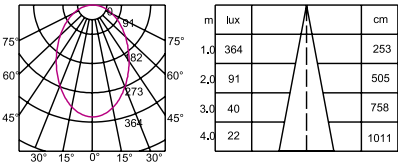


MLL300 10W 4000K CRI>90 110°

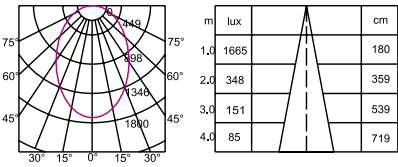

MLL640 20W 4000K CRI>90 110°

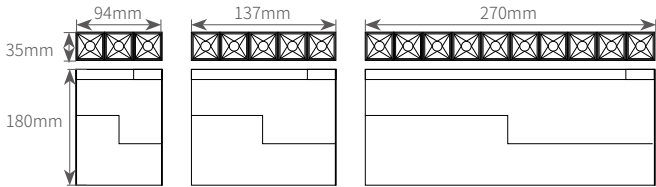


MGS03/MGS05/MGS10

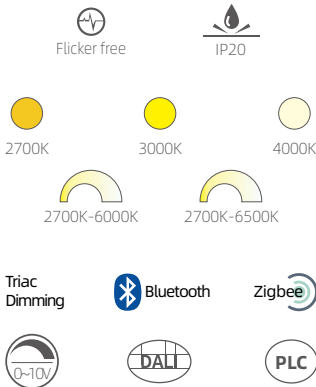


Product information	
Power	3W/6W,5W/10W,10W/20W
Beam angle	15°/30°/45°
Input voltage	DC24V
Input frequency	/
System Luminous flux	83lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

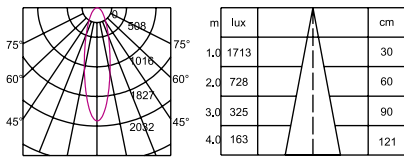


MLS03 3W 3000K CRI>90 30°

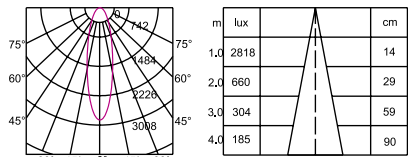


MLS05 5W 3000K CRI>90 30°

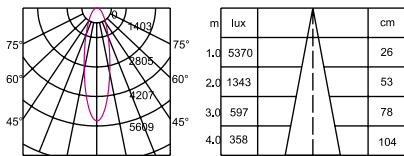

MLS10 10W 3000K CRI>90 30°

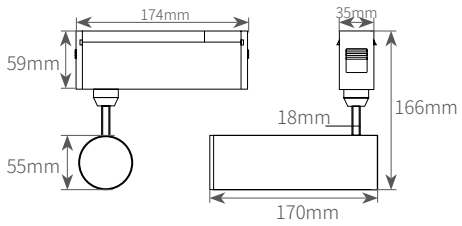


MS55

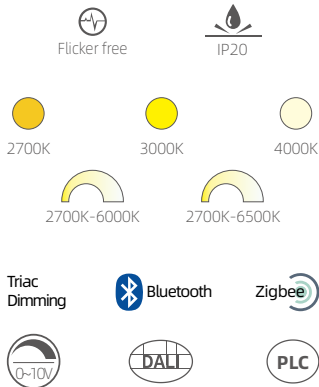


Product information	
Power	8W/15W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	/
System Luminous flux	82lm/W
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

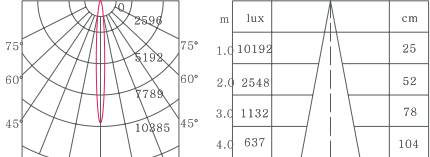


Beam Angle=15°

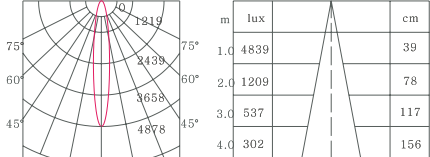

Beam Angle=24°

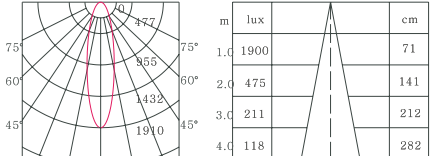

Beam Angle=36°

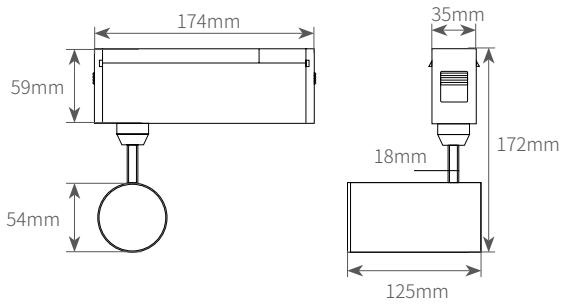

MS54

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V




DALI

PLC

Product information	
Power	15W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	/
System Luminous flux	90lm/W
CRI	>90
Finish color	Sand white / Sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

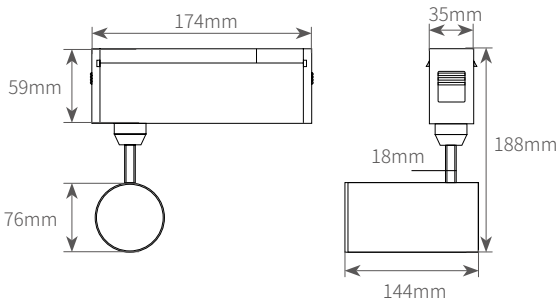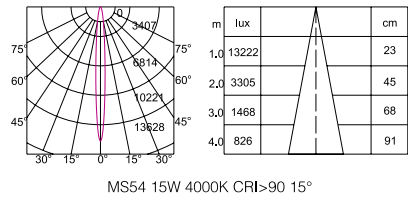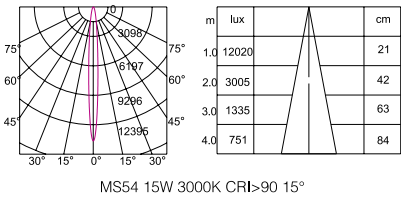

MS76

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V



DALI


PLC

Product information	
Power	15W/20W/25W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	/
System Luminous flux	82lm/W
CRI	>90
Finish color	Sand white / Sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

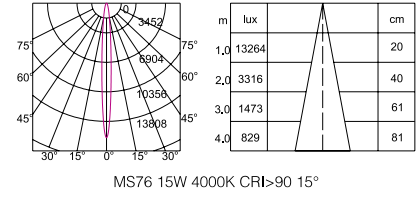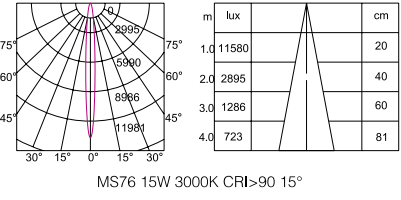

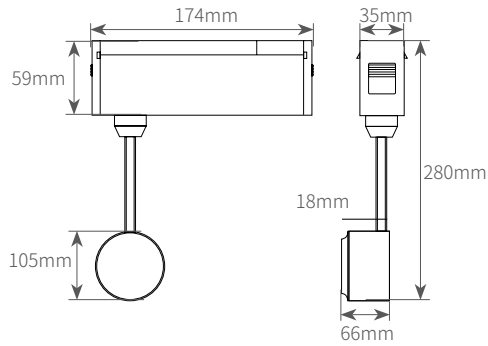


MS112

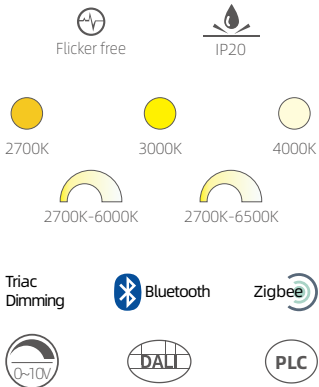


Product information	
Power	15W/20W/25W/30W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	/
System Luminous flux	86lm/W
CRI	>90
Finish color	Sand white / Sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

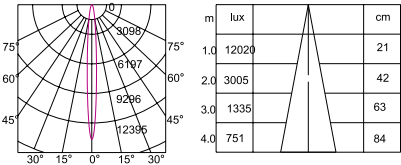

MS112 15W 3000K CRI>90 15°

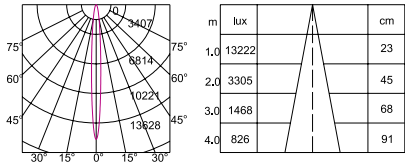

MS112 15W 4000K CRI>90 15°

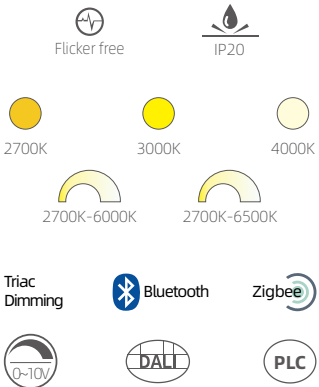


MP55


Product information	
Power	8W/15W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	/
System Luminous flux	80lm/W
CRI	>90
Finish color	Sand white / Sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track



Light distribution parameters

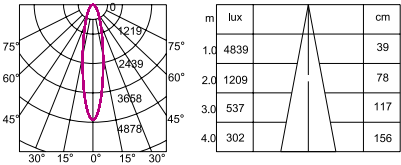


MP55 15W 3000K CRI>90 24°

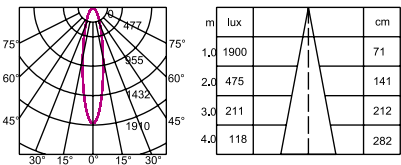


MP55 15W 3000K CRI>90 36°

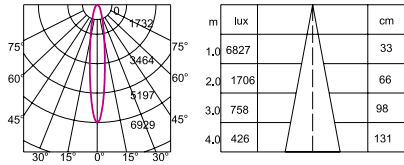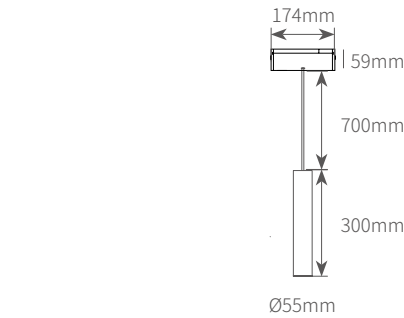

MP55 15W 4000K CRI>90 24°

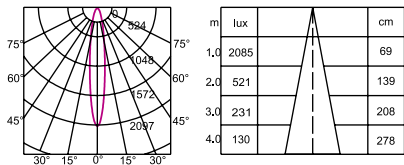

MP55 15W 4000K CRI>90 36°

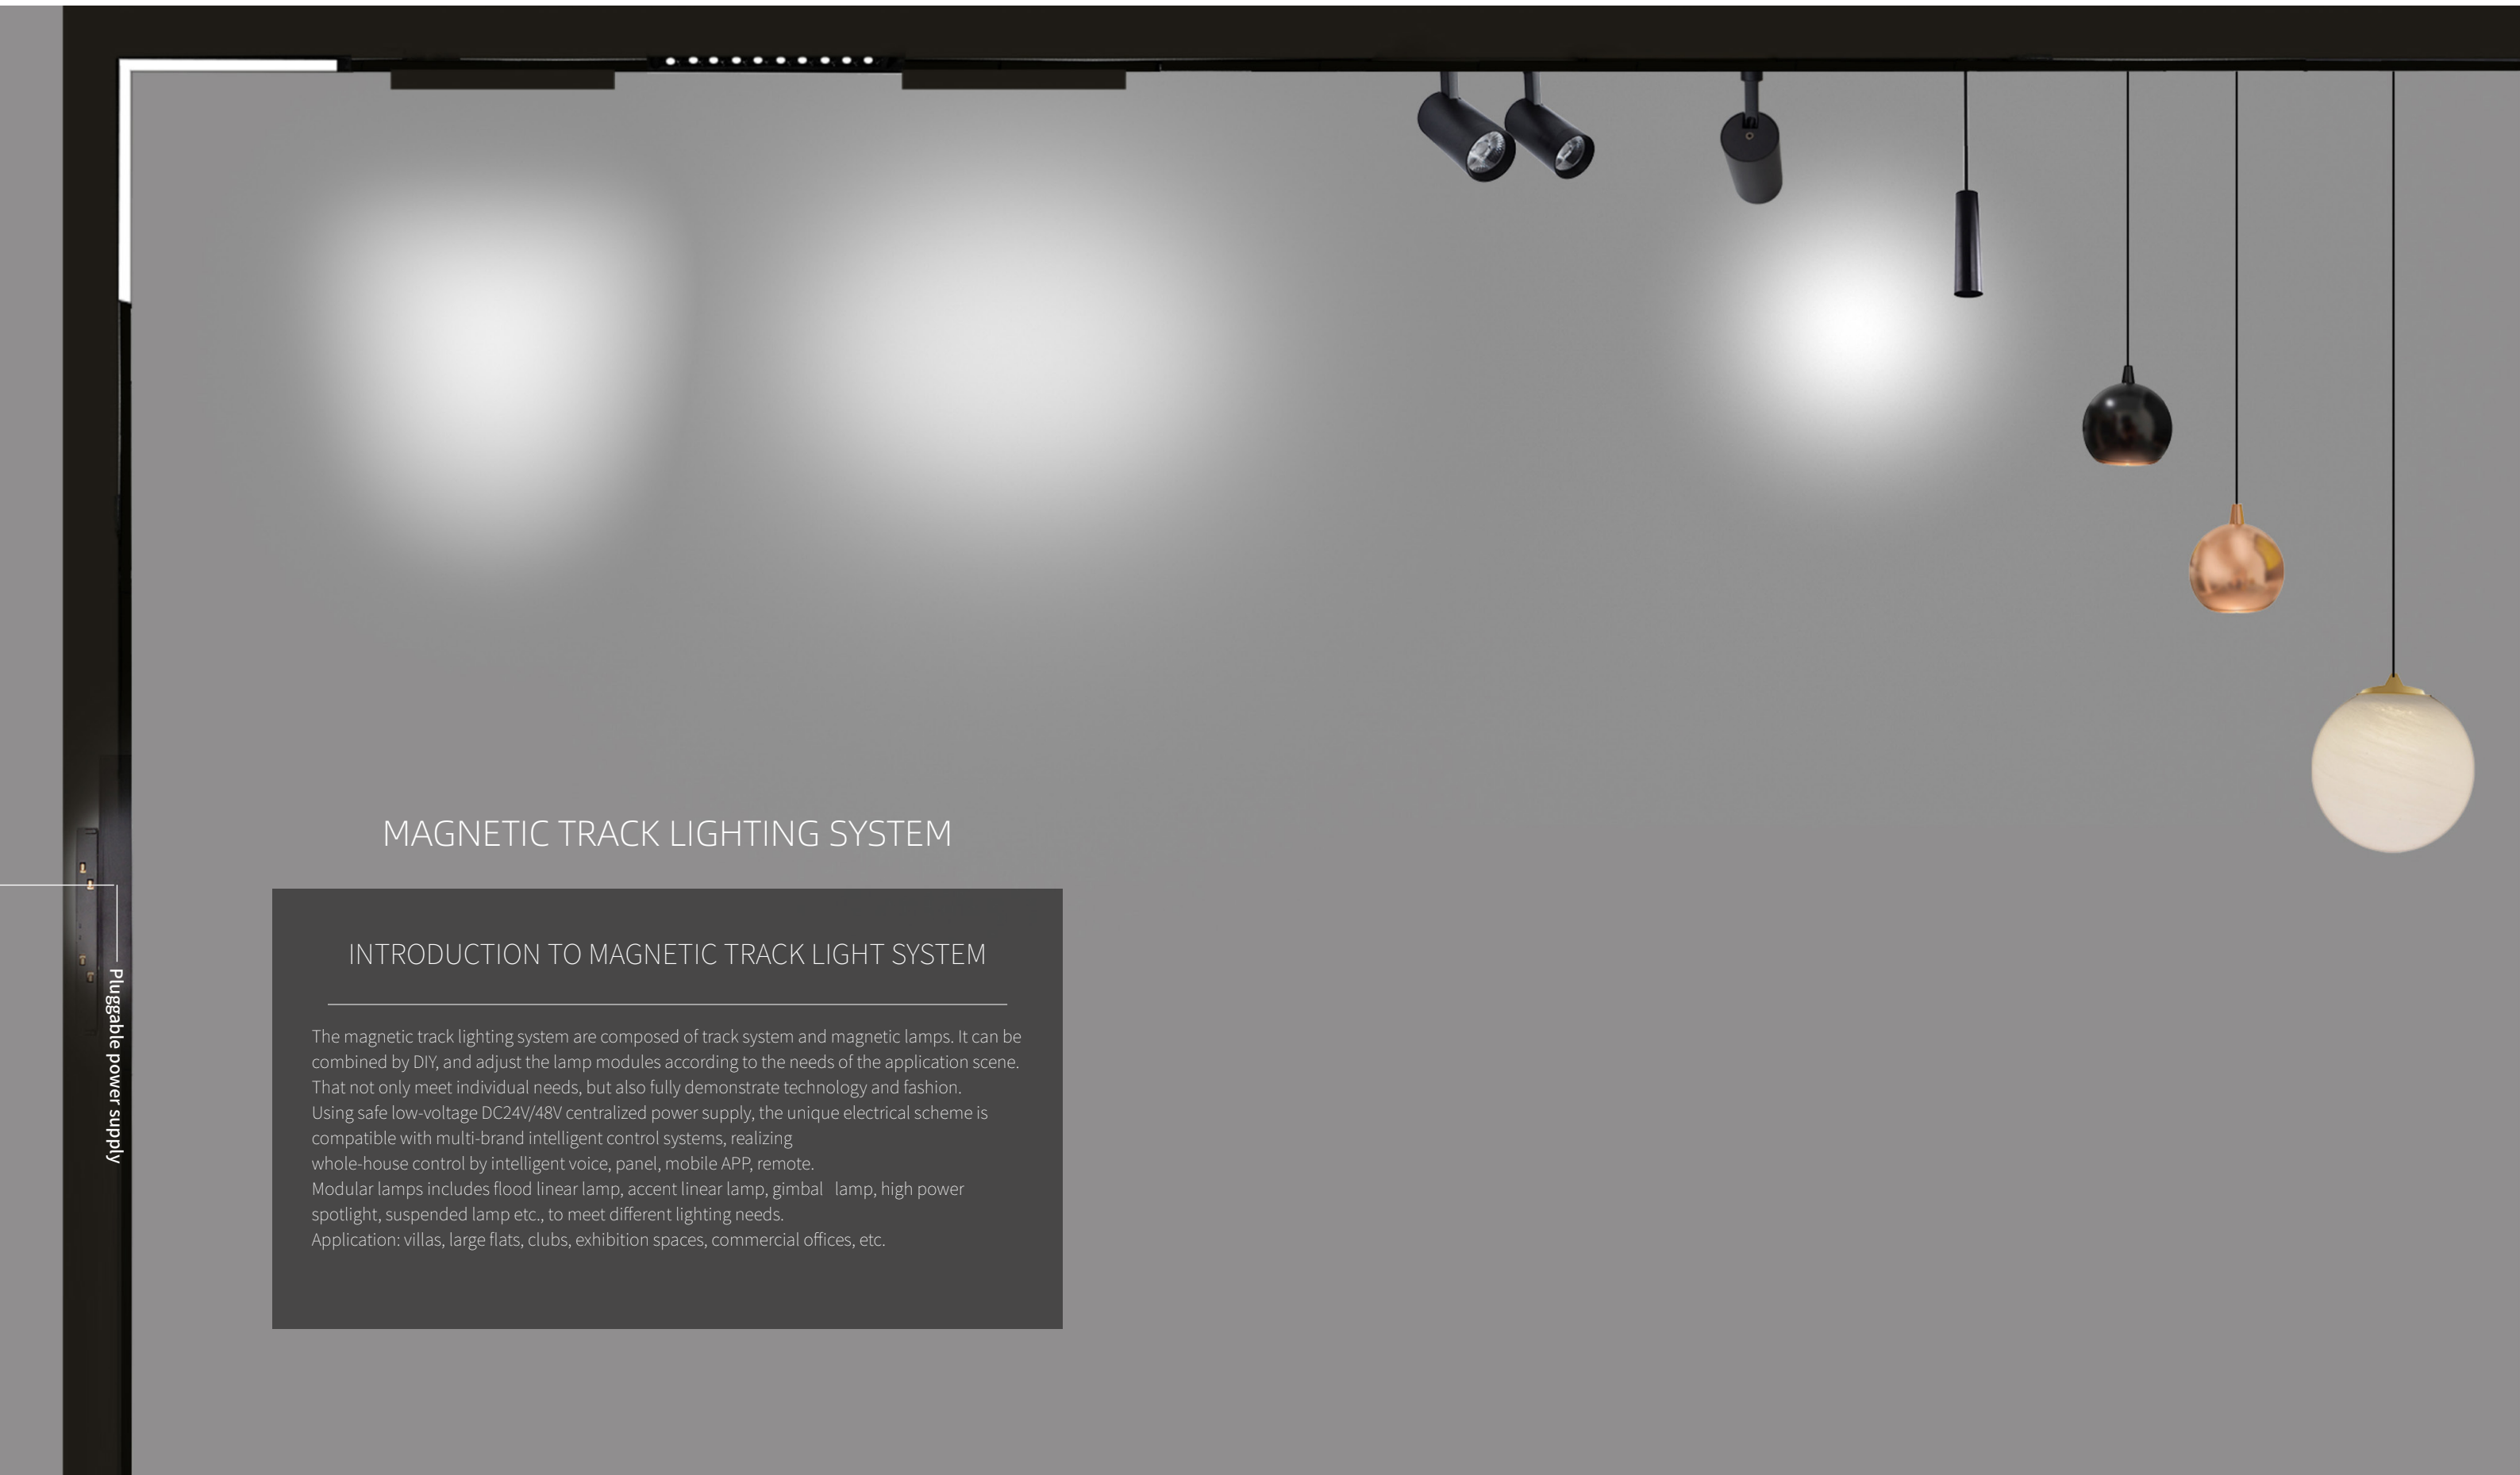

MAGNETIC TRACK LIGHTING SYSTEM

INTRODUCTION TO MAGNETIC TRACK LIGHT SYSTEM

The magnetic track lighting system are composed of track system and magnetic lamps. It can be combined by DIY, and adjust the lamp modules according to the needs of the application scene. That not only meet individual needs, but also fully demonstrate technology and fashion. Using safe low-voltage DC24V/48V centralized power supply, the unique electrical scheme is compatible with multi-brand intelligent control systems, realizing whole-house control by intelligent voice, panel, mobile APP, remote. Modular lamps includes flood linear lamp, accent linear lamp, gimbal lamp, high power spotlight, suspended lamp etc., to meet different lighting needs. Application: villas, large flats, clubs, exhibition spaces, commercial offices, etc.

Pluggable power supply



Various specifications


According to the customer's requirements, it can be cut into different lengths and matched with different shapes to reflect different lighting effects.
All products are available in pendant, surface mount and recessed mount versions.

SSP
V4.0 suspended track

SSM
V4.0 surface mount track

SRC-E
V4.0 recessed track with trim

SRC-D
V4.0 recessed track with deeper trim


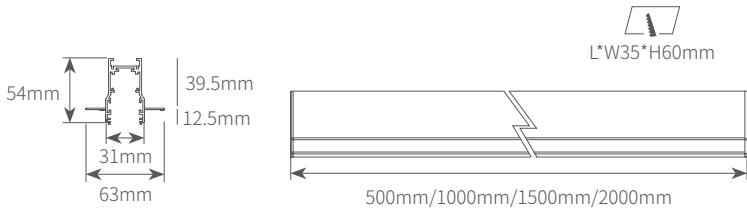


SRC-D

Product information	
Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Recessed

Accessories

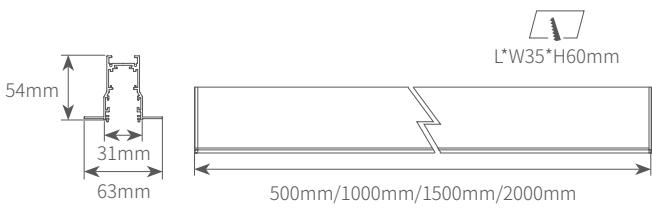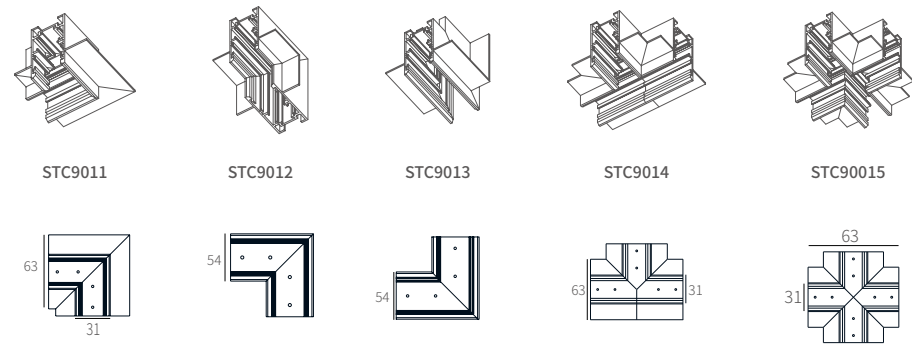


SRC-E

Product information	
Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Recessed

Accessories

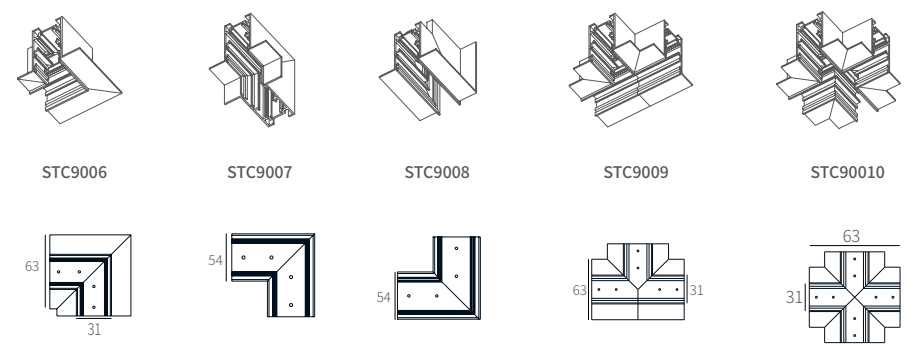





SSM-D

Product information	
Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Surface Mounted

Accessories

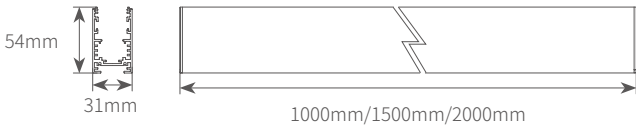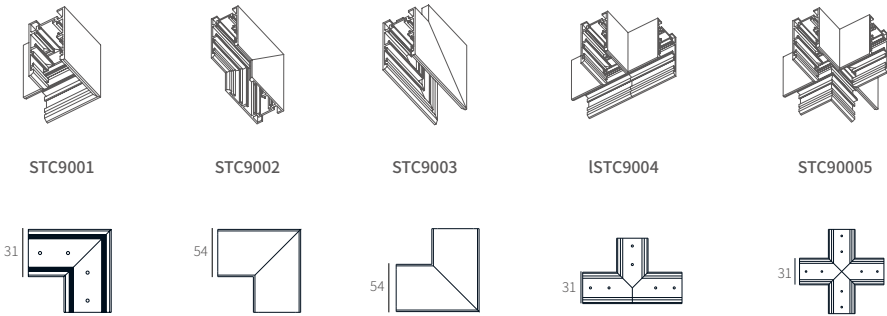


SSP-D


Product information	
Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Pendant


Accessories

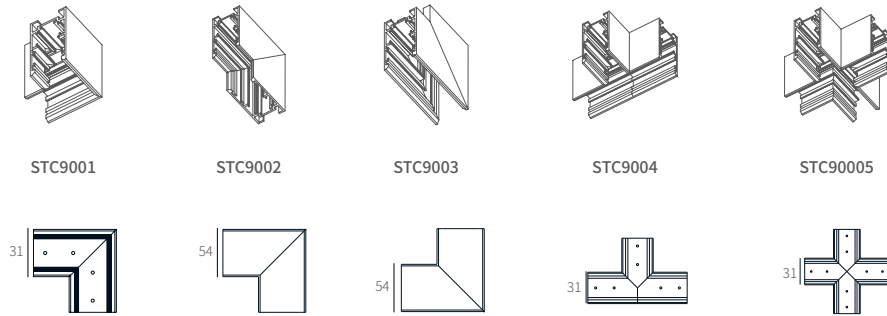








SMLL3007

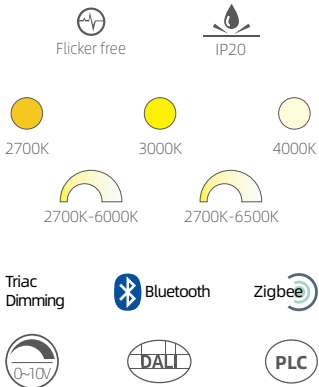


Product information	
Power	7W/10W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

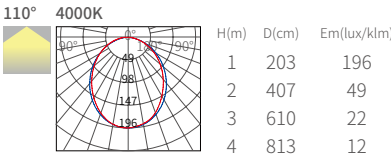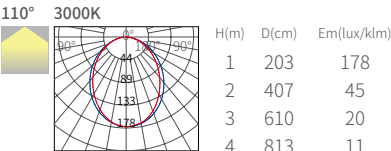



SMLL6015

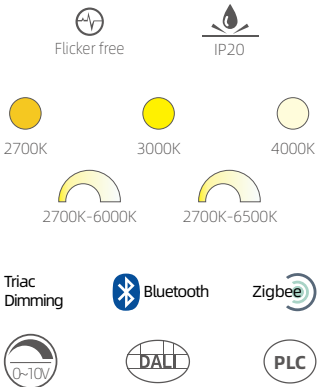


Product information	
Power	15W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

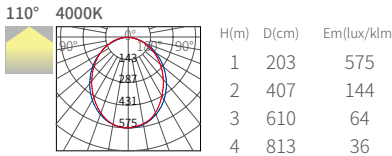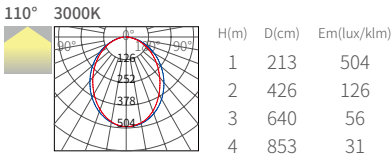






SMLL9022

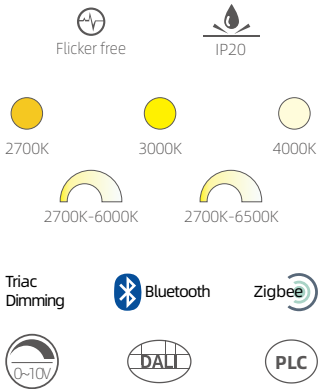


Product information	
Power	22W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

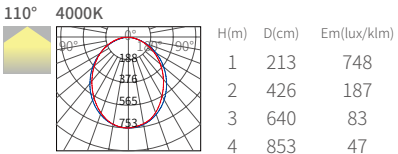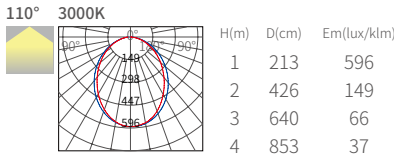



SMLL12030

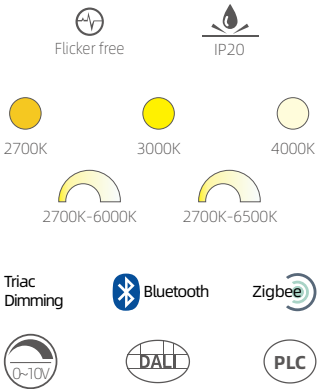


Product information	
Power	30W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

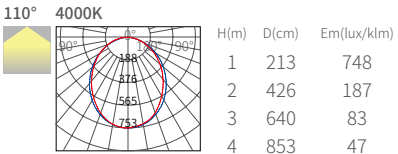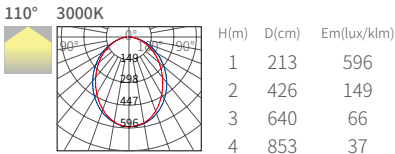

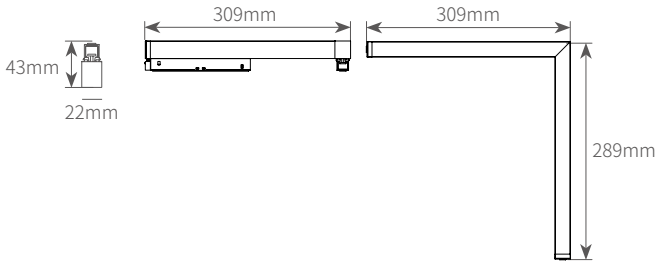




LMLL3015

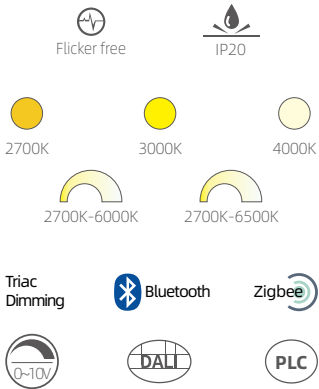


Product information	
Power	15W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

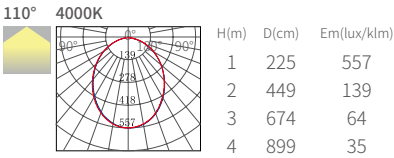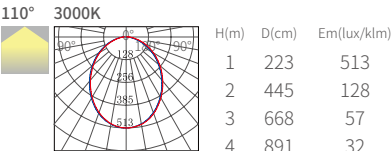



SMGL1505

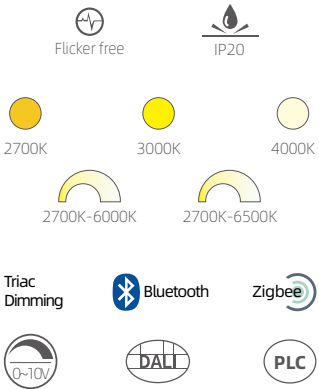


Product information	
Power	5W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

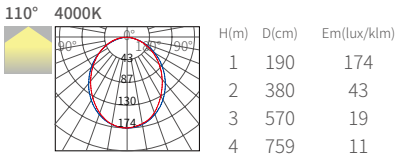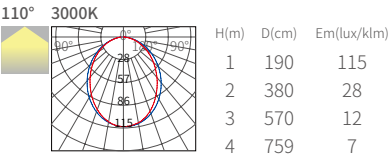






SMGL3007

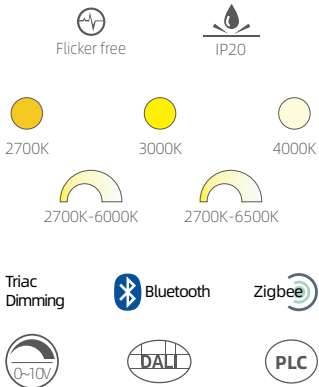


Product information	
Power	7W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

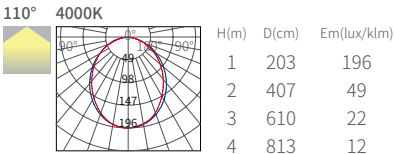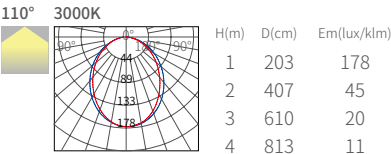



SMGL3010

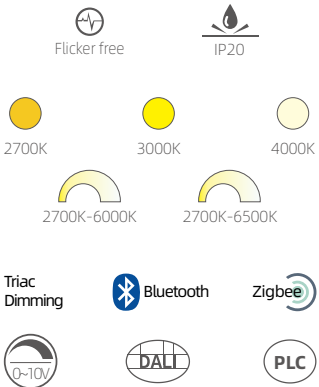


Product information	
Power	10W
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

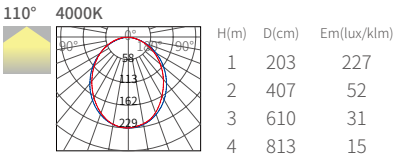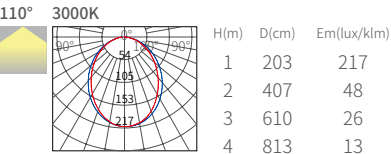





SMLS0606/SMLS0612

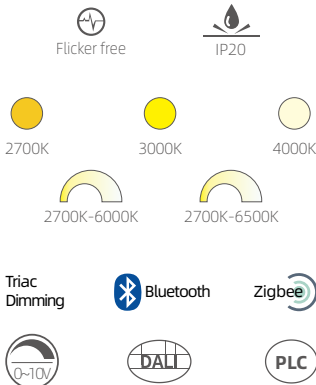


Product information	
Power	6W/12W
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

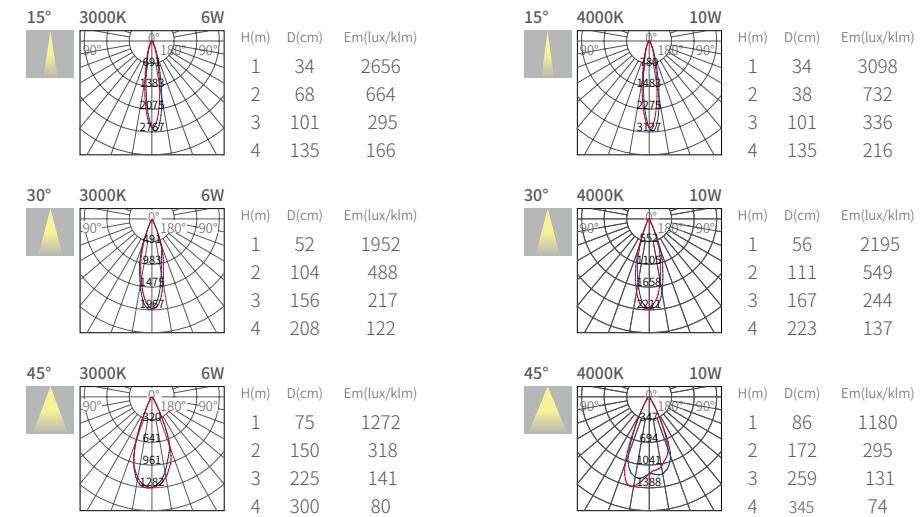


SMLS1212/SMLS1224

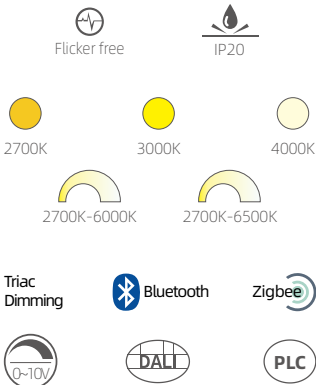


Product information	
Power	12W/20W
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

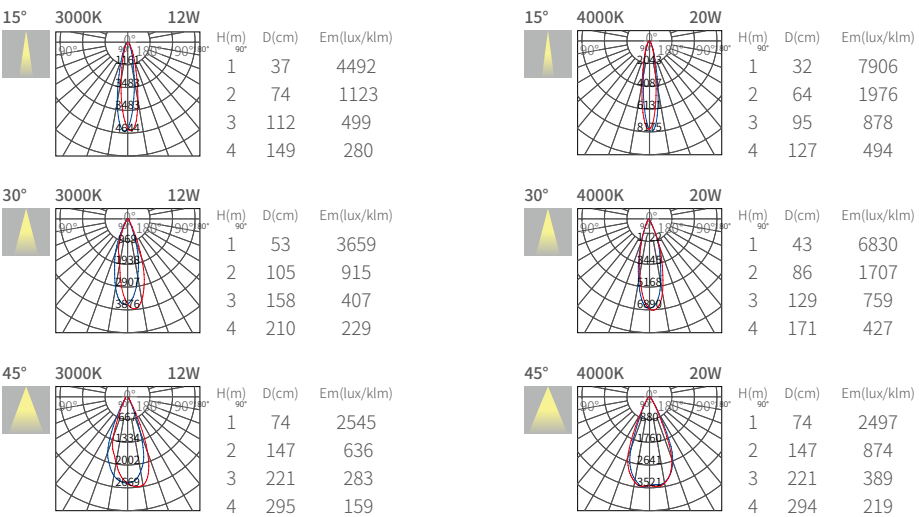





SMGS0606/SMGS0612

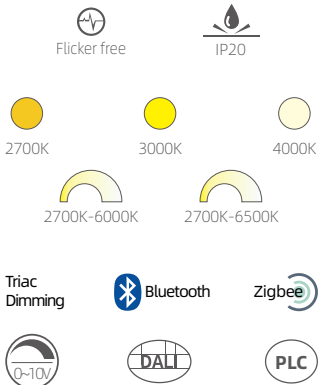


Product information	
Power	6W/12W
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

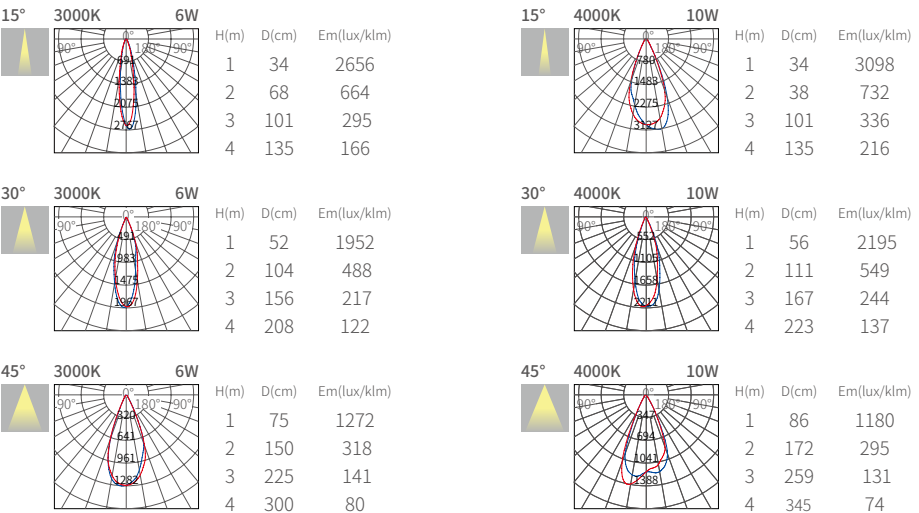


SMGS1212/SMGS1224

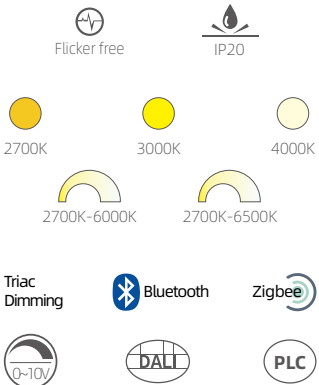


Product information	
Power	12/24W
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

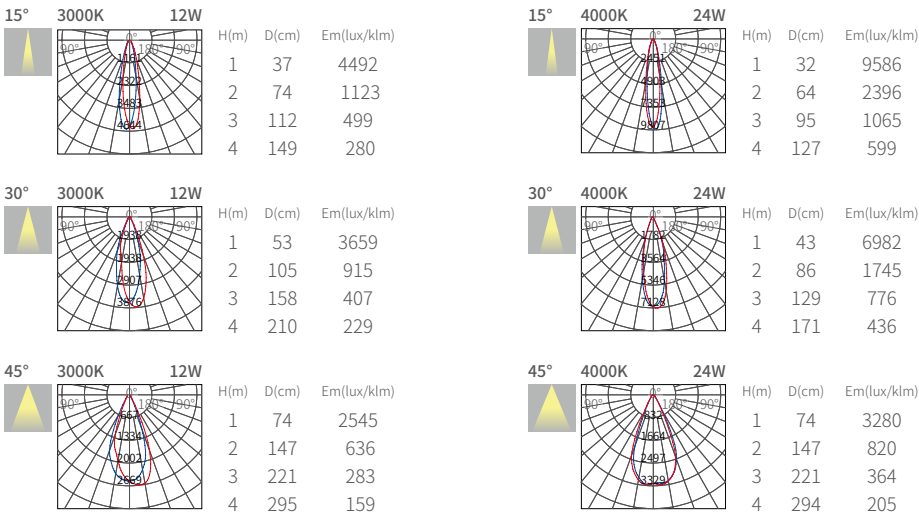

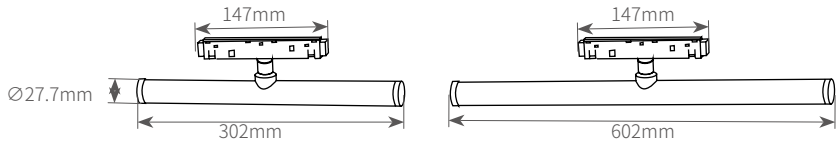




SMLT3006/SMLT6012

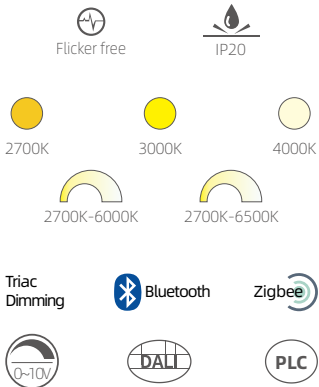


Product information	
Power	6W/12W
Beam angle	120°
Input voltage	48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

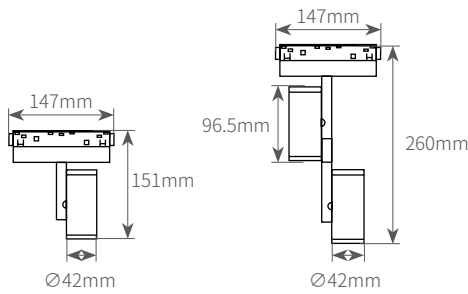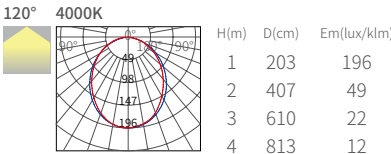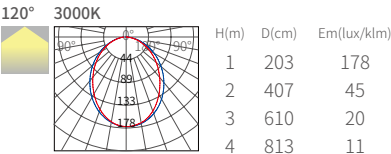




SMS4208/SMS4216

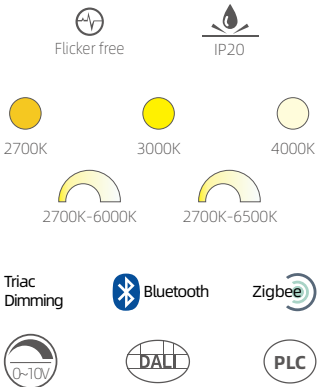


Product information	
Power	8W/16W
Beam angle	15°/24°/36°
Input voltage	48V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

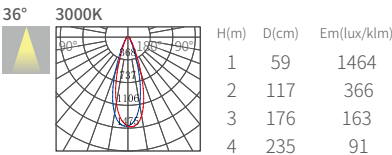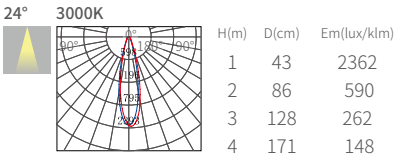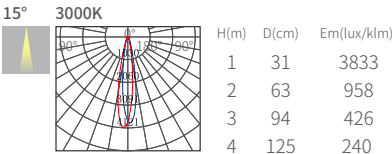

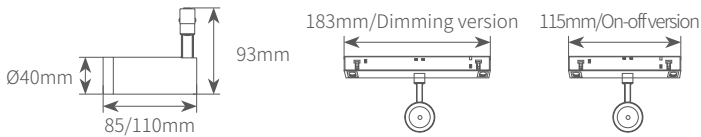








SMS4005/SMS4008

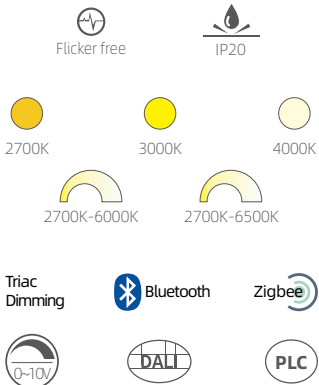


Product information	
Power	5W/8W
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	75Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

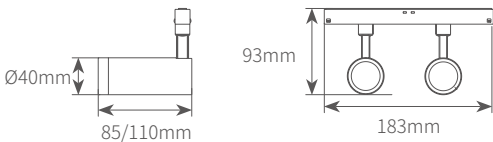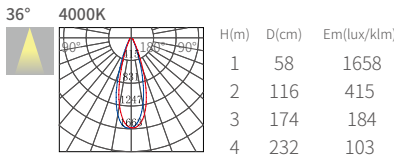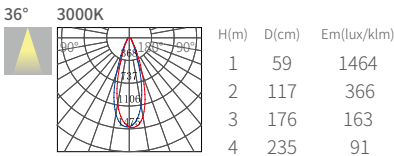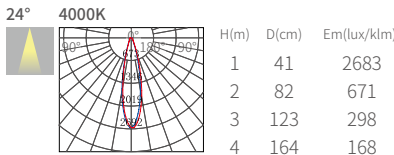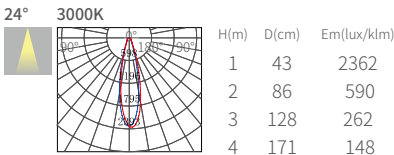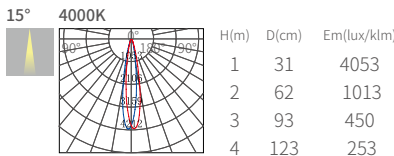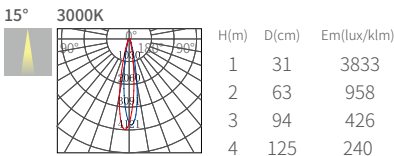







SMS4010/SMS4016

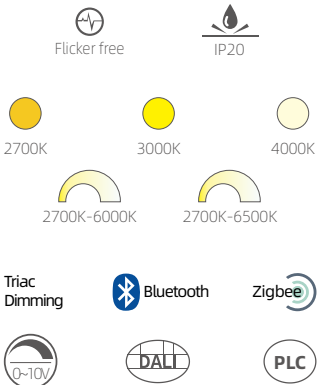


Product information	
Power	10W/16W
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	75Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

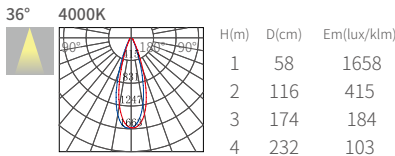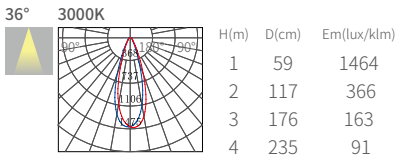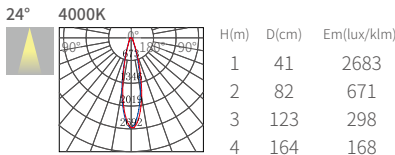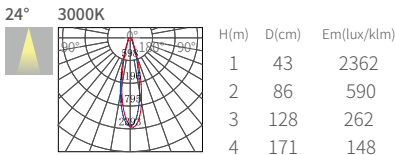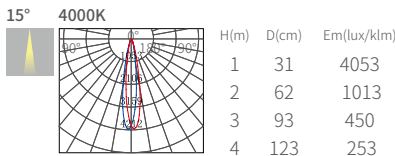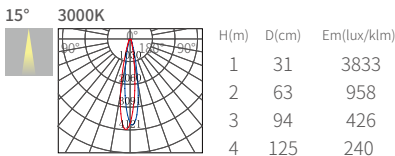

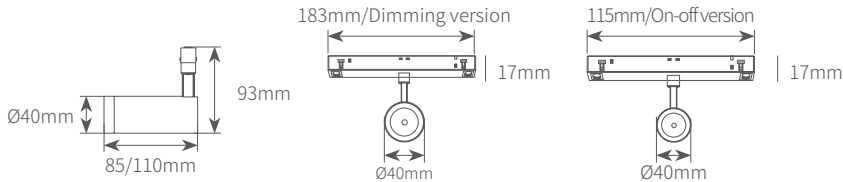



SMS4005F/SMS4008F

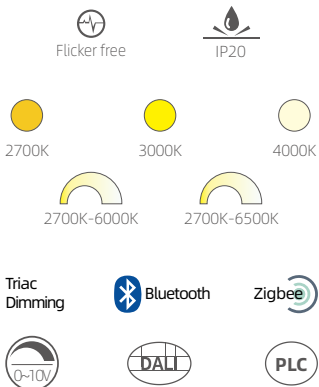


Product information	
Power	5W/8W
Beam angle	15°-36° zoomable
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	75Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

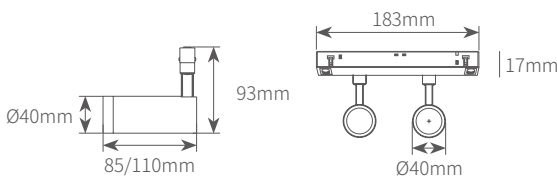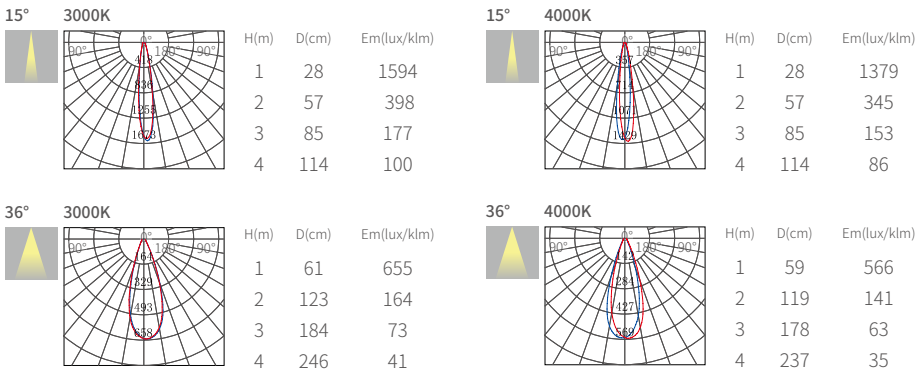


SMS4010F/SMS4016F

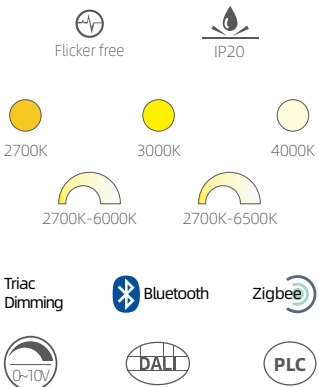


Product information	
Power	10W/16W
Beam angle	15°-36° zoomable
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	75Lm/w
CRI	>90/97
Finish color	Sand white / sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

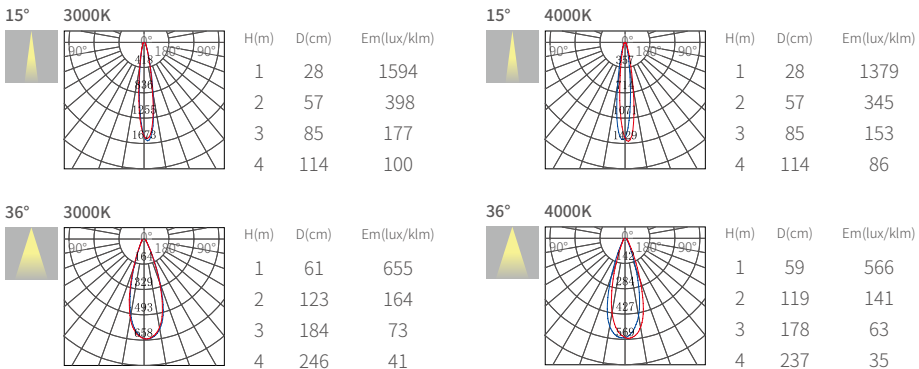

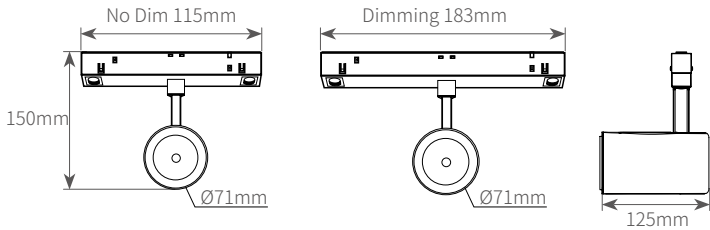



SMS5415

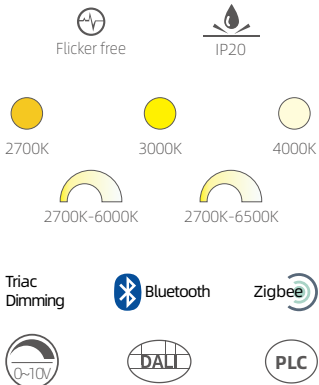


Product information	
Power	15W
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	87Lm/w
CRI	Ra 90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

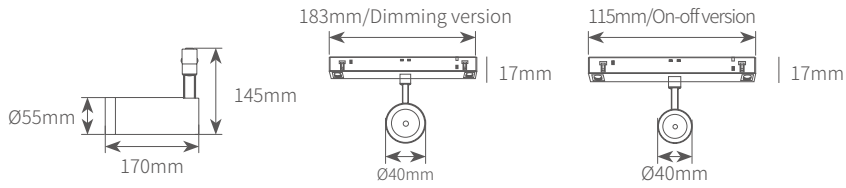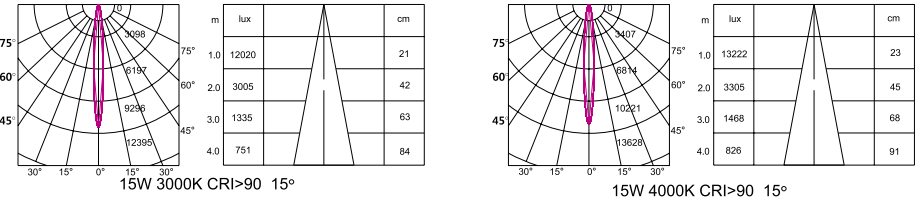


SMS5515

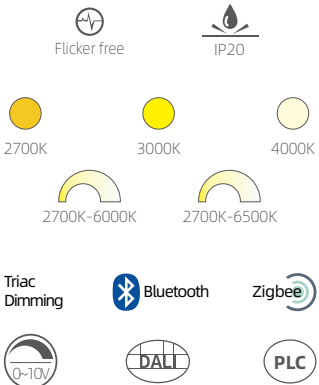


Product information	
Power	15W
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	82Lm/w
CRI	Ra 90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

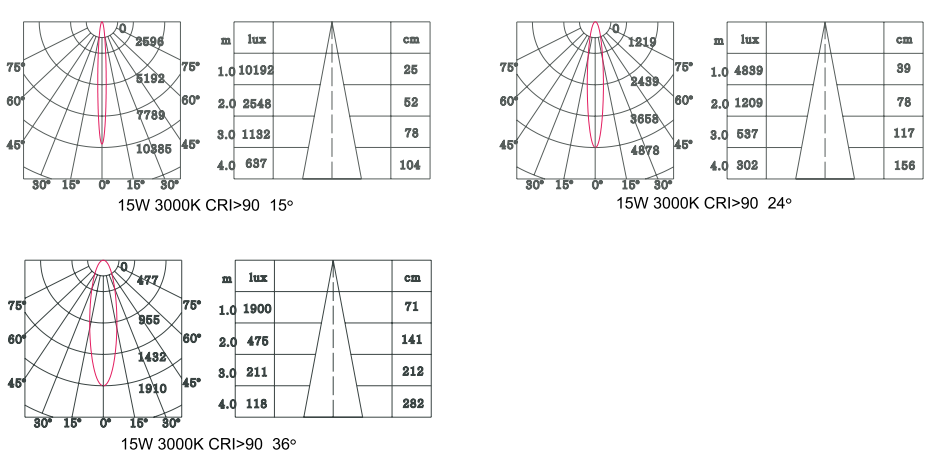

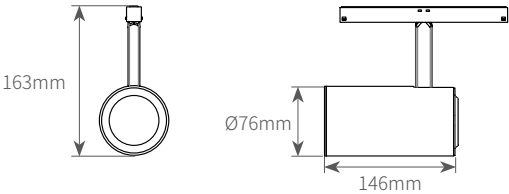

SMS7615/SMS7620/SMS7625/SMS7630

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V


DALI



PLC

Product information	
Power	15W/20W/25W/30W
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	82Lm/w
CRI	Ra 90
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters


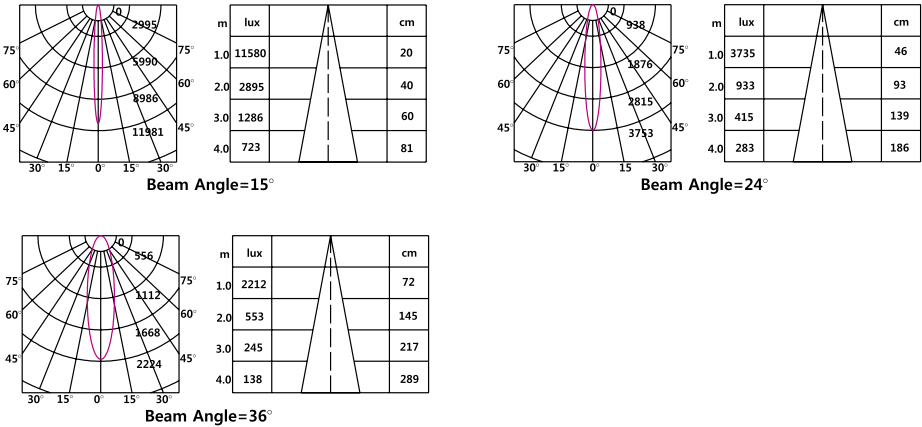


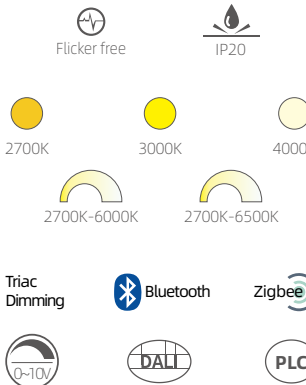

SMP8005

Product information	
Power	5W
Beam angle	75°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	60Lm/w
CRI	>90/97
Finish color	rose gold / Pearl black
Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

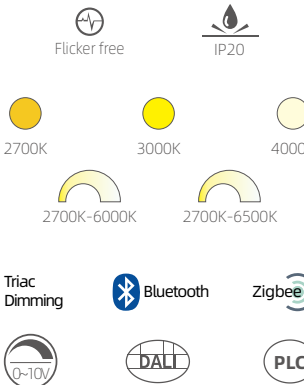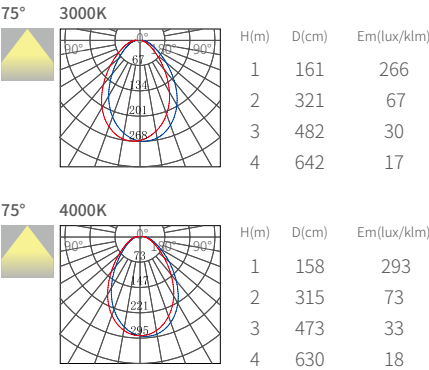


SMP13006

Product information	
Power	6W
Beam angle	220°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	60Lm/w
CRI	>90/97
Finish color	Marble white
Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

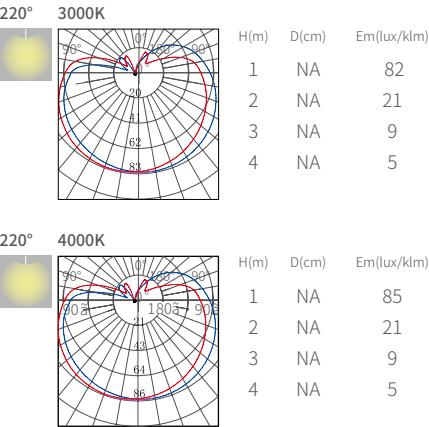

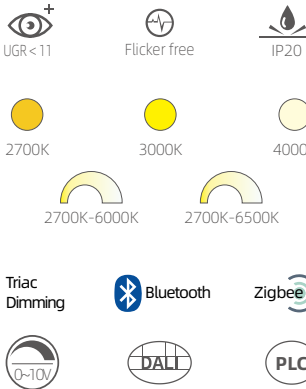


SMP4008/SMP4015

Product information	
Power	8W/15W
Beam angle	15°/30°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	70Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

15° 3000K			15° 4000K																																
		<table><tr><th>H(m)</th><th>D(cm)</th><th>Em(lux/klm)</th></tr><tr><td>1</td><td>36</td><td>3173</td></tr><tr><td>2</td><td>72</td><td>793</td></tr><tr><td>3</td><td>108</td><td>353</td></tr><tr><td>4</td><td>144</td><td>198</td></tr></table>	H(m)	D(cm)	Em(lux/klm)	1	36	3173	2	72	793	3	108	353	4	144	198			<table><tr><th>H(m)</th><th>D(cm)</th><th>Em(lux/klm)</th></tr><tr><td>1</td><td>39</td><td>4029</td></tr><tr><td>2</td><td>77</td><td>1007</td></tr><tr><td>3</td><td>116</td><td>448</td></tr><tr><td>4</td><td>193</td><td>252</td></tr></table>	H(m)	D(cm)	Em(lux/klm)	1	39	4029	2	77	1007	3	116	448	4	193	252
H(m)	D(cm)	Em(lux/klm)																																	
1	36	3173																																	
2	72	793																																	
3	108	353																																	
4	144	198																																	
H(m)	D(cm)	Em(lux/klm)																																	
1	39	4029																																	
2	77	1007																																	
3	116	448																																	
4	193	252																																	
30° 3000K			30° 4000K																																
		<table><tr><th>H(m)</th><th>D(cm)</th><th>Em(lux/klm)</th></tr><tr><td>1</td><td>46</td><td>2478</td></tr><tr><td>2</td><td>92</td><td>590</td></tr><tr><td>3</td><td>138</td><td>275</td></tr><tr><td>4</td><td>184</td><td>155</td></tr></table>	H(m)	D(cm)	Em(lux/klm)	1	46	2478	2	92	590	3	138	275	4	184	155			<table><tr><th>H(m)</th><th>D(cm)</th><th>Em(lux/klm)</th></tr><tr><td>1</td><td>45</td><td>3151</td></tr><tr><td>2</td><td>90</td><td>788</td></tr><tr><td>3</td><td>135</td><td>350</td></tr><tr><td>4</td><td>180</td><td>197</td></tr></table>	H(m)	D(cm)	Em(lux/klm)	1	45	3151	2	90	788	3	135	350	4	180	197
H(m)	D(cm)	Em(lux/klm)																																	
1	46	2478																																	
2	92	590																																	
3	138	275																																	
4	184	155																																	
H(m)	D(cm)	Em(lux/klm)																																	
1	45	3151																																	
2	90	788																																	
3	135	350																																	
4	180	197																																	
36° 3000K			36° 4000K																																
		<table><tr><th>H(m)</th><th>D(cm)</th><th>Em(lux/klm)</th></tr><tr><td>1</td><td>65</td><td>1475</td></tr><tr><td>2</td><td>129</td><td>368</td></tr><tr><td>3</td><td>194</td><td>164</td></tr><tr><td>4</td><td>258</td><td>92</td></tr></table>	H(m)	D(cm)	Em(lux/klm)	1	65	1475	2	129	368	3	194	164	4	258	92			<table><tr><th>H(m)</th><th>D(cm)</th><th>Em(lux/klm)</th></tr><tr><td>1</td><td>61</td><td>1942</td></tr><tr><td>2</td><td>123</td><td>486</td></tr><tr><td>3</td><td>184</td><td>216</td></tr><tr><td>4</td><td>245</td><td>121</td></tr></table>	H(m)	D(cm)	Em(lux/klm)	1	61	1942	2	123	486	3	184	216	4	245	121
H(m)	D(cm)	Em(lux/klm)																																	
1	65	1475																																	
2	129	368																																	
3	194	164																																	
4	258	92																																	
H(m)	D(cm)	Em(lux/klm)																																	
1	61	1942																																	
2	123	486																																	
3	184	216																																	
4	245	121																																	

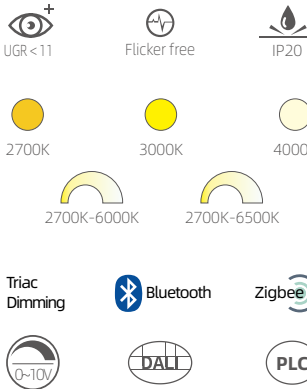

SMP4008F/SMP4015F

Product information	
Power	8W/15W
Beam angle	15°-36° zoomable
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	70Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

15°

3000K

H(m)	D(cm)	Em(lux/klm)
1	29	2052
2	57	513
3	86	228
4	114	128

15°

6000K

H(m)	D(cm)	Em(lux/klm)
1	30	2027
2	60	507
3	90	225
4	121	126

36°


3000K

H(m)	D(cm)	Em(lux/klm)
1	61	837
2	123	209
3	194	93
4	184	52

36°

6000K

H(m)	D(cm)	Em(lux/klm)
1	61	878
2	123	219
3	184	97
4	245	54

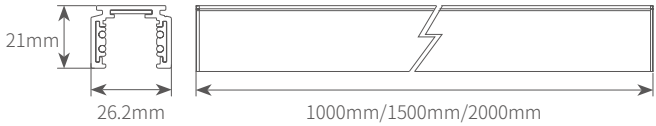

MSSM-M


Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Surface Mounted

Accessories




Model D7



Model D15



Model D17

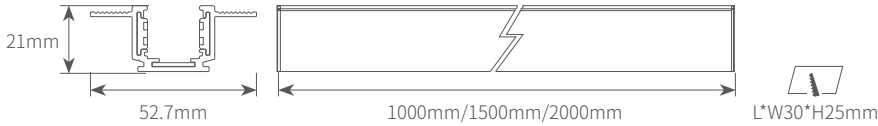


MSRC-A


Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Recessed

Accessories



Model D46

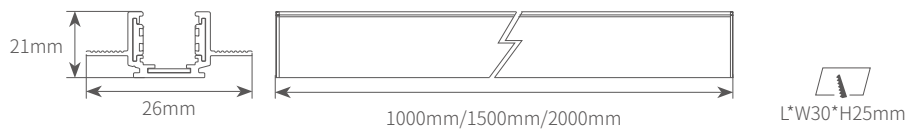


MSRC-B


Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Recessed

Accessories



Model D46

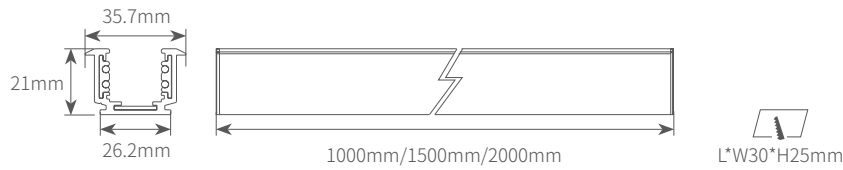


MSRC-C


Product information	
Power	384W Max
Beam angle	/
Input voltage	DC24V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Black

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Recessed

Accessories



Model D46

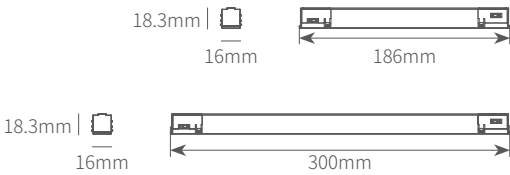

MSMLS0606/MSMLS1212

UGR < 19

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V




DALI

PLC

Product information	
Power	6W/12W
Beam angle	24°/36°
Input voltage	24V
Input frequency	16KHz
System Luminous flux	60Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

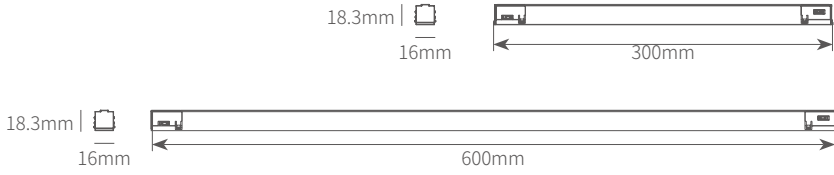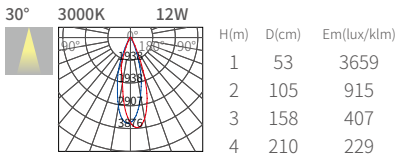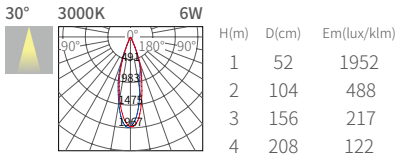

MSMLL3006/MSMLL6012

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V


DALI


PLC

Product information	
Power	6W/12W
Beam angle	110°
Input voltage	24V
Input frequency	16KHz
System Luminous flux	60Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

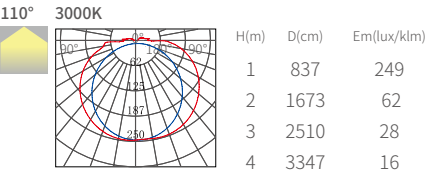



MSMW2515

UGR < 19

Flicker free

IP20

2700K

3000K

4000K

2700K-6000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V


DALI

PLC

Product information	
Power	15W
Beam angle	35° * 70°
Input voltage	24V
Input frequency	16KHz
System Luminous flux	65Lm/w
CRI	>90/97
Finish color	Sand white / sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

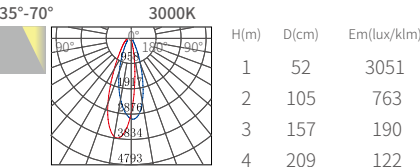


CL-600 ~ CL-3000

Product information	
Input voltage	24/48V
Finish color	Black
Cirle Dimater	Φ600/Φ800/Φ900/Φ1000/Φ1200/Φ1500/Φ1800/Φ2000/Φ2400/Φ3000mm
Dimension	D600/D800/D900/D1000/D1200/D1500/D1800/D2000/D2400/D3000*W52*H52mm

Product performance	
Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Recessed / Surface mount / Pendant




CL-SM5508/CL-SM5510/CL-SM5515




Product information	
Power	8W/10W/15W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90
Finish color	Sand white / Sand black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track




CL-SLS0606



Product information	
Power	6W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90
Finish color	Sand white / Sand black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track



CL-SLL2007

Product information	
Power	7W
Beam angle	110°
Input voltage	DC24V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90
Finish color	Sand white / Sand black



Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track




CL-SLS0202

Product information	
Power	2W
Beam angle	15°/24°/36°
Input voltage	DC24V
Input frequency	16KHz
System Luminous flux	80Lm/w
CRI	>90
Finish color	Sand white / Sand black



Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track




ARMANI RECESSED
LINEAR SERIES



UGR<11







LMN0608

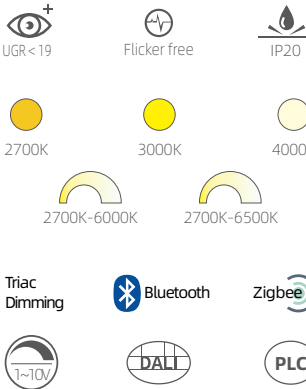


Product information	
Power	8W
Beam angle	25°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	70Lm/w
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below

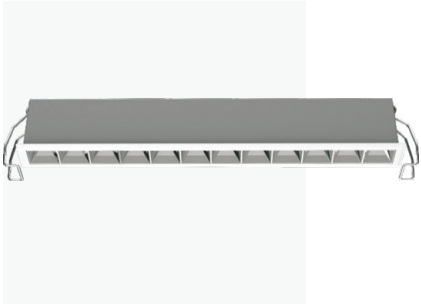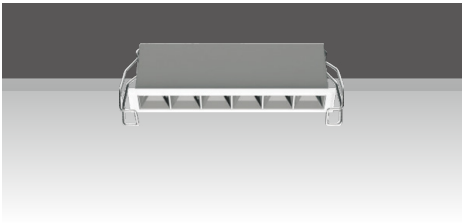



LMN1212

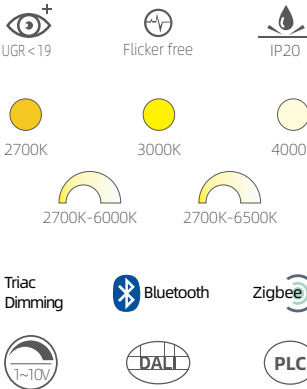


Product information	
Power	12W
Beam angle	25°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	70Lm/w
CRI	Ra>90
Finish color	White+Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below

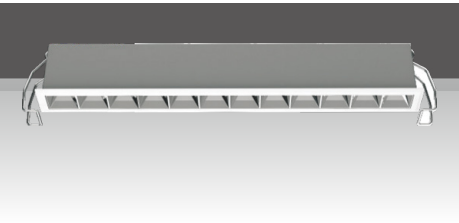

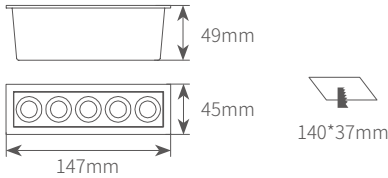




LMN0510

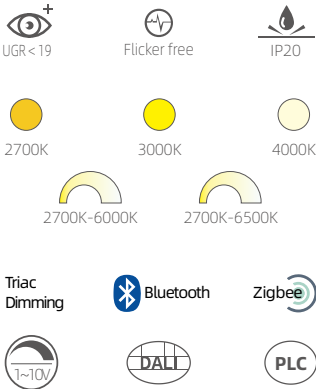


Product information	
Power	10W
Beam angle	15°/30°/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	80Lm/w
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below

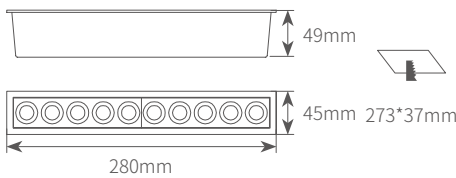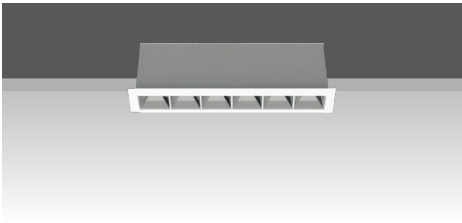


LMN1020

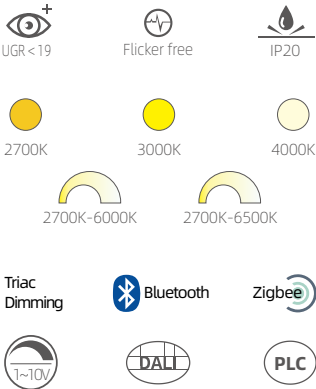


Product information	
Power	20W
Beam angle	15°/30°/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	80Lm/w
CRI	Ra>90
Finish color	White+Titanium


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below








LMN0510-W/LMN0510-W-CW

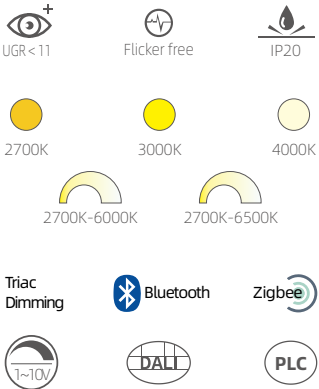


Product information	
Power	10W
Beam angle	35° * 70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	75Lm/w
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below

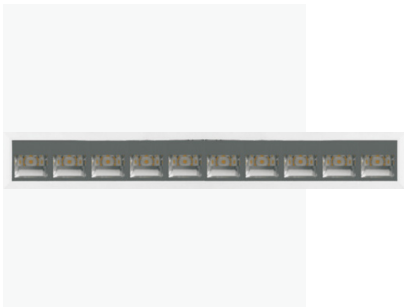



LMN1020-W/LMN1020-W-CW

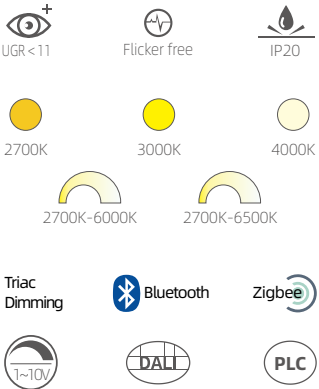

Product information	
Power	12W
Beam angle	35° * 70°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	75Lm/w
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below

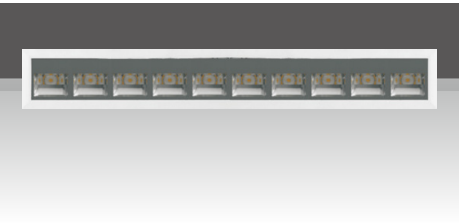


LED FLEXIBLE STRIP SERIES




LED STRIP STRUCTURE

The LED strip light is composed of FPC, LED Chip, SMD resistor, IC, waterproof silicone, connecting terminals and so on


I Light strip type

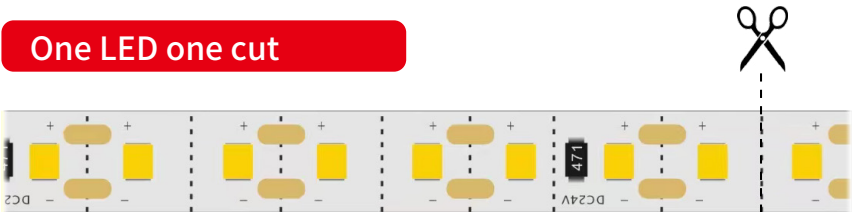


I LED

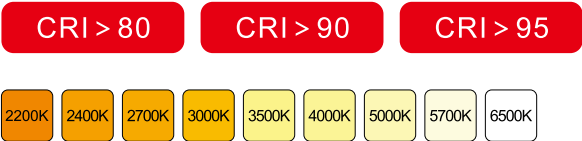

I Double layer copper flexible circuit board

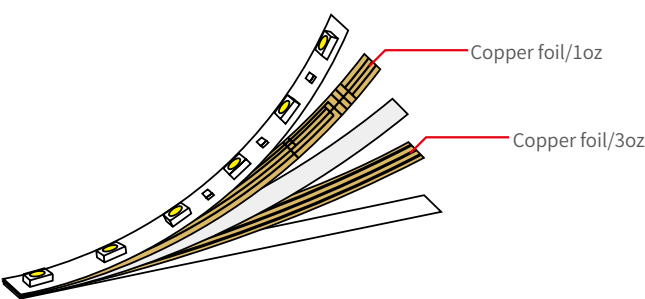




LB2835-24/08-10W-120D

Product information	
Power	10W/m
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	95Lm/w
CRI	Ra>90/95
Cut length	One LED one cut


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



LB2835-24/08-12W-120S

Product information	
Power	12W/m
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	75Lm/w
CRI	Ra>90/95
Cut length	One LED one cut


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



FS2835-24/08-10W-120D

Product information	
Power	10W/m
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	95Lm/w
CRI	Ra>90/95
Cut length	One LED one cut

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



FS2835-24/08-12W-120S

Product information	
Power	12W/m
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	75Lm/w
CRI	Ra>90/95
Cut length	One LED one cut

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



LB5050-24/12-12W-60RGB

Product information

Power	12W/m
LED QTY	60LED/m
Input voltage	DC24V
PCB width	12mm
System Luminous flux	90Lm/w
CRI	Ra>90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



LB5050-24/12-15W-60RGBW

Product information

Power	15W/m
LED QTY	60LED/m
Input voltage	DC24V
PCB width	12mm
System Luminous flux	72Lm/w
CRI	Ra>90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



LB5050-24/12-12W-60RGBCW

Product information

Power	12W/m
LED QTY	60LED/m
Input voltage	DC24V
PCB width	12mm
System Luminous flux	90Lm/w
CRI	Ra>90/95
Cut length	One LED one cut



Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	/
Installation	Paving or aluminum groove



LINEAR PROFILE SERIES





M1010
standard length of aluminum groove: 1m/1.5m/2m

UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth

Zigbee


0-10V

DALI




PLC

Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

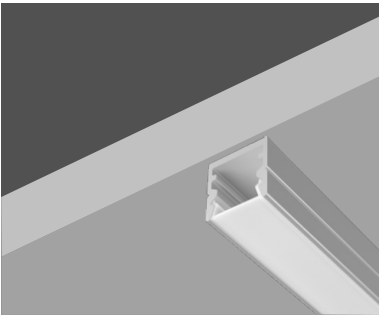

Installation steps

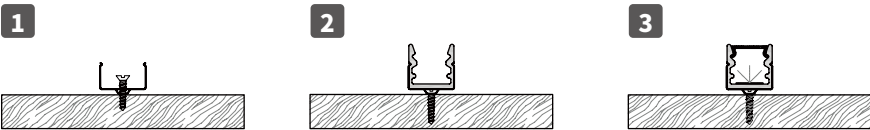

M1213
standard length of aluminum groove: 1m/1.5m/2m

UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth

Zigbee


0-10V

DALI


PLC



Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

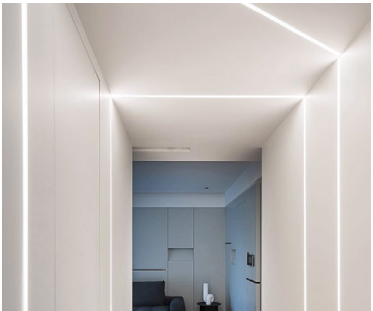


Installation steps

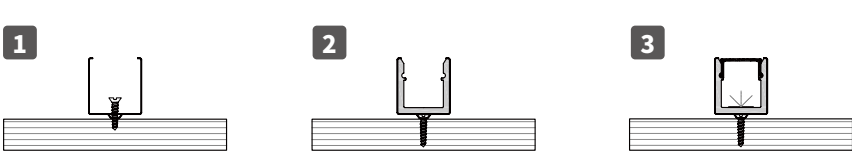

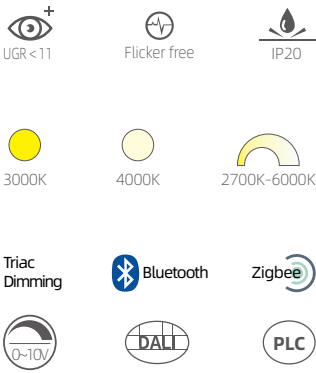


M2010

standard length of aluminum groove: 1m/1.5m/2m






Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

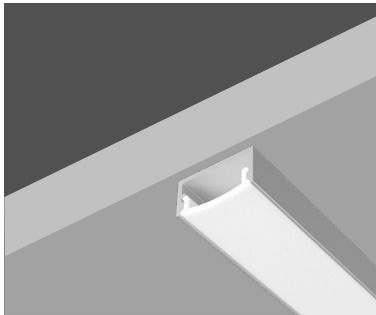


Installation steps

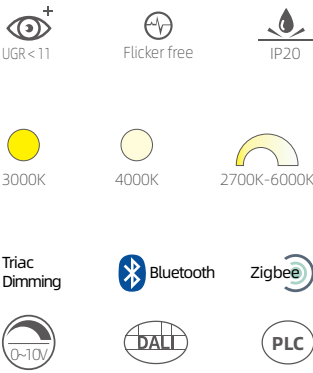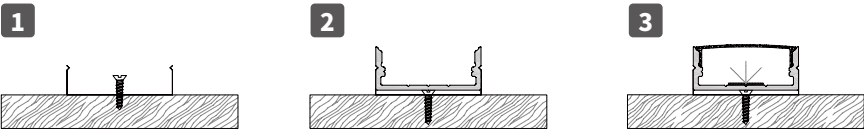

M3535

standard length of aluminum groove: 1m/1.5m/2m






Product information	
Power	24W/36W/48W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps

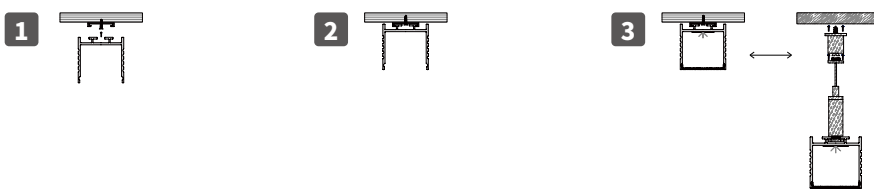

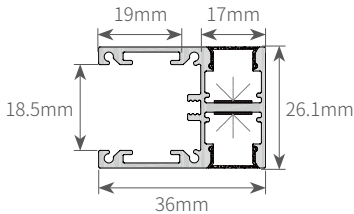


M3626

standard length of aluminum groove: 1m/1.5m/2m






Product information	
Power	Up 10/12.5/18W + Down 10/12.5/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	> 100Lm/w
CRI	Ra > 90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf ≥ 92
Color Saturation	Rg=99
Color tolerance	SDCM < 3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

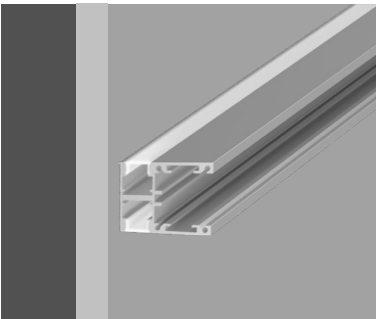

Installation steps

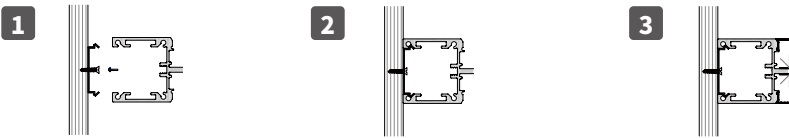

M1616

standard length of aluminum groove: 1m/1.5m/2m





Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	> 100Lm/w
CRI	Ra > 90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf ≥ 92
Color Saturation	Rg=99
Color tolerance	SDCM < 3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted




Installation steps

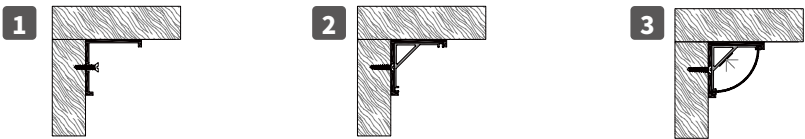

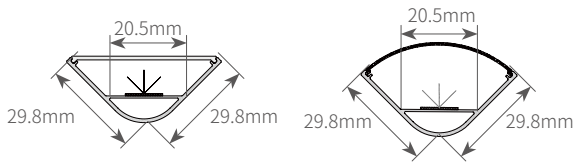


M3030

standard length of aluminum groove: 1m/1.5m/2m


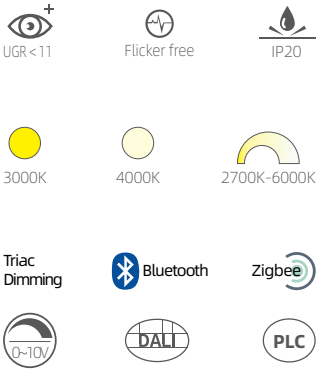


Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

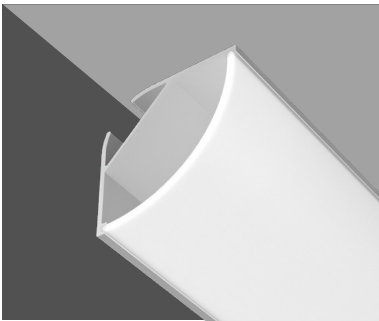


Installation steps

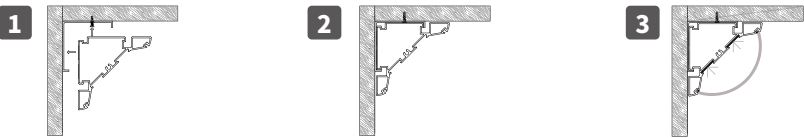


M5036

standard length of aluminum groove: 1m/1.5m/2m

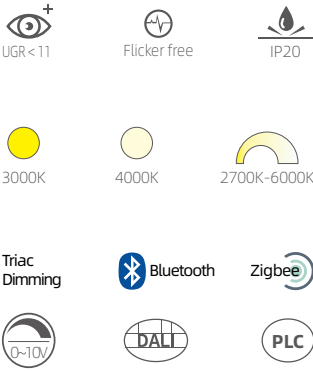




Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

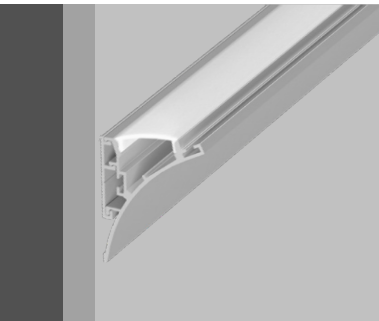

Installation steps

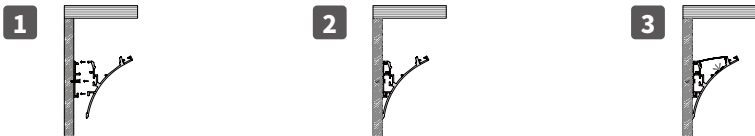

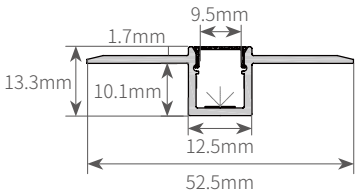


C5315

standard length of aluminum groove: 1m/1.5m/2m






Product information	10W/12.5W/18W
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	> 100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed

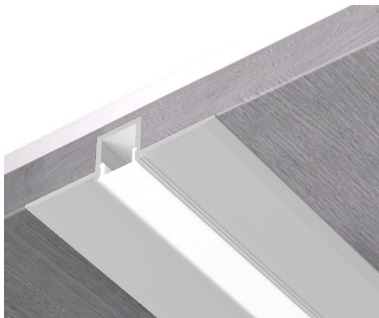

Installation steps

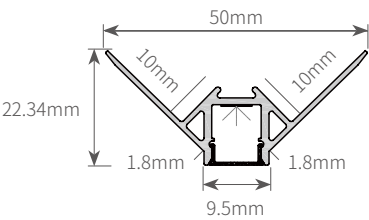


C5022

standard length of aluminum groove: 1m/1.5m/2m






Product information	10W/12.5W/18W
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	> 100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed

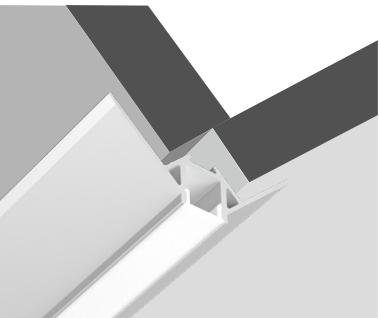

Installation steps

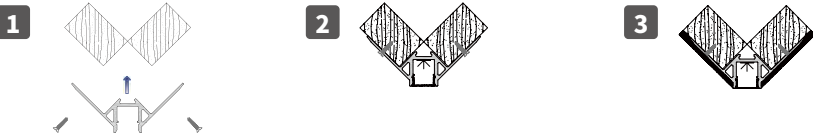

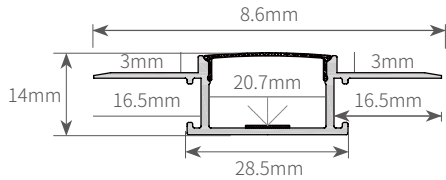

C6214

standard length of aluminum groove:1m/1.5m/2m

UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth

Zigbee


0-10V

DALI



PLC

Product information	10W/12.5W/18W
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed

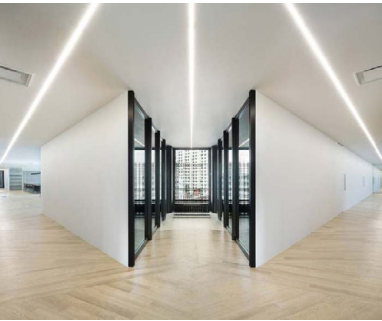

Installation steps

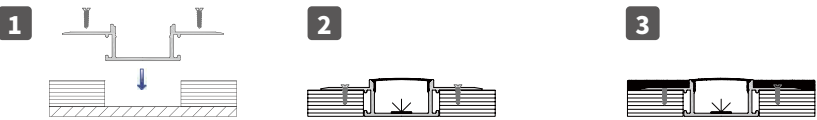

C8016

standard length of aluminum groove:1m/1.5m/2m

UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth

Zigbee

0-10V

DALI


PLC


Product information	10W/12.5W/18W
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed




Installation steps

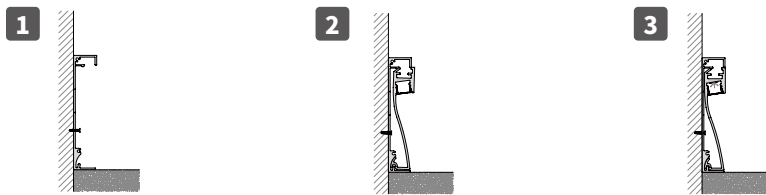



C9719
standard length of aluminum groove:1m/1.5m/2m



UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth

Zigbee


0-10V

DALI



PLC

Product information	
Power	10W/12.5W/18W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed

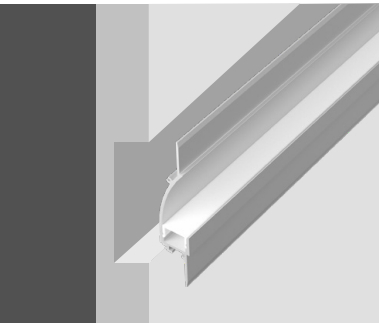

Installation steps

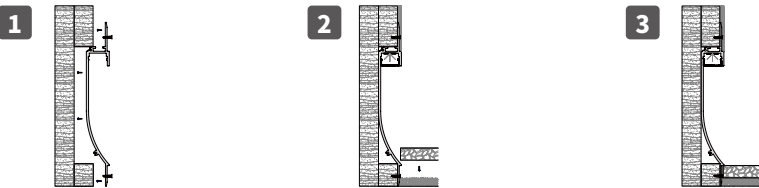

C8958
standard length of aluminum groove:1m/1.5m/2m



UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth

Zigbee


0-10V

DALI


PLC


Product information	
Power	24W/36W/48W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	>100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed

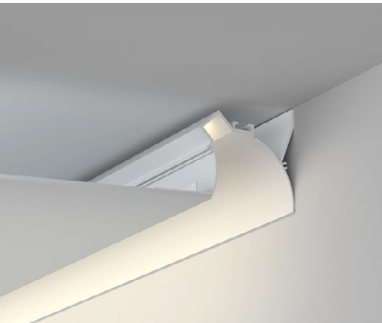


Installation steps

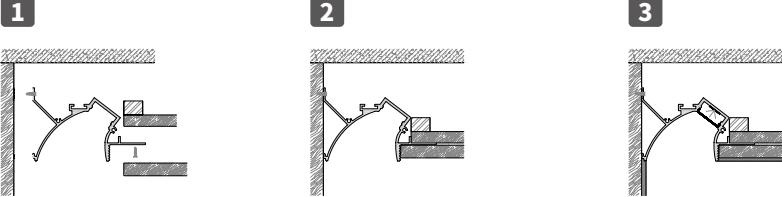



C9835
standard length of aluminum groove: 1m/1.5m/2m



UGR < 11

Flicker free

IP20

3000K

4000K

2700K-6000K

Triac Dimming

Bluetooth


Zigbee

0-10V


DALI

PLC

Product information	
Power	24W/36W/48W
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	> 100Lm/w
CRI	Ra>90
Length	1000/1500/2000mm
Finish color	white/silver/black
Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed

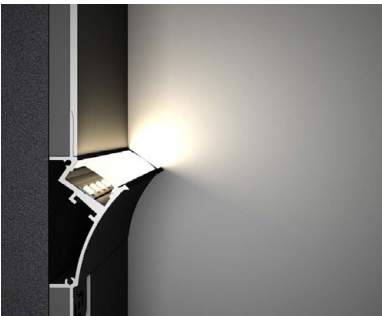


Installation steps

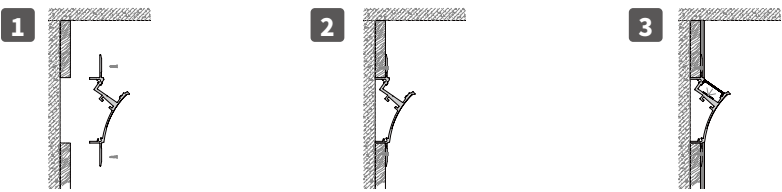



STEP LIGHT SERIES

Adopting high-quality LED point light source, with soft light and long lifespan
Adopting high-quality aluminum material with precision surface treatment, it is simple, luxurious, and noble;
Constant current driver, with anti over-voltage and short-circuit protection functions, safe and durable;
Adopting 86-type standard bottom box installation, with strong compatibility, convenient to installation



FL03-L-S

Product information	
Power	2W
Beam angle	10°
Input voltage	AC 100-240V
Input frequency	50/60Hz
System Luminous flux	16Lm/w
CRI	Ra>90
Finish color	/


Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



FL04-L-L


Product information	
Power	3W
Beam angle	90°
Input voltage	AC 100-240V
Input frequency	50/60Hz
System Luminous flux	16Lm/w
CRI	Ra>90
Finish color	/

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed



OFFICE LINEAR LIGHT
SERIES



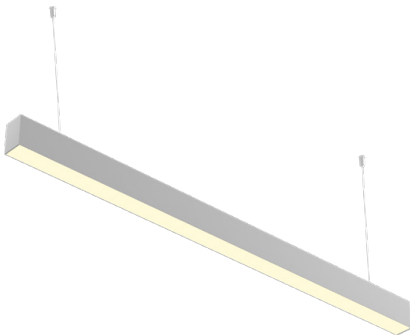



BM5075

Product information

Power	36W
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	85Lm/w
CRI	Ra>90
Lamp size	L1200xW50xH75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod

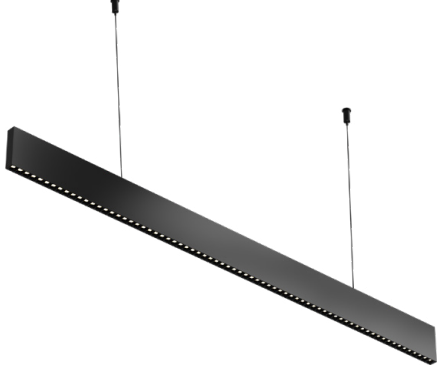


BM1670


Product information

Power	36W
Beam angle	15/30/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	75Lm/w
CRI	Ra>90
Lamp size	L1200xW16xH70mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



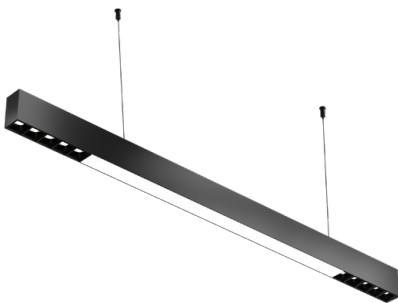



BM4375

Product information

Power	36W
Beam angle	30°/110°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	85Lm/w
CRI	Ra>90
Lamp size	L1200xW43xH75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod

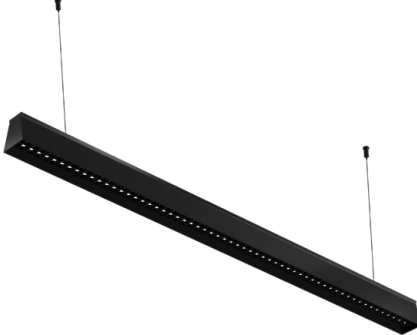


M6270

Product information

Power	36W
Beam angle	15/30/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	75Lm/w
CRI	Ra>90
Lamp size	L1200xW62xH70mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod




CLASSROOM LIGHT
PANEL LIGHT
Highbay and Stadium Light Series





KWT-HB-040-N01

Product information	
Power	28W/32W/36W/40W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium




Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod



KWT-JS-040-N01

Product information	
Power	28W/32W/36W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium




Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod/ceiling/wire suspension




KWT-HB-040-N02

Product information	
Power	28W/32W/36W/40W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium




Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod




KWT-JS-040-N02


Product information	
Power	28W/32W/36W/40W/54W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium



Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod



KWT-JS-040-N02




Product information	
Power	28W/32W/36W/40W/54W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod/recessed/ceiling/wire suspension/ suspension ring




KWT-TD-015-N01




Product information	
Power	15W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	/



KWT-JS-036-N04




Product information	
Power	28W/32W/36W/40W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>90
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod/recessed/ceiling/wire suspension/ suspension ring



KWT-SP-0300




Product information	
Power	100W/120W/150W/200W/250W/300W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra>80
Finish color	White+Titanium

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	suspension rod / suspension ring



KWT-SP-1200

Product information	
Power	600W/1200W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	/
CRI	Ra>80
Finish color	White+Titanium




Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	/



KWT-SP-0300B

Product information	
Power	180W/240W/300W
Beam angle	/
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	/
CRI	Ra>80
Finish color	White+Titanium



Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	/

