





久荣光
LED 专业生产制造商



LED High Bay

Model: GK03122



Suzhou Jolighting Co., Ltd




Specification

Model	NS-GK03122-100	NS-GK03122-150	NS-GK03122-200	NS-GK03122-240
Input voltage	220-240/120-277Vac 50/60Hz	220-240/120-277Vac 50/60Hz	220-240/120-277Vac 50/60Hz	220-240/120-277Vac 50/60Hz
Power	100W	150W	200W	240W
Chips	2835	2835	2835	2835
Efficacy	130/150/180(LM/W)	130/150/180(LM/W)	130/150/180(LM/W)	130/150/180(LM/W)
Luminous Flux	13000/15000/18000(LM)	19500/22500/27000(LM)	26000/30000/36000(LM)	31200/36000/43200(LM)
CRI	80+	80+	80+	80+
LM80	>36,000hrs	>36,000hrs	>36,000hrs	>36,000hrs
Color temperature	5000K	5000K	5000K	5000K
Driver brand	JR/Sosen/Moso/Lifud	JR/Sosen/Moso/Lifud	JR/Sosen/Moso/Lifud	JR/Sosen/Moso/Lifud
Beam angle	90°	90°	90°	90°
Working temperature	-30-50℃	-30-50℃	-30-50℃	-30-50℃
IP rating	IP65	IP65	IP65	IP65
Lifetime	60000h	60000h	60000h	60000h
Warranty	5 years	5 years	5 years	5 years
Optional	Sensor/0-10V/PWM/12Vdc auxiliary power supply			




Product Basic Diagram

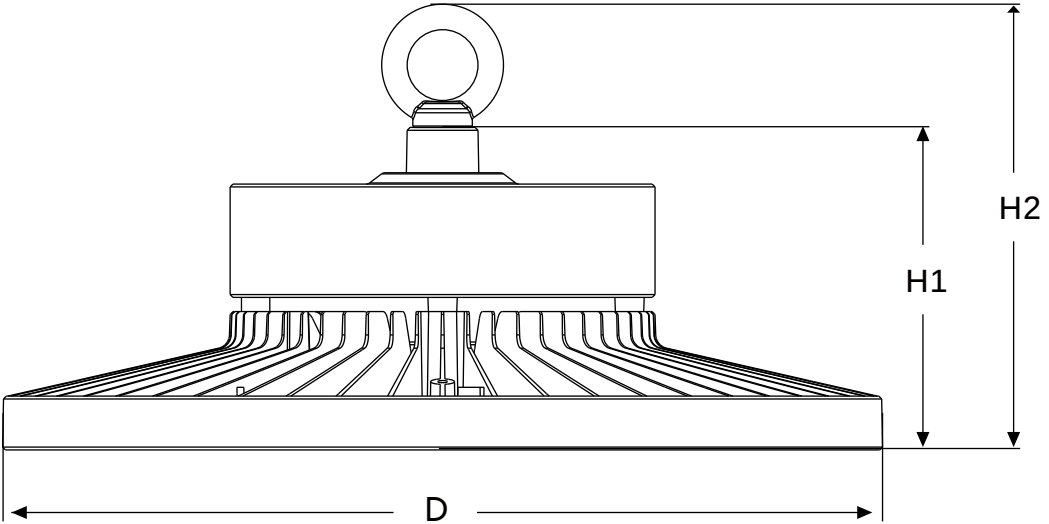

Model	Diameter	H1	H2	Weight
NS-GK03122-100	φ265mm/10.4in	110mm/4.3in	155mm/6.1in	1.8kg
NS-GK03122-150	φ265mm/10.4in	110mm/4.3in	155mm/6.1in	1.9kg
NS-GK03122-200	φ310mm/12.2in	115mm/4.5in	160mm/6.3in	2.7kg
NS-GK03122-240	φ340mm/13.4in	120mm/4.7in	165mm/6.5in	3.1kg

Including driver

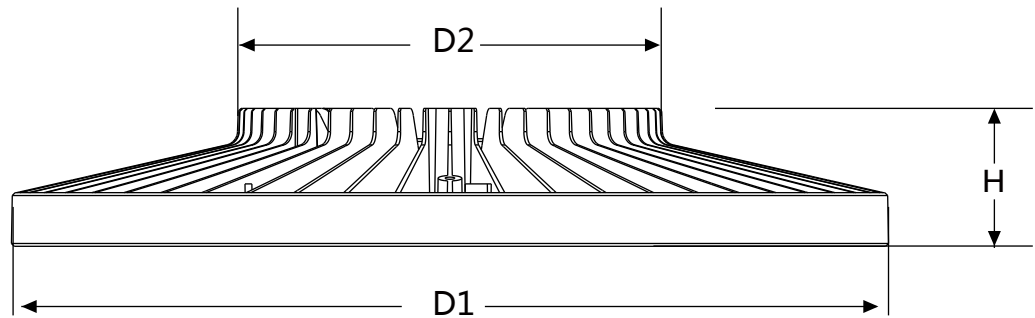


Model	D1	D2	H	Weight
NS-GK03122-100	φ265mm/10.4in	130mm/5.1in	50mm/2.0in	0.86kg
NS-GK03122-150	φ265mm/10.4in	130mm/5.1in	50mm/2.0in	0.87kg
NS-GK03122-200	φ310mm/12.2in	150mm/5.9in	56mm/2.0in	1.36kg
NS-GK03122-240	φ340mm/13.4in	150mm/5.9in	56mm/2.2in	1.8kg

Without driver



Accessories

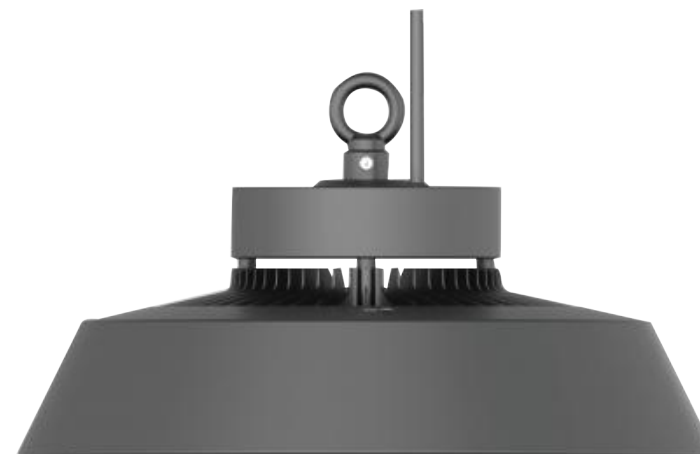

Reflector



Hook



Ring



Sensor



Remote control