

Waterproof Connector Series

防水连接器系列

锁线系列

Screw Connector Series



WPC20S-SCT	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	400V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPC25S-SCT	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	41A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm, 10-14mm,14-18mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPC20S-SCX	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPC25S-SCX	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	41A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm, 10-14mm,14-18mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



UAC-250Y	
芯数 Number of Poles	2/3/4/5Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	32A
接线范围 Wire section	0.5-4.0mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm, 10-14mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

Waterproof Connector Series

防水连接器系列

■ 双头螺纹型快速接线防水连接器

Double-head Threaded Quick Wiring Waterproof Connector



WPC20C-SC	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	16A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC25C-SC	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	16A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC25H-SC	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPC20C-SCT	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	16A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC20C1-SCT	
芯数 Number of Poles	2Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC25C1-SCT	
芯数 Number of Poles	3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C ~ +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

Waterproof Connector Series

防水连接器系列

■ 双头螺纹型防水连接器

Double-head Threaded Waterproof Connector



WPC21C1-SCX	
芯数 Number of Poles	2Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC25C1-SCX	
芯数 Number of Poles	3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC23-SC03/SC05	
芯数 Number of Poles	3/5Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-4mm ²
外径直线 Outer Cable Diameter	6-9mm,9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

■ 对插式圆形防水连接器

Plug-in Circular Waterproof Connector



WPC23-PL03/PL05	
芯数 Number of Poles	—
额定电压 Rated Voltage	450V
额定电流 Rated Current	16A
接线规格 Wiring specification	22-12AWG (0.5-4mm ²)
外径直线 Outer Cable Diameter	5-9mm,9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	—
端子材质 Contact/Terminal Material	—

WPC19S-PL		
芯数 Number of Poles	2/3Pin	4/5Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	20A	16A
接线范围 Wire section	0.5-2.5mm ²	0.5-1.5mm ²
外径直线 Outer Cable Diameter	3.5-7mm,5-8mm, 7-10mm	
环境温度 Temperature Range	-40°C - +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	

WPC28S-PL		
芯数 Number of Poles	2/3/4Pin	5/6Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	50A	20A
接线范围 Wire section	0.5-6.0mm ²	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm	
环境温度 Temperature Range	-40°C - +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	

Waterproof Connector Series

防水连接器系列

■ 面板系列防水连接器

Panel Series Waterproof Connector



WPC23C-PL	
芯数 Number of Poles	2/3Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	20A
接线范围 Wire section	0.5-2.5mm²
外径直线 Outer Cable Diameter	5-9mm, 9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPC25C-PL	
芯数 Number of Poles	4/5Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	50A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	5-9mm, 9-12mm, 10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPC19S-PLP1		
芯数 Number of Poles	2/3/4Pin	5/6Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	20A	15A
接线范围 Wire section	0.5-6.0mm²	0.5-1.5mm²
外径直线 Outer Cable Diameter	3.5-7mm, 5-8mm, 7-10mm	
环境温度 Temperature Range	-40°C - +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	



WPC19S-PLP2		
芯数 Number of Poles	2/3Pin	4/5Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	20A	15A
接线范围 Wire section	0.5-2.5mm²	0.5-1.5mm²
外径直线 Outer Cable Diameter	3.5-7mm, 5-8mm, 7-10mm	
环境温度 Temperature Range	-40°C - +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	



WPC23S-PLP1		
芯数 Number of Poles	2/3Pin	4/5Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	30A	15A
接线范围 Wire section	0.5-4.0mm²	0.5-2.5mm²
外径直线 Outer Cable Diameter	5-9mm, 9-12mm	
环境温度 Temperature Range	-40°C - +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	



WPC23S-PLP2		
芯数 Number of Poles	2/3Pin	4/5Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	30A	15A
接线范围 Wire section	0.5-4.0mm²	0.5-2.5mm²
外径直线 Outer Cable Diameter	5-9mm, 9-12mm	
环境温度 Temperature Range	-40°C - +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	

Waterproof Connector Series

防水连接器系列

一字防水连接器

“1” Type Waterproof Connector



WPC28S-PLP2		
芯数 Number of Poles	2/3/4Pin	5/6Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	50A	25A
接线范围 Wire section	0.5-6.0mm ²	0.5-2.5mm ²
外径直线 Outer Cable Diameter	5-9mm,9-12mm,10-14mm	
环境温度 Temperature Range	-40°C ~ +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	

WPC82S-PLP1		
芯数 Number of Poles	2/3/4Pin	5/6Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	50A	20A
接线范围 Wire section	0.5-6.0mm ²	0.5-2.5mm ²
外径直线 Outer Cable Diameter	3.5-7mm,5-8mm,7-10mm	
环境温度 Temperature Range	-40°C ~ +105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	合金铜 Copper alloy	

UAC-200/03/05		
芯数 Number of Poles	3Pin	5Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	32A	25A
接线范围 Wire section	0.5-4.0mm ²	0.5-2.5mm ²
外径直线 Outer Cable Diameter	—	
环境温度 Temperature Range	—	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	—	

T形防水连接器


“T” Type Waterproof Connector



UAC-200/003T/05T	
芯数 Number of Poles	3/5Pin
额定电压 Rated Voltage	450V
额定电流 Rated Current	25A
接线范围 Wire section	0.5-2.5mm ²
外径直线 Outer Cable Diameter	—
环境温度 Temperature Range	—
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	—

迷你防水盒系列

Mini Waterproof Box Series

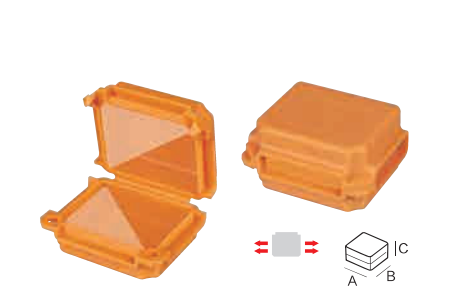

型号Model	L	W	H(Box12)	包装Packing
WPB 01	41	28	19	泡沫Foam
WPB 02	45	37	24	泡沫Foam
WPB 03	53	39	24	泡沫Foam

Waterproof Junction Box Series

防水盒系列



WPB20A-0201	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB20A-0301	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M16: 3.5-7mm,7-10mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB20A-0401	
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M16: 3.5-7mm,7-10mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB20A-0402	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M16: 3.5-7mm,7-10mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB20A-0501	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M16: 3.5-7mm,7-10mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB20A-0601	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M16: 3.5-7mm,7-10mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

Waterproof Junction Box Series

防水盒系列



WPB25B-0401	
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm, 10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPB25B-0301	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm, 10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPB25B-0302	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm, 10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB20B-0401	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPB20b-1001	
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

WPC20B-XXXX	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

Waterproof Junction Box Series

防水盒系列



WPB25C-0201	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm, 10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB25C-0301	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M25: 5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB25C-0401	
额定电压 Rated Voltage	450V
额定电流 Rated Current	24A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M25: 5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB25C-0402	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M25: 5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy



WPB25C-0501	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M25: 5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy




WPB25C-0601	
额定电压 Rated Voltage	450V
额定电流 Rated Current	40A
接线范围 Wire section	0.5-6.0mm ²
外径直线 Outer Cable Diameter	M20: 5-9mm,9-12mm M25: 5-9mm,9-12mm,10-14mm
环境温度 Temperature Range	-40°C - +105°C
防水等级 IP Code	IP68
外壳材质 Housing Materials	PA66
端子材质 Contact/Terminal Material	合金铜 Copper alloy

Cable Gland

电缆防水接头

PG 尼龙电缆压盖


PG Nylon Cable Gland

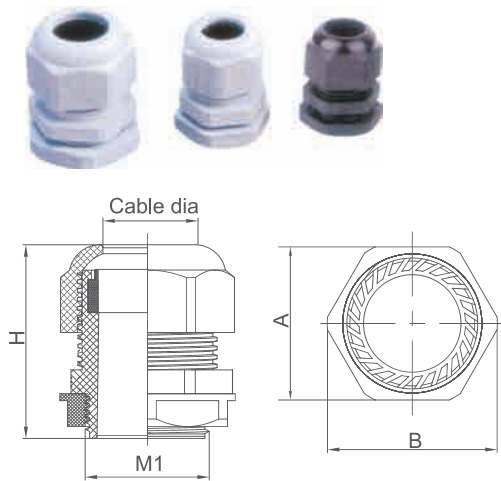

MODEL	Cable dia	H	A	B	M1
PG7	3-6.5	31	16.1±0.2	17.9±0.2	12.3±0.2
PG9	4-8	32	18.8±0.2	20.5±0.2	15±0.2
PG11	6-10	33	21.6±0.2	23.7±0.2	19.4±0.2
PG13.5	6-12	37	23.8±0.2	25.3±0.2	20.3±0.2
PG16	8-14	43	26.7±0.2	29.7±0.2	22.4±0.2
PG19	12-15	42	27±0.3	29.7±0.3	24±0.3
PG21	13-18	48	32.7±0.3	36±0.3	28.3±0.3
PG25	14-20	44	34.9±0.3	39.9±0.3	29.8±0.3
PG29	18-24	50	41.4±0.3	44.9±0.3	31.9±0.3
PG36	22-32	61	50.6±0.3	56.1±0.3	46.7±0.3
PG42	32-38	64	59±0.3	65.2±0.3	53.5±0.3
PG48	37-44	62	62.5±0.3	68±0.3	58.9±0.3
PG63	42-52	86	75.5±0.3	83.2±0.3	71.1±0.3

BSP 尼龙电缆压盖


BSP Nylon Cable Gland

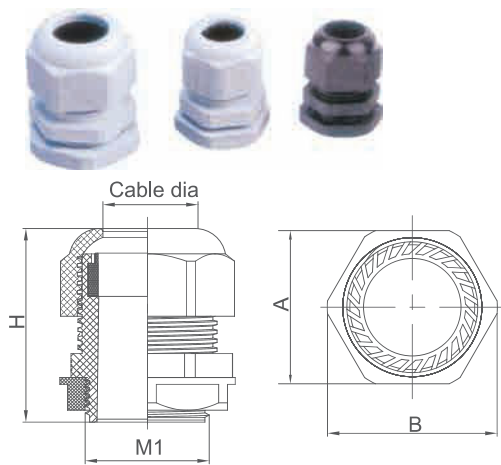

型号 MODEL	Cable dia	H	A	B	M1
BSP 1/4"	3-6.5	30	15.1±0.2	17.1±0.2	13
BSP 3/8"	5-10	34	21.7±0.2	24.1±0.2	16.5
BSP 1/2"	8-12	36	23.4±0.2	26.3±0.2	20.8
BSP 3/4"	13-18	45	32.5±0.2	36.0±0.2	26.2
BSP 1"	18-25	51	41.2±0.2	44.8±0.3	33
BSP 1 1/4"	25-32	64	52.2±0.3	57.5±0.3	41.5
BSP 1 1/2"	32-38	66	59.1±0.3	64.5±0.3	47.5
BSP 2"	37-43	72	67.2±0.3	74.2±0.3	59.6

M 尼龙电缆压盖

M Nylon Cable Gland

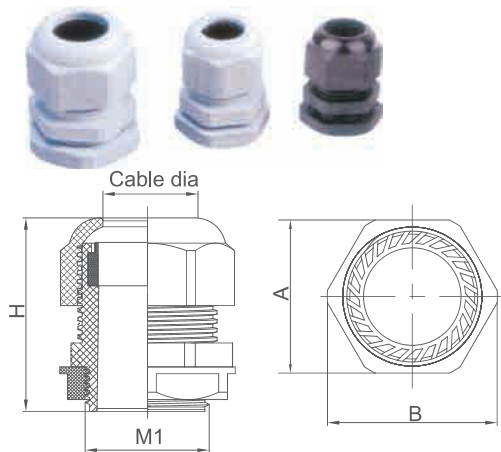

型号 MODEL	Cable dia	H	A	B	M1
M12*1.5	3-6.5	31	16±0.2	17.9±0.2	12
M16*1.5	5-8	34	18.7±0.2	20.6±0.2	16
M20*1.5	6-12	38	22.9±0.2	25.1±0.2	20
M25*1.5	12-18	43	32.5±0.3	35.5±0.3	25
M32*1.5	22-25	49	41.2±0.3	44.8±0.3	32
M40*1.5	25-32	63	52±0.3	57.8±0.3	40
M50*1.5	32-38	65	61.3±0.3	68.3±0.3	50
M63*1.5	37-44	66	67±0.3	72.9±0.3	63

UAC Series Air Connectors

UAC 系列航空连接器

直头对接航空连接器TP系列

Direct Docking TP series



外壳材料：热塑塑料PA66、PA6
绝缘体：热塑塑料PPS耐高温260℃
接触件材料：铜（镀金）
湿度范围：-25℃-85℃

Shell material: PA66, PA6
Insulators: PPS
High temperature resistance: 260℃
Contact material: copper (Gold Plated)
Humidity range: -25℃-85℃

UAC13TP Series	UAC16TP Series	UAC20TP Series	UAC28TP Series
UAC13TP-1	UAC16TP-2	UAC20TP-2	UAC28TP-2
UAC13TP-2	UAC16TP-3	UAC20TP-3	UAC28TP-3
UAC13TP-3	UAC16TP-4	UAC20TP-4	UAC28TP-4
UAC13TP-4	UAC16TP-5	UAC20TP-5	UAC28TP-5
UAC13TP-5	UAC16TP-6	UAC20TP-6	UAC28TP-6
UAC13TP-6	UAC16TP-7	UAC20TP-7	UAC28TP-7
UAC13TP-7	UAC16TP-9	UAC20TP-9	UAC28TP-9
		UAC20TP-10	UAC28TP-10
		UAC20TP-12	UAC28TP-12
		UAC20TP-14	UAC28TP-14
			UAC28TP-16
			UAC28TP-19
			UAC28TP-22
			UAC28TP-24
			UAC28TP-26

后螺母对接航空连接器TF系列

Rear Nut Loking TF Series



外壳材料：热塑塑料PA66、PA6
绝缘体：热塑塑料PPS耐高温260℃
接触件材料：铜（镀金）
湿度范围：-25℃-85℃

Shell material: PA66, PA6
Insulators: PPS
High temperature resistance: 260℃
Contact material: copper (Gold Plated)
Humidity range: -25℃-85℃

UAC13TF Series	UAC16TF Series	UAC20TF Series	UAC28TF Series
UAC13TF-1	UAC16TF-2	UAC20TF-2	UAC28TF-2
UAC13TF-2	UAC16TF-3	UAC20TF-3	UAC28TF-3
UAC13TF-3	UAC16TF-4	UAC20TF-4	UAC28TF-4
UAC13TF-4	UAC16TF-5	UAC20TF-5	UAC28TF-5
UAC13TF-5	UAC16TF-6	UAC20TF-6	UAC28TF-6
UAC13TF-6	UAC16TF-7	UAC20TF-7	UAC28TF-7
UAC13TF-7	UAC16TF-9	UAC20TF-9	UAC28TF-9
		UAC20TF-10	UAC28TF-10
		UAC20TF-12	UAC28TF-12
		UAC20TF-14	UAC28TF-14
			UAC28TF-16
			UAC28TF-19
			UAC28TF-22
			UAC28TF-24
			UAC28TF-26

方形固定孔航空连接器TR系列

Square Fixed Flange TR series



外壳材料：热塑塑料PA66、PA6
绝缘体：热塑塑料PPS耐高温260℃
接触件材料：铜（镀金）
湿度范围：-25℃-85℃

Shell material: PA66, PA6
Insulators: PPS
High temperature resistance: 260℃
Contact material: copper (Gold Plated)
Humidity range: -25℃-85℃

UAC16TR Series	UAC20TR Series	UAC28TR Series
UAC16TR-2	UAC20TR-2	UAC28TR-2
UAC16TR-3	UAC20TR-3	UAC28TR-3
UAC16TR-4	UAC20TR-4	UAC28TR-4
UAC16TR-5	UAC20TR-5	UAC28TR-5
UAC16TR-6	UAC20TR-6	UAC28TR-6
UAC16TR-7	UAC20TR-7	UAC28TR-7
UAC16TR-9	UAC20TR-9	UAC28TR-9
	UAC20TR-10	UAC28TR-10
	UAC20TR-12	UAC28TR-12
	UAC20TR-14	UAC28TR-14
		UAC28TR-16
		UAC28TR-19
		UAC28TR-22
		UAC28TR-24
		UAC28TR-26

法兰固定航空连接器TA系列

Fixed Flange TA series



外壳材料：热塑塑料PA66、PA6
绝缘体：热塑塑料PPS耐高温260℃
接触件材料：铜（镀金）
湿度范围：-25℃-85℃

Shell material: PA66, PA6
Insulators: PPS
High temperature resistance: 260℃
Contact material: copper (Gold Plated)
Humidity range: -25℃-85℃

UAC13TA Series	UAC16TA Series	UAC20TA Series
UAC13TA-1	UAC16TA-2	UAC20TA-2
UAC13TA-2	UAC16TA-3	UAC20TA-3
UAC13TA-3	UAC16TA-4	UAC20TA-4
UAC13TA-4	UAC16TA-5	UAC20TA-5
UAC13TA-5	UAC16TA-6	UAC20TA-6
UAC13TA-6	UAC16TA-7	UAC20TA-7
UAC13TA-7	UAC16TA-9	UAC20TA-9
		UAC20TA-10
		UAC20TA-12
		UAC20TA-14