

LUX UNIVERSE LIGHTING

LYS
Lux Universe Lighting

Ningbo Lux Universe Lighting Technology Co., Ltd.

Tel/Fax: +86 574 8716 6561


Email: info@leyusen.com

Website: www.leyusen.com

Office Add: Rm710, Block C, China Sports City, Jiangbei District, Ningbo 315032, China

Factory Add: Xiaobai Village, Dongwu Town, Yinzhou District, Ningbo 315113, China


Ningbo Lux Universe
Lighting Technology Co., Ltd.

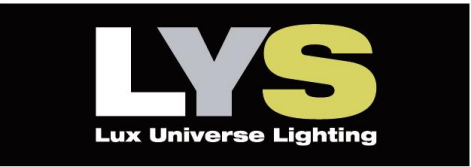

LED


CABINET LIGHT

PRODUCT DISPLAY

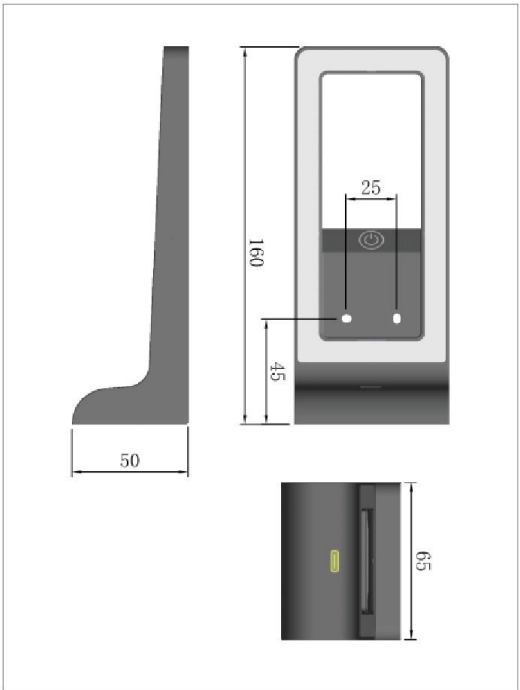

PRODUCT PARAMETER


Model No.:	20.1.3.007	Beam Angle:	100°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	3W(LED)+5V 2.4A(Type C)	Cutout:	/
CCT:	3000K/4000K/6500K	Finishing:	Black/Grey
Lumen:	225LM(3000K)	Installation:	Surface opening installation
CRI:	Ra>80	Switch:	Touch Sensor with TYPE-C

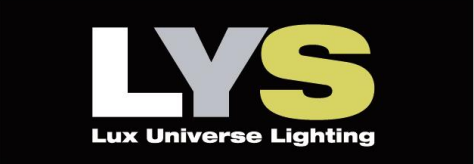

LED


CABINET LIGHT

PRODUCT DISPLAY

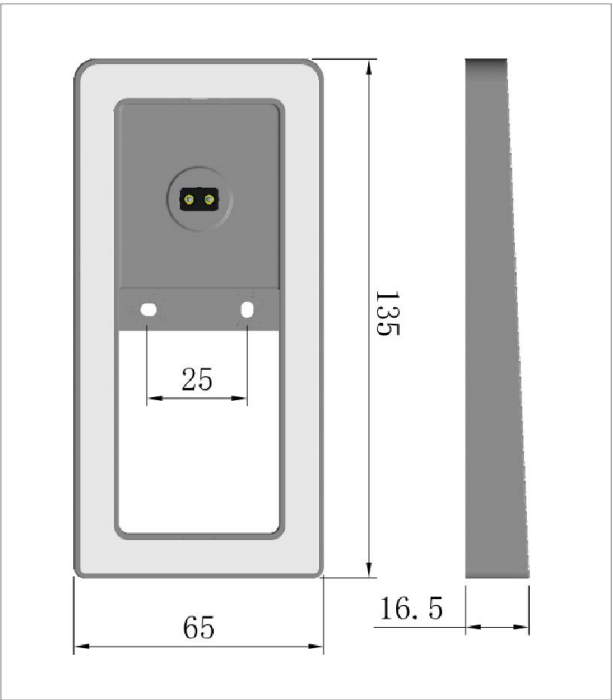

PRODUCT PARAMETER



Model No.:	20.1.3.006	Beam Angle:	100°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	3W	Cutout:	/
CCT:	3000K/4000K/6500K	Finishing:	Black/Grey
Lumen:	225LM(3000K)	Installation:	Surface opening installation
CRI:	Ra>80	Switch:	IR Sensor

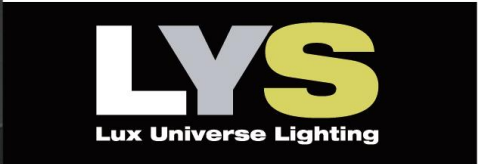

LED


CABINET LIGHT

PRODUCT DISPLAY

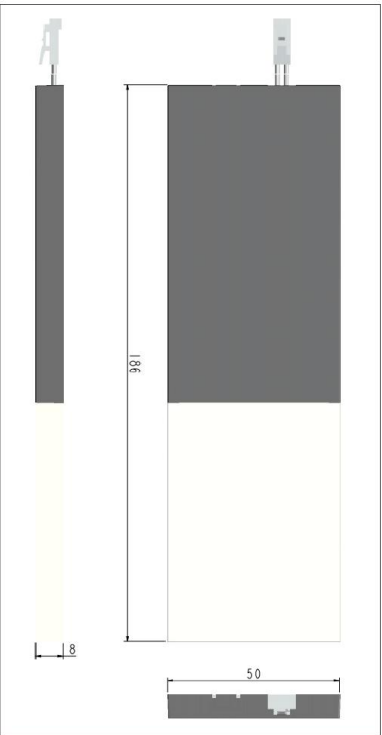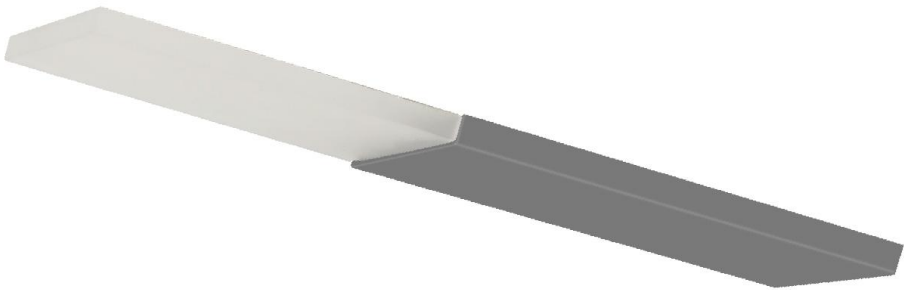

PRODUCT PARAMETER


Model No.:	20.1.3.002	Beam Angle:	110°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	2W	Cutout:	/
CCT:	3000K/4000K/6500K	Finishing:	Black/Grey
Lumen:	140LM	Installation:	Surface opening installation
CRI:	Ra>80	Switch:	IR Sensor/Touch Sensor

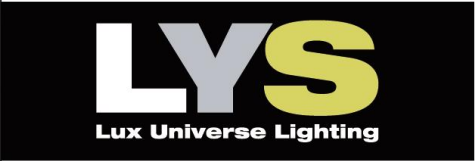

LED


CABINET LIGHT

PRODUCT DISPLAY

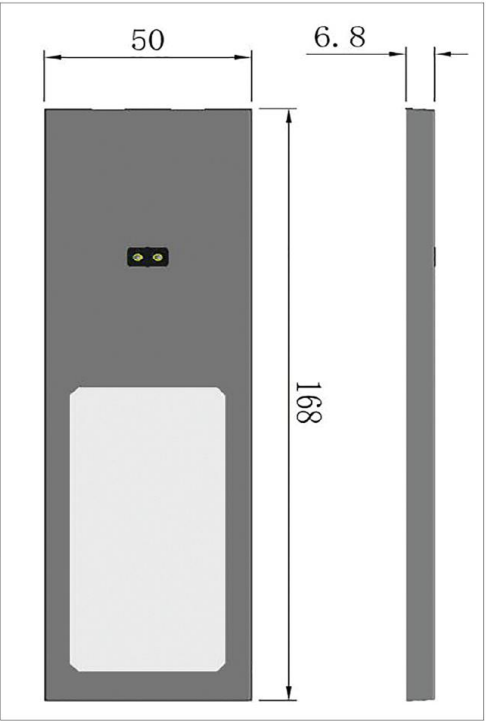

PRODUCT PARAMETER



Model No.:	20.1.2.001	Beam Angle:	120°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	4W	Cutout:	/
CCT:	3000K/4000K/6500K	Finishing:	Black/White/Grey
Lumen:	240LM	Installation:	Surface opening installation
CRI:	Ra>80	Switch:	IR Sensor

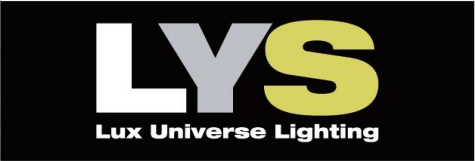

LED


CABINET LIGHT

PRODUCT DISPLAY

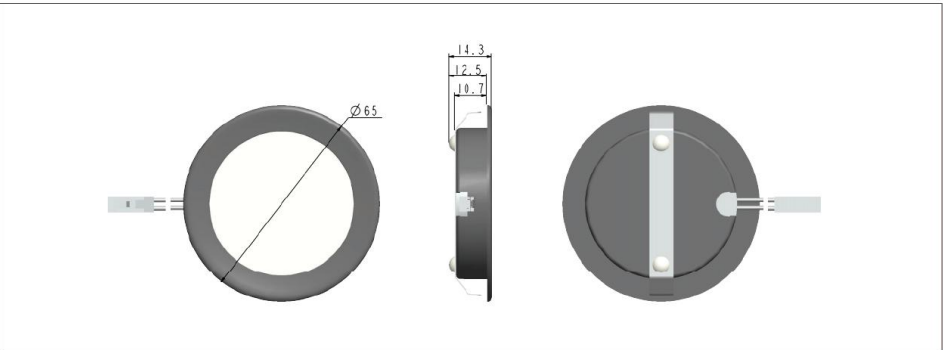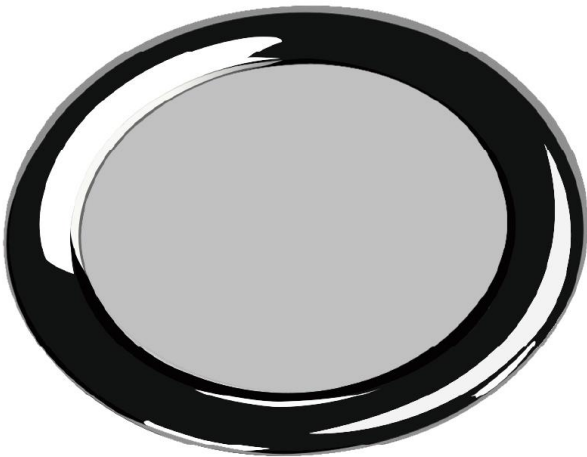

PRODUCT PARAMETER



Model No.:	20.1.0.003	Beam Angle:	110°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	2.8W	Cutout:	Φ58mm
CCT:	3000K/4000K/6500K	Finishing:	Black/White/Grey
Lumen:	196LM(4000k)	Installation:	Recessed installation
CRI:	Ra>80	Switch:	/

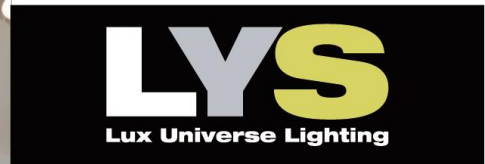

LED


CABINET LIGHT

PRODUCT DISPLAY

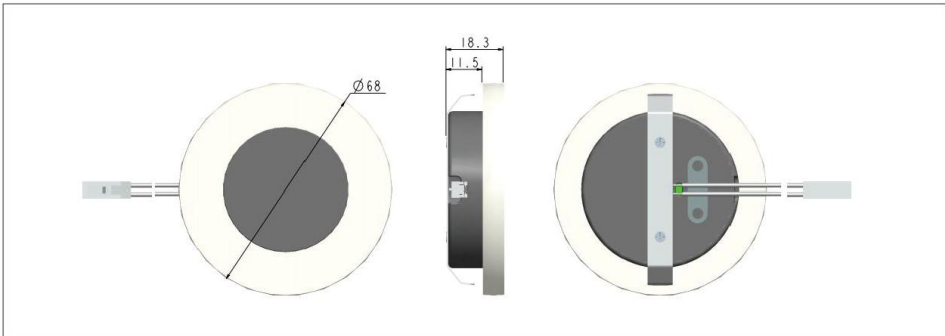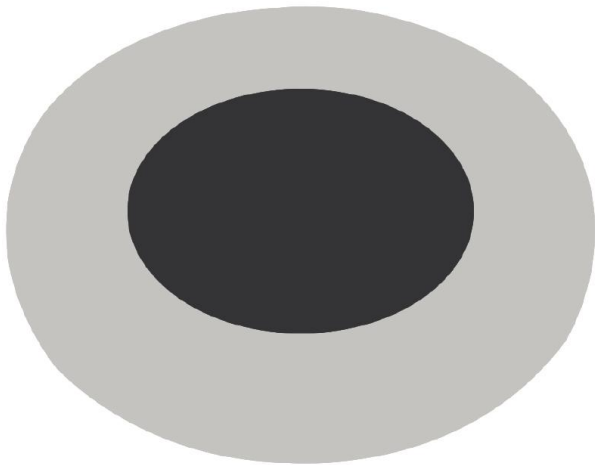

PRODUCT PARAMETER



Model No.:	20.1.0.005	Beam Angle:	120°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	2W	Cutout:	Φ58mm
CCT:	3000K/4000K/6500K	Finishing:	Black/White/Grey
Lumen:	90LM(3000k)	Installation:	Recessed installation
CRI:	Ra>80	Switch:	/

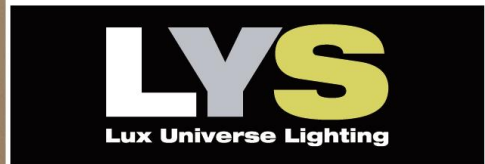

LED

CABINET LIGHT

PRODUCT DISPLAY

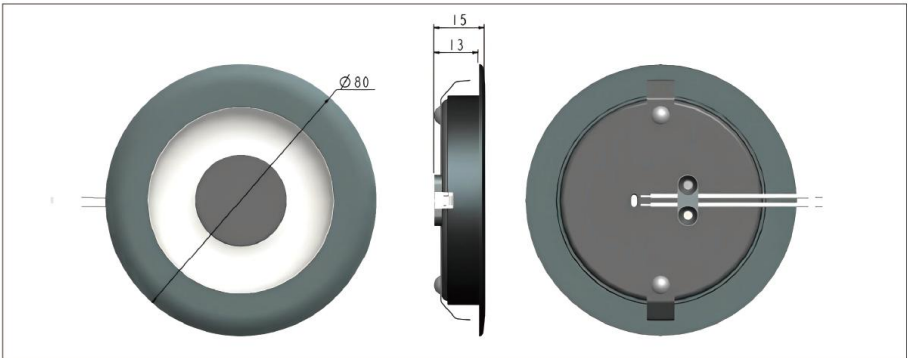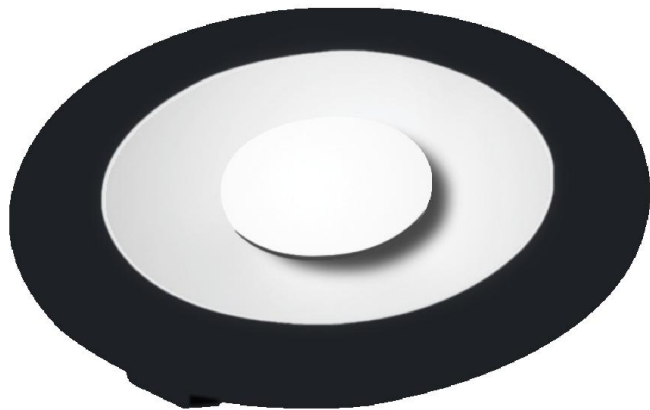

PRODUCT PARAMETER

Model No.:	20.1.0.007	Beam Angle:	110°
Input Voltage:	DC12V	Protection Class:	IP20
Power:	2W	Cutout:	Φ68mm
CCT:	3000K/4000K/6500K	Finishing:	Black/White/Grey/Chrome
Lumen:	100LM(4000k)	Installation:	Recessed installation
CRI:	Ra>80	Switch:	/