



**PROFESSIONAL FACTORY FOR
BATHROOM LIGHT AND SOCKET**

CONTENT

SOCKET

IP44 POWER BOX 09

IP20 POWER BOX 19

IP44 SOCKET 33

LIGHTING SET 37

LED LIGHT

LED MIRROR LAMP 41

SPOT LIGHT 57

LED UNDER CABINET LAMP 59

CERTIFICATE






SOCKET

The item is built for protecting your electronics. It automatically shuts down if the certain power absorption is reached. So you never have to worry about blown breakers, potential fires, or damaged electronics.

- IP44 POWER BOX
- IP20 Power box
- IP44 SOCKET
- LIGHTING SET

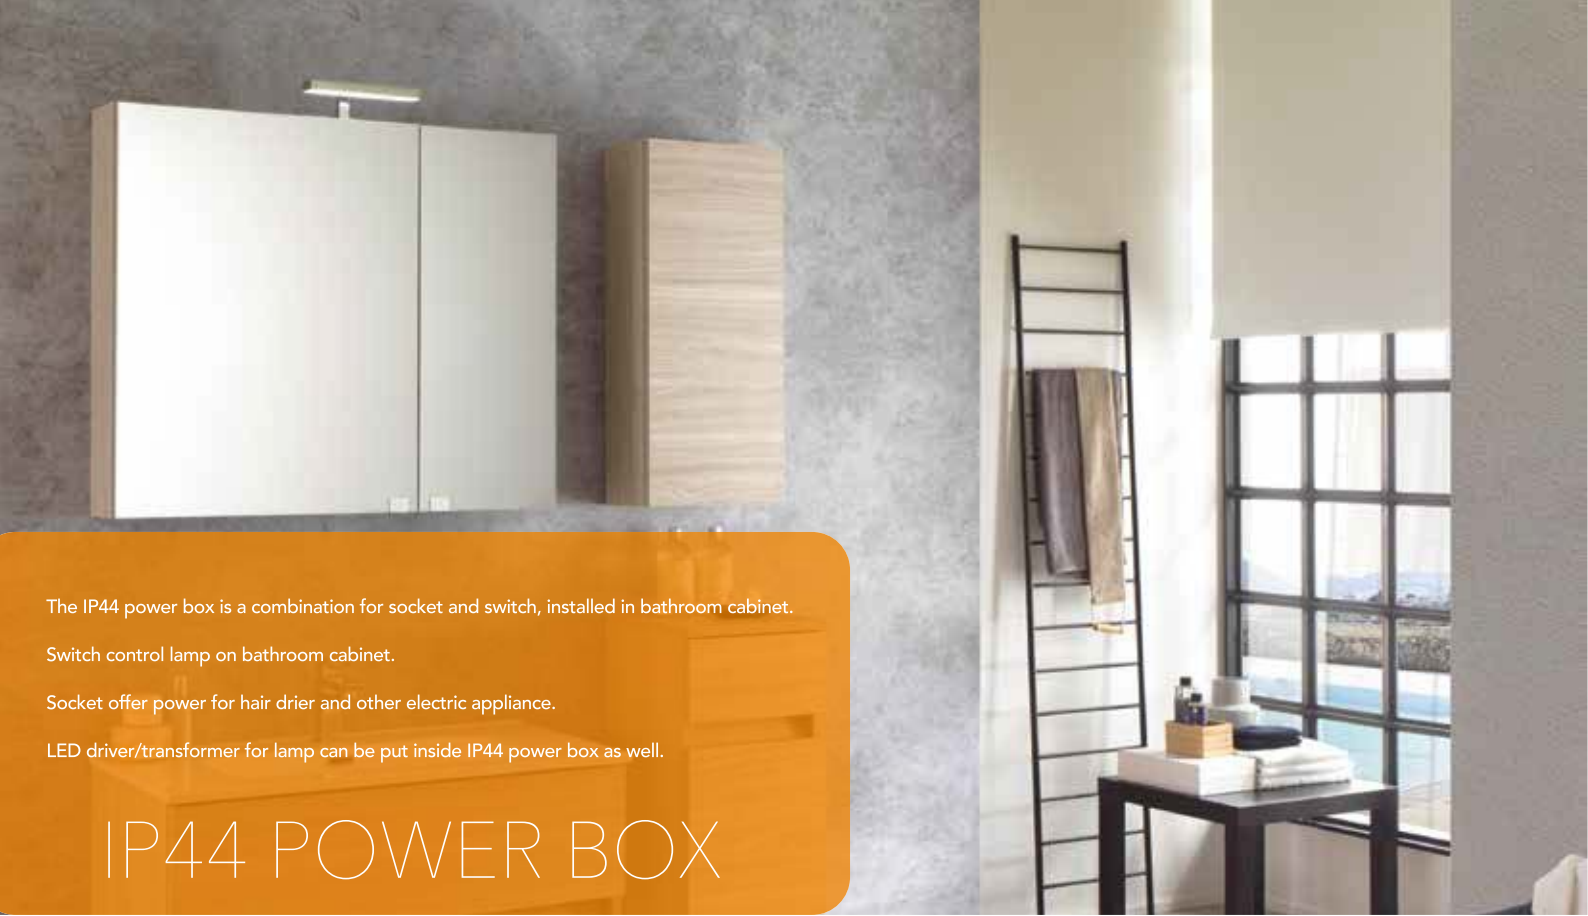

The IP44 power box is a combination for socket and switch, installed in bathroom cabinet.

Switch control lamp on bathroom cabinet.

Socket offer power for hair drier and other electric appliance.

LED driver/transformer for lamp can be put inside IP44 power box as well.


IP44 POWER BOX

PATENT PROTECTED




NC-B7

INSTALLATION

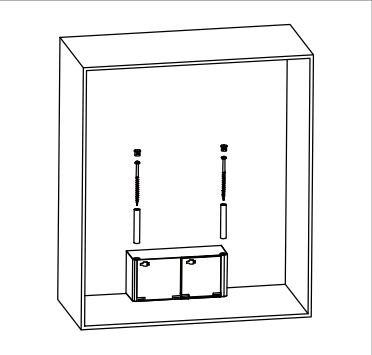

DIMENSION

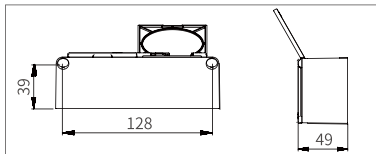

MODLE	NC-B7
SOCKET	German / French / Swiss / Shaver
INPUT	220~240VAC;50CM(3x1.5mmq)
OUTPUT	/
PROTECTION CLASS	IP44
COLOR	Black/ Grey / White
MATERIAL	ABS



PATENT PROTECTED




NC-B9-W

NC-B9-W 20W


SOCKET TYPE



INSTALLATION

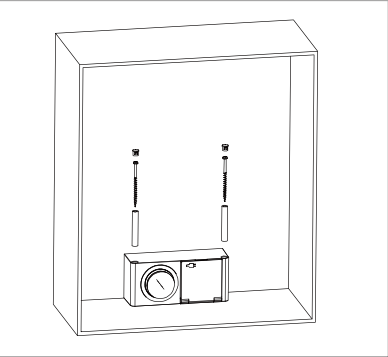

DIMENSION

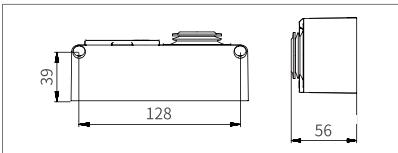


MODLE	NC-B9-W	NC-B9-W 20W
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC; 50CM(3x1.5mmq)	220~240VAC; 50CM(3x1.5mmq)
OUTPUT	220~240VAC; 20CM(2x0.75mmq)	12VDC; 50CM AWG22 wire
PROTECTION CLASS	IP44	IP44
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	20W 12VDC DRIVER
MATERIAL	ABS	ABS


PATENT PROTECTED



NC-B9W-C
NC-B9W-C 20W

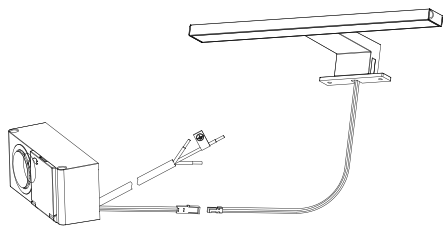


NC-B9W-C 20W

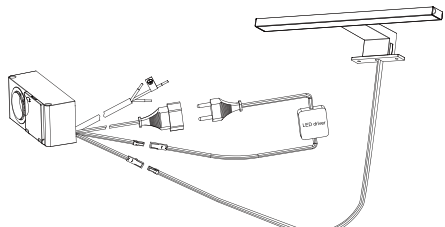


NC-B9W-C

INSTALLATION



DIMENSION

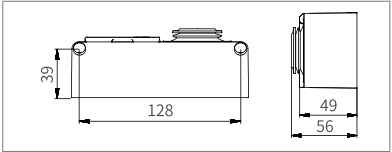

MODLE	NC-B9W-C	NC-B9W-C 20W
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC; 50CM(3x1.5mmq)	220~240VAC; 50CM(3x1.5mmq)
OUTPUT (CONNECT LED DRIVER)	220~240VAC; 30CM(2x0.75mmq)	/
CCT IN (CONNECT LED DRIVER)	12VDC Max.60W 30CM(2x0.75mmq)	/
CCT OUT (CONNECT LAMP)	12VDC 30CM(2x0.5mmq)	12VDC Max.20W 50CM AWG22 wire
COLOR	Black/Grey/White	Black/ Grey / White
PROTECTION CLASS	IP44	IP44
INSIDE	No LED driver	20W 12VDC LED Driver
MATERIAL	ABS	ABS




NC-DR03




NC-DR04




DIMENSION



INSTALLATION

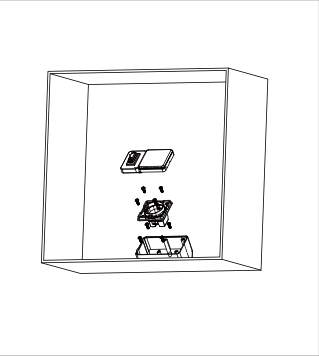

SOCKET TYPE

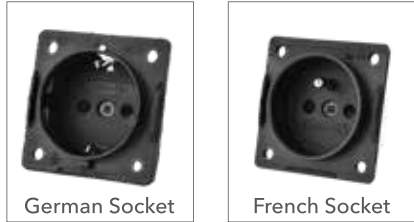

German Socket

French Socket


MODLE	NC-DR03	NC-DR04
SOCKET	German / French	German / French
INPUT	220~240VAC; 50CM(3x1.5mmq)	220~240VAC; 50CM(3x1.5mmq)
OUTPUT	220~240VAC; 20CM(2x0.75mmq)	/
USB	/	5V 2.1A
PROTECTION CLASS	IP44	IP44
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	No LED driver
MATERIAL	ABS	ABS




MODLE	NC-B31	NC-B32	NC-B33
SOCKET	German	German	German
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 50CM(2x0.75mmq)	/	/
COLOR	Black/ Grey / White	Black/ Grey / White	Black/ Grey / White
PROTECTION CLASS	IP44	IP44	IP44
INSIDE	No LED driver	No LED driver	No LED driver
MATERIAL	ABS	ABS	ABS



DIMENSION

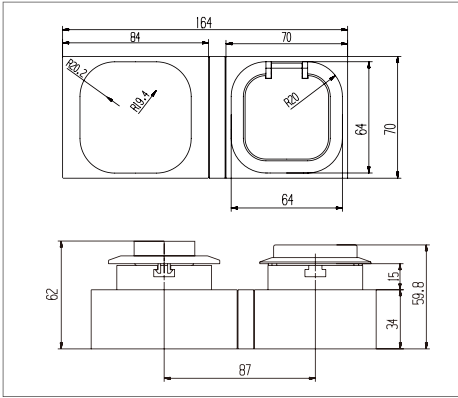

Outside of cabinet

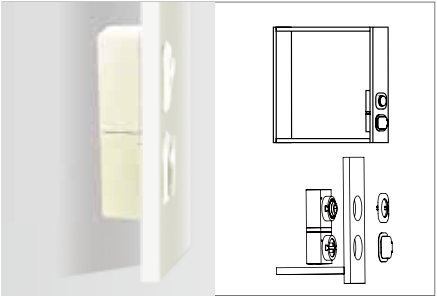

MODLE	NC-B31-C	NC-B31-C 20W
SOCKET	German	German
INPUT	220~240VAC; 50CM(3x1.5mmq)	220~240VAC; 50CM(3x1.5mmq)
OUTPUT (CONNECT LED DRIVER)	220~240VAC; 30CM(2x0.75mmq)	/
CCT IN (CONNECT LED DRIVER)	12VDC Max.60W 30CM(2x0.75mmq)	/
CCT OUT (CONNECT LAMP)	12VDC 30CM(2x0.5mmq)	12VDC Max.20W 50CM AWG22 wire
COLOR	Black/Grey/White	Black/ Grey / White
PROTECTION CLASS	IP44	IP44
INSIDE	No LED driver	20W 12VDC LED Driver
MATERIAL	ABS	ABS

PATENT PROTECTED




NC-B22




NC-B21



INSTALLATION

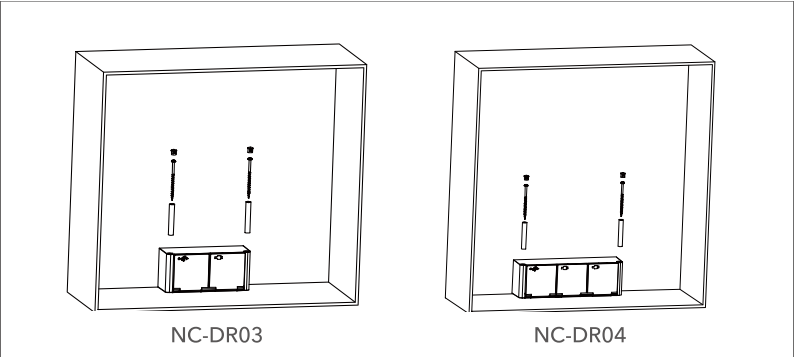

DIMENSION

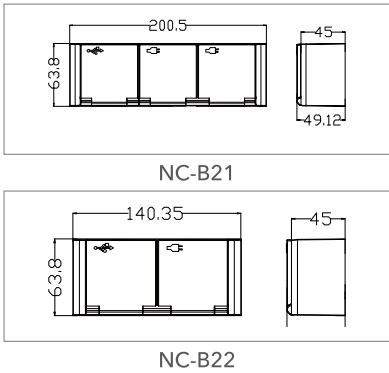

MODLE	NC-B22	NC-B21
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	/	/
USB	5V 2.1A	5V 2.1A
PROTECTION CLASS	IP44	IP44
COLORv	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	No LED driver
MATERIAL	ABS	ABS


PATENT PROTECTED




NC-B23



INSTALLATION

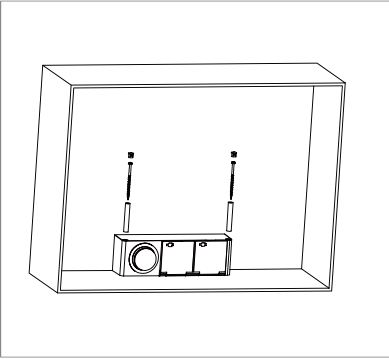

DIMENSION

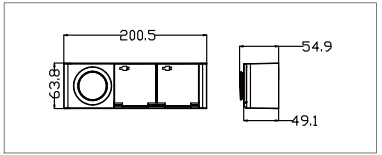

MODLE	NC-B23
SOCKET	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)
OUTPUT	12VDC Max.30W 50CM(2x0.5mmq)
PROTECTION CLASS	IP44
COLOR	Black/ Grey / White
INSIDE	30W 12VDC LED driver
MATERIAL	ABS

PATENT PROTECTED




NC-B



SOCKET TYPE



DIMENSION

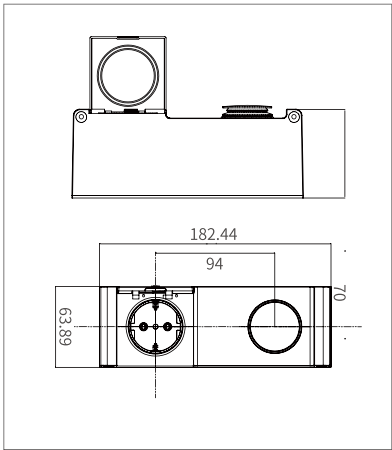

MODLE	NC-B6
SOCKET	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 50CM(2x0.75mmq)
PROTECTION CLASS	IP44
COLOR	Black/ Grey / White
INSIDE	No LED driver
MATERIAL	ABS

PATENT PROTECTED




NC-B61




NC-B61 U




INSTALLATION

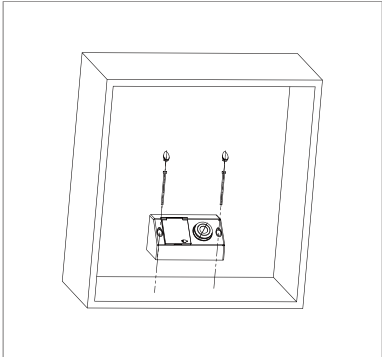

DIMENSION

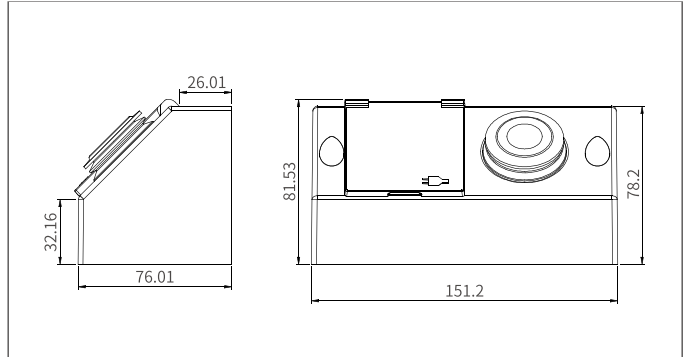

MODLE	NC-B61	NC-B61 U
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC/ 12VDC 20CM(2x0.75mmq)	220~240VAC/ 12VDC 20CM(2x0.75mmq)
USB	/	5V 2.1A
PROTECTION CLASS	IP44	IP44
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver/20W 12VDC LED driver	No LED driver/20W 12VDC LED driver
MATERIAL	ABS	ABS

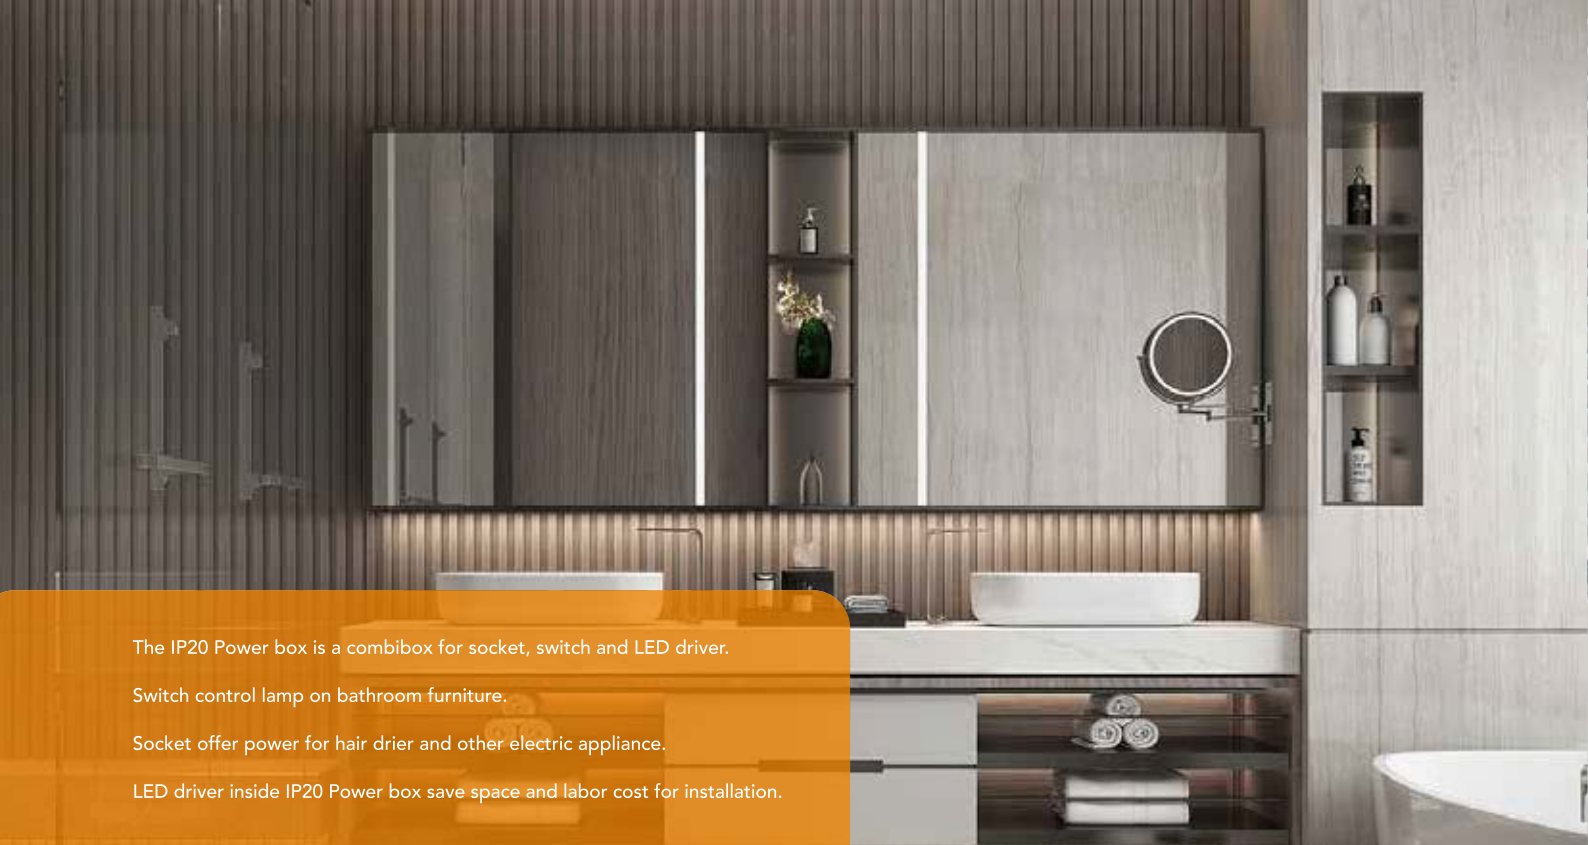

The IP20 Power box is a combibox for socket, switch and LED driver.


Switch control lamp on bathroom furniture.

Socket offer power for hair drier and other electric appliance.


LED driver inside IP20 Power box save space and labor cost for installation.

IP20 POWER BOX

INSTALLATION

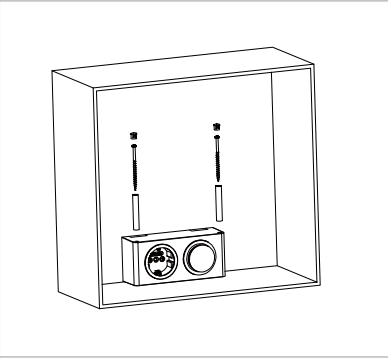

DIMENSION

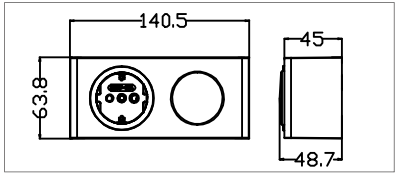

MODLE	NC-B9 3way
SOCKET	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)
OUTPUT	12VDC Max.20W 2X50CM AWG22 wire
IP	IP20
SIZE	Black/ Grey / White
INSIDE	Max. 20W 12VDC LED driver
MATERIAL	ABS




NC-B9-C


NC-B9-C 20W




2750K < 6500K
Dim From Warm To Cold



SHORT PRESS: Turn on/off light
LONG PRESS: Change brightness
ROTATE: Change color

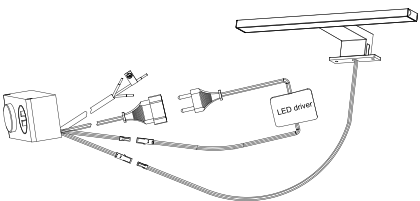


NC-B9-C

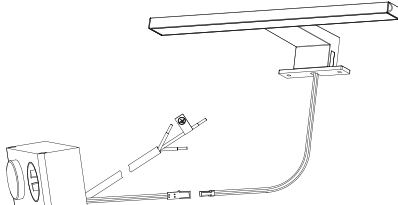

NC-B9-C 20W

DIMENSION

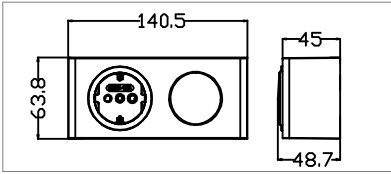


MODLE	NC-B9-C	NC-B9-C 20W
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT (CONNECT LED DRIVER)	220~240VAC 30CM(2x0.75mmq)	/
CCT IN (CONNECT LED DRIVER)	12VDC Max.60W 30CM(2x0.75mmq)	/
CCT OUT (CONNECT LAMP)	12VDC 30CM(2x0.5mmq)	12VDC Max.20W 50CM AWG22 wire
PROTECTION CLASS	IP20	IP20
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	Max. 20W 12VDC LED DRIVER
MATERIAL	ABS	ABS




NC-B9 U
NC-B9 U20W



INSTALLATION

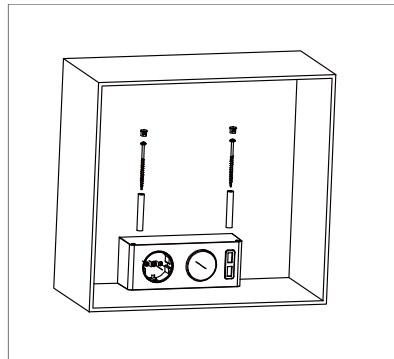

DIMENSIONS

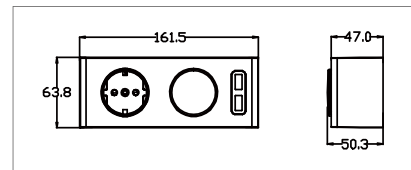


MODLE	NC-B9 U	NC-B9 U20W
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	12VDC 50CM AWG22 wire
USB	5V 2.1A	5V 2.1A
PROTECTION CLASS	IP20	IP20
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	Max. 20W 12VDC LED driver
MATERIAL	ABS	ABS




NC-B9
NC-B9 20W



INSTALLATION

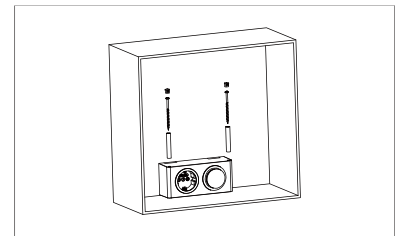

DIMENSION

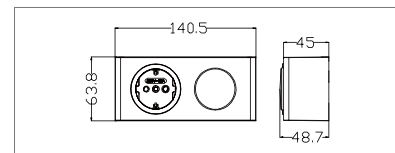

SOCKET TYPE



MODLE	NC-B9	NC-B9 20W
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	12VDC 50CM AWG22 wire
PROTECTION CLASS	IP20	IP20
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	Max. 20W 12VDC LED driver
MATERIAL	ABS	ABS

PATENT PROTECTED




NC-B81




NC-B81 U



INSTALLATION

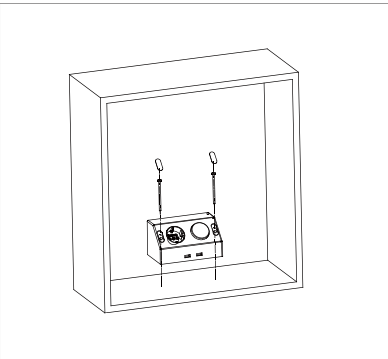

DIMENSIONS

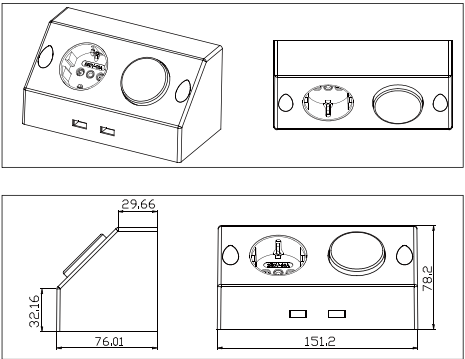

MODLE	NC-B81 NC-B81 U	
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC/ 12VDC 20CM(2x0.75mmq)	220~240VAC/ 12VDC 20CM(2x0.75mmq)
USB	/	5V 2.1A
PROTECTION CLASS	IP20	IP20
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver/20W 12VDC LED driver	No LED driver/20W 12VDC LED driver
MATERIAL	ABS	ABS




NC-B4



SOCKET TYPE



DIMENSION

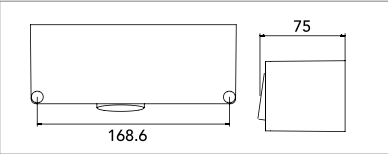

MODLE	NC-B4 NC-B4 20W	
SOCKET	German / French / Swiss / Shaver	German / French / Swiss / Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	12DC; 50CM AWG22 wire
PROTECTION CLASS	IP20	IP44
COLOR	Black/ Grey / White	Black/ Grey / White
INSIDE	No LED driver	20W 12DC driver
MATERIAL	ABS	ABS



NC-L01



NC-L02



NC-L03



NC-L04

SOCKET TYPE




German Socket




French Socket

● Note:
Following are assemble according to request:
Socket quantity in Alu power box;
Socket type: German socket/ French socket;
With switch / without switch.

DIMENSION

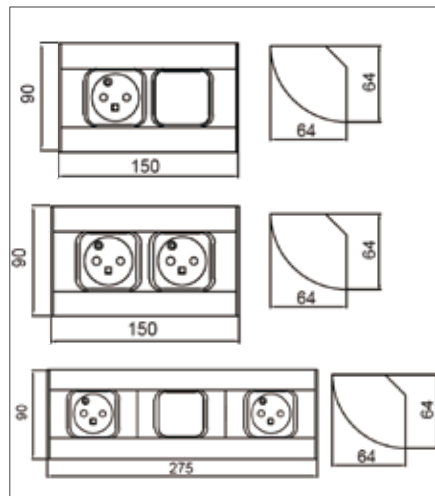

INSTALLATION

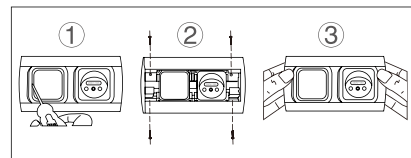

MODLE	NC-L01	NC-L02
SOCKET	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	/
PROTECTION CLASS	IP20	IP20
COLOR	Grey + Black	Grey + Black
INSIDE	No LED driver	No LED driver
MATERIAL	Aluminum alloy	Aluminum alloy



SOCKET TYPE




German Socket



French Socket

● Note:
Following are assemble according to request:
Socket quantity in Alu power box;
Socket type: German socket/ French socket;
With switch / without switch.

DIMENSION

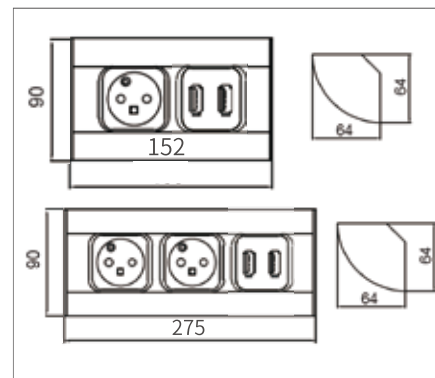

MODLE	NC-L03	NC-L04
SOCKET	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	5V 2.1A USB 220~240VAC
USB	/	5V 2.1A
PROTECTION CLASS	IP20	IP20
COLOR	Grey + Black	Grey + Black
INSIDE	No LED driver	No LED driver
MATERIAL	Aluminum alloy	Aluminum alloy

PATENT PROTECTED



NC-L11S



NC-L12




NC-L12S-1



NC-L13

SOCKET TYPE





German Socket



French Socket

● Note:
Following are assemble according to request:
Socket quantity in Alu power box;
Socket type: German socket/ French socket;
With switch / without switch.

DIMENSION

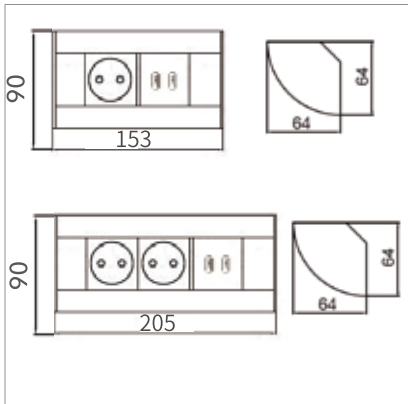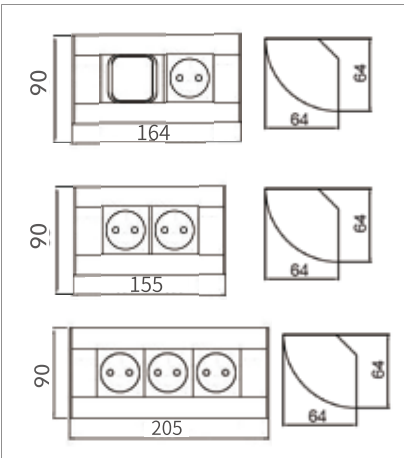

MODLE	NC-L11S	NC-L12	NC-L13	NC-L12S-1
SOCKET	German / French	German / French	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	/	/	220~240VAC 20CM(2x0.75mmq)
PROTECTION CLASS	IP20	IP20	IP20	IP20
COLOR	Black + Grey / White + Grey	Black + Grey / White + Grey	Black + Grey / White + Grey	Black + Grey / White + Grey
INSIDE	No LED driver	No LED driver	No LED driver	No LED driver
MATERIAL	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy

PATENT PROTECTED



NC-L11U

ALUMINUM ALLO




NC-L11US



NC-L12U

INSTALLATION

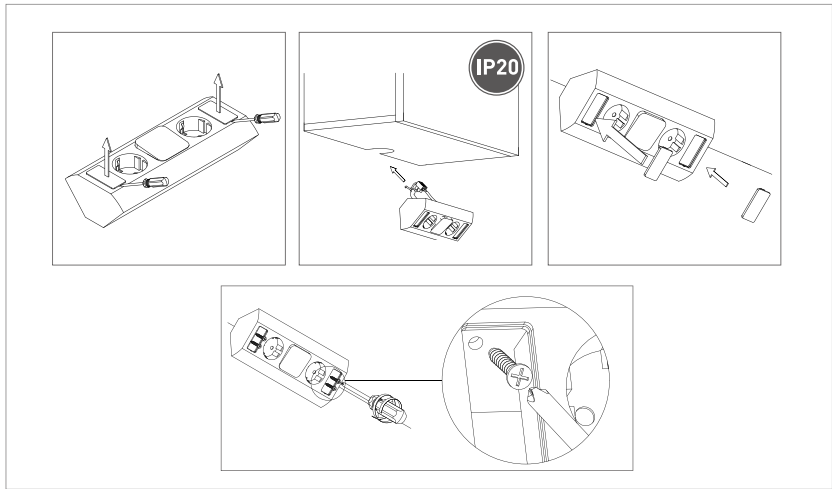

MODLE	NC-L11U	NC-L11US	NC-L12U
SOCKET	German / French	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	/	220~240VAC 20CM(2x0.75mmq)	/
USB	5V 2.1A	5V 2.1A	5V 2.1A
PROTECTION CLASS	IP20	IP20	IP20
COLOR	Black + Grey / White + Grey	Black + Grey / White + Grey	Black + Grey / White + Grey
INSIDE	No LED driver	No LED driver	No LED driver
MATERIAL	Aluminum alloy	Aluminum alloy	Aluminum alloy

PATENT PROTECTED



NC-L31S
ALUMINUM ALLOY



NC-L32
ALUMINUM ALLOY




NC-L32S-1



NC-L33
ALUMINUM ALLOY

SOCKET TYPE





German Socket



French Socket

● Note:
Following are assemble according to request:
Socket quantity in Alu power box;
Socket type: German socket/ French socket;
With switch / without switch.

DIMENSION

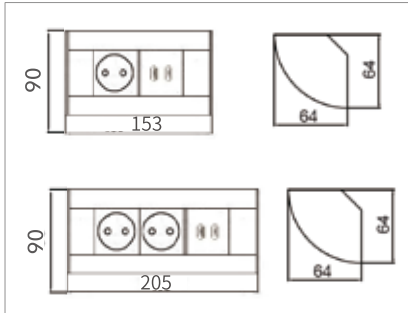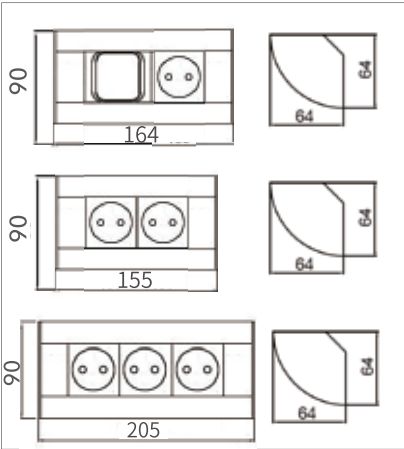

MODLE	NC-L31S	NC-L32	NC-L33	NC-L32S-1
SOCKET	German / French	German / French	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 20CM(2x0.75mmq)	/	/	220~240VAC 20CM(2x0.75mmq)
PROTECTION CLASS	IP20	IP20	IP20	IP20
COLOR	Black + Grey / White +Grey	Black + Grey / White +Grey	Black + Grey / White +Grey	Black + Grey / White +Grey
INSIDE	No LED driver	No LED driver	No LED driver	No LED driver
MATERIAL	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy

PATENT PROTECTED



NC-L31US




NC-L31U
ALUMINUM ALLO



NC-L332U

INSTALLATION

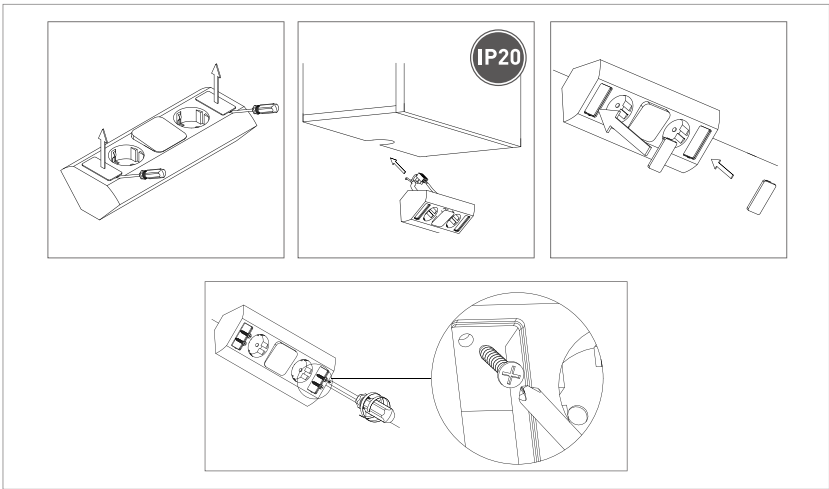

MODLE	NC-L31U	NC-L31US	NC-L332U
SOCKET	German / French	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	/	220~240VAC 20CM(2x0.75mmq)	/
USB	5V 2.1A	5V 2.1A	5V 2.1A
PROTECTION CLASS	IP20	IP20	IP20
COLOR	Black + Grey / White + Grey	Black + Grey / White + Grey	Black + Grey / White + Grey
INSIDE	No LED driver	No LED driver	No LED driver
MATERIAL	Aluminum alloy	Aluminum alloy	Aluminum alloy

PATENT PROTECTED




NC-L11 CCT

NC-L11 CCT20W




Dim From Warm To Cold


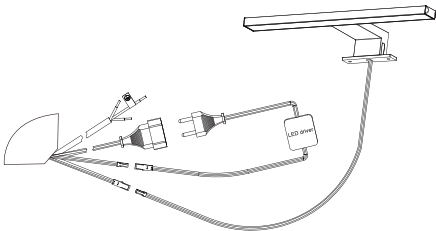


NC-L11 CCT

INSTALLATION

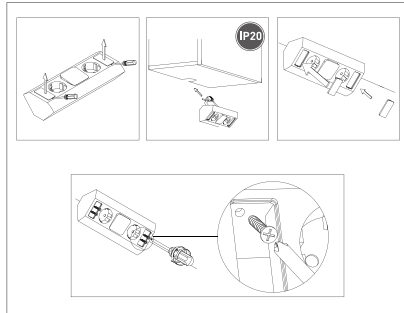

DIMENSION

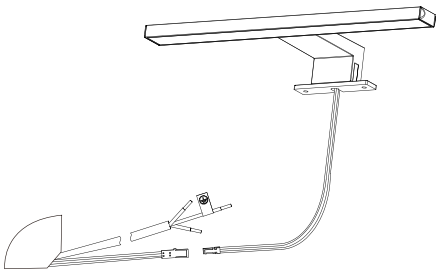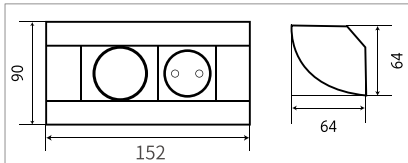

NC-L11 CCT20W

MODLE	NC-L11 CCT	NC-L11 CCT20W
SOCKET	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT (CONNECT LED DRIVER)	220~240VAC 30CM(2x0.75mmq)	/
CCT IN (CONNECT LED DRIVER)	12VDC Max.60W 30CM(2x0.75mmq)	/
CCT OUT (CONNECT LED DRIVER)	12VDC 30CM(2x0.5mmq)	12VDC Max.20W 50CM AWG22 wire
PROTECTION CLASS	IP20	IP20
COLOR	Black + Grey / White + Grey	Black + Grey / White + Grey
INSIDE	No LED driver	20W 12VDC LED driver
MATERIAL	Aluminum alloy	Aluminum alloy

PATENT PROTECTED



NC-L18



SOCKET TYPE




German Socket



French Socket

DIMENSION



MODLE	NC-L18
SOCKET	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)
USB	5V 2.1A
PROTECTION CLASS	IP20
COLOR	Black + Grey / White + Grey
SIZE	500x164x164MM
LED LIGHT	7W, 230V, 4000K
INSIDE	10W LED driver
MATERIAL	Aluminum alloy




NC-DR01




NC-BI01



INSTALLATION

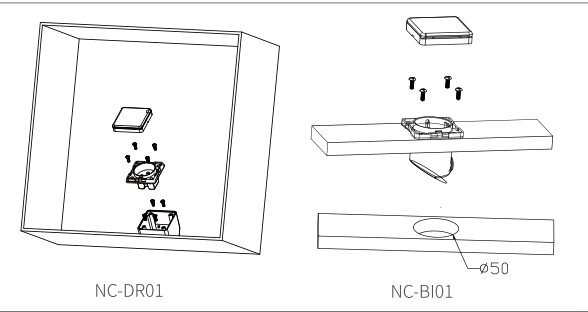

DIMENSION

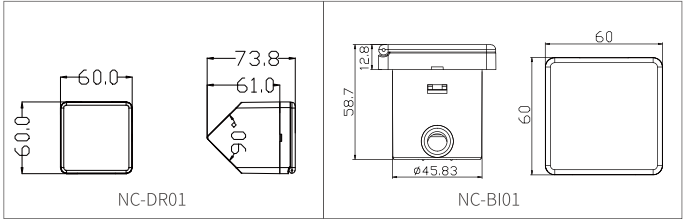


MODLE	NC-DR01	NC-BI01
SOCKET	German / French	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
PROTECTION CLASS	IP44	IP44
COLOR	Black / Grey / White	Black / Grey / White
INSIDE	No LED driver	No LED driver
INSTALLATION	Fixed on Cornor	Build in
MATERIAL	ABS	ABS




NC-BI21

INSTALLATION

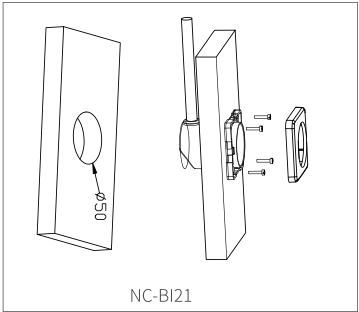


DIMENSION

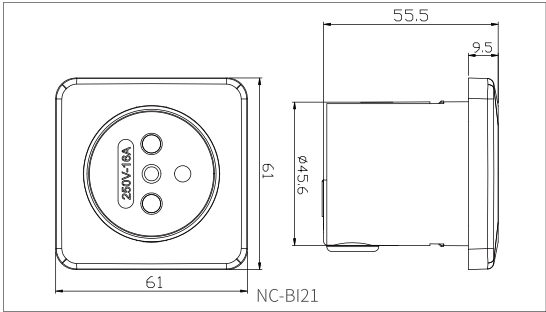


MODLE	NC-BI21
SOCKET	German / French
INPUT	220~240VAC 50CM(3x1.5mmq)
PROTECTION CLASS	IP20
COLOR	Black / Grey / White
INSIDE	No LED driver
INSTALLATION	Build in
MATERIAL	ABS



INSTALLATION

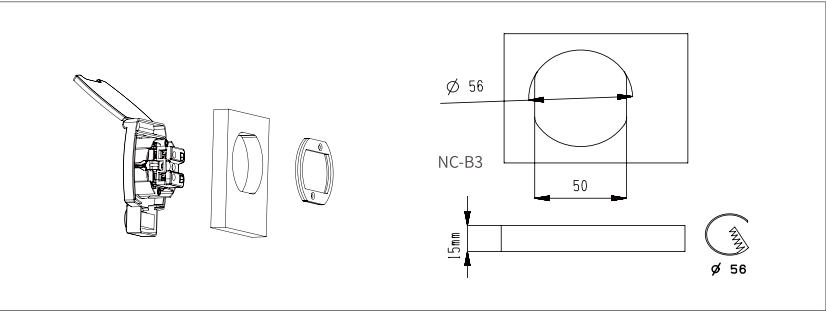


DIMENSION

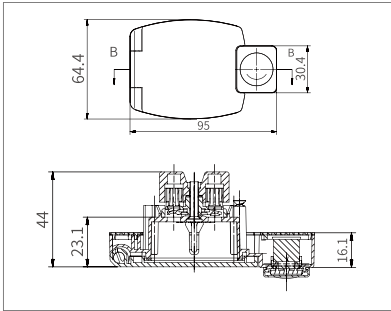

MODE	Y-116	Y-115	Y-114
SOCKET	German	French	UK Shaver
INPUT	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)	220~240VAC 50CM(3x1.5mmq)
OUTPUT	220~240VAC 30CM(2x0.75mmq)	220~240VAC 30CM(2x0.75mmq)	220~240VAC 30CM(2x0.75mmq)
PROTECTION CLASS	IP44	IP44	IP44
COLOR	Black / White / Chrome	Black / White / Chrome	Black / White / Chrome
MATERIAL	ABS	ABS	ABS

Connection between Power box and LED light



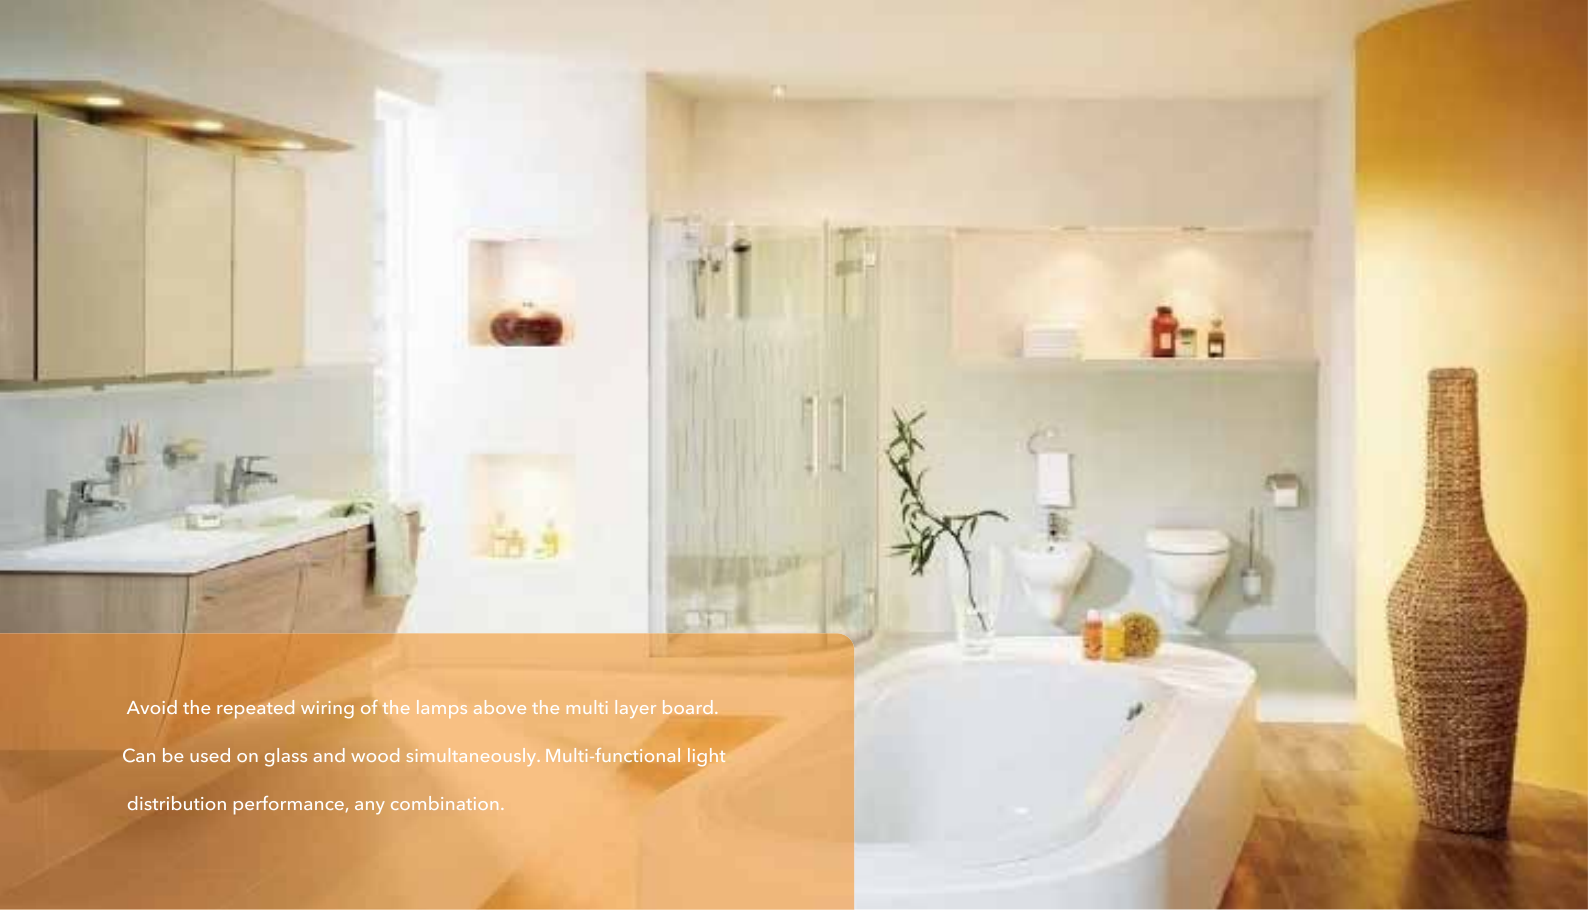

Avoid the repeated wiring of the lamps above the multi layer board.
Can be used on glass and wood simultaneously. Multi-functional light distribution performance, any combination.

LIGHTING SET



NC-P011-L



NC-P011-L IP44 38CM




NC-P011-L IP44 55CM



NC-P011-D


DIMENSION

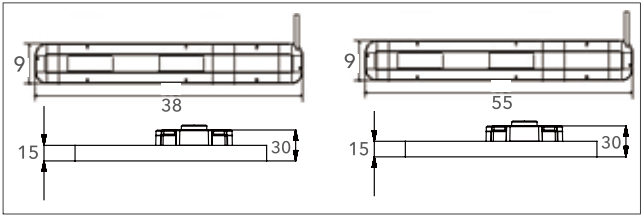

COVER TYPE



INSTALLATION



SOCKET TYPE



LAMP TYPE



MODLE	NC-P011-D	NC-P011-L	NC-P011-L IP44 55CM	NC-P011-L IP44 38CM
SOCKET	German / French	German / French	German / French	German / French
PROTECTION CLASS	IP20	IP20	IP44	IP44
LAMP	Halogen light, NC-P012 (12V 20W)	LED Light, NC-P023 230V 2W	LED Light, NC-P023 230V 2W	LED Light, NC-P023 230V 2W
COVER	PVC/ABS	PVC/ABS	PVC/ABS	PVC/ABS
LIGHTING SET	Socket+2pcs halogen lights+ TUV transformer+Cover	Socket+2pcs LED lights+ Cover	IP44 Socket+2pcs LED lights+Cover	Socket+1pcs LED lights+Cover
CABLE	50CM(3*1.5mmq +20CM(2*0.75mmq)	50CM(3*1.5mmq +20CM(2*0.75mmq)	50CM(3*1.5mmq +20CM(2*0.75mmq)	50CM(3*1.5mmq +20CM(2*0.75mmq)



LED LIGHT

LEDs offer benefits such as small size, long lamp life, low heat output, energy savings and durability. They also allow extraordinary design flexibility in color changing, dimming and distribution by combining these small units into desired shapes, colors, sizes and lumen packages.

- LED MIRROR LAMP
- SPOT LIGHT
- LED UNDER CABINET LAMP



LED MIRROR LAMP





NC-LE71



NC-LE71 400M

NC-LE72



Mirror lamp + part B:
Fixing on mirror cabinet





Mirror lamp :
Fixing on mirrors




Mirror lamp + part A:
Fixing on wall



Mirror lamp + part C:
Fixing on wall




DIMENSION

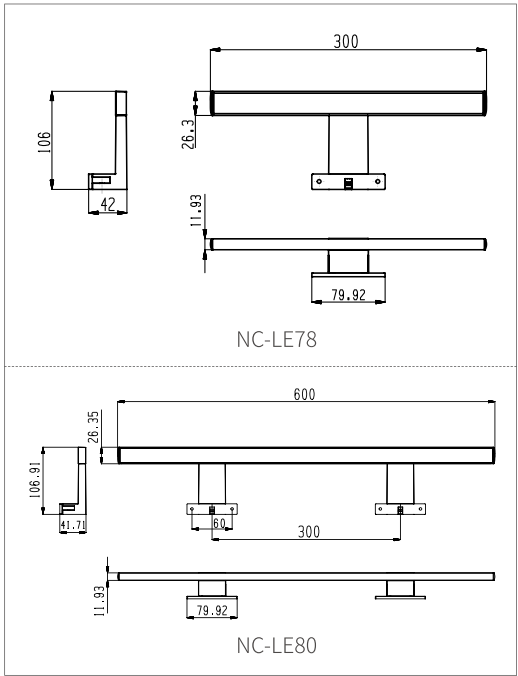


MODE	NC-LE71	NC-LE71 400M	NC-LE72
POWER	4.5W	7W	9W
VOLTAGE	220~240VAC	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K,	3000K/4000K/6000K,	3000K/4000K/6000K,
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	300x105x42MM	400x105x42MM	600x105x42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Aluminum alloy	Aluminum alloy	Aluminum alloy




Mirror lamp + part B:
Fixing on mirror cabinet

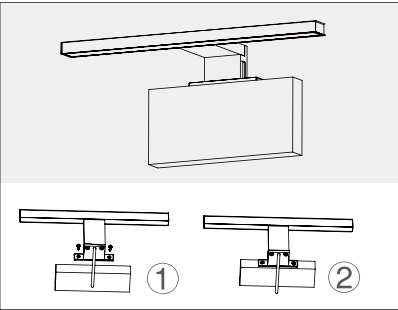


Mirror lamp + part A:
Fixing on wall

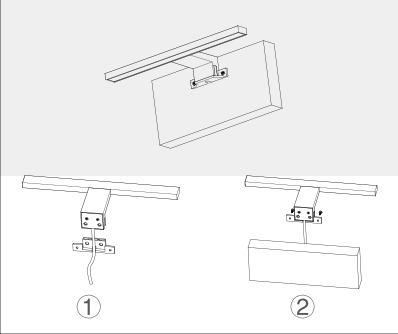


Mirror lamp :
Fixing on mirrors

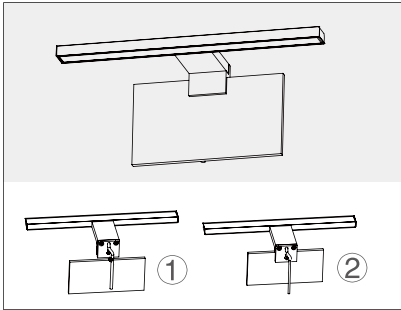


Mirror lamp + part C:
Fixing on wall

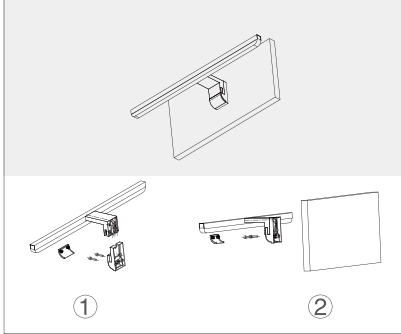

DIMENSION

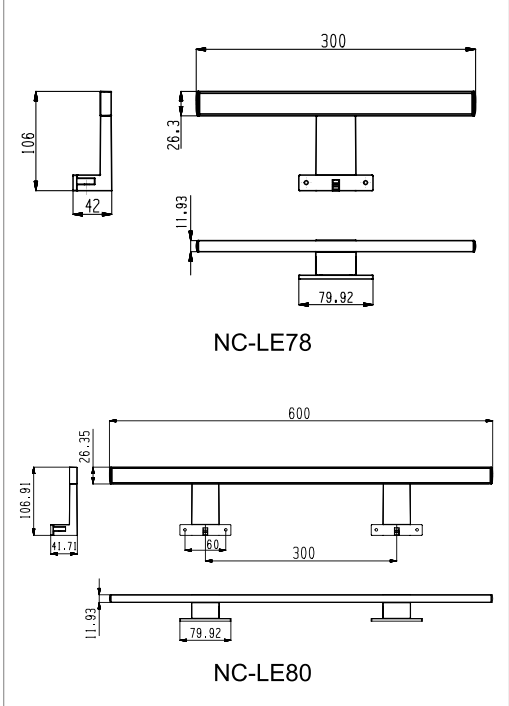

2750K ◀ 6500K
Dim From Warm To Cold



SHORT PRESS: Turn on/off light
LONG PRESS: Change brightness
ROTATE: Change color



MODLE	NC-LE78	NC-LE80	NC-LE78-C
POWER	4.5W	9W	4.5W
VOLTAGE	220~240VAC	220~240VAC	12VDC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	50CM AWG 24 wire
MATERIAL	Plastic + Acrylic	Plastic + Acrylic	Plastic + Acrylic


PATENT PROTECTED




NC-LE75




Mirror lamp + part B:
Fixing on mirror cabinet

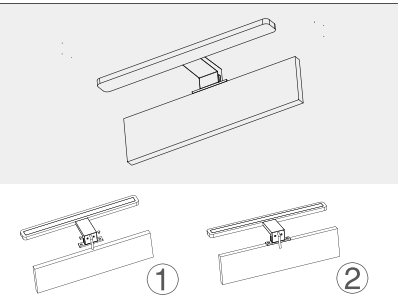


Mirror lamp :
Fixing on mirrors

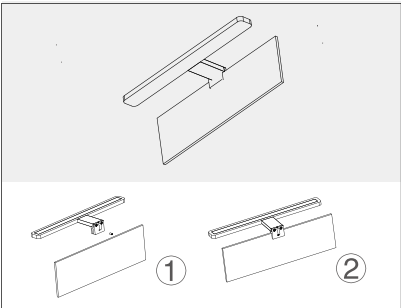


Mirror lamp + part A:
Fixing on wall

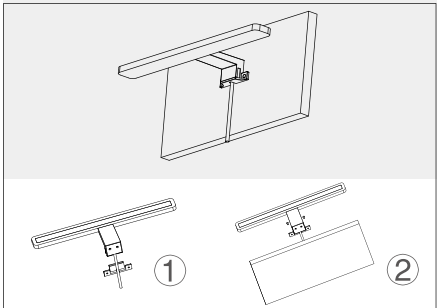

Mirror lamp + part C:
Fixing on wall

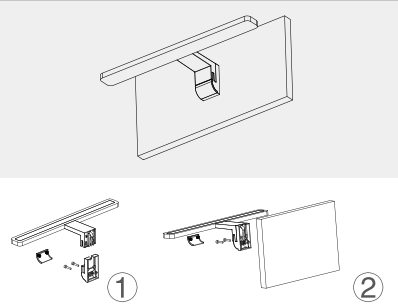

DIMENSION

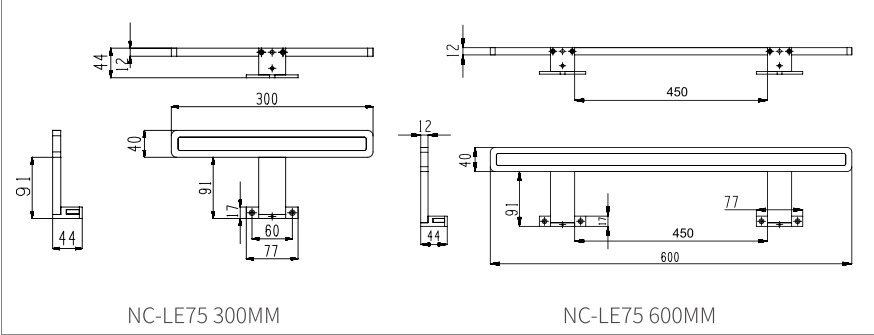

MODLE	NC-LE75 300MM	NC-LE75 400MM	NC-LE75 600MM
POWER	4.5W	6W	9W
VOLTAGE	220~240VAC	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	300x105x42MM	400x105x42MM	600x105x42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Aluminum alloy + Acrylic	Aluminum alloy + Acrylic	Aluminum alloy + Acrylic


PATENT PROTECTED




NC-LE76




Mirror lamp + part B:
Fixing on mirror cabinet

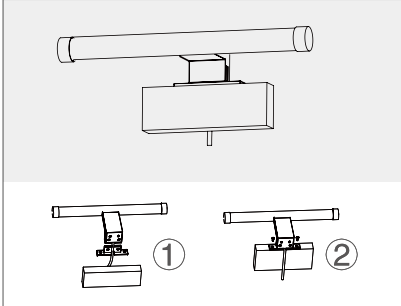


Mirror lamp :
Fixing on mirrors

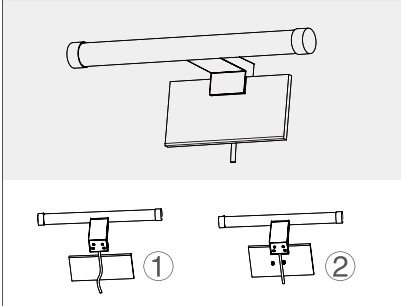


Mirror lamp + part A:
Fixing on wall

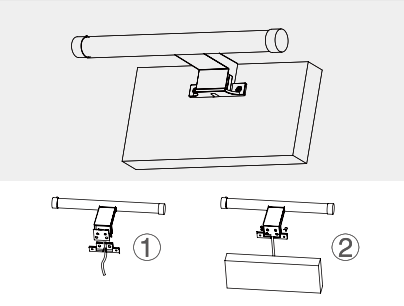

Mirror lamp + part C:
Fixing on wall

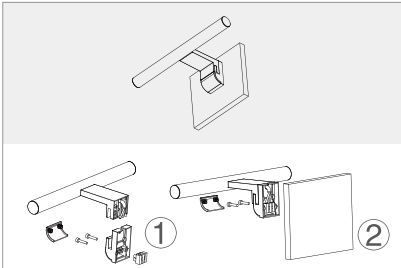

DIMENSION

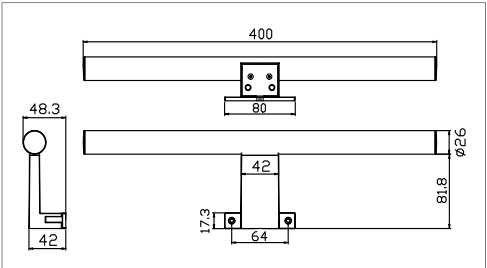

MODLE	NC-LE76 300MM	NC-LE76 400MM	NC-LE76 600MM
POWER	4.5W	6W	9W
VOLTAGE	220~240VAC	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	300x110x42MM	400x110x42MM	600x110x42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Plastic + Acrylic	Plastic + Acrylic	Plastic + Acrylic


PATENT PROTECTED




NC-AR89




Mirror lamp + part B:
Fixing on mirror cabinet

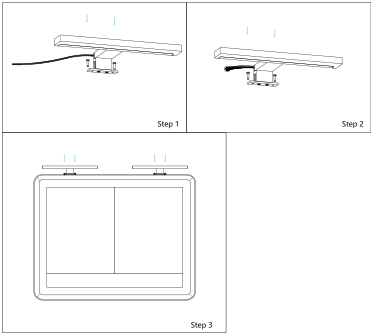


Mirror lamp :
Fixing on mirrors




Mirror lamp + part A:
Fixing on wall

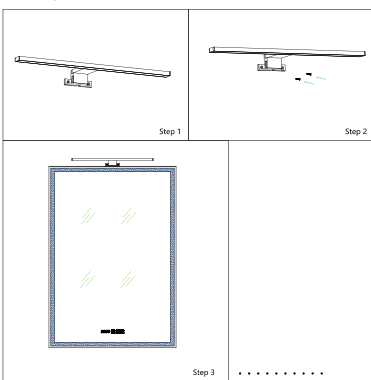

Mirror lamp + part C:
Fixing on wall

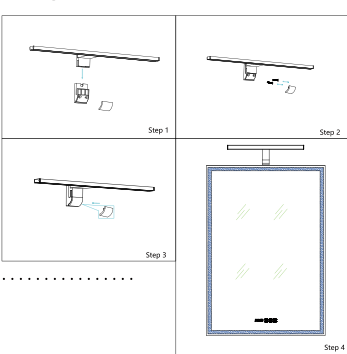

DIMENSIONS

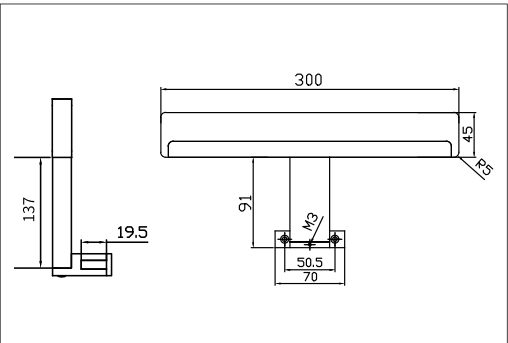

MODLE	NC-AR86 400MM	NC-AR86 500MM	NC-AR86 600MM
POWER	7W	9W	12W
VOLTAGE	220~240VAC	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	400*137*42MM	500*137*42MM	600*137*42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Aluminum + Acrylic	Aluminum + Acrylic	Aluminum + Acrylic


PATENT PROTECTED




NC-AR88




Mirror lamp + part B:
Fixing on mirror cabinet

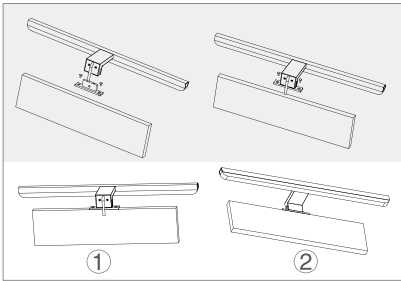


Mirror lamp :
Fixing on mirrors

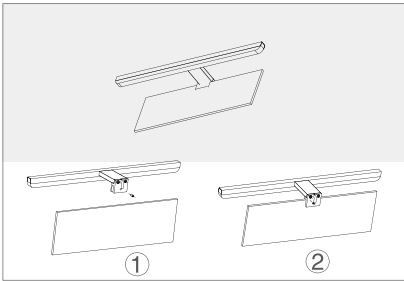


Mirror lamp + part A:
Fixing on wall

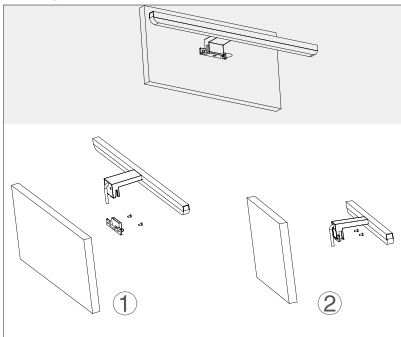

Mirror lamp + part C:
Fixing on wall

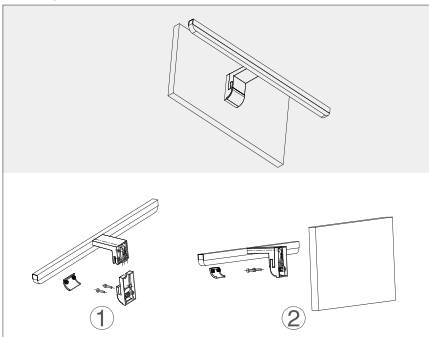

INSTRUCTIONS

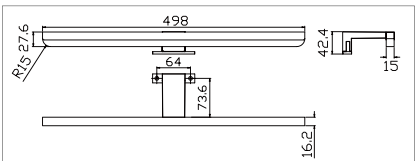

MODE	NC-AR88 400MM	NC-AR88 500MM	NC-AR88 600MM
POWER	7W	9W	12W
VOLTAGE	220~240VAC	1220~240VAC2VDC	220~240VAC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	400x98x42MM	500x98x42MM	600x98x42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Aluminum + Acrylic	Aluminum + Acrylic	Aluminum + Acrylic


PATENT PROTECTED




NC-AR81




Mirror lamp + part B:
Fixing on mirror cabinet

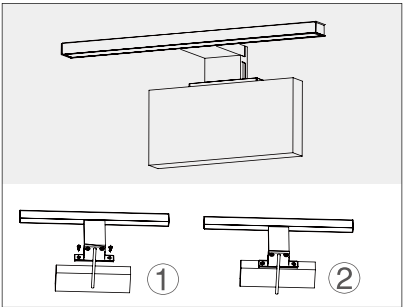


Mirror lamp :
Fixing on mirrors

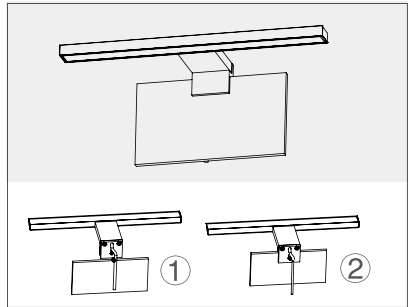


Mirror lamp + part A:
Fixing on wall

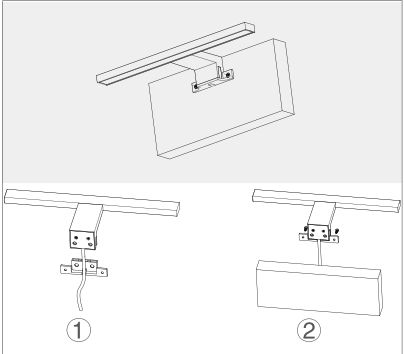

Mirror lamp + part C:
Fixing on wall

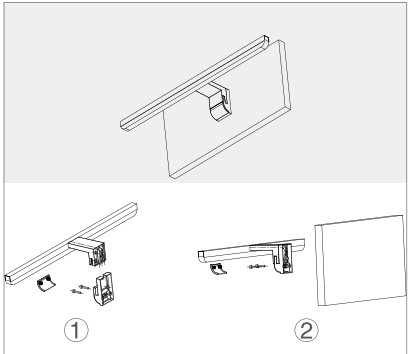

INSTALLATION




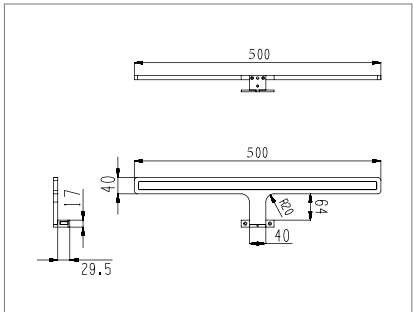


MODLE	NC-AR81 300MM	NC-AR81 400MM	NC-AR81 500MM
POWER	5W	6W	7W
VOLTAGE	12VDC	12VDC	12VDC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	300x121x42MM	400x121x42MM	500x121x42MM
CABLE	50CM AWG 24 wire	50CM AWG 24 wire	50CM AWG 24 wire
MATERIAL	Aluminum+Acrylic	Aluminum+Acrylic	Aluminum+Acrylic


PATENT PROTECTED



NC-AR82

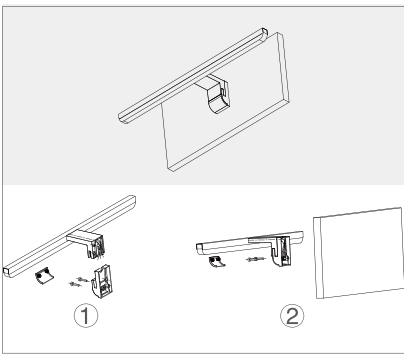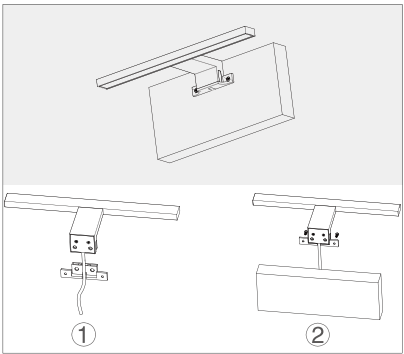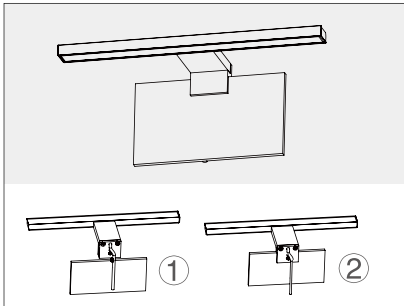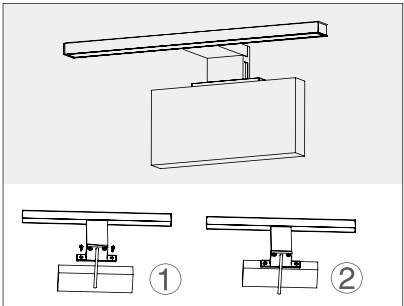

INSTALLATION

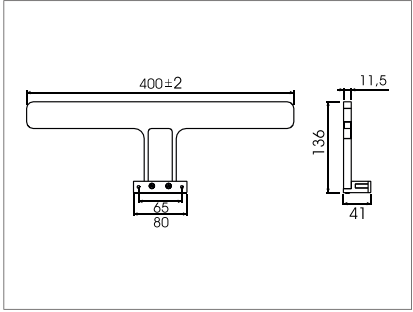

MODLE	NC-LE82 300MM	NC-LE82 400MM	NC-LE82 500MM
POWER	5W	6W	7W
VOLTAGE	220~240VAC	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White	Chrome, Black, White
SIZE	400x121x42MM	400x121x42MM	500x121x42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Aluminum+Acrylic	Aluminum+Acrylic	Aluminum+Acrylic



NC-LE79




NC-AR83 300MM




NC-AR83 600MM



INSTALLATION

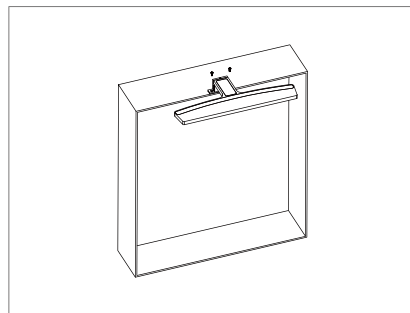


DIMENSION

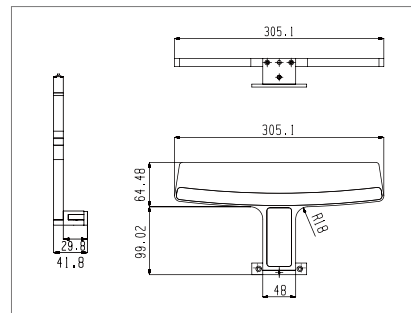

MODLE	NC-LE79 300MM	NC-LE79 600MM
POWER	4.5W	9W
VOLTAGE	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White
SIZE	300x164x42MM	600x164x42MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Aluminum + Acrylic	Aluminum + Acrylic

DIMENSIONS

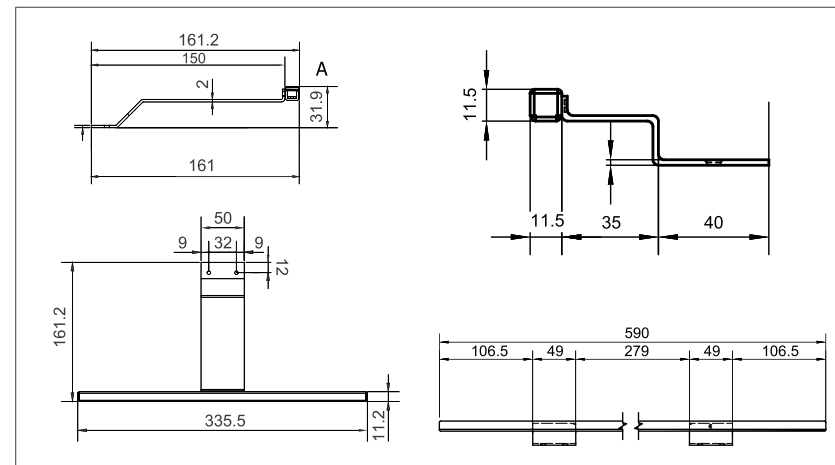

MODLE	NC-AR83 333MM	NC-AR83 590MM
POWER	3.3W	6W
VOLTAGE	12VDC	12VDC
PROTECTION CLASS	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome, Black, White	Chrome, Black, White
SIZE	333.5*161*32MM	590*161*32MM
CABLE	50CM AWG 24 wire	50CM AWG 24 wire
MATERIAL	Aluminum + Acrylic	Aluminum + Acrylic



NC-LE76 12V


PATENT PROTECTED




NC-AR89 12V



DIMENSIONS

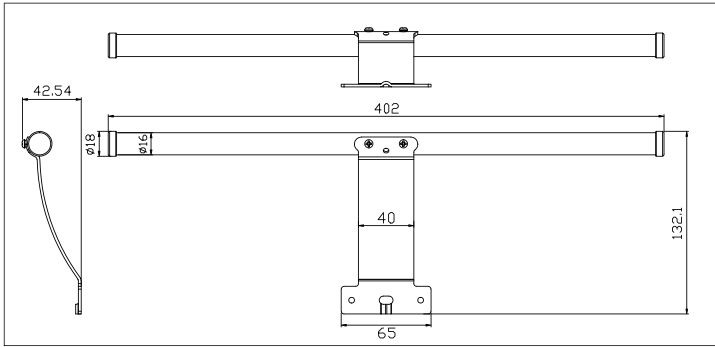

DIMENSIONS

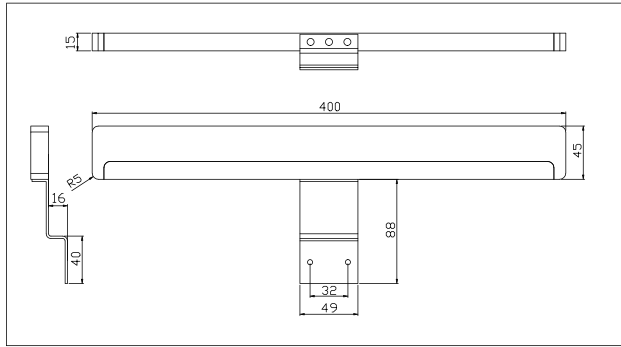

MODLE	NC-LE76 12V 400M	NC-LE76 12V 600M
POWER	4W	6W
VOLTAGE	12V	12V
PROTECTION CLASS	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Anodized/Chrome/Black	Anodized/Chrome/Black
SIZE	L400MMxW130MMxH41MM	L600MMxW130MMxH41MM
CABLE	80CM AWG24 Wire with L813 plug	80CM AWG24 Wire with L813 plug
MATERIAL	ABS, PMMA, Alu alloy	ABS, PMMA, Alu alloy


MODLE	NC-AR89 12V 400M	NC-AR89 12V 600M
POWER	7W	12W
VOLTAGE	12V	12V
PROTECTION CLASS	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Chrome/Black/White	Chrome/Black/White
SIZE	L400MMxW150MMxH30MM	L600MMxW150MMxH30MM
CABLE	80CM AWG24 Wire with L813 plug	80CM AWG24 Wire with L813 plug
MATERIAL	Aluminum + Acrylic	Aluminum + Acrylic




NC-PL01




INSTALLATION



DIMENSION

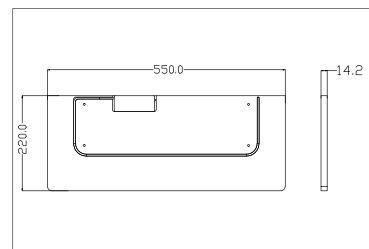


MODLE	NC-PL01 600MM	NC-PL01 900MM
POWER	9W	12W
VOLTAGE	220~240VAC	220~240VAC
PROTECTION CLASS	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	White / Matt	White / Matt
SIZE	600x220x15MM	900x220x15MM
CABLE	30CM(2x0.75mm2)	30CM(2x0.75mm2)
MATERIAL	Acrylic	Acrylic

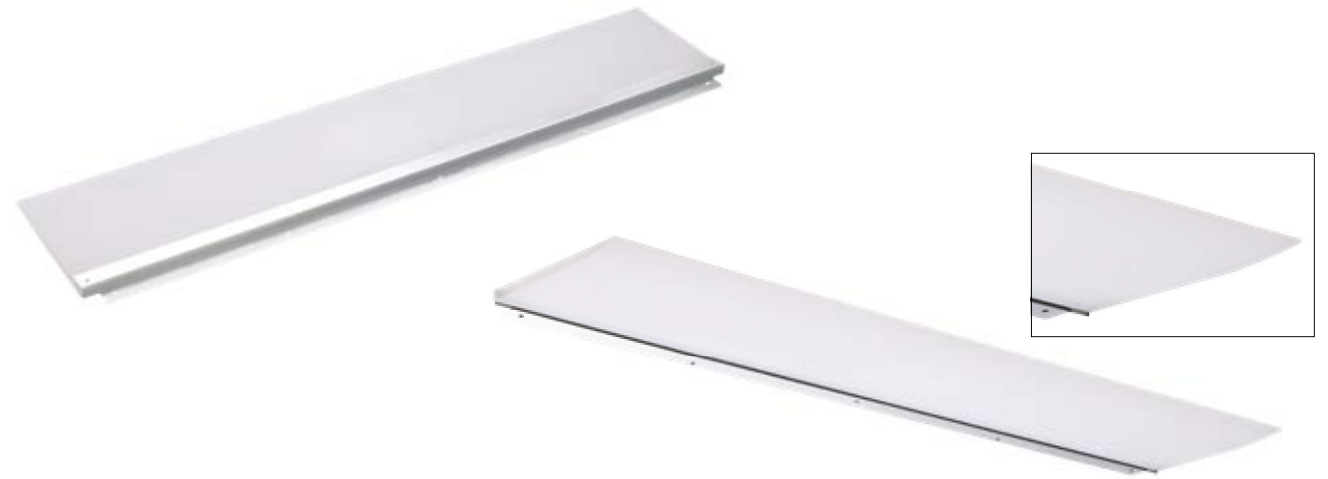


NC-PL08

INSTALLATION

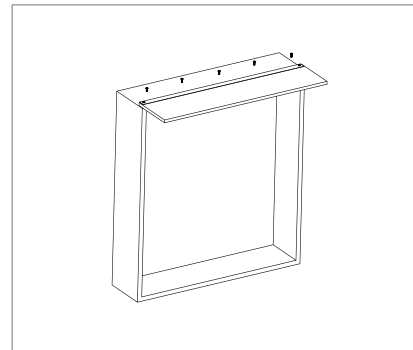

DIMENSION

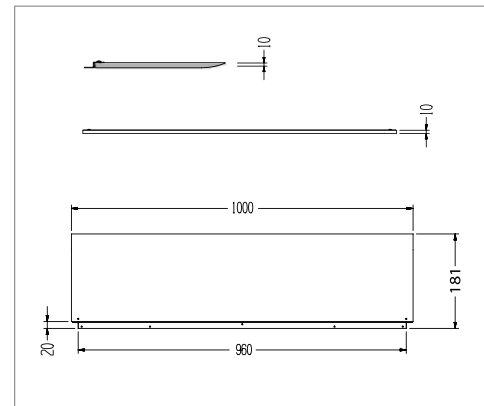

MODLE	NC-PL08 600MM	NC-PL08 900MM
POWER	6W	9W
VOLTAGE	12VDC	12VDC
COLOR	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	White / Matt	White / Matt
SIZE	600x181x10MM	900x181x10MM
CABLE	50CM AWG 24 wire	50CM AWG 24 wire
MATERIAL	Aluminum+Acrylic	Aluminum+Acrylic



Suitable for use in cabinet lighting, under or top of wall cabinet, mirror cabinet, kitchen kick boards, bedroom wardrobes, reception desk lighting, etc.

SPOT LIGHT

PATENT PROTECTED



NC-P023



NC-P012



NC-P021

Surface mounted on cabinets



Under the cabinets




Recessed in cupboard




On th rang hood



DIMENSION

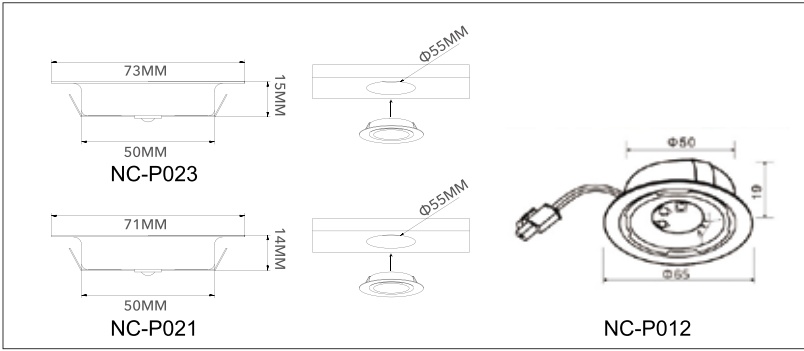

MODE	NC-P023	NC-P021	NC-P012
POWER	2W	2W	20W
VOLTAGE	220~240VAC	12VDC	12VDC
PROTECTION CLASS	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	White / Black / Chrome / Anodized	White / Black / Chrome / Anodized	White / Black / Chrome / Anodized
SIZE	Dia73MM x H15MM	Dia71MM x H15MM	Dia65MM x H19MM
CABLE	30CM(2x0.75mm2)	50CM AWG 24 wire	15CM(2x0.75mm2)
MATERIAL	Plastic	Iron	Iron

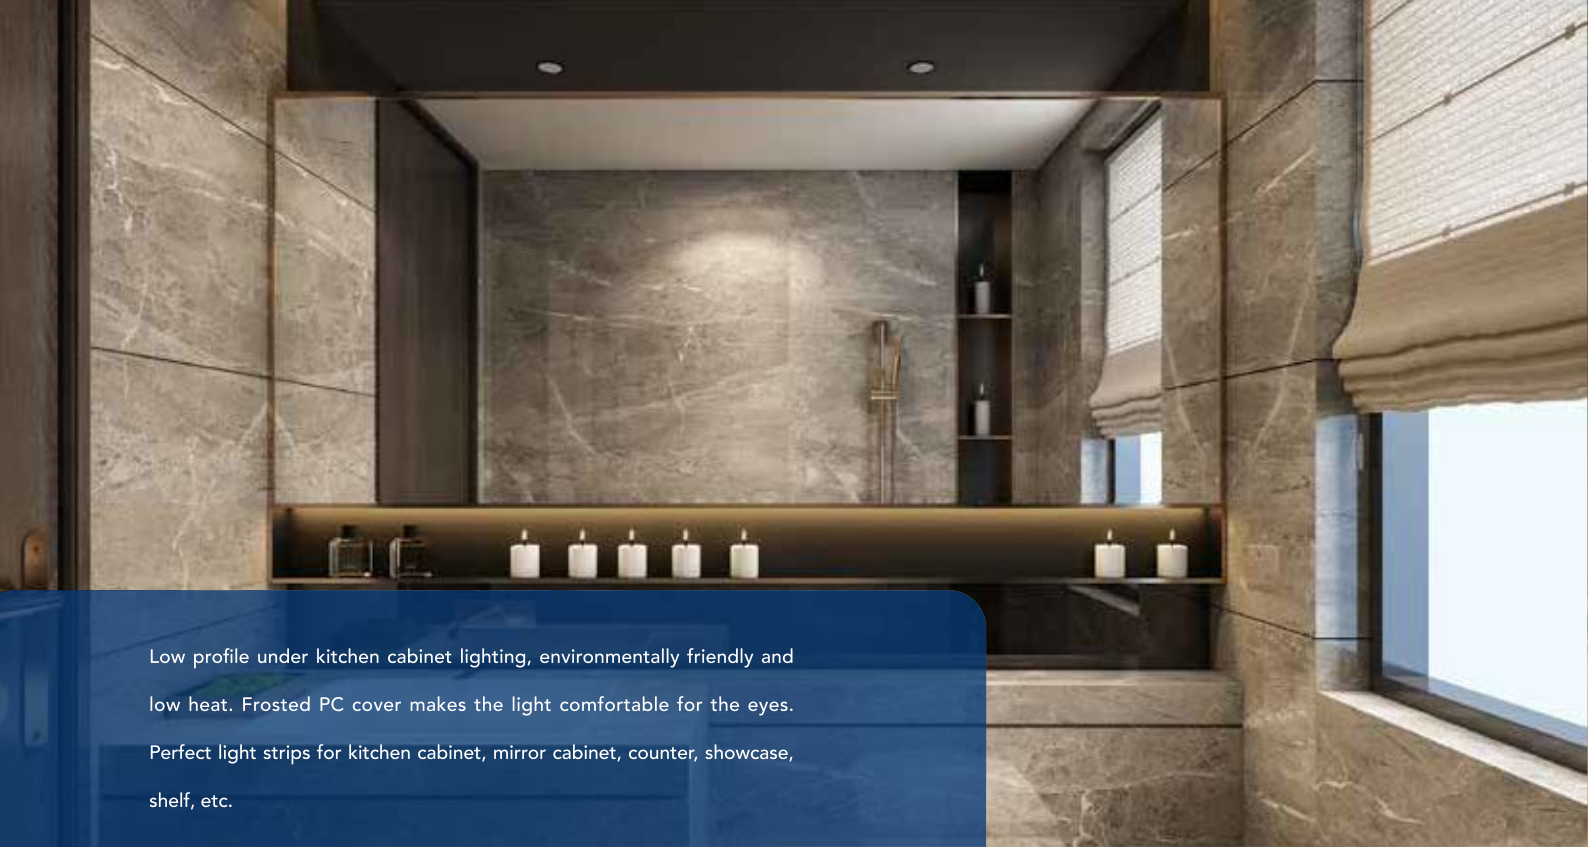

Low profile under kitchen cabinet lighting, environmentally friendly and low heat. Frosted PC cover makes the light comfortable for the eyes.
Perfect light strips for kitchen cabinet, mirror cabinet, counter, showcase, shelf, etc.

LED UNDER CABINET LAMP





NC-S05
ALUMINUM ALLOY

NC-S08

NC-S09

DIMENSION

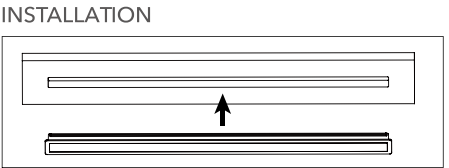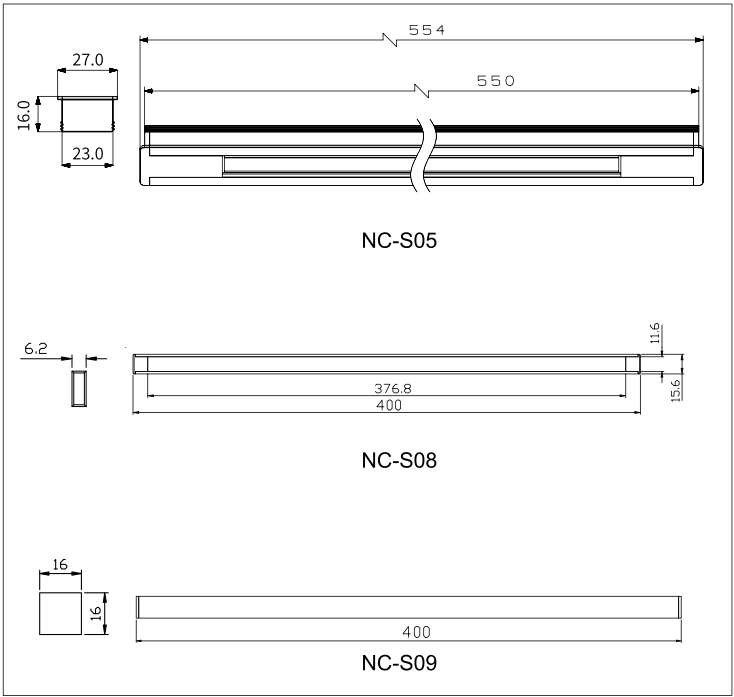

NC-S05-T
ALUMINUM ALLOY



MODE	NC-S05	NC-S05-T	NC-S08	NC-S09
POWER	10W per meter	10W per meter	10W per meter	10W per meter
VOLTAGE	12VDC	12VDC	12VDC	12VDC
PROTECTION CLASS	IP44	IP44	IP44	IP44
COLOR	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
SURFACE	Anodized	Anodized	Anodized	Anodized
SIZE	Length x W27MM x H16MM	Lengthx27x16MM	Length x W15.9MM x H6MM	Length * W16mm * H16mm
CABLE	80CM AWG24 Wire with L813 plug	30CM(2x0.75mm2)	80CM AWG24 Wire with L813 plug	80CM AWG24 Wire with L813 plug
INSTALLATION	Build in	Build in	Tape or Clips	Tape or Clips
MATERIAL	Aluminum+PMMA	Aluminum+PMMA	ABS, PMMA, Alu alloy	ABS, PMMA, Alu alloy