

RECOLUX

Tubular Led Weatherproof Light



+86-0755-8217-6296




www.recolux.com



2F, BaoZi Road#57, KengZi,
PingShan, ShenZhen, PRC



info@recolux.com

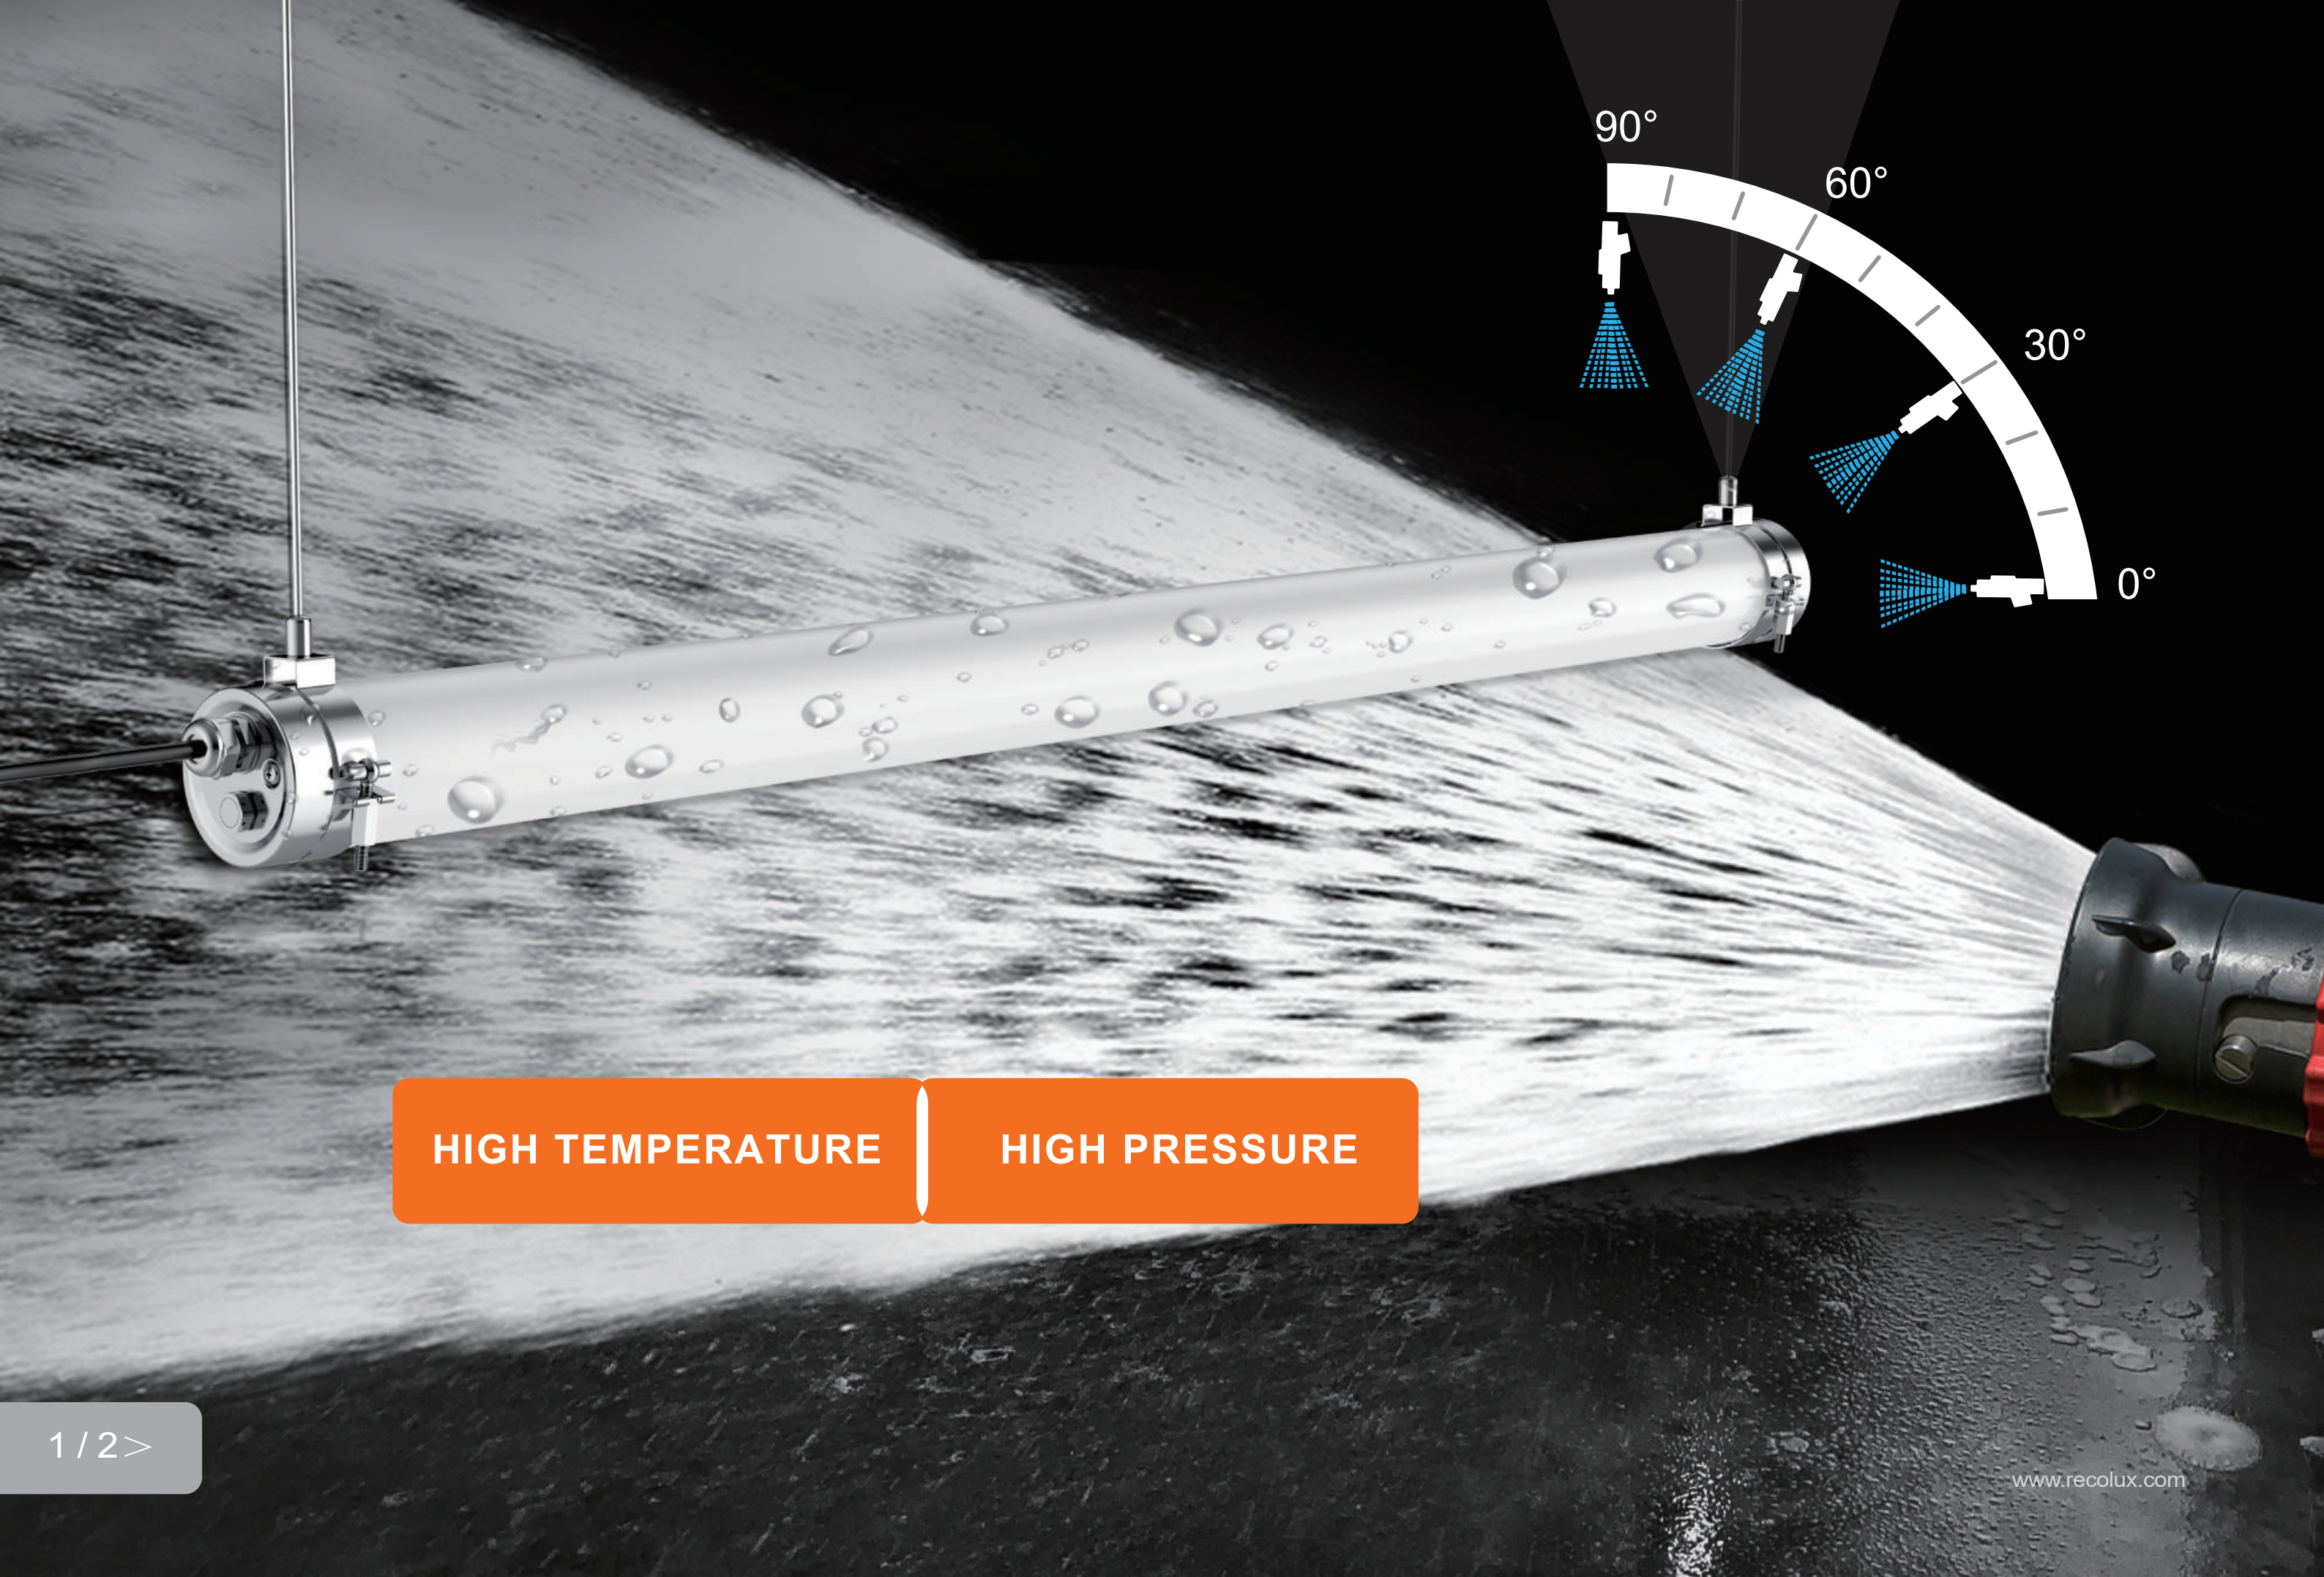

HIGH TEMPERATURE

HIGH PRESSURE



IP69K Weatherproof Tubular can stand firm under such harsh environments as cow farms, chicken farms, food industry, car washing rooms, etc.


Datasteel PMMA



General Information:

Material	PMMA
Input Voltage	220 - 240V AC
Lifetime	>50.000 h [L80, B10]
CCT	3000K/4000K/5000K/6000K
BEAM ANGLE	130°
CRI	>80
Protection class	IK08
Operating temperature	-25° bis +45°C
Storing temperature	-30° bis +60°C
Function	DALI Dimming, Emergency
Warranty	5 Years

Dimension(mm)

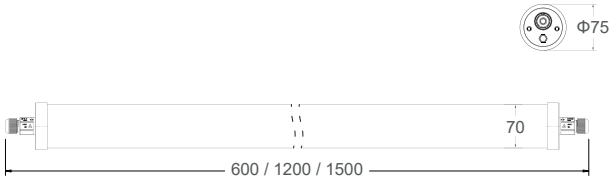

ECO Version: 130-140lm/w

Wiring	Dimension (mm)	TYPE	POWER	DRIVER	LM/W	EFFICACY	FUNCTION	Through-wire
"Standard version (1m single wiring)"								
	600	T062D-20-PMMA	20W	OSRAM/ BOKE	130-140	2800lm	On/off,DALI	/
	1200	T064D-40-PMMA	40W	OSRAM/ BOKE	130-140	5600lm	On/off,DALI	/
	1500	T065D-60-PMMA	60W	OSRAM/ BOKE	130-140	8400lm	On/off,DALI	/
Linkable version								
	600	T062D-20-PMMA	20W	OSRAM/ BOKE	130-140	2800lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5*2.5mm² wires
	1200	T064D-40-PMMA	40W	OSRAM/ BOKE	130-140	5600lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5*2.5mm² wires
	1500	T065D-60-PMMA	60W	OSRAM/ BOKE	130-140	8400lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5*2.5mm² wires

Super Version: 150-160lm/w

Wiring	Dimension (mm)	TYPE	POWER	DRIVER	LM/W	EFFICACY	FUNCTION	Through-wire
"Standard version (1m single wiring)"								
	600	T062S-20-PMMA	20W	OSRAM/ BOKE	150-160	3200lm	On/off,DALI	/
	1200	T064S-40-PMMA	40W	OSRAM/ BOKE	150-160	6400lm	On/off,DALI	/
	1500	T065S-60-PMMA	60W	OSRAM/ BOKE	150-160	9600lm	On/off,DALI	/
Linkable version								
	600	T062S-20-PMMA	20W	OSRAM/ BOKE	150-160	3200lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5*2.5mm² wires
	1200	T064S-40-PMMA	40W	OSRAM/ BOKE	150-160	6400lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5*2.5mm² wires
	1500	T065S-60-PMMA	60W	OSRAM/ BOKE	150-160	9600lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5*2.5mm² wires


Datasheet PC



Gernal Information:

Material	PC
Input Voltage	220 - 240V AC
Lifetime	>50.000 h [L80, B10]
CCT	3000K/4000K/5000K/6000K
BEAM ANGLE	130°
CRI	>80
Protection class	IP69K / IK10
Operating temperature	-25° bis +45°C
Storing temperature	-30° bis +60°C
Function	DALI Dimming, Emergency
Warranty	5 Years

Dimension(mm)

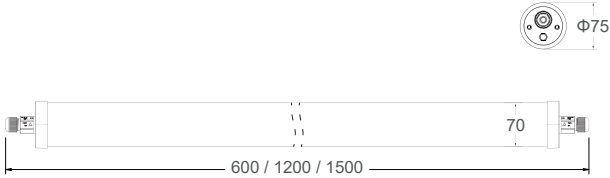

ECO Version: 120-130lm/w

Wiring	Dimension (mm)	TYPE	POWER	DRIVER	LM/W	EFFICACY	FUNCTION	Through-wire
"Standard version (1m single wiring)"								
	600	T062D-20-PC	20W	OSRAM/ BOKE	120-130	2600lm	On/off,DALI	/
	1200	T064D-40-PC	40W	OSRAM/ BOKE	120-130	5200lm	On/off,DALI	/
	1500	T065D-60-PC	60W	OSRAM/ BOKE	120-130	7800lm	On/off,DALI	/
Linkable version								
	600	T062D-20-PC	20W	OSRAM/ BOKE	120-130	2600lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5²2.5mm² wires
	1200	T064D-40-PC	40W	OSRAM/ BOKE	120-130	5200lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5²2.5mm² wires
	1500	T065D-60-PC	60W	OSRAM/ BOKE	120-130	7800lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5²2.5mm² wires

Super Version: 135-145lm/w


Wiring	Dimension (mm)	TYPE	POWER	DRIVER	LM/W	EFFICACY	FUNCTION	Through-wire
"Standard version (1m single wiring)"								
	600	T062S-20-PC	20W	OSRAM/ BOKE	135-145	3000lm	On/off,DALI	/
	1200	T064S-40-PC	40W	OSRAM/ BOKE	135-145	6000lm	On/off,DALI	/
	1500	T065S-60-PC	60W	OSRAM/ BOKE	135-145	9000lm	On/off,DALI	/
Linkable version								
	600	T062S-20-PC	20W	OSRAM/ BOKE	135-145	3000lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5²2.5mm² wires
	1200	T064S-40-PC	40W	OSRAM/ BOKE	135-145	6000lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5²2.5mm² wires
	1500	T065S-60-PC	60W	OSRAM/ BOKE	135-145	9000lm	On/off,DALI	3x1.5 mm²/5x1.5 mm²/5²2.5mm² wires

Installation

Surface Mount




Suspension Mount

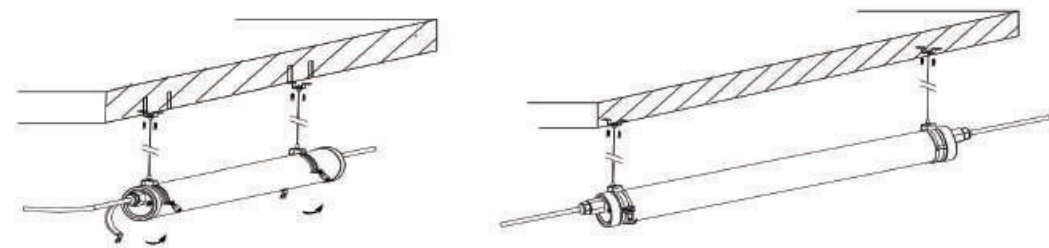

connection


Single Wired



Linkable (Double Wired)



Package




Tubular Led Weatherproof Light

PE Bag



Shipping Carton

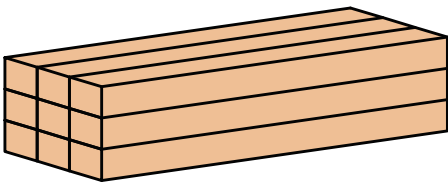

9PCS/CTN

Length	Single Box	Outer Carton	Qty/Carton	Unit N.W	G.W/Carton
600mm	1Pcs	710 x 260 x 265mm	9Pcs	7.2Kg	11.4Kg
1200mm	1Pcs	1310 x 260 x 265mm	9Pcs	11.7Kg	13.2Kg
1500mm	1Pcs	1610 x 260 x 200mm	6Pcs	12.5Kg	17Kg

Caution

- ※ In case of electric shock, please make sure the power is off before installation.
- ※ The lamp should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
- ※ Do not use sharp tools near or on the surface of the lamp.
- ※ Unpack and examine the product carefully. Report any damage and save all packing materials if any portion of the product was damaged during transportation.

Statement

According to the International Standard of LED luminaire, here Recolux formally claims that RECOLUX LED Tri-proof(Weather proof) series products is only allowed to be applied to indoor or semi-outdoor neutral environment. Meanwhile Recolux promises full warranty for the products.

Any severe environment application including high/low temperature, high humidity, high salinity, high-ammonia etc..is not permitted without the official confirmation from the manufacturer. If any misapplication happens, the warranty policy is no longer guaranteed