
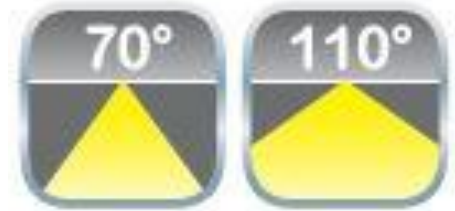
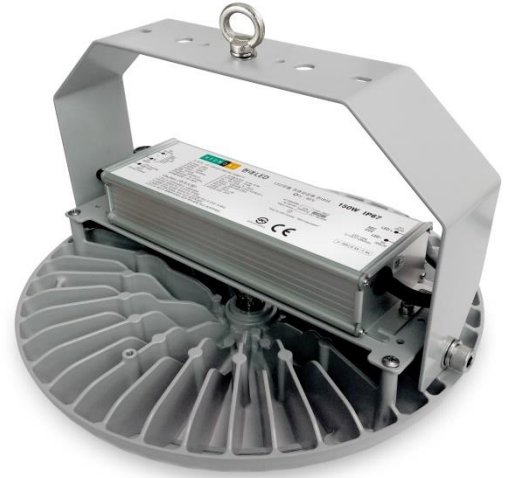


LED HIGH BAY LIGHT

(HIL-005, 250W MH Replacement)

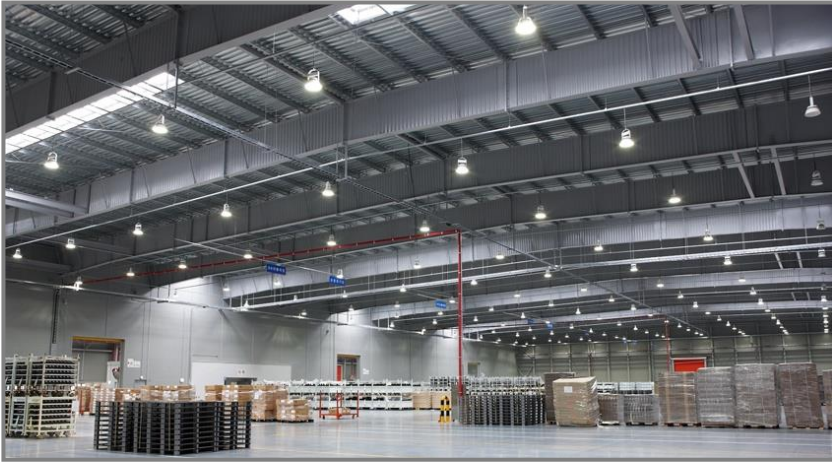

Beam Angle Options

**250W
MH
Replacement**

**More than
60%
Energy Saving**

**220~240
VAC
INPUT**




**115lm/W
High
Efficacy**

CE/RoHS

**5Years
Warranty**

IP66

Operating Temp. : -20°C~+50°C

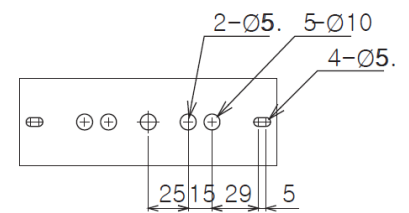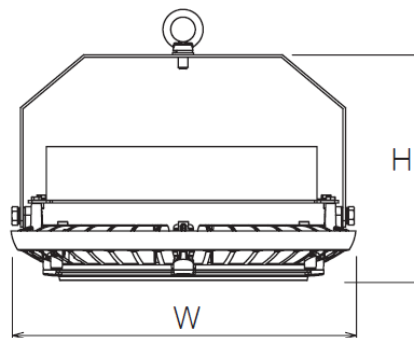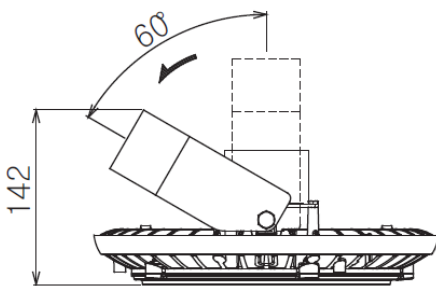




(Bracket)

Size : 280Ø (W) x 183.5(H) mm

Model (Model No.)	Input Vol.	Power Con.	CCT	Beam angle	CRI	Lum. Flux	Lum. Efficiency
HIL-005 100W 5700K 70D	220~240 VAC	100W	5700K	70°	Ra80	11500 lm	115 lm/W
HIL-005 100W 5700K 110D	220~240 VAC	100W	5700K	110°	Ra80	11500 lm	115 lm/W

LED HIGH BAY LIGHT

(HIL-005, 400W MH Replacement)

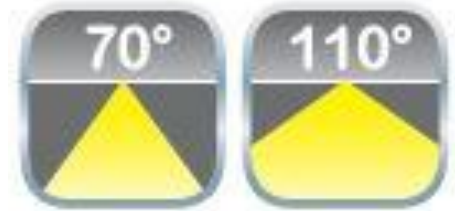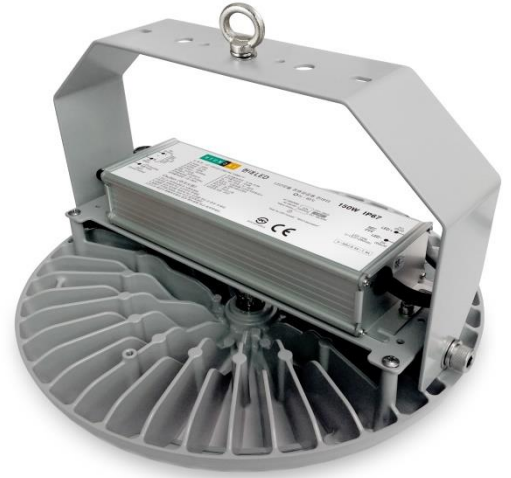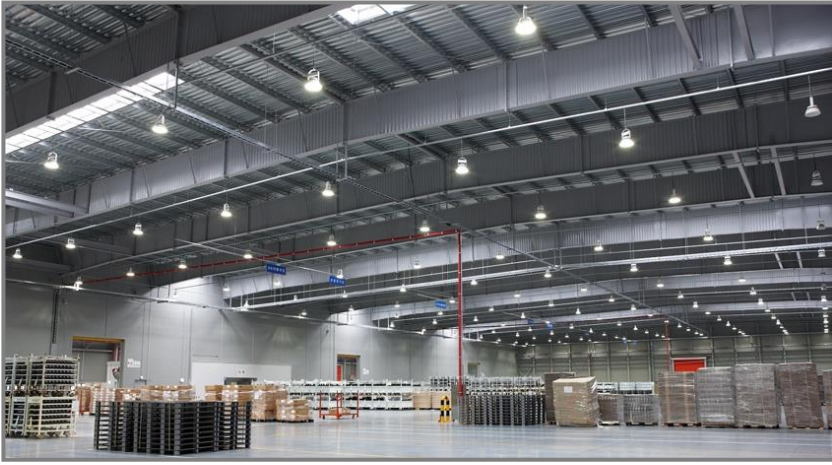

Beam Angle Options

**400W
MH
Replacement**

**More than
60%
Energy Saving**

**220~240
VAC
INPUT**




**125lm/W
High
Efficacy**

CE/RoHS

**5Years
Warranty**

IP66

Operating Temp. : -20°C~+50°C

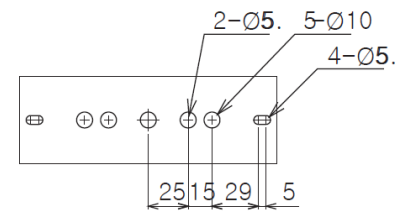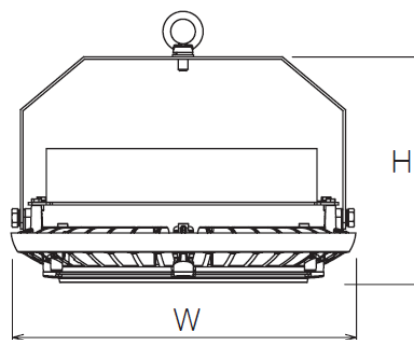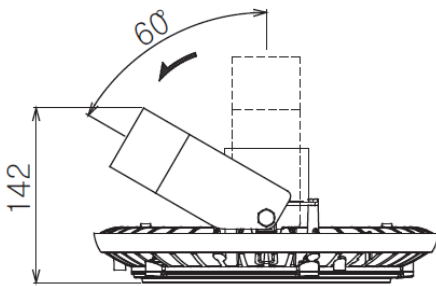

(Bracket)

Size : 280Ø (W) x 183.5(H) mm

Model (Model No.)	Input Vol.	Power Con.	CCT	Beam angle	CRI	Lum. Flux	Lum. Efficiency
HIL-005 160W 5700K 70D	220~240 VAC	160W	5700K	70°	Ra80	20000 lm	125 lm/W
HIL-005 160W 5700K 110D	220~240 VAC	160W	5700K	110°	Ra80	20000 lm	125 lm/W