



LED Panel Light | LED Down Light | LED Ceiling Light | LED Batten Light | LED Solar Light



Topjet Optoelectronic Co.,Ltd

TEL:0086 (0)756 8828 380

Email:Sales@topjetled.com

ADD:TOPJET Industrial Park, PingBei 2nd Road, NanPing S&T Industrial Park, Zhuhai, Guangdong, China

www.topjet-led.com


2022

PROFESSIONAL LED LUMINAIRE MANUFACTURER



Credibility • Quality • Service • Win-Win

Topjet Optoelectronic Co.,Ltd

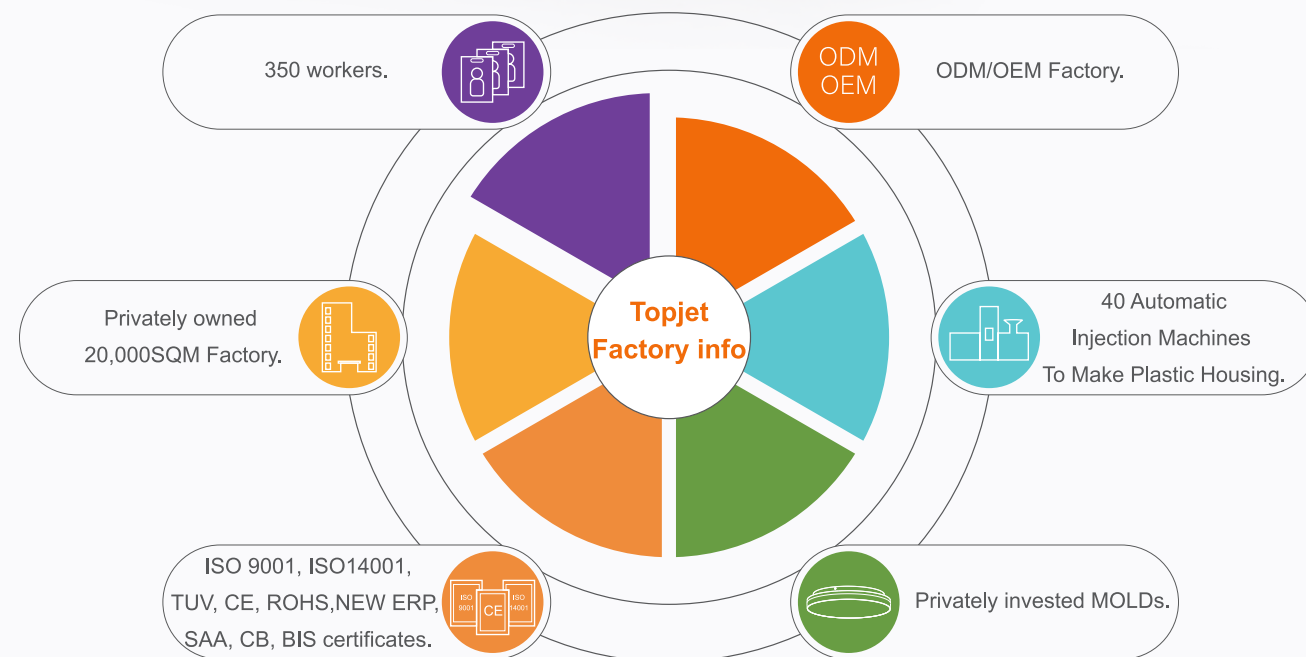

TOPjet

Topjet Main Products:

- * Recessed&Surfaced LED Down Light
- * X in 1 Super Slim Panel Light
- * Ceiling Light(IP54&IP65&IP20)
- * IP20&IP65 LED Batten Light, LED Shadowless Batten Light
- * Solar Energy Light
- * LED Cabinet Light

Multi Functions for options: CCT Change, Power Change, Dimmable, Microwave sensor, PIR Sensor, Wifi Control, Bluetooth Mesh, RGB, Emergency, CCT Change by Wall Switch, Dimmable by Wall Switch etc..

Workshop



Equipment



EMC Test Lab

Injection Machines

Aging Machines

LED SMT Machines

01 Home Smart Lighting

02 LED Slim Panel Light

P01-06
PERCEBES Series



03 LED Down Light

P07-12
HORIZON Series



P13-14
KOALA / MOVI Series



P15-20
BRAVO Series



04 LED Ceiling Light

P21-24
IP54 LUNA Series



P25-28
IP65 OTO Series



P29-32
OYSTER Series




05 LED Batten Light

P33-36
NAVI Series



P37-38
SLIM-FIT Series




06 Solar Energy Light

P39-44
APOLO Series







HOME SMART LIGHTING

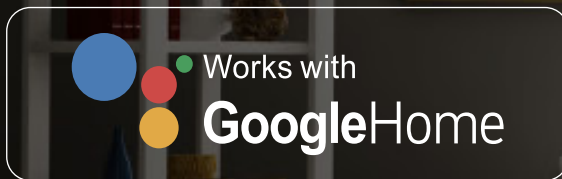



HOME SMART LIGHTING

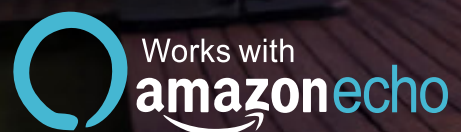


LED Slim Panel Light


- CCT Change
- Traic Dimmable
- CCT Change+ Traic Dimmable
- Microwave sensor
- CCT Change+Microwave sensor
- WIFI Control+Bluetooth+ RGB
- Bluetooth Mesh+ RGB
- Power Change+ CCT Change
- CCT Change by Wall Switch
- Dimmable by Wall Switch




PERCEBES

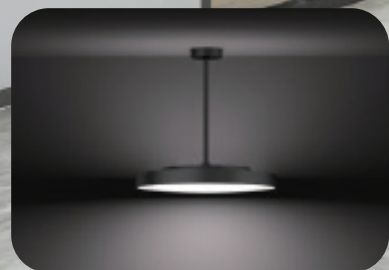

Suspending

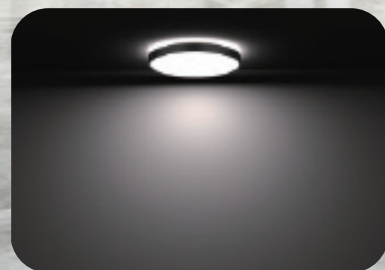

Surface

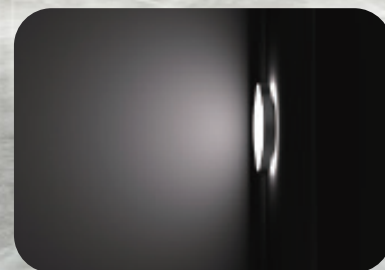


Wall Mounting

PERCEBES ECO

Super Slim LED Panel Light



Recessed Surfaced

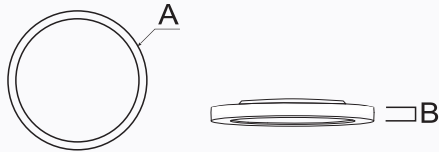

MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

100% 50% 10%

Switch Dimmable

CCT + Dimmable

6W 12W 18W

Power Changeable

5.8G

Microwave sensor

RGB

RGB

WiFi+Bluetooth

CCT

3000K 4000K 6500K



Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
PCB2-170-6W	170*17	6	420	525	185-265	≥0.7	80	120°	F
PCB2-170-12W	170*17	12	952	1190	185-265	≥0.7	80	120°	F
PCB2-225-18W	225*17	18	1684	2106	185-265	≥0.7	80	120°	F
PCB2-300-24W	300*17	24	2052	2565	185-265	≥0.7	80	120°	F
PCB2-330-30W	300*17	30	2538	3255	185-265	≥0.9	80	120°	F

PERCEBES PRO

Super Slim LED Panel Light



PRO Version

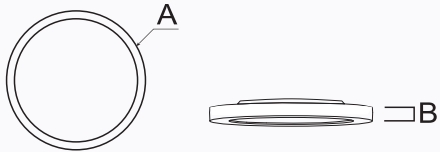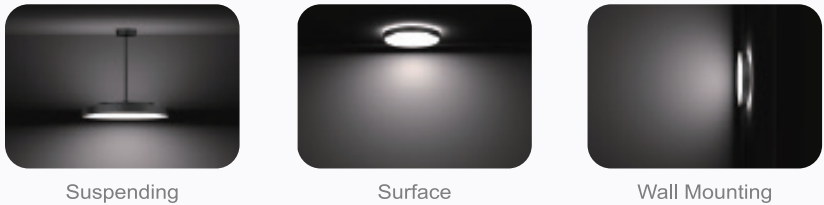

MORE OPTIONS

100% 50% 10%

Switch Dimmable

CCT + Dimmable

5.8G

Microwave sensor

RGB

RGB

WiFi+Bluetooth


CCT

3000K 4000K 6500K

Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
PCB3-290-18W	290*25	18	1684	2106	220-240	≥0.8	80	120°	F
PCB3-400-24W	400*25	24	2052	2565	220-240	≥0.8	80	120°	F
PCB3-400-36W	400*25	36	2681	3830	220-240	≥0.9	80	120°	F

PERCEBES BASIC

Super Slim LED Panel Light

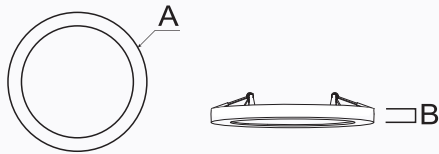

MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

100% 50% 10%

Switch Dimmable

CCT + Dimmable

6W 12W 18W

Power Changeable

5.8G

Microwave sensor

WiFi+Bluetooth

CCT

3000K

4000K

6500K

Model No.	Size (A*Bmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
PCB-170-12W	φ170*19	⌀65-155	12	810	1190	185-265	≥0.7	80	120°	F
PCB-220-18W	φ225*19	⌀65-210	18	1430	1880	185-265	≥0.8	80	120°	F
PCB-330-24W	φ330*19	⌀65-310	24	2000	2565	185-265	≥0.8	80	120°	F
PCB-330-30W	φ330*19	⌀65-310	30	2540	3255	185-265	≥0.9	80	120°	F

PERCEBES

Super Slim LED Panel Light



Metal Ring



With Magnet



Nickel

Chrome

Black

Simply plug Wires IN here,
It locks tightly and Automatically!
Simply Plug & Play!
No need Extra Cable & Junction box!
Save \$\$\$



2 IN 1 Recessed & Surfaced
Recessed installation:
★Adjustable Spring Clips suitable for different hole sizes.
Surface Installation
★ Can install on junction box, or screw on ceiling.



Recessed



Surfaced



LED Down Light 03


- CCT Change
- Traic Dimmable
- PIR Sensor
- Microwave sensor
- WIFI Control+Bluetooth+RGB
- Bluetooth Mesh+RGB
- Power Change+ CCT Change
- CCT Change by Wall Switch
- Dimmable by Wall Switch



HORIZON

HORIZON

Recessed Super Slim LED Down Light



MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

1x 50% 10%

Switch Dimmable

1x 2x 3x

Switch CCT

CCT + Dimmable

5.8G

Microwave sensor

PIR sensor

RGB


WiFi+Bluetooth

CCT 3000K 4000K 6500K

Model No.	Size (A*Bmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
RP-3-6W	φ115*32	⌀100-110	6	400	525	185-265	≥0.7	80	120°	F
RP-5-12W	φ170*32	⌀150-160	12	900	1190	185-265	≥0.8	80	120°	F
RP-7-18W	φ220*32	⌀200-210	18	1500	1880	185-265	≥0.8	80	120°	F
RP-8-20W	φ240*32	⌀220-230	20	1600	2106	185-265	≥0.8	80	120°	F
RP-8-24W	φ240*32	⌀220-230	24	2100	2565	185-265	≥0.8	80	120°	F

HORIZON

Recessed Super Slim LED Down Light

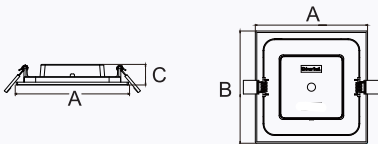

MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

1x 50% 10%

Switch Dimmable

1x 2x 3x

Switch CCT

CCT + Dimmable

5.8G

Microwave sensor

PIR sensor

RGB


WiFi+Bluetooth

CCT 3000K 4000K 6500K

Model No.	Size (A*B*Cmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
SP-3-6W	115*115*32	⌀100-110	6	400	525	185-265	≥0.7	80	120°	F
SP-5-12W	165*165*32	⌀150-160	12	900	1190	185-265	≥0.8	80	120°	F
SP-7-18W	220*220*32	⌀200-210	18	1500	1880	185-265	≥0.8	80	120°	F
SP-7-20W	220*220*32	⌀200-210	20	1600	2106	185-265	≥0.8	80	120°	F
SP-7-24W	220*220*32	⌀200-210	24	2100	2565	185-265	≥0.8	80	120°	F

HORIZON

Surfaced Super Slim LED Down Light

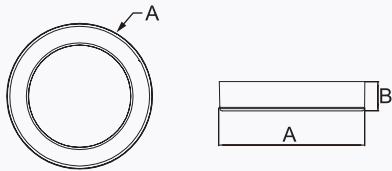

MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

1x 50% 10%

Switch Dimmable

1x 2x 3x

Switch CCT

CCT + Dimmable

5.8G

Microwave sensor

PIR sensor

RGB


RGB

WiFi+Bluetooth

Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
RC-3-6W	φ122*35	6	400	525	185-265	≥0.7	80	120°	F
RC-5-12W	φ177*35	12	900	1190	185-265	≥0.8	80	120°	F
RC-7-18W	φ226*35	18	1500	1880	185-265	≥0.8	80	120°	F
RC-8-20W	φ247*35	20	1600	2106	185-265	≥0.8	80	120°	F
RC-8-24W	φ247*35	24	2100	2565	185-265	≥0.8	80	120°	F

HORIZON

Surfaced Super Slim LED Down Light

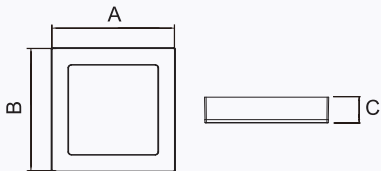

MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

1x 50% 10%

Switch Dimmable

1x 2x 3x

Switch CCT

CCT + Dimmable

5.8G

Microwave sensor

PIR sensor

RGB


RGB

WiFi+Bluetooth

Model No.	Size (A*B*Cmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
SC-3-6W	122*122*35	6	400	525	185-265	≥0.7	80	120°	F
SC-5-12W	172*172*35	12	900	1190	185-265	≥0.8	80	120°	F
SC-7-18W	227*227*35	18	1500	1880	185-265	≥0.8	80	120°	F
SC-7-20W	227*227*35	20	1600	2106	185-265	≥0.8	80	120°	F
SC-7-24W	227*227*35	24	2100	2565	185-265	≥0.8	80	120°	F

KOALA

Down Light

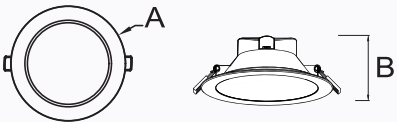

MORE OPTIONS

3000K 4000K 6500K

CCT Changeable

Dimmable


PIR sensor

CCT 3000K 4000K 6500K

Model No.	Size (A*Bmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
DL-2-7W	φ97*53	φ75-80	7	525	618	185-265	≥0.7	80	100°	F
DL-3-9W	φ115*58	φ90-102	9	722	850	185-265	≥0.7	80	100°	E
DL-4-12W	φ145*61	φ120-130	12	1010	1190	185-265	≥0.8	80	100°	E
DL-6-18W	φ190*75	φ155-170	18	1598	1880	185-265	≥0.8	80	100°	E
DL-8-25W	φ225*85	φ195-210	25	2276	2678	185-265	≥0.9	80	100°	E
DL-8-30W	φ225*85	φ195-210	30	2766	3255	185-265	≥0.9	80	100°	E

MOVI

Spot Light



MORE OPTIONS

Dimmable

Model No.	Size (A*Bmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
DLAA-2-7W	φ85*72	φ68-75	7	450	450	185-265	≥0.9	80	36°	G
DLAA-2-9W	φ85*72	φ68-75	9	560	620	185-265	≥0.9	80	36°	G

PIR Sensor

ErP

IP20

IP44

CE

RoHS

CB




(12/18/24W)




(12/18/24W)



(10/25W)

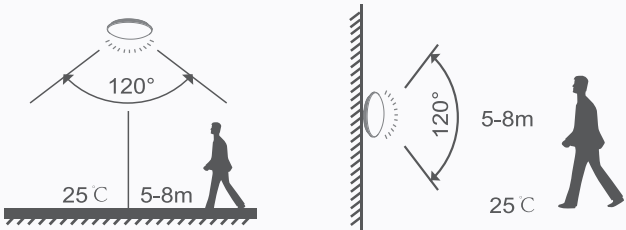

It only works in the night time .






When there is a motion detected the lamp will light on automatically .



The light automatically turn off 60 seconds after human leave.

Microwave Sensor

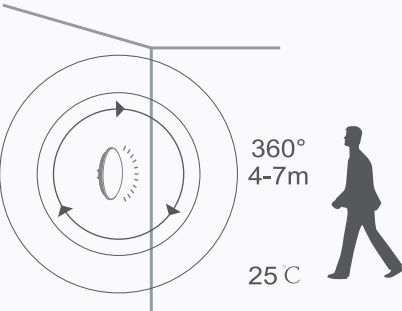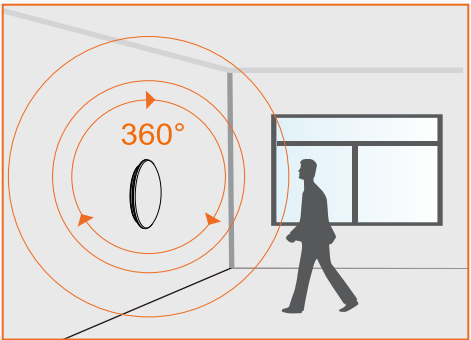



LED Down Light 03



- CCT Change
- WIFI Control+Bluetooth+RGB
- Bluetooth Mesh+RGB



BRAVO

BRAVO




Recessed LED Down light

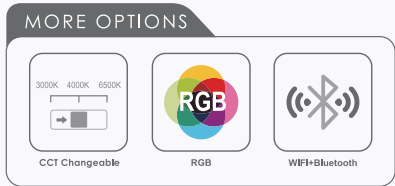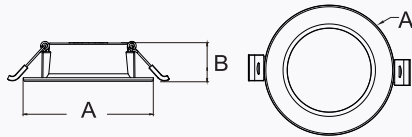

Model No.	Size (A*Bmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
BRP-2-4W	φ90*26.5	⌀68-80	4	200	230	AC220-240V	≥0.7	80	120°	G
BRP-3-6W	φ115*26.5	⌀100-110	6	350	525	AC220-240V	≥0.7	80	120°	F
BRP-4-9W	φ145*26.5	⌀120-130	9	536	825	AC220-240V	≥0.7	80	120°	F
BRP-5-12W	φ170*26.5	⌀150-160	12	790	1050	AC220-240V	≥0.7	80	120°	F
BRP-8-18W	φ230*26.5	⌀200-220	18	1070	1600	AC220-240V	≥0.8	80	120°	F
BRP-8-20W	φ230*26.5	⌀200-220	20	1200	1800	AC220-240V	≥0.8	80	120°	F
BRP-11-24W	φ300*26.5	⌀260-280	24	1450	2150	AC220-240V	≥0.8	80	120°	F

BRAVO



Recessed LED Down light

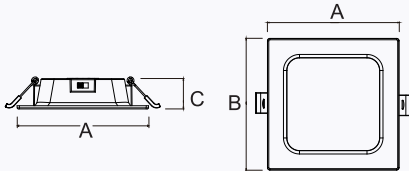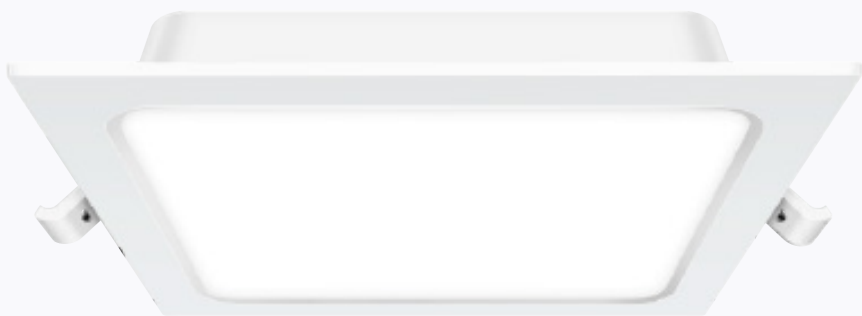

Model No.	Size (A*B*Cmm)	Cutout (mm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
BSP-12-6W	115*115*26.5	⌀100-110	6	350	525	AC220-240V	≥0.7	80	120°	F
BSP-17-12W	170*170*26.5	⌀150-160	12	790	1050	AC220-240V	≥0.7	80	120°	F
BSP-23-18W	230*230*26.5	⌀200-220	18	1070	1600	AC220-240V	≥0.8	80	120°	F
BSP-23-20W	230*230*26.5	⌀200-220	20	1200	1800	AC220-240V	≥0.8	80	120°	F
BSP-30-24W	300*300*26.5	⌀260-280	24	1450	2150	AC220-240V	≥0.8	80	120°	F

BRAVO




Surfaced LED Down light

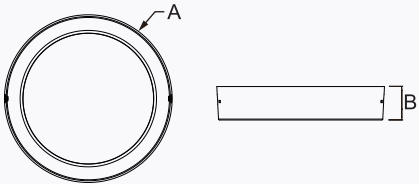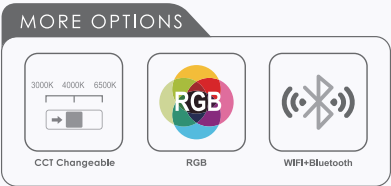

Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
BRC-4-9W	Φ 148*34.5	9	536	825	AC220-240V	≥0.7	80	120°	F
BRC-5-12W	Φ 173*34.5	12	790	1050	AC220-240V	≥0.7	80	120°	F
BRC-8-18W	Φ 233*34.5	18	1070	1600	AC220-240V	≥0.8	80	120°	F
BRC-8-20W	Φ 233*34.5	20	1200	1800	AC220-240V	≥0.8	80	120°	F
BRC-11-24W	Φ 303*34.5	24	1450	2150	AC220-240V	≥0.8	80	120°	F

BRAVO

Surfaced LED Down light

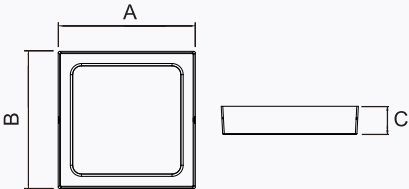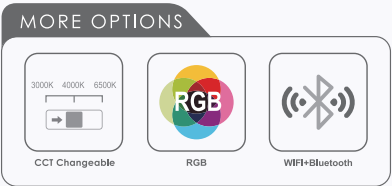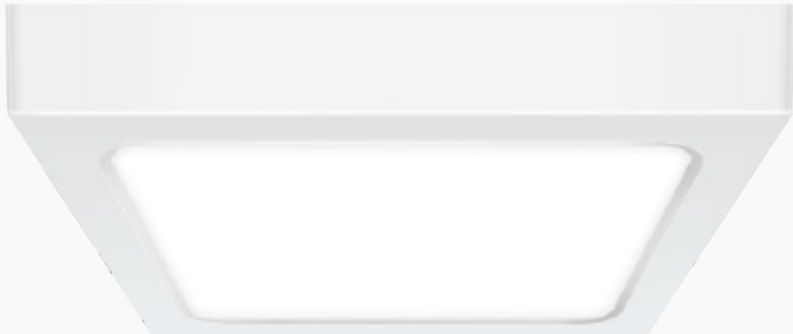

Model No.	Size (A*B*Cmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
BSC-17-12W	172*172*34.5	12	790	1050	AC220-240V	≥0.7	80	120°	F
BSC-23-18W	232*232*34.5	18	1070	1600	AC220-240V	≥0.8	80	120°	F
BSC-23-20W	232*232*34.5	20	1200	1800	AC220-240V	≥0.8	80	120°	F
BSC-30-24W	303*303*34.5	24	1450	2150	AC220-240V	≥0.8	80	120°	F



IP54 Ceiling Light 04


- CCT Change
- Traic Dimmable
- Microwave sensor
- Emergency
- WIFI Control+Bluetooth+RGB
- Bluetooth Mesh+RGB
- Power Change+CCT Change
- CCT Change by Wall Switch
- Dimmable by Wall Switch



LUNA

LUNA

IP54 Round Ceiling Light

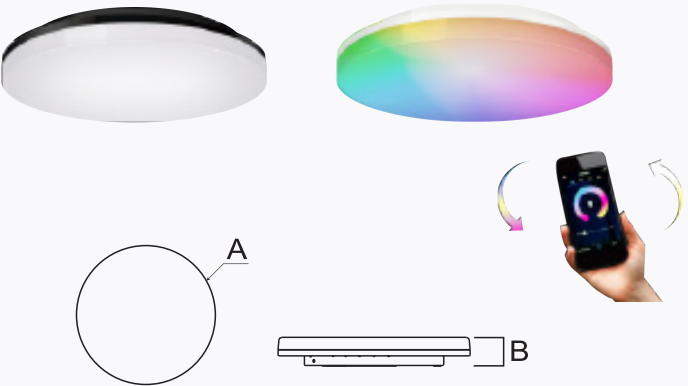

MORE OPTIONS

3000K 4000K 6000K

CCT Changeable

100% 50% 10%

Switch Dimmable

1x 2x 3x

Switch CCT

CCT + Dimmable

6W 12W 18W

Power Changeable

CUT OFF

Emergency

5.8G

Microwave sensor

RGB

RGB

WiFi+Bluetooth


CCT

3000K4000K6000K

Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
LR-220-18W	φ220*51	18	1800	1880	185-265	≥0.9	80	120°	F
LR-280-24W	φ280*51	24	2400	2565	185-265	≥0.9	80	120°	F
LR-330-30W	φ330*51	30	3000	3225	185-265	≥0.9	80	120°	F

LUNA

IP54 Square Ceiling Light

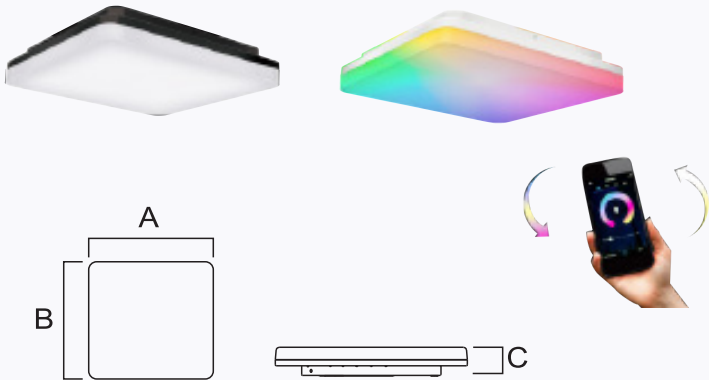

MORE OPTIONS

3000K 4000K 6000K

CCT Changeable

100% 50% 10%

Switch Dimmable

1x 2x 3x

Switch CCT

CCT + Dimmable

6W 12W 18W

Power Changeable

CUT OFF

Emergency

5.8G

Microwave sensor

RGB

RGB

WiFi+Bluetooth

CCT

3000K4000K6000K

Model No.	Size (A*B*Cmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
LS-220-18W	220*220*51	18	1800	1880	185-265	≥0.9	80	120°	F
LS-280-24W	280*280*51	24	2400	2565	185-265	≥0.9	80	120°	F
LS-330-30W	330*330*51	30	3000	3225	185-265	≥0.9	80	120°	F



IP65 Ceiling Light 04

- CCT Change
- Traic Dimmable
- Microwave sensor
- Emergency
- WIFI Control+Bluetooth+RGB
- Bluetooth Mesh+RGB
- Power Change+CCT Change
- CCT Change by Wall Switch
- Dimmable by Wall Switch





OTO

IP65 Round Ceiling Light



MORE OPTIONS

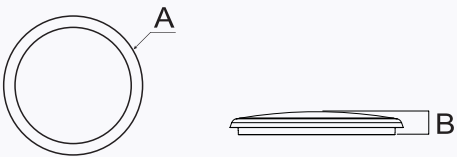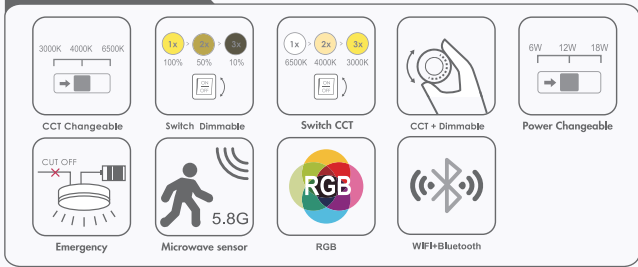




Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
OR250-18W	φ250*48	18	1350	1880	185-265	≥0.8	80	120°	F
OR350-30W	φ350*48	30	2340	3255	185-265	≥0.9	80	120°	F

OTO

IP65 Round Ceiling Light



Replaceable Ring

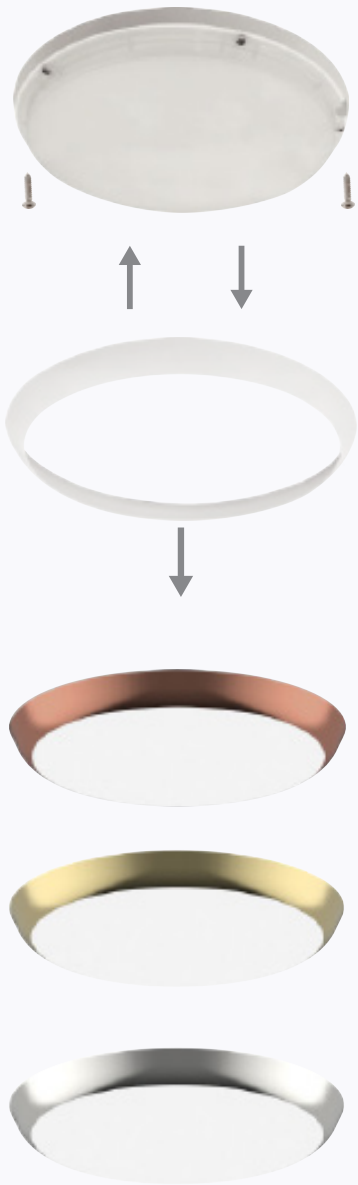



Ceiling Light 04



- CCT Change
- Traic Dimmable
- Microwave sensor
- WIFI Control+Bluetooth+RGB
- Bluetooth Mesh+RGB
- Power Change+CCT Change
- CCT Change by Wall Switch
- Dimmable by Wall Switch



OYSTER

OYSTER

Ceiling Light

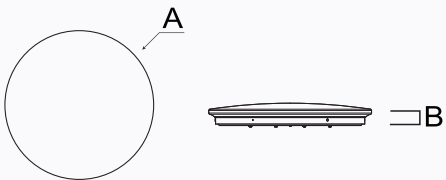

CCT 3000K 4000K 6500K




Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
CL-260-12W	260*58	12	822	1190	185-265	≥0.7	80	120°	F
CL-350-18W	350*62	18	1117	1880	185-265	≥0.7	80	120°	F
CL-380-24W	380*52	24	1333	2565	185-265	≥0.7	80	120°	F

OYSTER

PRO+Ceiling Light




PRO Version

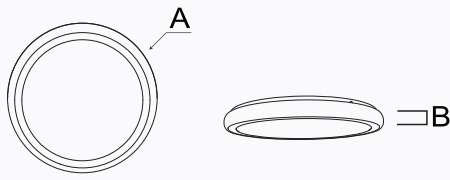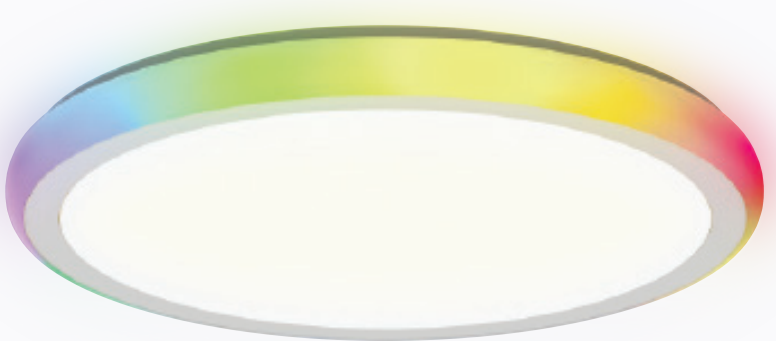

Optional Remote Controller

MORE OPTIONS

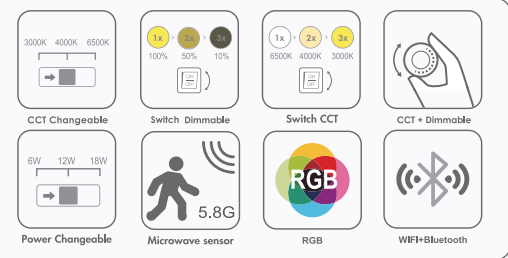

CCT 3000K 4000K 6500K

Model No.	Size (A*Bmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
CL-380-24W	380*65	24	1600	2600	185-265	≥0.7	80	120°	F
CL-485-36W	485*65	36	2900	3950	185-265	≥0.9	80	120°	F
CL-585-45W	585*65	45	3600	5000	185-265	≥0.9	80	120°	E

LED Batten Light

- Linkable for Options
- IP20/IP65 for Options
- Easy Installation




NAVI



NAVI

LED Shadowless Batten Light



Model No.	Size (A*B*Cmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
BLC-7035-12W	581*70*35	12	1020	1200	185-265	0.7	80	120°	F
BLC-7035-18W	881*70*35	18	1570	1850	185-265	0.8	80	120°	F
BLC-7035-24W	1186*70*35	24	2165	2550	185-265	0.8	80	120°	F
BLC-7035-30W	1486*70*35	30	2770	3260	185-265	0.9	80	120°	F
BLC-7035-40W	1186*70*35	40	3740	4400	185-265	0.9	80	120°	E
BLC-7035-50W	1486*70*35	50	4710	5540	185-265	0.9	80	120°	E


Different Installation

Standard accessories

- ① Expansion pipe
- ② Buckle
- ③ Linkable wire


Optional accessories

- ④ Power cord

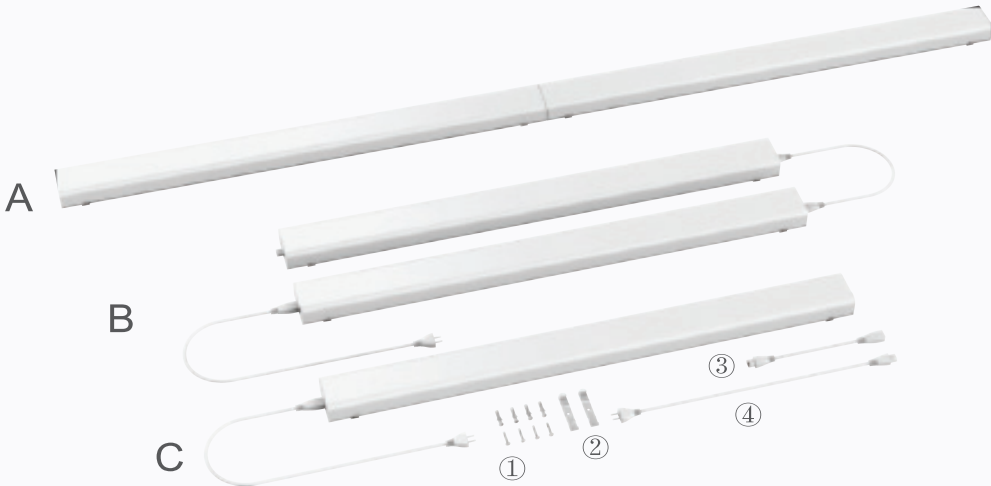


NAVI

BL70 Batten Light



Model No.	Size (A*B*Cmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
IP20-BL70-10W	300*75*23	10	815	960	185-265	≥0.7	80	120°	F
IP20-BL70-20W	600*75*23	20	1785	2100	185-265	≥0.7	80	120°	F
IP20-BL70-30W	900*75*23	30	2770	3260	185-265	≥0.9	80	120°	F
IP20-BL70-40W	1200*75*23	40	3740	4400	185-265	≥0.9	80	120°	E
IP20-BL70-50W	1500*75*23	50	4710	5540	185-265	≥0.9	80	120°	E



NAVI

BL50 Batten Light

Model No.	Size (A*B*Cmm)	Power (W)	Flux (LM)	FLUX(LM) Module	Voltage (V)	PF	CRI	Beam Angle	Energy Class
IP65-BL50-20W	600*53*28	20	1785	2100	185-265	≥0.8	80	120°	F
IP65-BL50-30W	900*53*28	30	2770	3260	185-265	≥0.9	80	120°	F
IP65-BL50-40W	1200*53*28	40	3740	4400	185-265	≥0.9	80	120°	E
IP65-BL50-50W	1500*53*28	50	4710	5540	185-265	≥0.9	80	120°	E

USB Rechargeable

Metal Surface—Ironwork

Easy to attach to any Iron Surface

Non-metallic Surface—Non-Ironwork

With Adhesive Magnetic Strip Just stick to anywhere you want

Interaction way: PIR Sensor
Induction distance: >3m Induction angle: 120°
Delay time: 18 secs

USB Rechargeable

SLIM-FIT

LED Cabinet Light

Technical drawing of a rectangular prism. The top view shows a horizontal line with a small semi-circle at the left end and a vertical line at the right end labeled 'L'. The front view shows a rectangle with a small circle on the left side. Dimension lines indicate length 'A' and width 'B'.


Model No.	Size(A*B*Cmm)	Power(W)	Flux(LM)	Voltage(V)	CCT(K)	Lithium battery capacity
Slim-fit CBL 150MM	150*39.8*10	0.5	45	DC-5V	3/4/6000K	420mA
Slim-fit CBL 240MM	240*39.8*10	1.5	100	DC-5V	3/4/6000K	900mA
Slim-fit CBL 400MM	400*39.8*10	3	190	DC-5V	3/4/6000K	1500mA
Slim-fit CBL 600MM	600*39.8*10	3.5	230	DC-5V	3/4/6000K	2200mA

Solar Energy Light


APOLO

APOLO

Solar Energy Light






Model No.	Size(A*B*Cmm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	LED Qty (PCS)
TJ-MWS	182*132*44 mm	0.3	1.2	230	3.7	6500	32
TJ-MBS	182*132*44 mm	0.3	1.2	230	3.7	6500	32



Model No.	Size(A*B*Cmm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	LED Qty (PCS)
TJ-LWS-White	300*132*44	0.5	2.4	465	3.7	6500	56/200
TJ-LBS-Black	300*132*44	0.5	2.4	465	3.7	6500	56/200

APOLO

Solar Ground Light



Model No.	Size(A*B*mm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	Lamp Beads
SGL-CCT	φ165*31.5MM	0.33	0.6	20	3.7	3000K/4000K/6500K	94*2835
SGL-RGB	φ165*31.5MM	0.33	0.6	10	3.7	RGB	32*5050
SGL-RGBIC	φ165*31.5MM	0.33	0.6	10	3.7	RGB	32*5050

APOLO

Solar Ground Light

1.CCT Changeable


Click the back button switch to change CCT and respiratory pattern

2.RGB function

Click the back button switch,tap the shell to change with Red color/Green color/Blue color/Yellow color/ Cyan color/Mageata color and respiratory pattern

3.Pro-RGB function

Click the back button switch,tap the shell to change with Red color/Green color/Blue color/Yellow color/ Cyan color/Mageata color,respiratory pattern etc. 10 pattern,Remote control for option.



1.Wall Mounting




2.Ground Insertion



APOLO

Solar Wall Light

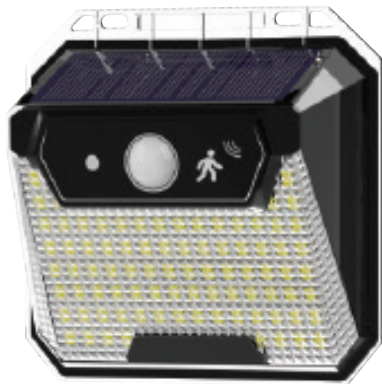

Model No.	Size(A*B*mm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	Lamp Beads
SWL-S	115*115*60	0.15	1.5	200	3.7	3000K/4000K/6500K	70*2835
SWL-M	170*170*60	0.25	2	260	3.7	3000K/4000K/6500K	100*2835
SWL-L	260*260*60	0.40	3	400	3.7	3000K/4000K/6500K	150*2835

APOLO


Solar Street Light



Model No.	Size(A*B*mm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	Lamp Beads
SSL-M	190*110*30	0.3	4	400	3.7	3000K/4000K/6500K	36*2835
SSL-L	400*210*50	1.2	8	1000	3.2	3000K/4000K/6500K	100*2835

APOLO


Solar Flood light



Model No.	Size(A*B*mm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	Lamp Beads
SFL-S	150*100*60	0.5	4	400	3.2	3000K/4000K/6500K	120*2835
SFL-M	200*150*60	0.7	5	700	3.2	3000K/4000K/6500K	200*2835
SFL-L	350*190*60	1	8	1000	3.2	3000K/4000K/6500K	300*2835

APOLO

Solar Wall Hanging Light



Model No.	Size(A*B*mm)	Weight(kg)	Power(W)	Flux(LM)	Voltage(V)	Color Temp.(K)	Lamp Beads
SWHL-M	180*180*60	1.2	4	600	3.2	3000K/4000K/6500K	40*2835

