


Guangdong Ynd Technological Lighting Co.,Ltd



WhatsApp

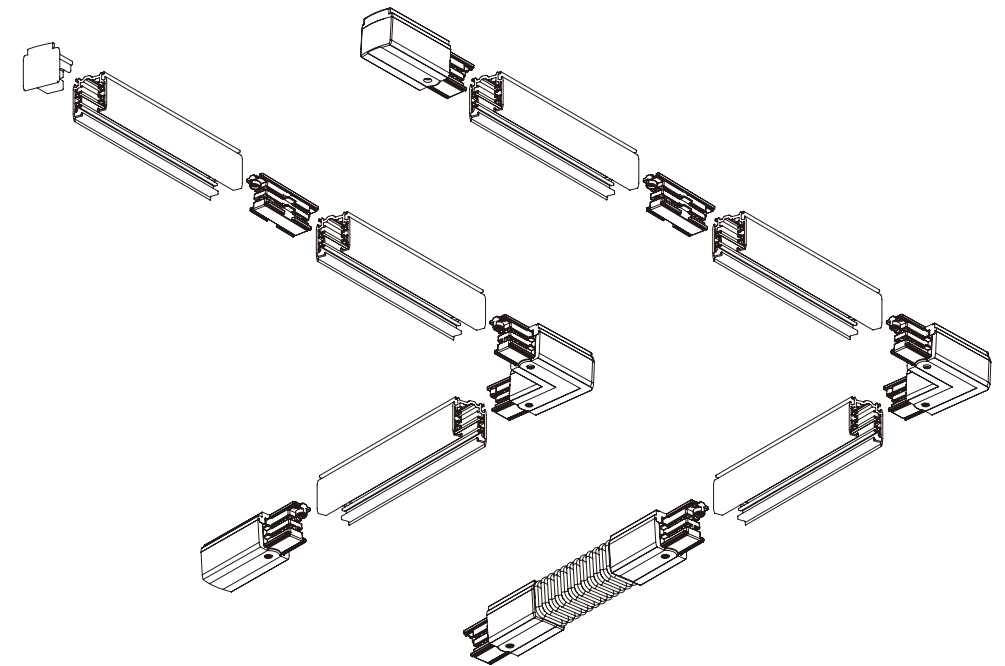

WeChat



ABOUT US

GUANGDONG YND Technological Lighting Co.,Ltd., referred as "YND" . Founded in 2009, it is located in HengLan. It is a professional LED lighting product manufacturer integrating, R&D, manufacturing, promotion and sales business.

After more than ten years of development, our company has successfully established a mature industrial chain integrating, R&D, production and service guarantee system.

YND introduces foreign leading design concept, focusing on research and development and manufacturing LED magnetic light system, LED linear light system, LED UFO high bay light system. With the concept of focusing on professionalism, we provide one-stop lighting products and services for various commercial and home projects.

Products are widely used in supermarkets, large clubs hotels 4S stores, office buildings, villas, warehouses, factories and so on. As a professional LED lighting manufacturer, we have first -class engineering and technical personnel and large product research and development teams. We continue to improve the quality and service level of the product to satisfy customers' demands and expectations.

YND covers an area of 10,000 square meters and employs more than 200 people. As a professional LED lighting manufacturer, YND have first-class engineering and technical personnel and a strong product, R&D, team. We have electronic engineers product development engineer, Dlux simulat design engineers tooling engineers, And we have our own tooling workshop, SMT, workshop, CNC, workshop stamping workshop finished product assembly workshop etc. Also have with high-speed SMT machine integrating sphere laser cutting machine, CNC, darkroom test , professional production and testing equipment etc. Specializing in the production and testing equipment. These equipment and workshops are rigorous operating and quality management systems to ensure high quality and performance of products. YND is committed to continuously improving the level of technology and production capacity to meet the different needs and requirements of customers.

In line with the interests of customers, we have successfully interpreted the concept of one-stop professional services. YND has always attached great importance to product quality, established a sound quality management system, and took the lead in the industry to pass TUV (ISO9001:2000 version) quality system certification and CE, GS, CB, 3C, ROHS, SAA and other product safety certification. These certifications marks YND has an internationally recognized professional level in quality management and product safety. YND product not only favored in the domestic market also exported to Europe, America, Southeast Asia, the Middle East, Australia and other countries. By virtue of professional OEM and ODM ability in the industry has been a good reputations. YND has made great efforts to enter the domestic market, and its products have been favored by professionals and won a large number of distributors designers and other channel customers.

YND products quality has been steadily improved and continuously upgraded by excellent research and development design, advanced production technology, accurate detection, strict quality management system, and excellent after-sales service. YND committed to continuously improve customer satisfaction, to provide customers with the best lighting solutions and first-class after-sales service. We are constantly innovating and striving for perfection to meet the various needs and requirements of our customers. Welcome to join us to create brilliant!

We warmly welcome you to join us together create a more brilliant future!

Raw Material Workshop



Assembly Production Line



Painting Workshop



Aging TestRoom 1



Aging TestRoom 2



High-Speed SMT Workshop



IES DarkRoom Testing Center



Integrating Sphere Optical Test Center



HONNORS AND CERTIFICATES



WIRED CONTROL

Global Lighting Control Protocol


Dimmable / CCT Adjustable
Intelligent control series

One of the DALI2 Community Members
Community Members (43)



0/1-10V



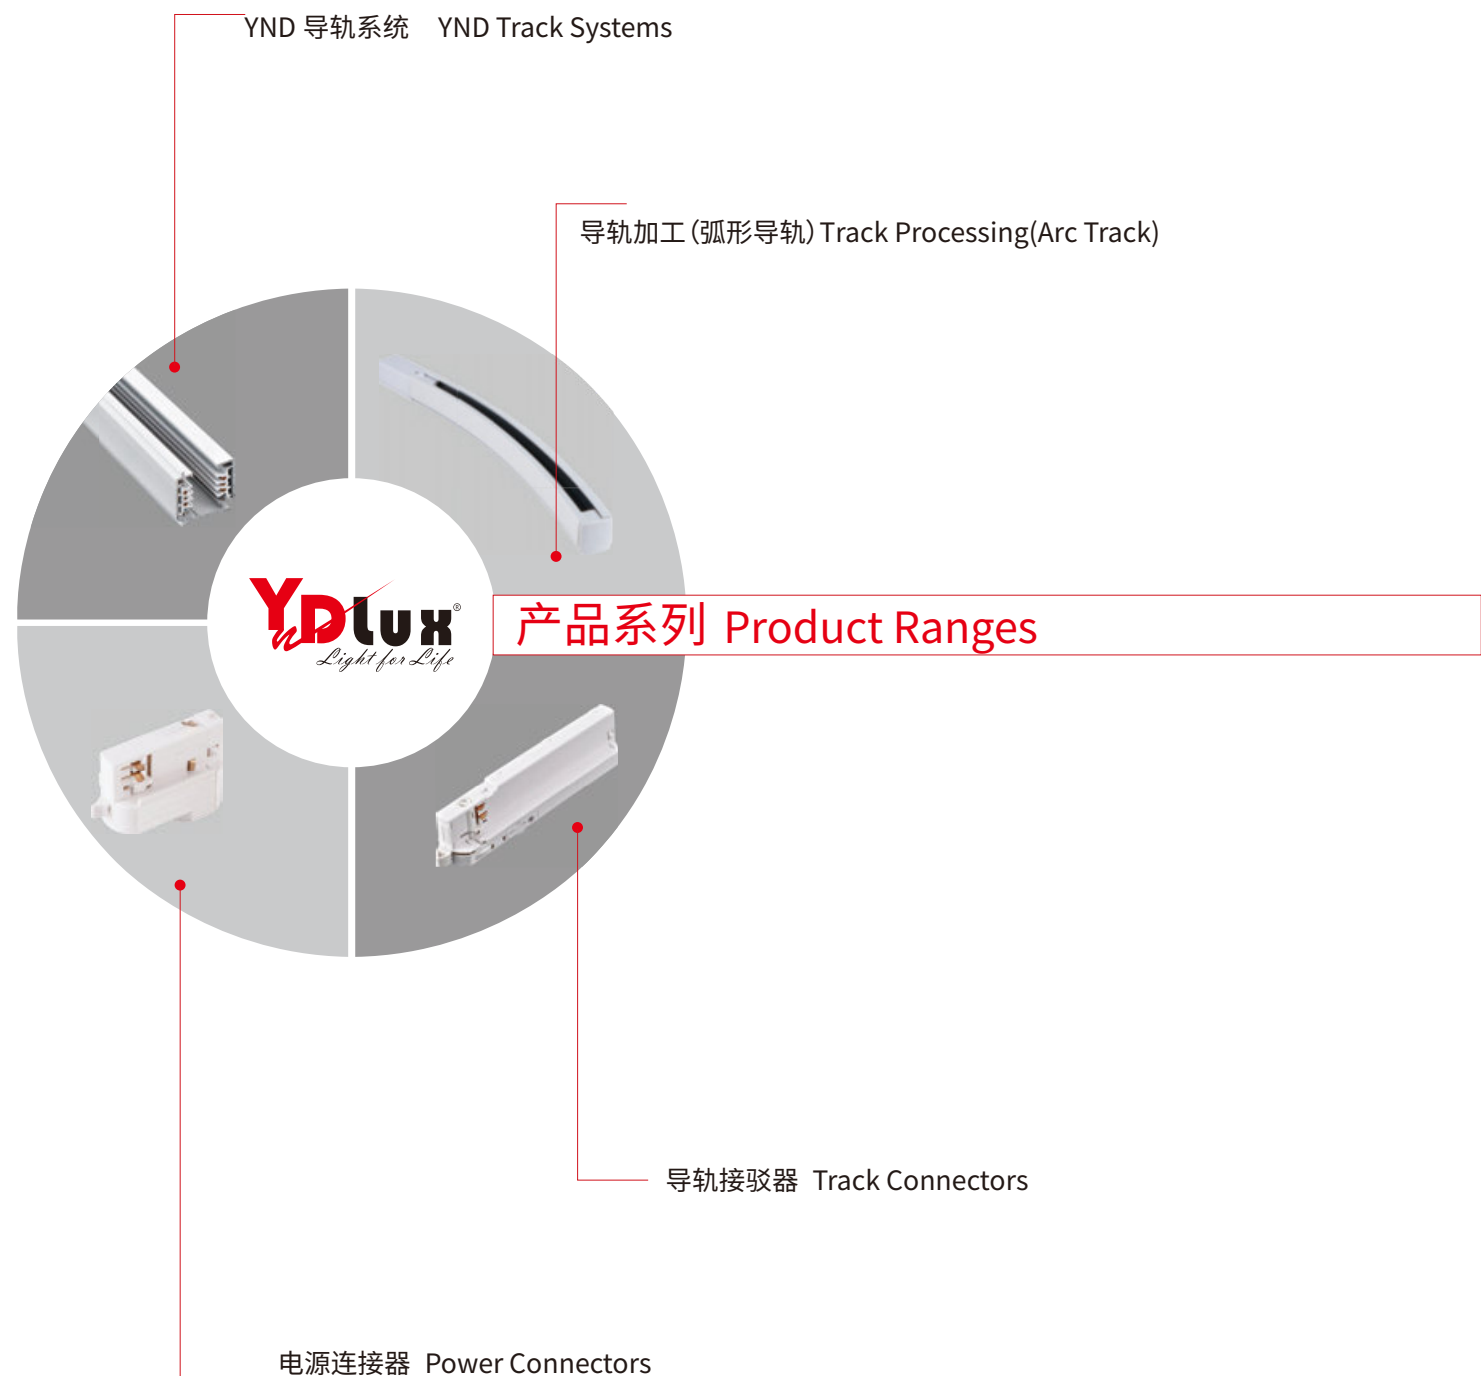

YND 导轨系统 YND track systems

YND 一诺德导轨系统采用全铝,铜材料制造,安装简易。
适用于商业照明,家居照明,工程照明。

YND track systems use aluminum and copper materials,easy to install Suitable for commercial lighting furniture lighting and engineering lighting.

导轨加工 (弧形导轨)Track processing(arc track)

YND 一诺德拥有一流的机械,对二线,三线,四线导轨加工成弧形。
可连接成2米-10米的圆形。

YND track factory has first-class machinery, processing 2-line, 3-line and 4-line track into arc shapes to be connected into round shapes of 2meters to 10meters.

导轨连接器 Track connectors

YND 一诺德导轨系统拥有多样连接器,可连接成L.T.X.I型,使用方便、美观、安全。
YND track systems have different connectors,capable of connecting into L-shape,T-shape,X-shape and I-shape,for ease of use,elegance and safety.

电源连接器 Power connectors

YND 一诺德连接器均有二线、三线、四线系列,采用新PC、PVC制造、款式多样。
YND power are available in 2lines,3lines and 4lines,made of all-new PC/PVC,with diversified styles.

YND 磁吸导轨系统 YND Magnet Track Systems

YND 一诺德导轨系统采用全铝,铜材料制造,安装简易。
适用于商业照明,家居照明,工程照明。

YND track systems use aluminum and copper materials,easy to install Suitable for commercial lighting furniture lighting and engineering lighting.

6 线导轨条 Six Line Track Syste




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




6线导轨采用全铝材制造,内置全新 PVC 绝缘材料压铜条导电。只要电压

产品介绍 Product introduction

6线导轨采全铝材制造,内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器,可根据设计师要求,实施多种安装方式,满足各种照明需要。


6-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

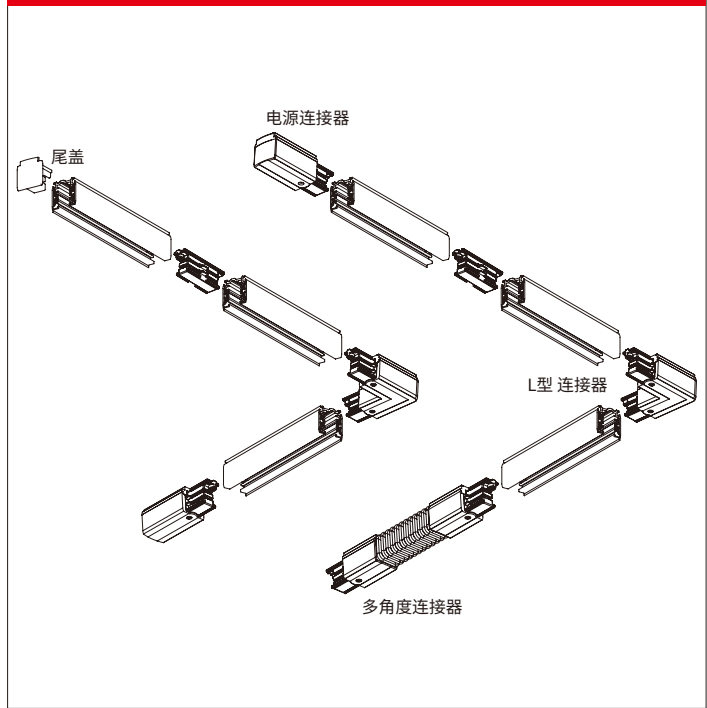


导轨连接器 Track Connectors


NO: YND-6-Feeder 6线导轨电源头

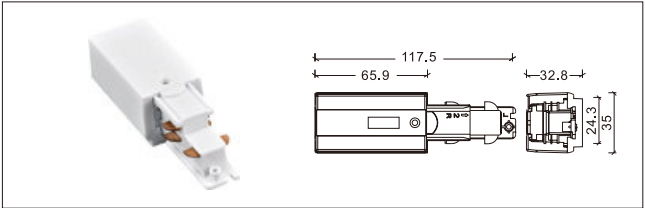


NO: YND-6-I 6线导轨 I 型连接器

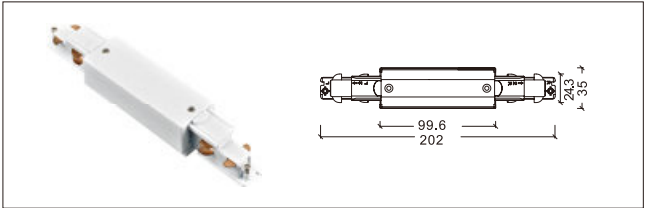


NO: YND-6-L 6线导轨 L 型连接器

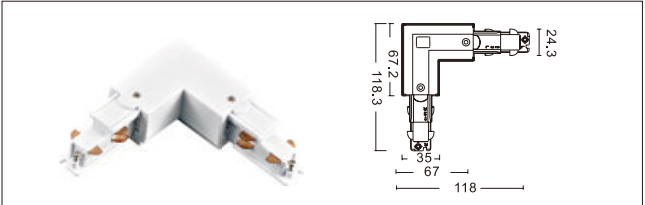


NO: YND-6-T 6线导轨 T 型连接器

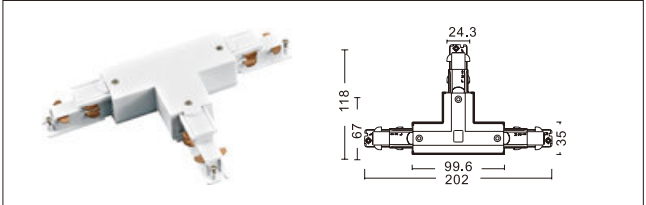


NO: YND-6-X 6线导轨 X 型连接器

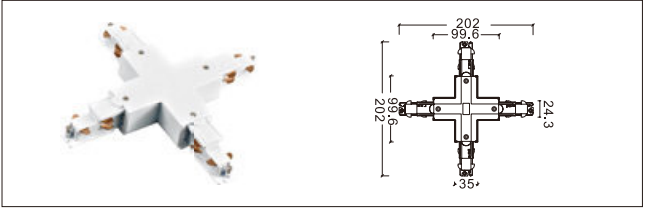


NO: YND-6-I-MINI 6线导轨迷你 I 型连接器

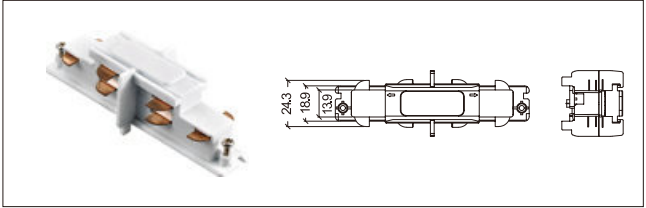


NO: N609 6线调光导轨头

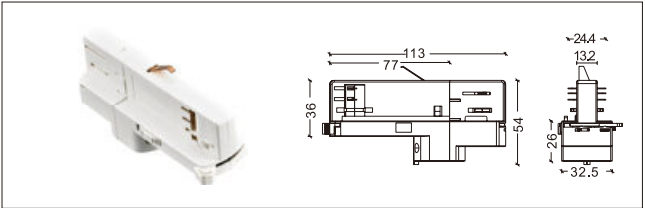

NO: YND-610 6线导轨头

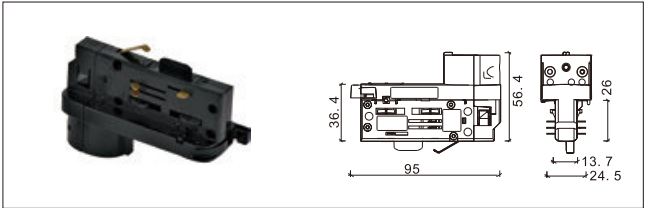

NO: YND-6-END CAP 6线尾盖

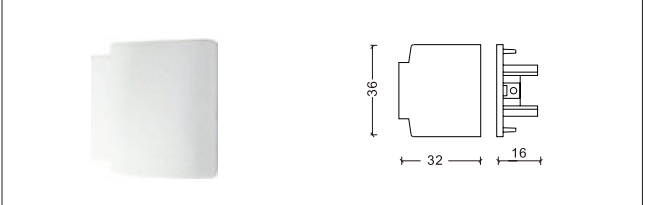

NO: YND-6-fitting 6线吊绳挂件



YND-6-C 明装六线导轨 Six Line Track System



YND-6-B 暗装六线导轨 Six Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm

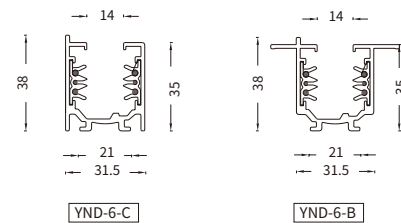


产品介绍 Product introduction

6线导轨采全铝材制造,内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器,可根据设计师要求,实施多种安装方式,满足各种照明需要。


6-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

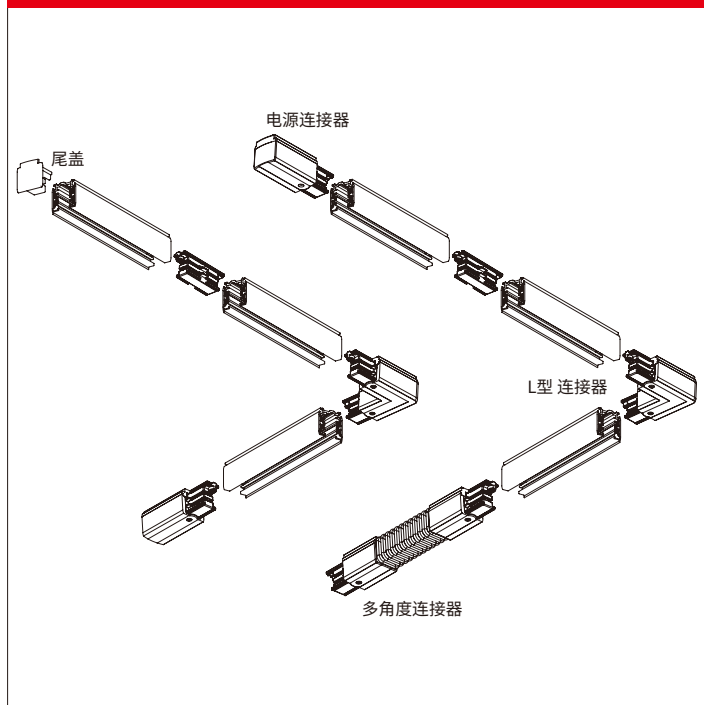


六线导轨头 ADAPTOR


NO: YND-601 6线导轨电器盒

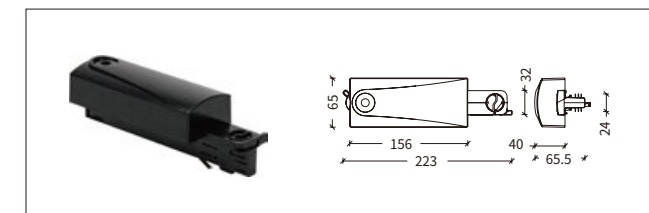

NO: YND-6-B-Feeder 暗装6线电源头

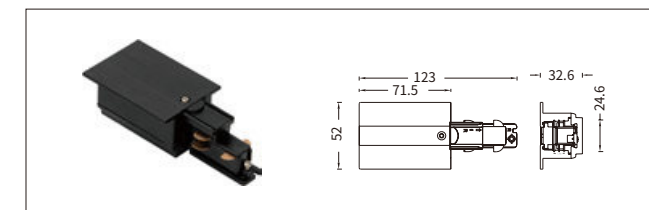


NO: YND-6-B-mini-i 6线无缝内接

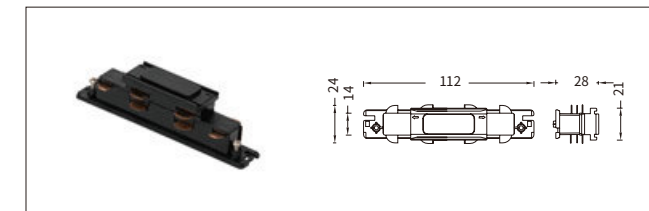


NO: YND-6-B-L 暗装6线 L 型连接




NO: YND-6-B-X 暗装6线十字连接

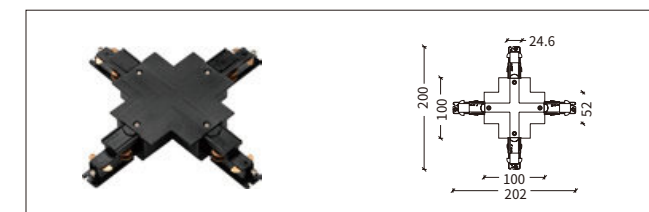


NO: YND-611

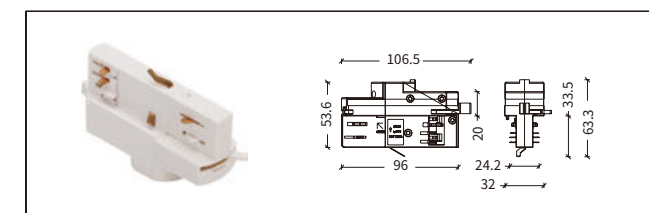

6线可调角度面板线条灯

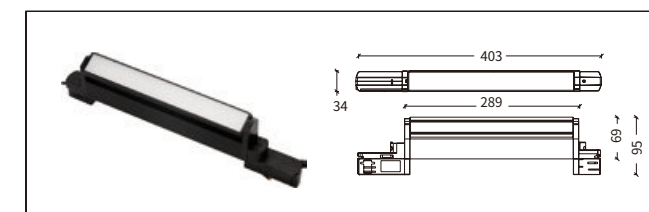


NO: YND-6-C-F 6线软接

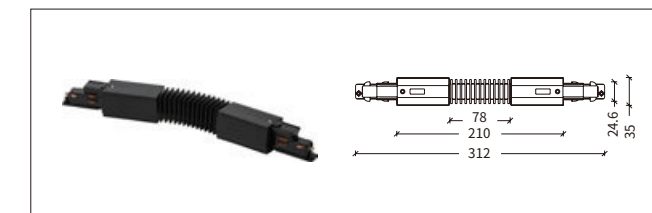


NO: YND-6-B-End cap 暗装6线尾盖




NO: YND-6-B-I 暗装6线 I 型连接

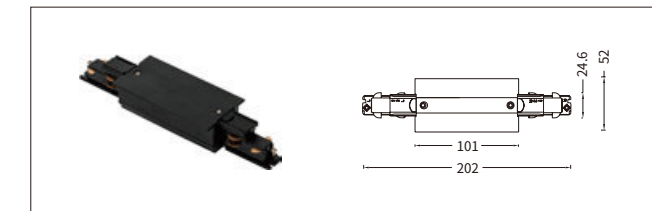


NO: YND-6-B-T 暗装6线 T 型连接

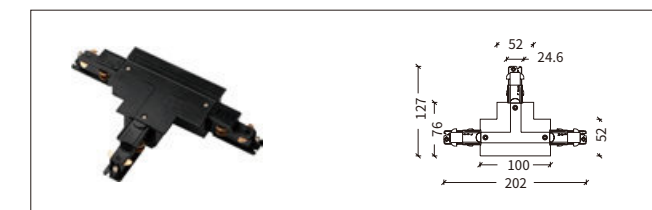

NO: YND-6-B-F 暗装6线软接

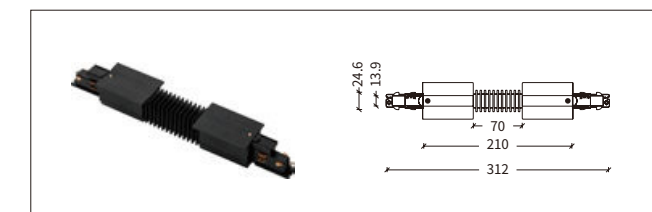

6 线导轨弹性吊挂件

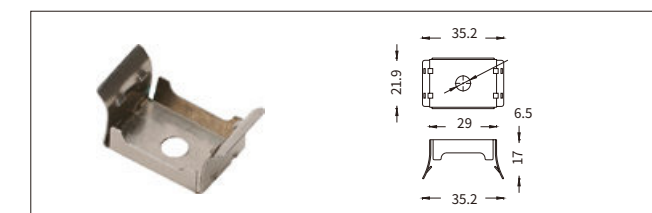

5 线导轨条 Five Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm





产品介绍 Product introduction

5线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。

5-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

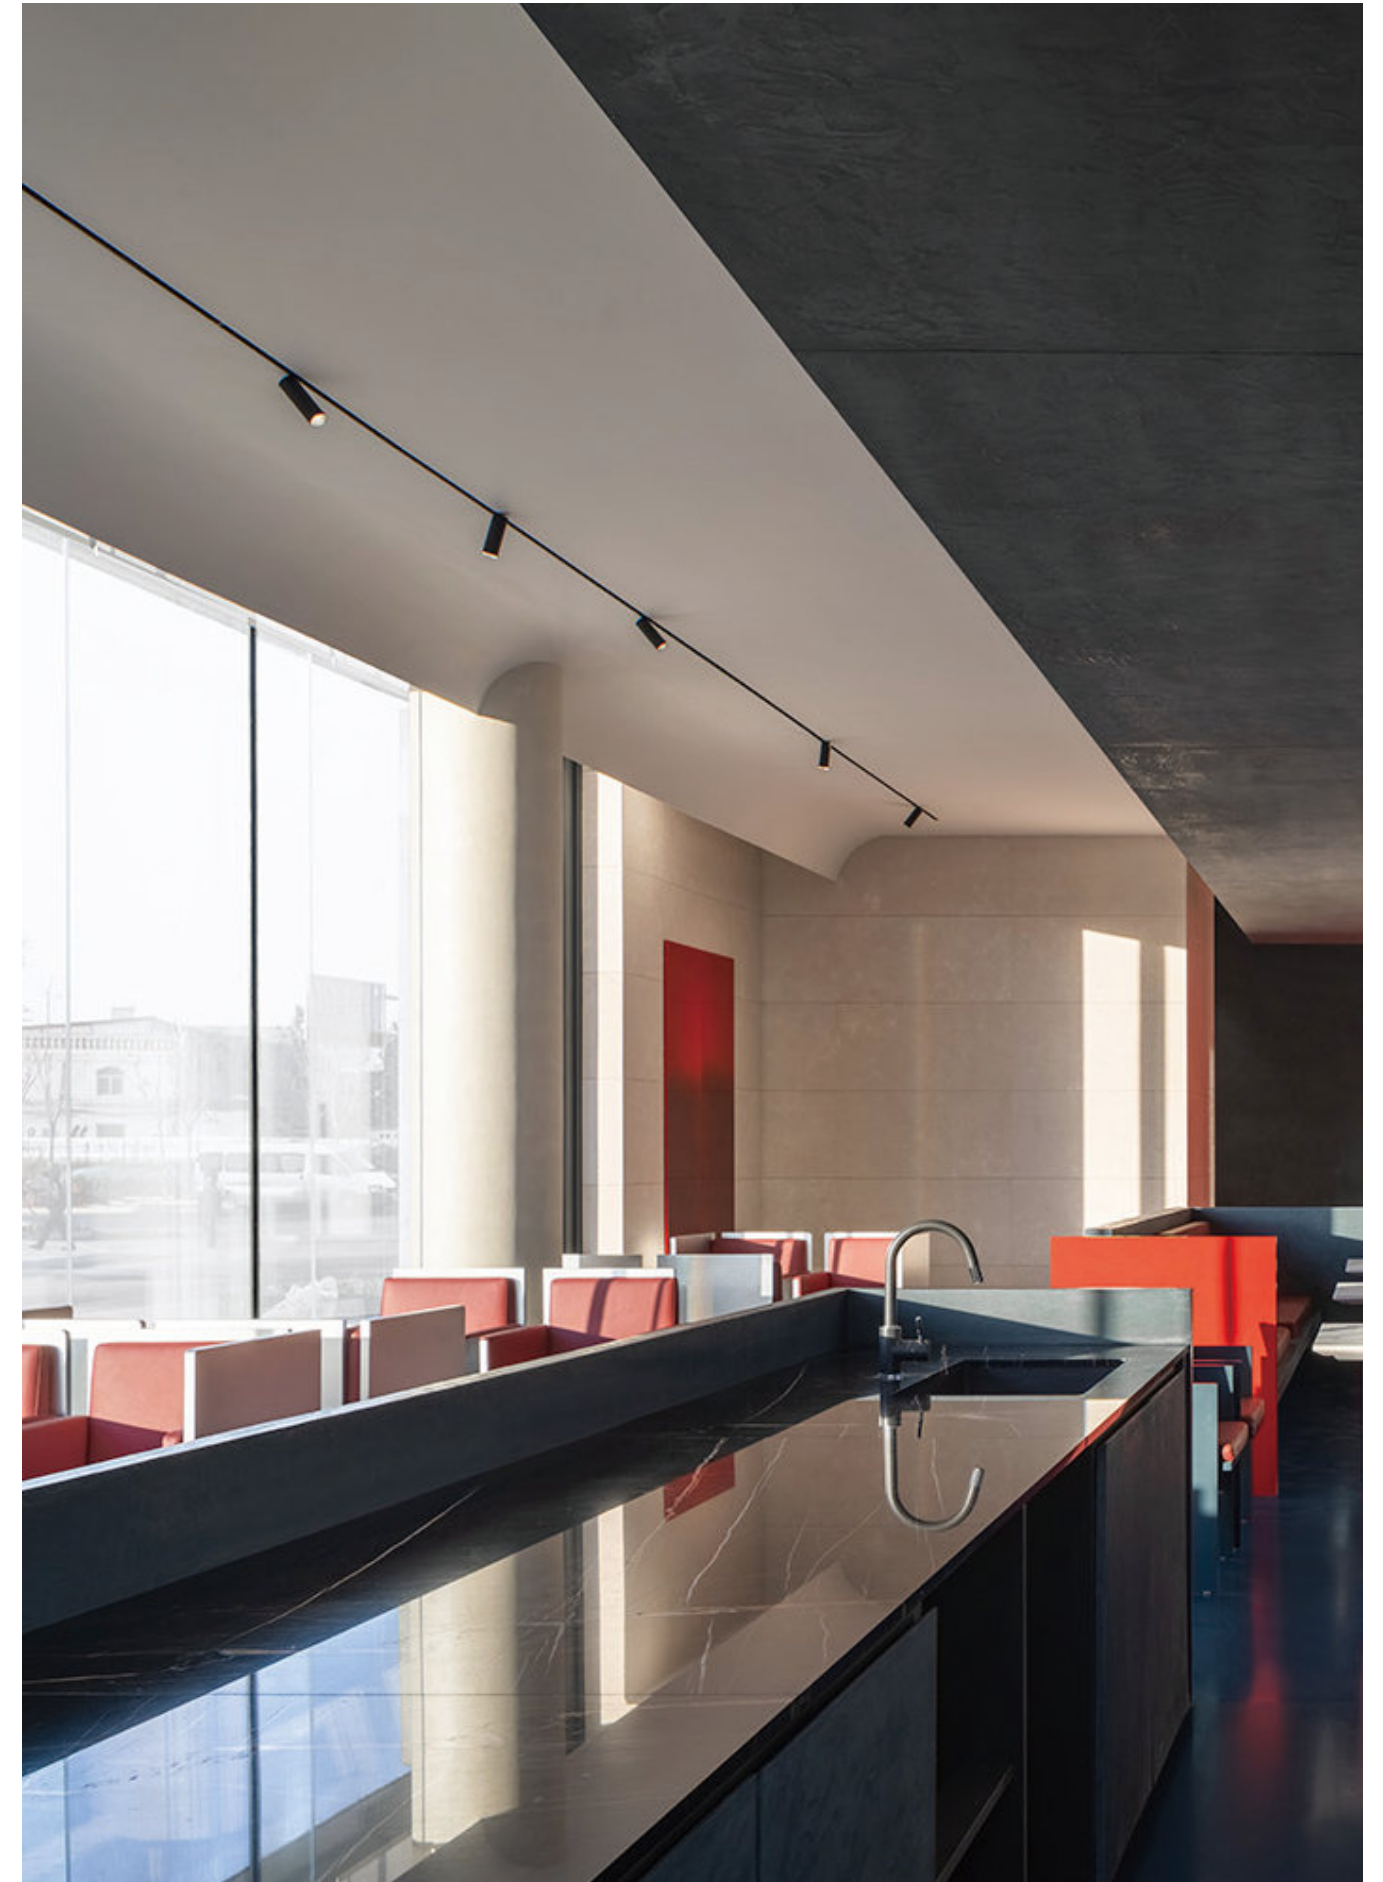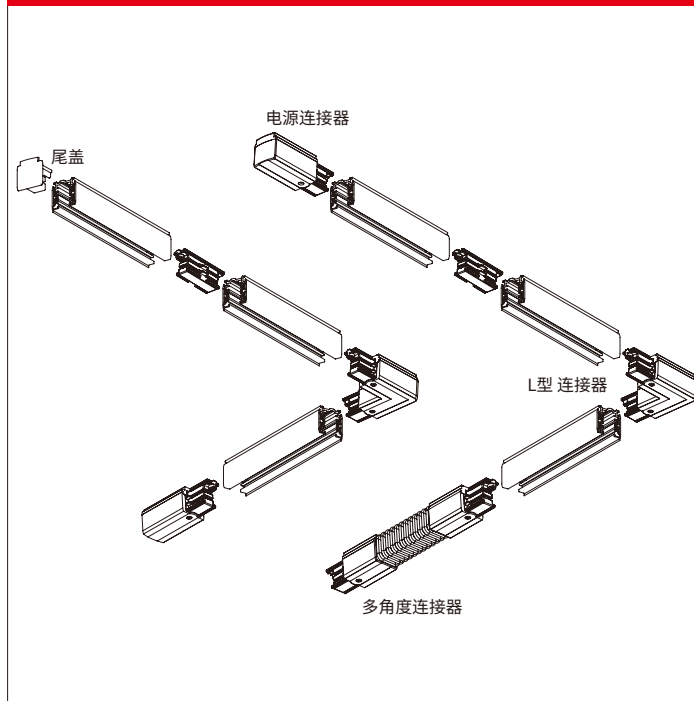

4 线 H-01 型导轨条 Four Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


4-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extrude PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

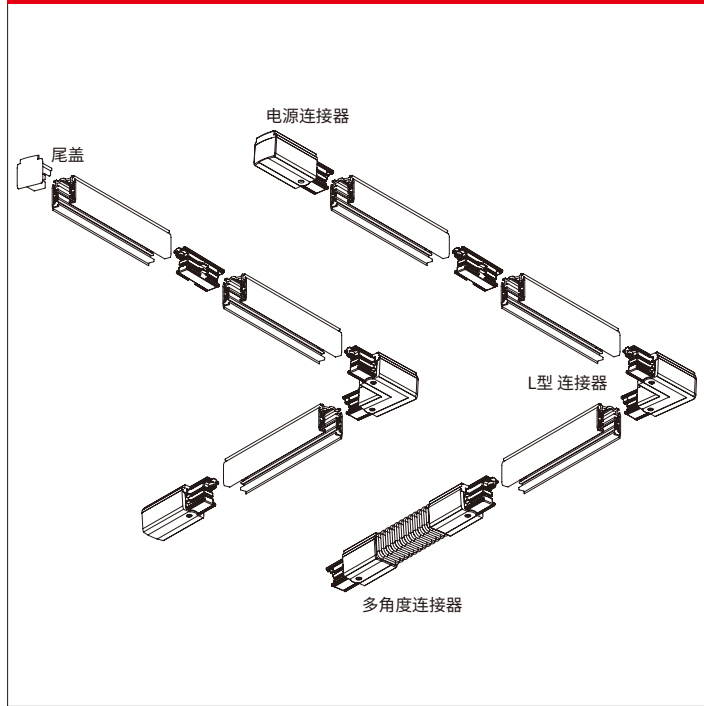


导轨连接器 Track Connectors


H-01 电源连接器-左
Feeder-L

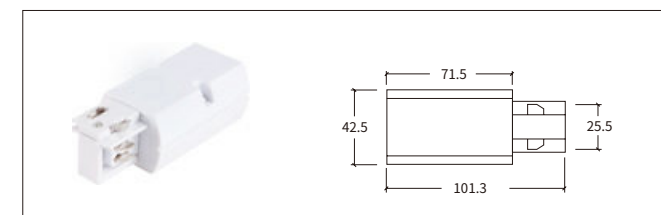


H-01 电源连接器-右
Feeder-R

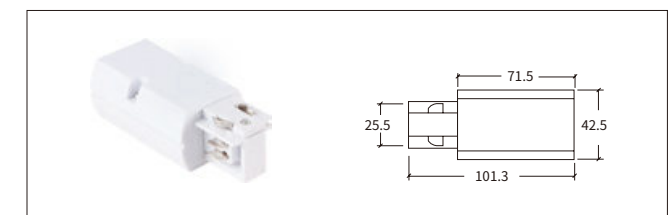


H-01 mini型直线连接器
Straight Connector MINI

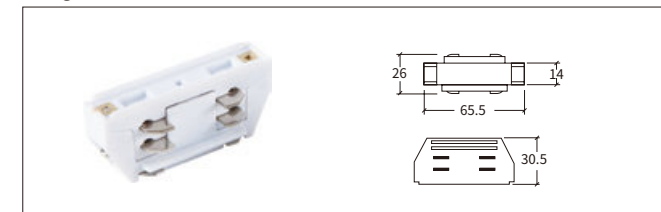


H-01 直线连接器
Straight Connector

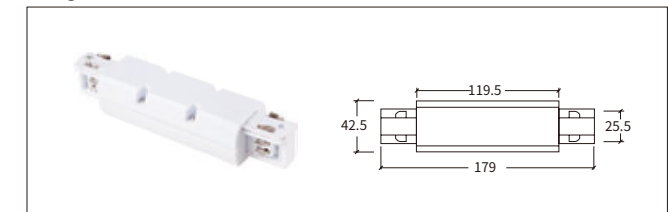


H-01 L型连接器-左
L-Connector-L

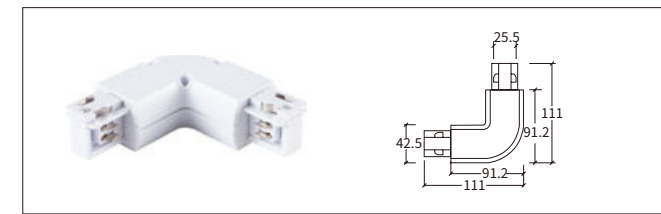


H-01 L型连接器-右
L-Connector-R

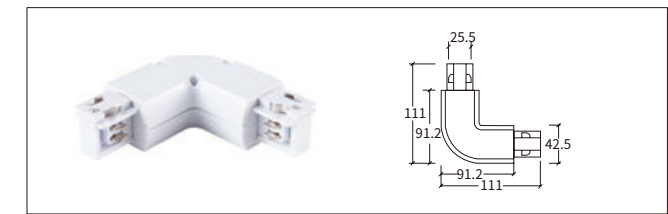


H-01 三向连接器-左
T-Connector-L

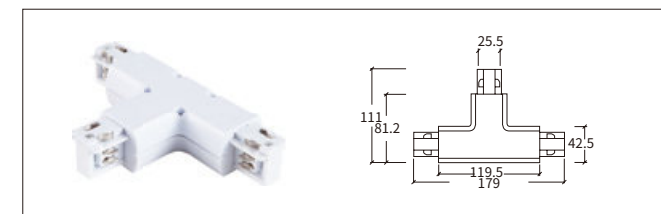


H-01 三向连接器-右
T-Connector-R

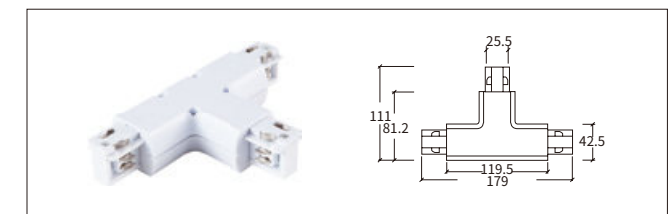


H-01 四向连接器
X-Connector

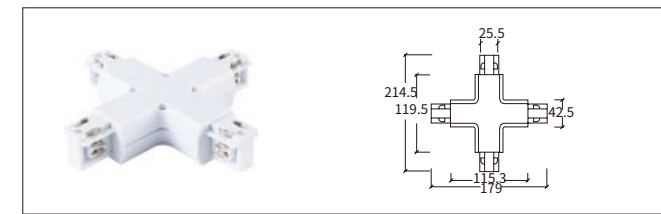

H-01 尾盖
End Cap

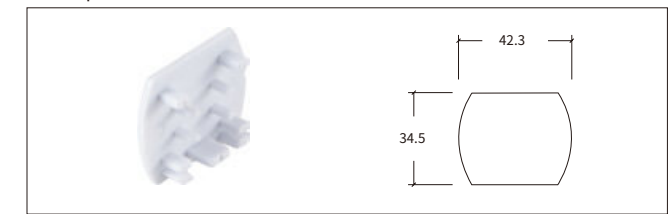

H-01 多角度连接器 (软接)
Flexible Connector

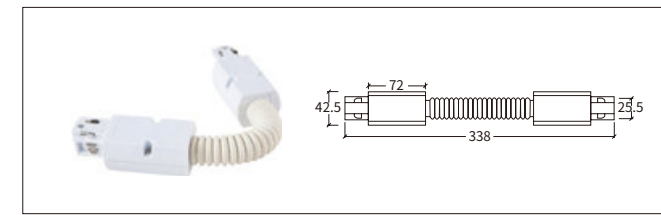

H-01 四线吊绳挂件
Fitting



4 线 H-02 型导轨条 Four Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


4-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extrude PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

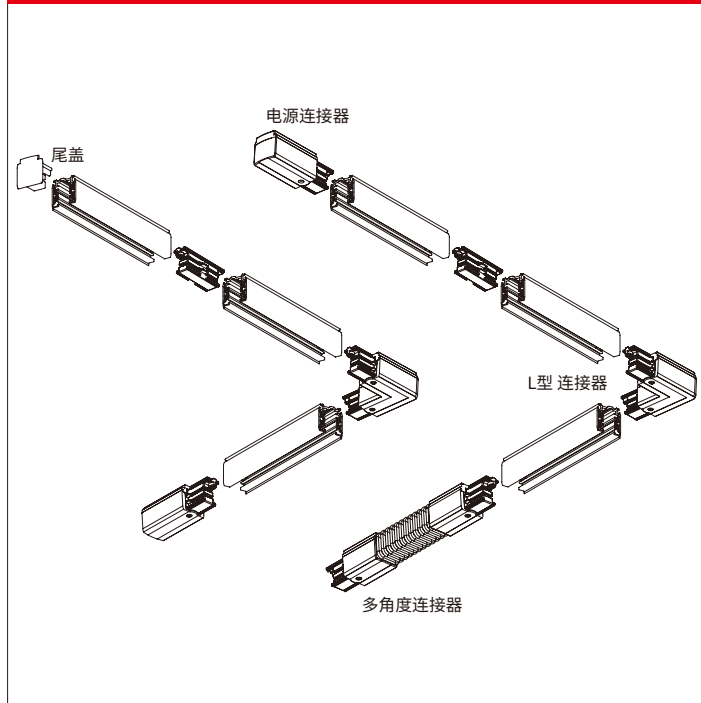


导轨连接器 Track Connectors


H-02 电源连接器-左
Feeder-L

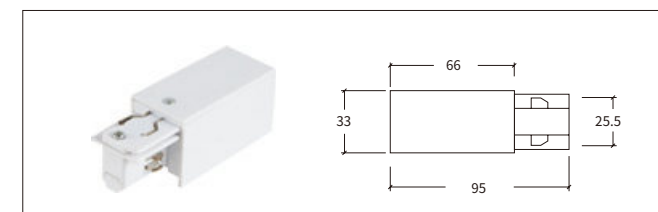


H-02 电源连接器-右
Feeder-R

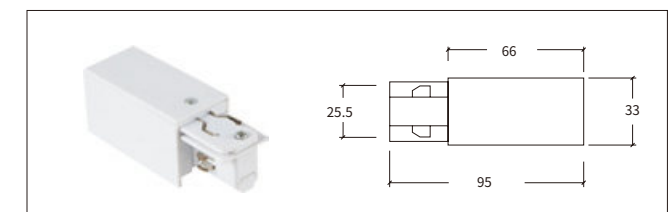


H-02 mini型直线连接器
Straight Connector MINI

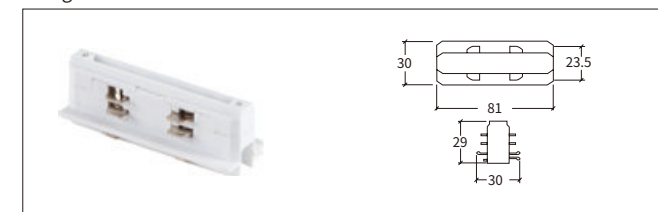


H-02 直线连接器
Straight Connector

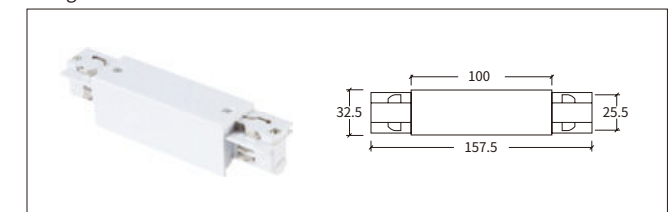


H-02 L型连接器-左
L-Connector-L

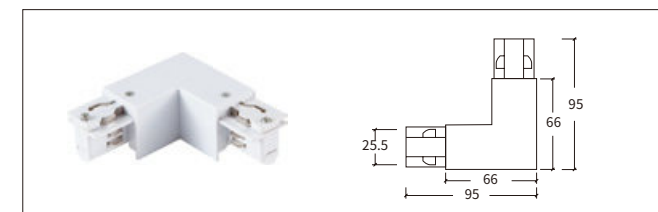


H-02 L型连接器-右
L-Connector-R

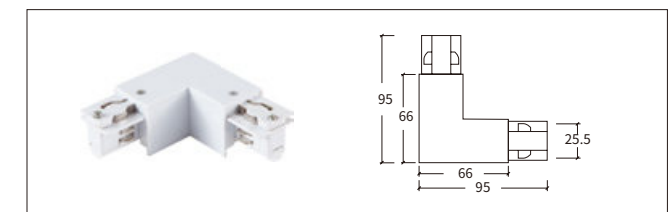


H-02 三向连接器-左
T-Connector-L

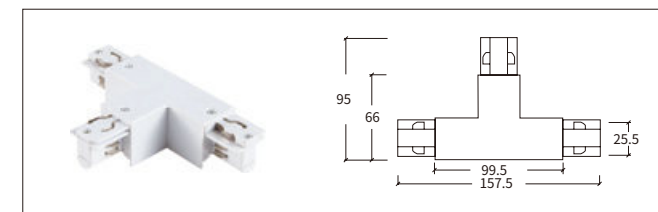


H-02 三向连接器-右
T-Connector-R

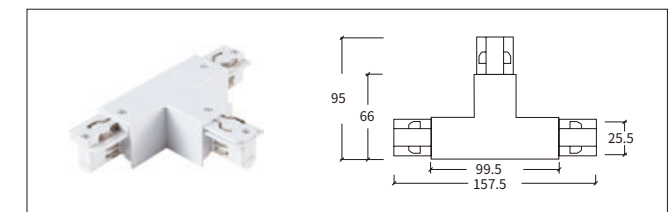


H-02 四向连接器
X-Connector

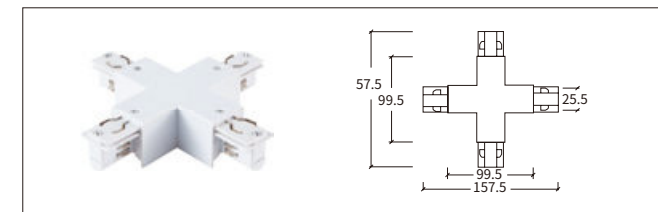


H-02 尾盖
End Cap

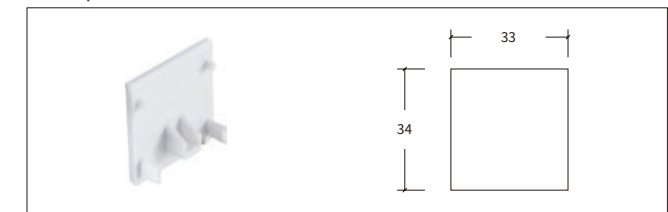

H-02 多角度连接器 (软接)
Flexible Connector

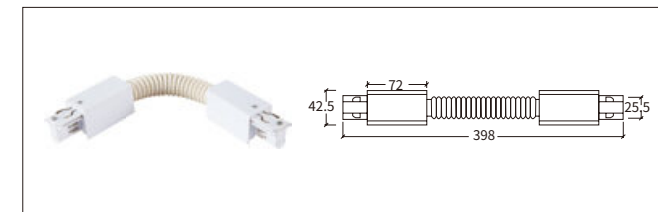

H-02 四线吊绳挂件
Fitting

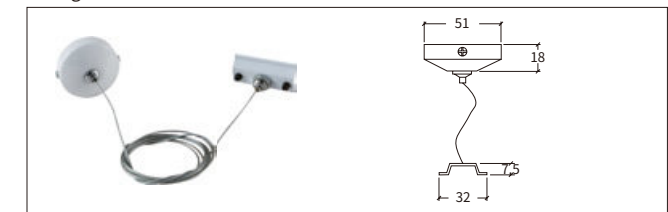

4 线 H-03 型导轨条 Four Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


4-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extrude PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

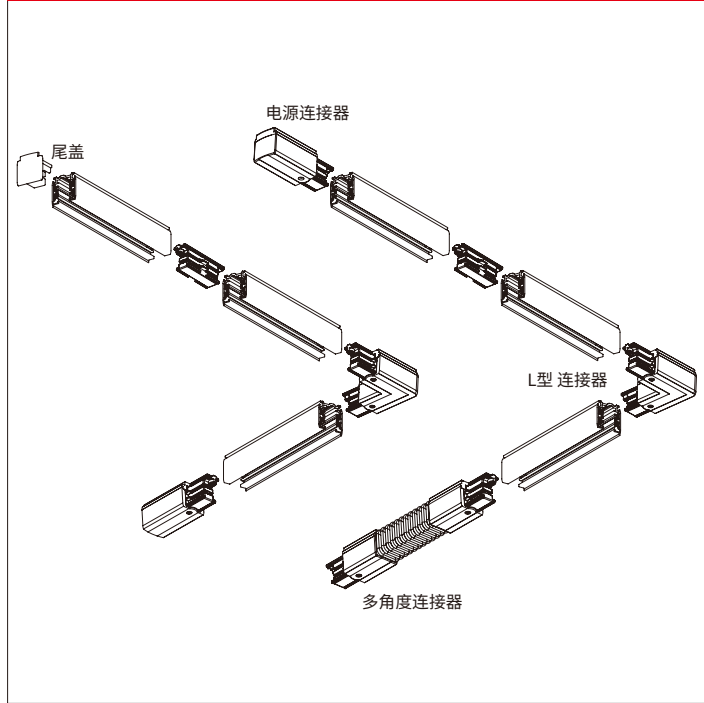


导轨连接器 Track Connectors


H-03 电源连接器-左
Feeder-L

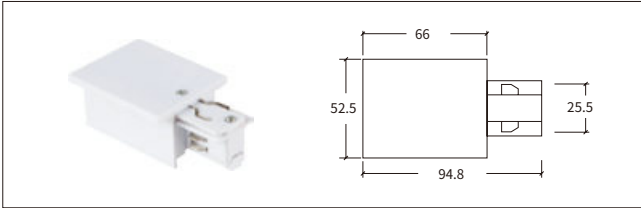


H-03 电源连接器-右
Feeder-R

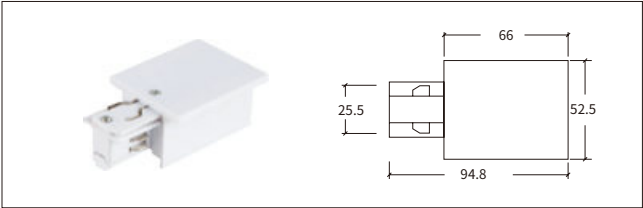


H-03 直线连接器
Straight Connector

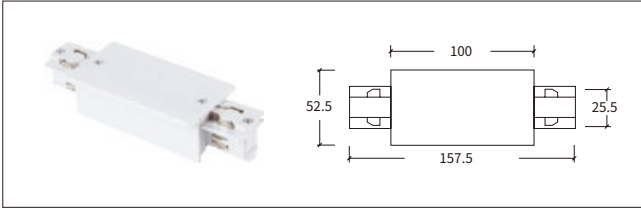


H-03 四线连接器
X-Connector

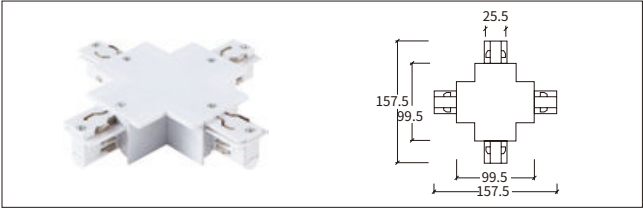


H-03 L型连接器-左
L-Connector-L

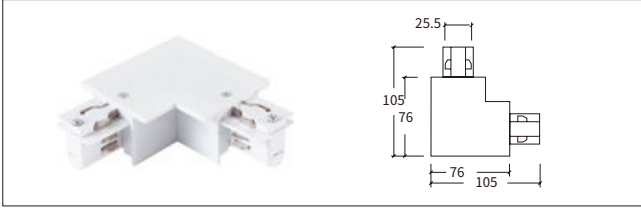


H-03 L型连接器-右
L-Connector-R

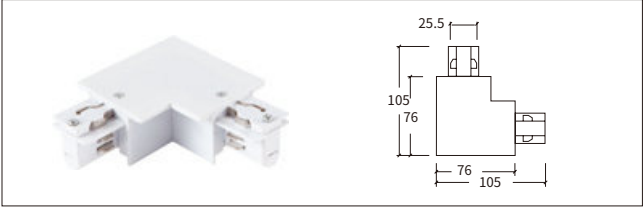


H-03 三向连接器-左
T-Connector-L

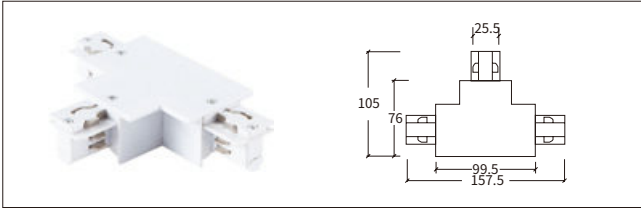


H-03 三向连接器-右
T-Connector-R

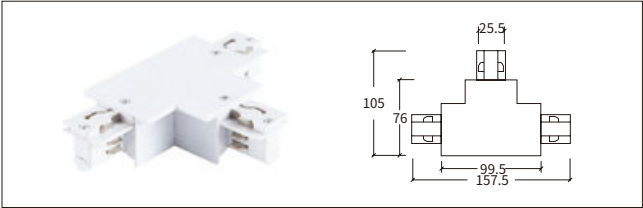


H-03 多角度连接器 (软接)
Flexible Connector

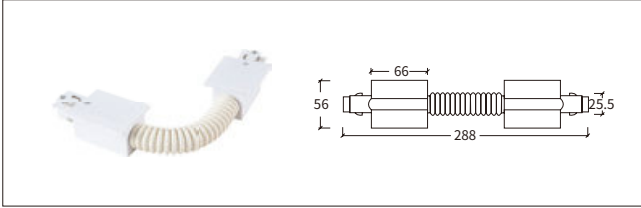


H-03 尾盖
End Cap

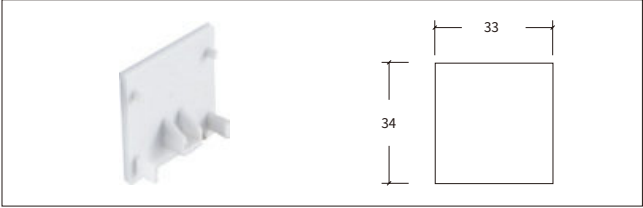

YND-D4 四线底座 (S)

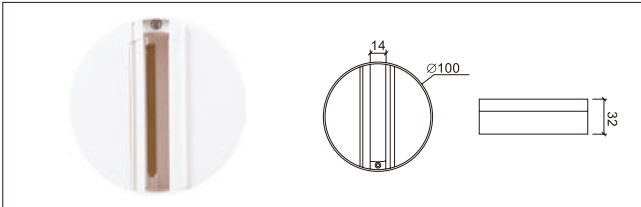

YND-D4 四线底座 (B)

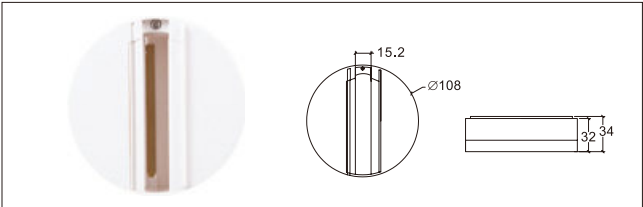

4 线 H-04 型导轨条 Four Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


4-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing. The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500mm spacing.

安装示意图 Installation diagram

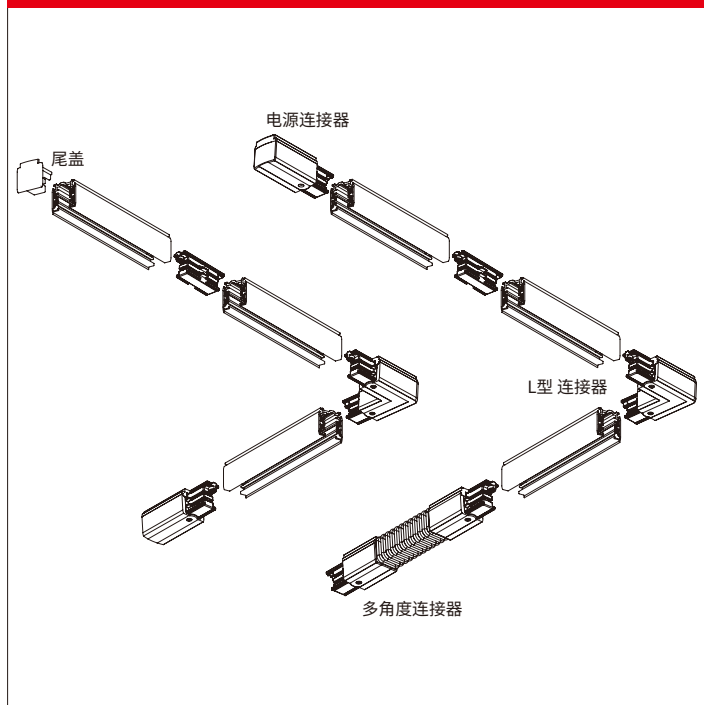


导轨连接器 Track Connectors


H-04 电源连接器-左 Feeder-L

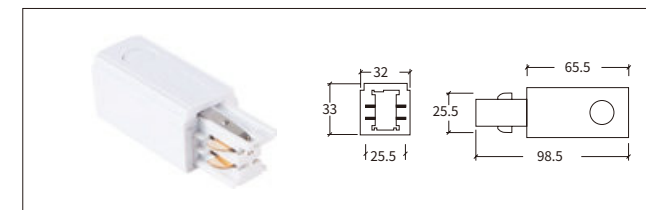


H-04 电源连接器-右 Feeder-R

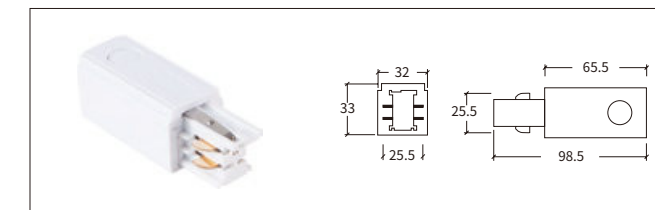


H-04 迷你型直线连接器 Straight Connector MINI

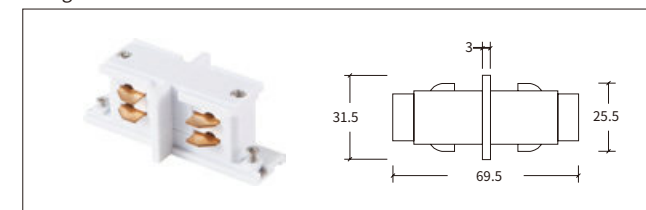


H-04 直线连接器 Straight Connector

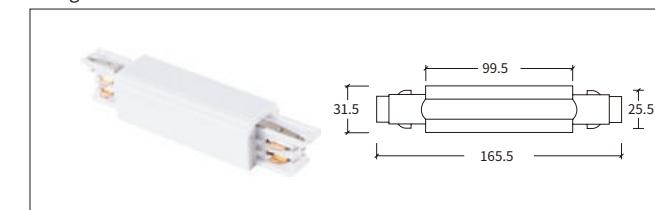


H-04 L型连接器-左 L-Connector-L

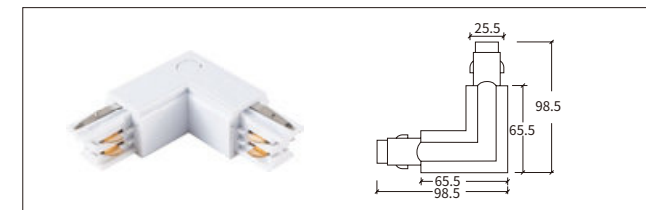


H-04 L型连接器-右 L-Connector-R

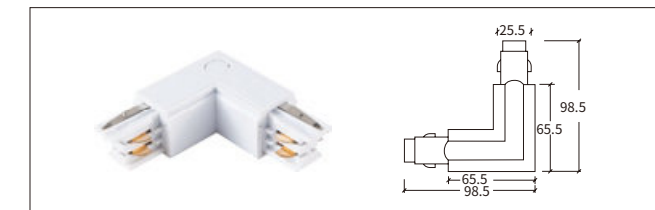


H-04 三向连接器-左 T-Connector-L

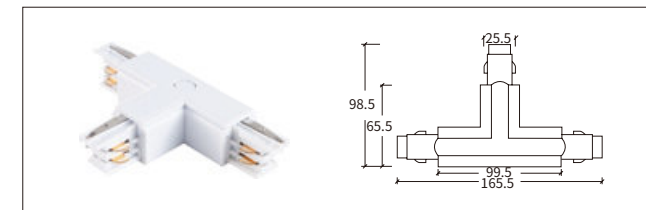


H-04 三向连接器-右 T-Connector-R

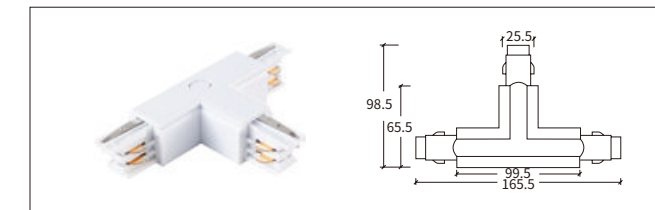


H-04 四向连接器 X-Connector

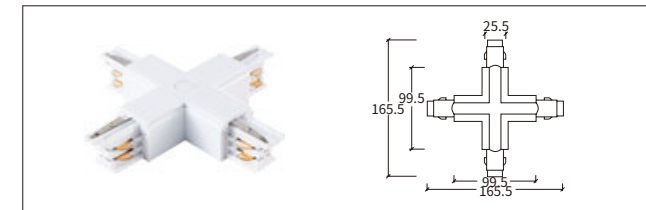


H-04 尾盖 End Cap

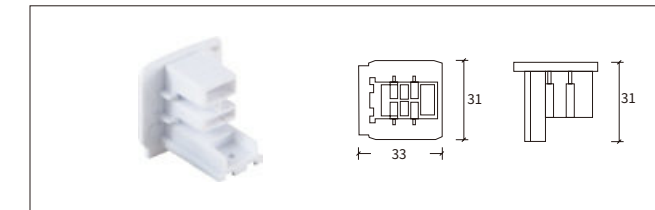

H-04 任意角度连接器 Flexible Connector

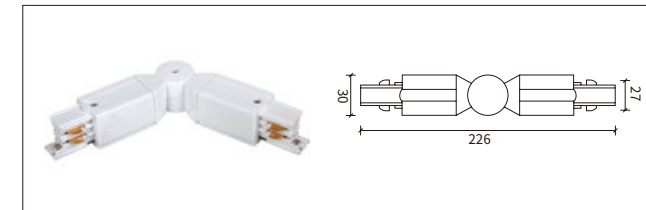

H-04 多角度连接器 (软接) Flexible Connector

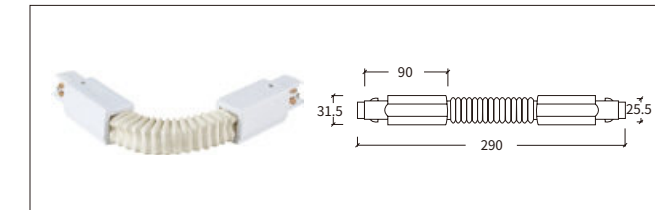


4线 H-05 嵌入式 导轨条 Four Line Recessed Track System



COLOUR:
WH BK SL

LENGTH:
1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


4-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing. The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500mm spacing.

安装示意图 Installation diagram

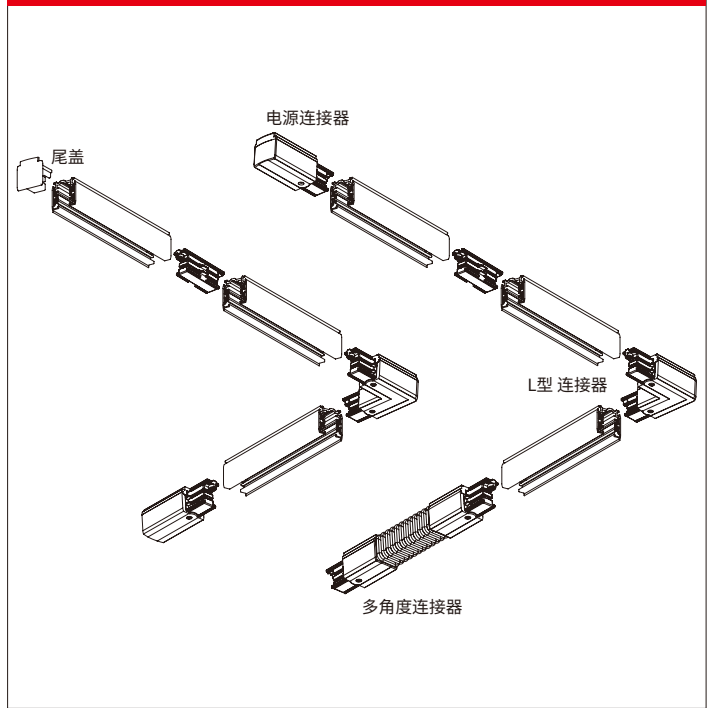


导轨连接器 Track Connectors


H-05 电源连接器-左 Feeder-L

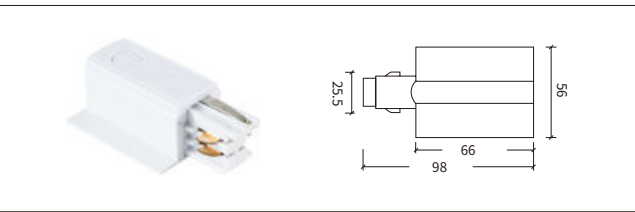


H-05 电源连接器-右 Feeder-R

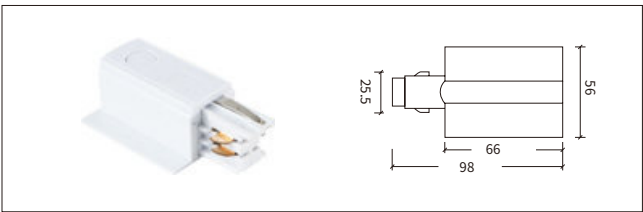


H-05 直线连接器 Straight Connector

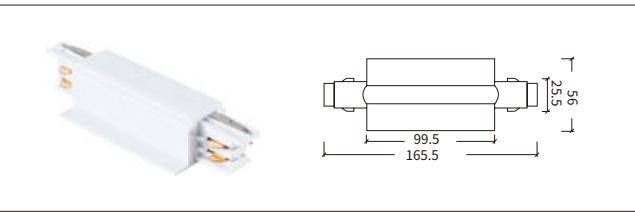


H-05 四向连接器 X-Connector

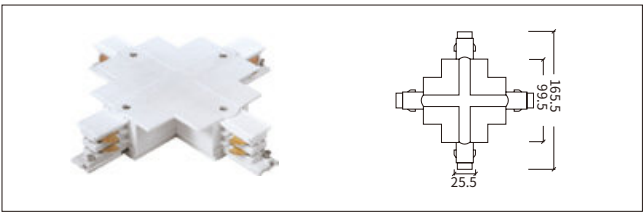


H-05 L型连接器-左 L-Connector-L

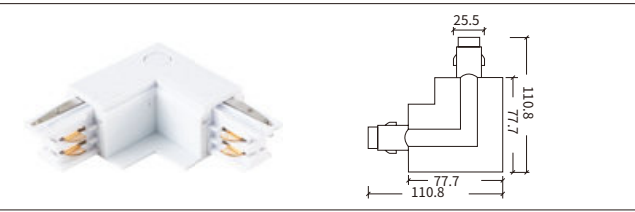

H-05 L型连接器-右 L-Connector-R

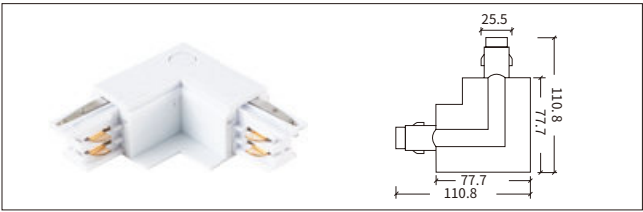


H-05 三向连接器-左 T-Connector-L

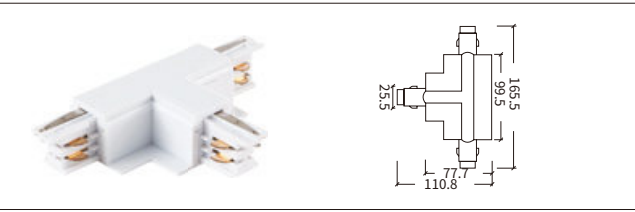


H-05 三向连接器-右 T-Connector-R




H-05 多角度连接器 (软接) Flexible Connector

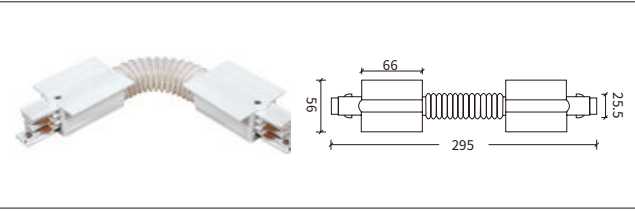

H-05 尾盖 End Cap

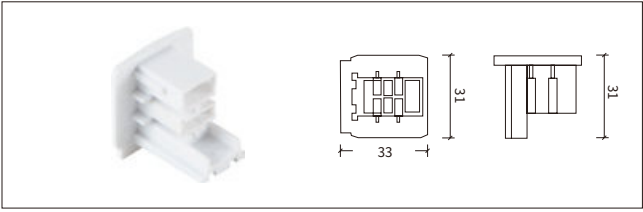


H-04 导轨吊装线 Fitting

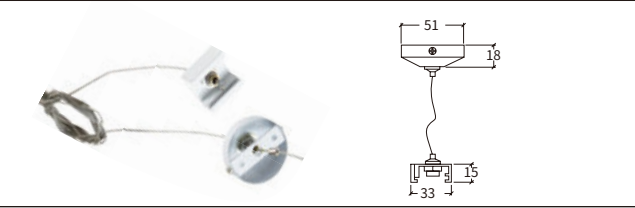

H-04 喇叭型导轨吊装线 Fitting



4线 H-06 型导轨条 Four Line Track System

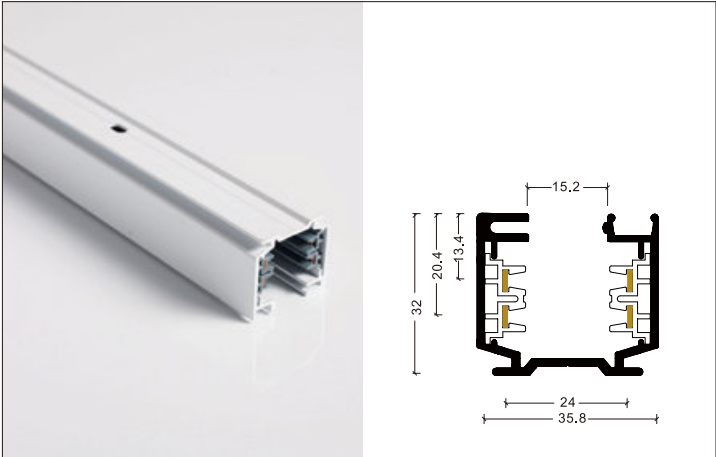

产品介绍 Product introduction


4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。

4-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

COLOUR: WH BK SL LENGTH: 1000mm/1500mm/2000mm/3000mm



4线 H-09 型导轨条 Four Line Track System

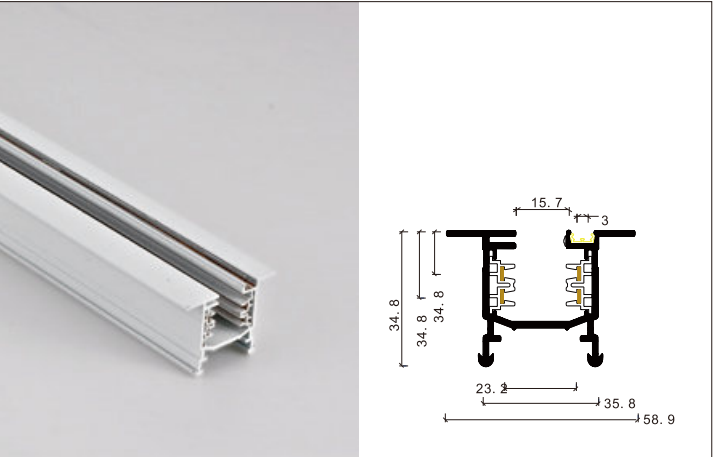

产品介绍 Product introduction


4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。

4-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

COLOUR: WH BK SL LENGTH: 1000mm/1500mm/2000mm/3000mm



4线 H-07 型导轨条 Four Line Track System

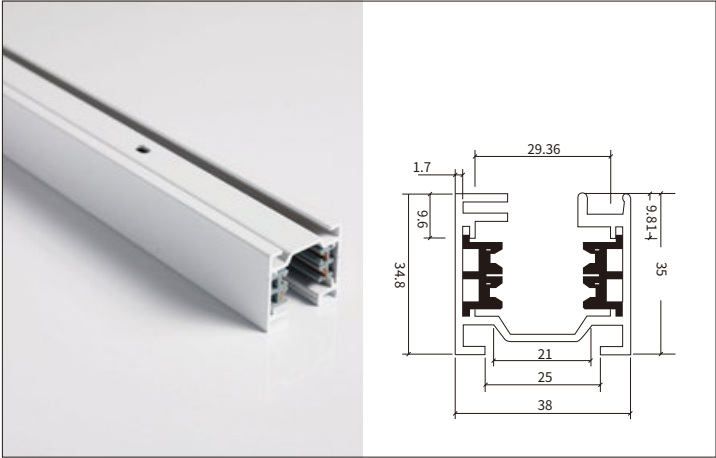

产品介绍 Product introduction





4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。

4-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.


COLOUR: WH BK SL LENGTH: 1000mm/1500mm/2000mm/3000mm



4 线导轨灯连接器 Power Connector for four line track system

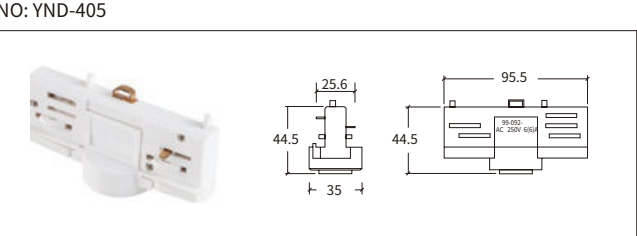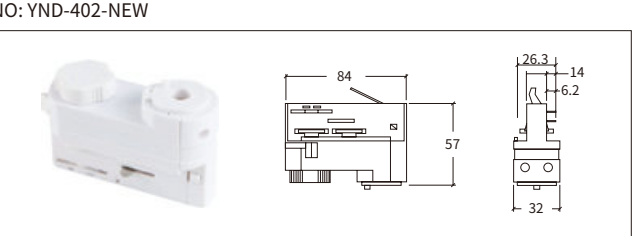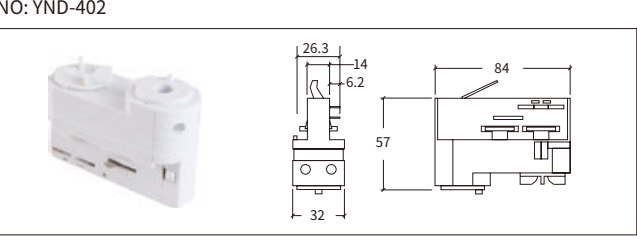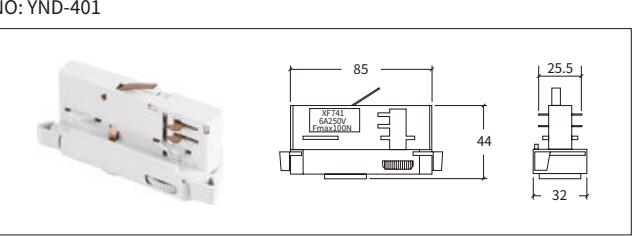

4线 H-08 型导轨条 Four Line Track System




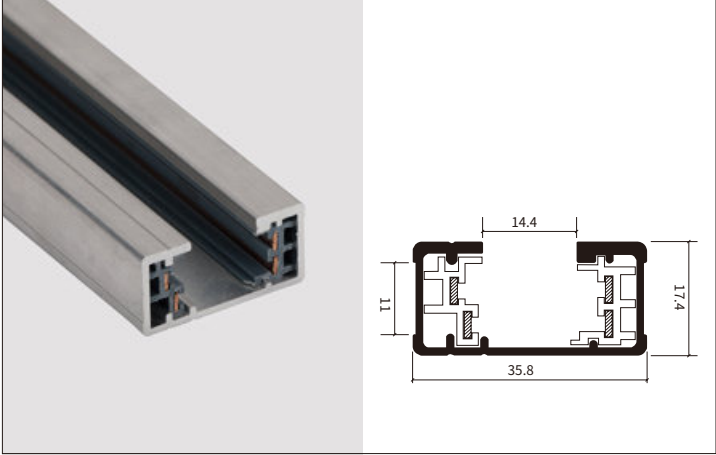


产品介绍 Product introduction


4线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。

4-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.


COLOUR: WH BK SL LENGTH: 1000mm/1500mm/2000mm/3000mm

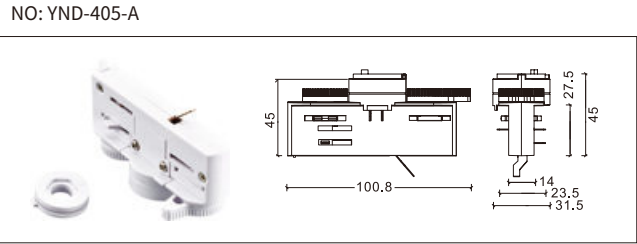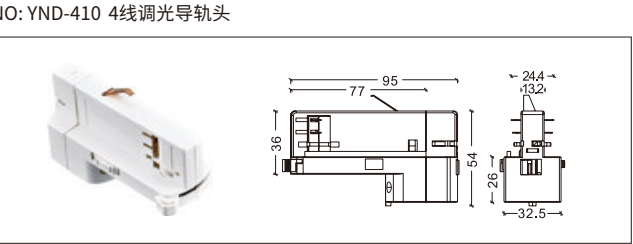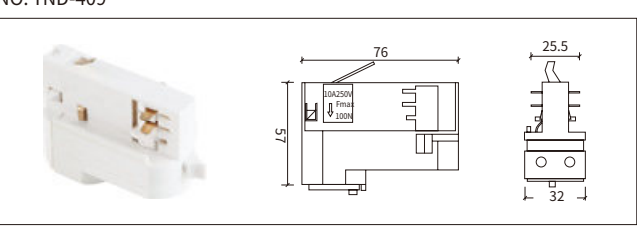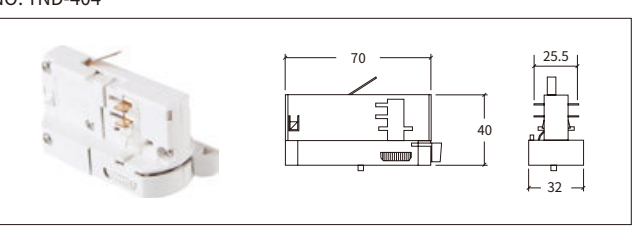


NO: YND-H-041 4线嵌入式导轨

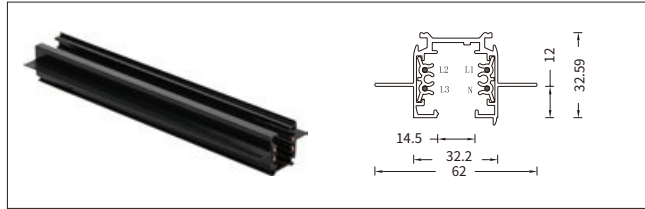


H-04-cover 新方型导轨防尘盖

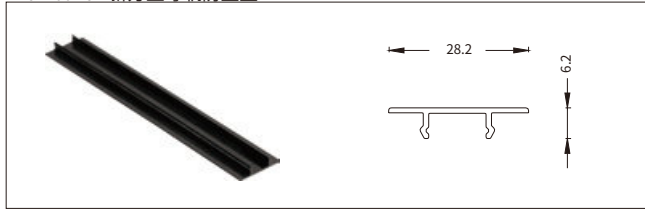


H04 新方型导轨软接

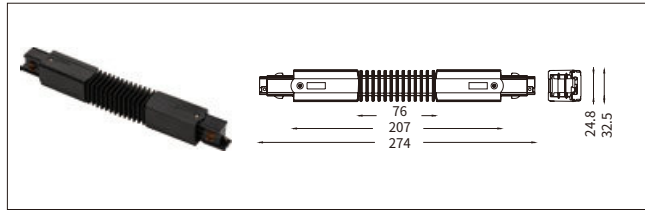



H04 新方型导轨旋转吊挂件

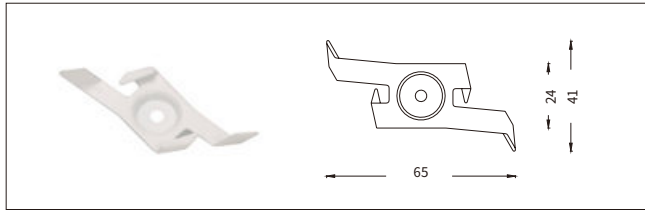

H-04-fitting 新方型导轨弹性吊挂件

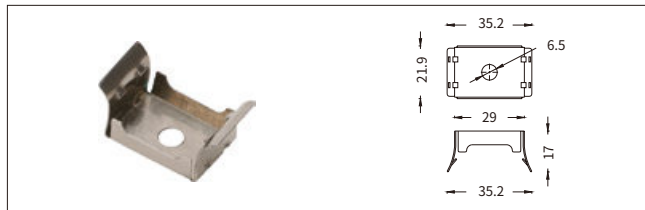

NO: YND-H-05-MINI-I 4线新方形无缝内接

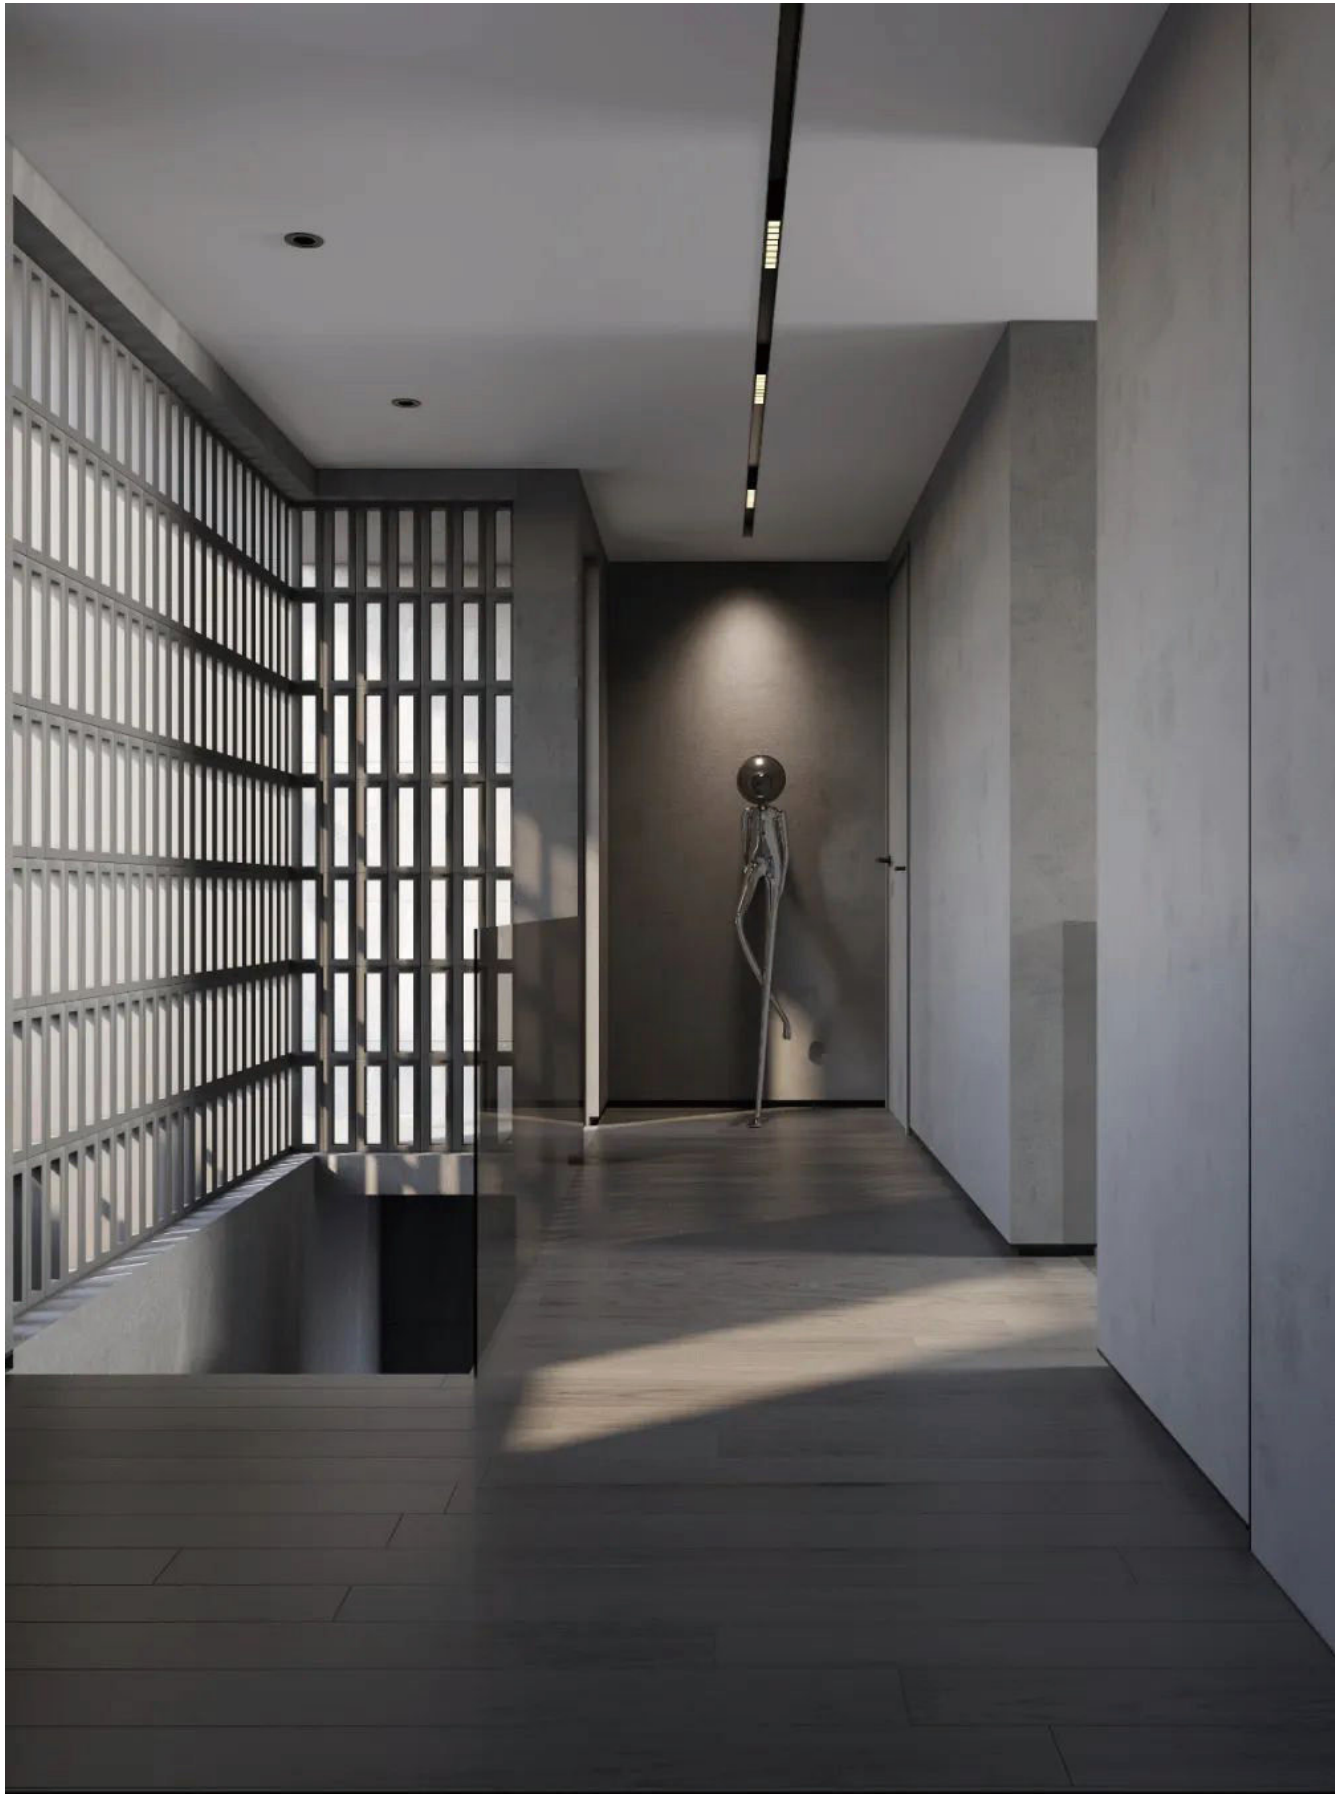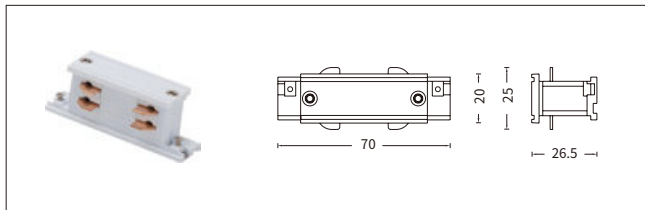

3线A型导轨条 Three Line Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

3线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


3-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing. The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500mm spacing.

安装示意图 Installation diagram

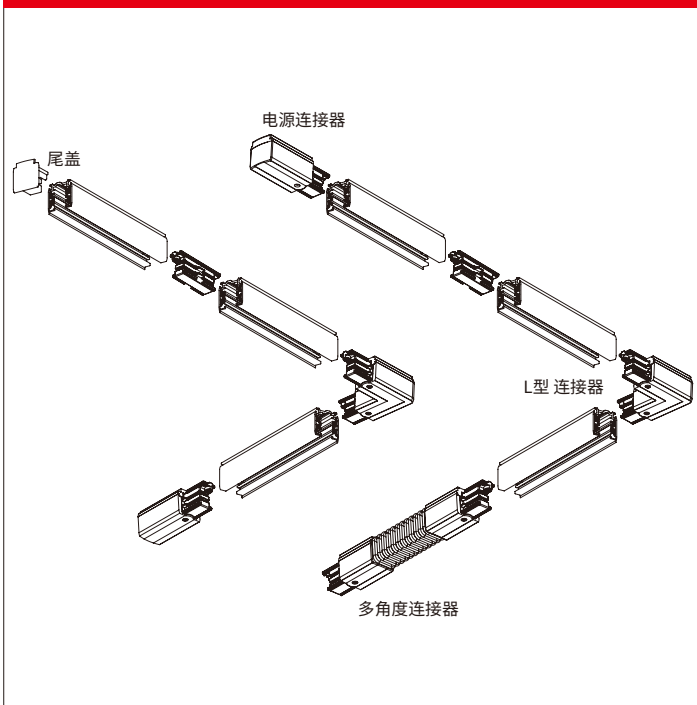


导轨连接器 Track Connectors


3线A 电源连接器-左 Feeder-L

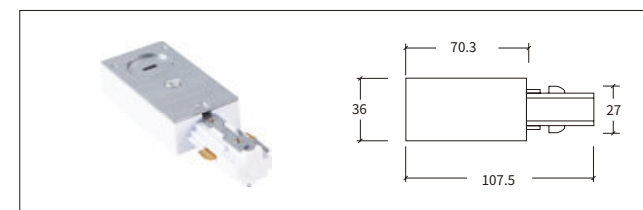


3线A 电源连接器-右 Feeder-R

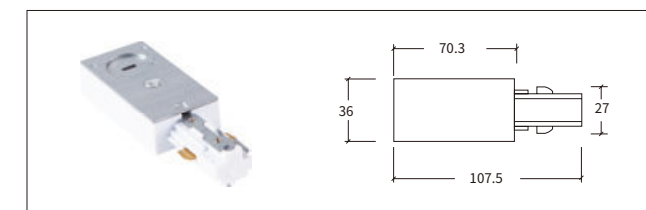


3线A 迷你型直线连接器 Straight Connector MINI

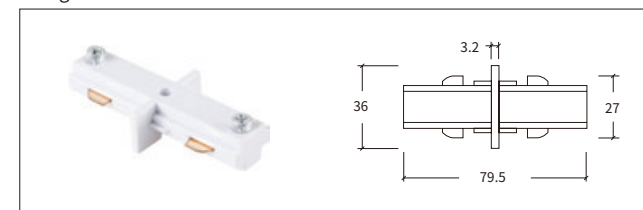


3线A 直线连接器 Straight Connector

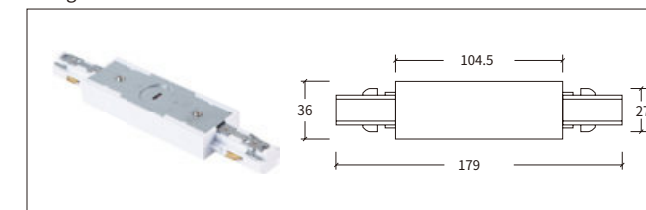


3线A L型连接器-左 L-Connector-L

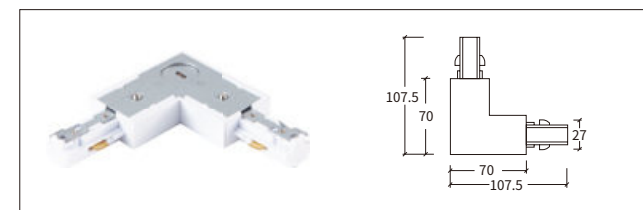


3线A L型连接器-右 L-Connector-R

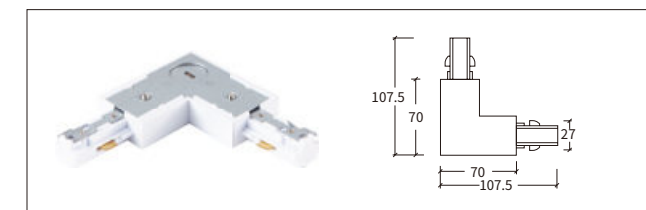


3线A 三向连接器-左 T-Connector-L

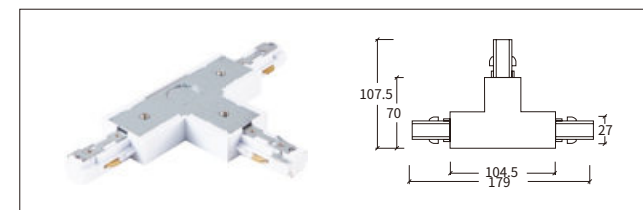


3线A 三向连接器-右 T-Connector-R

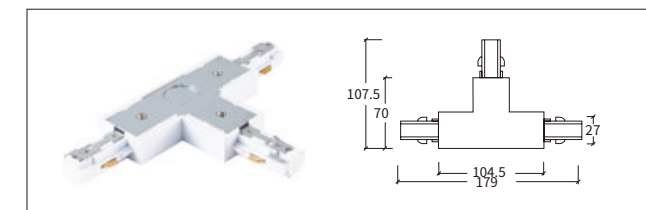


3线A 四向连接器 X-Connector

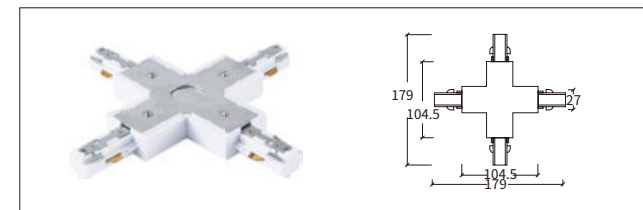


3线A 尾盖 End Cap

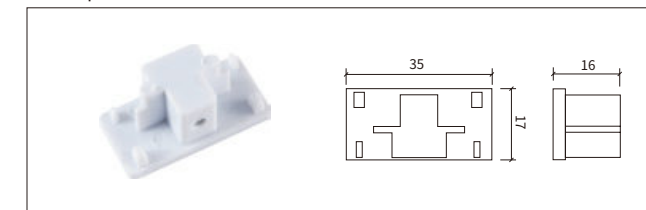

3线A 多角度连接器(软接) Flexible Connector

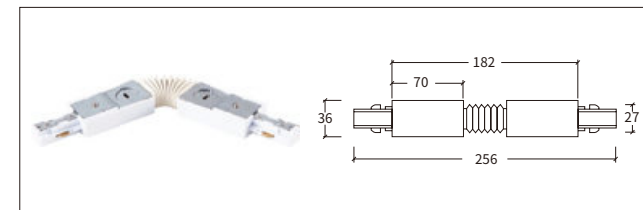

3线A 型美规导轨条 Three Line ASA Track

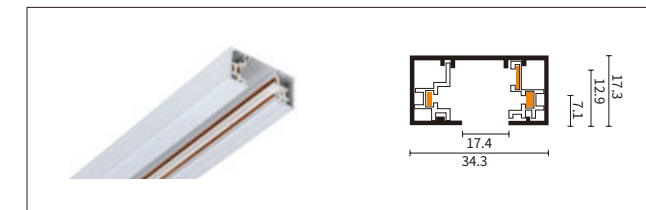

3线A型嵌入式导轨条 Three Line Recessed Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

3线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


3-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

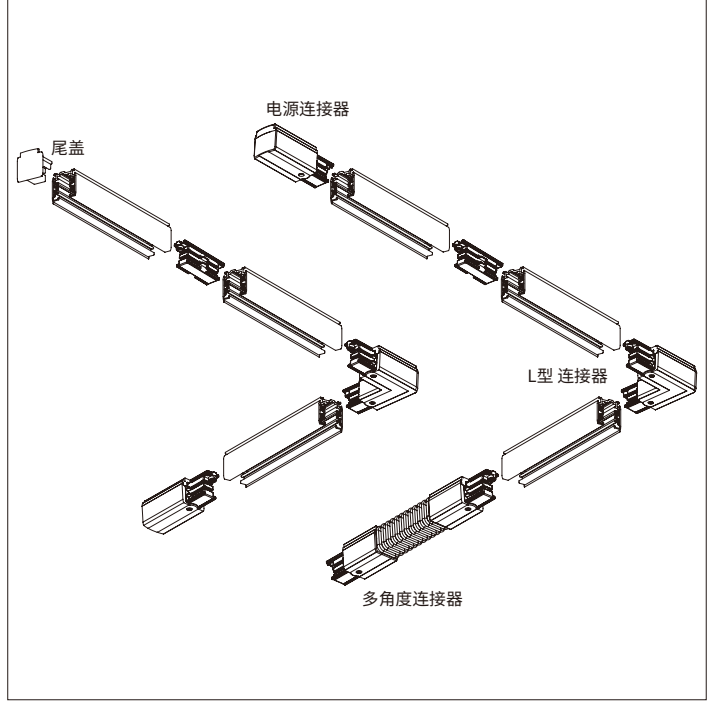


导轨连接器 Track Connectors


3线A嵌入式 电源连接器-左
Feeder-L

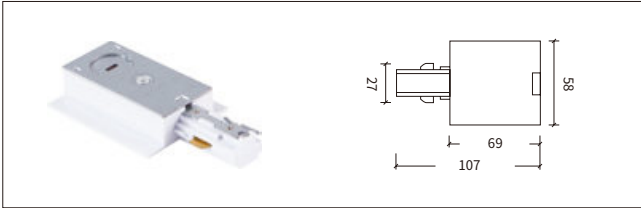


3线A嵌入式 电源连接器-右
Feeder-R

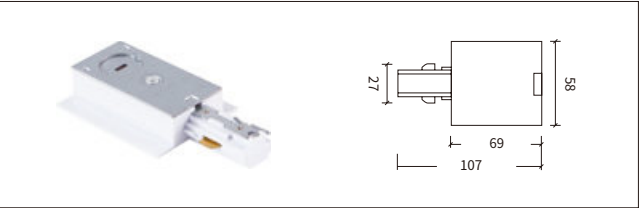


3线A嵌入式 直线连接器
Straight Connector

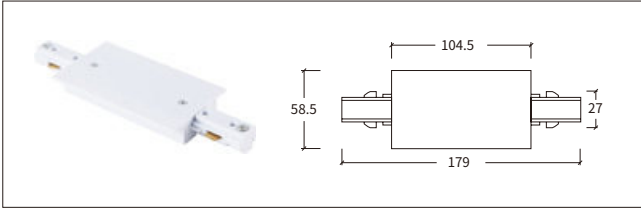


3线A嵌入式 四向连接器
X-Connector

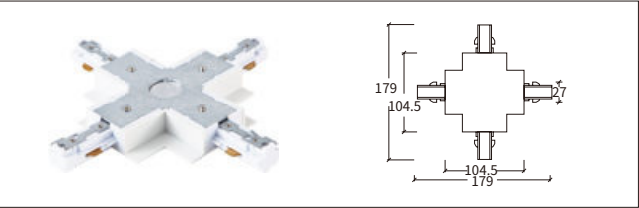


3线A嵌入式 L型连接器-左
L-Connector-L

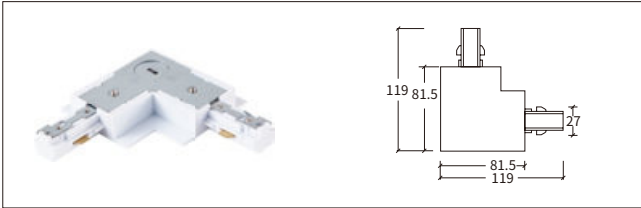


3线A嵌入式 L型连接器-右
L-Connector-R

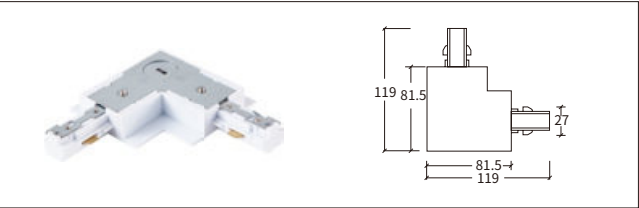


3线A嵌入式 三向连接器-左
T-Connector-L

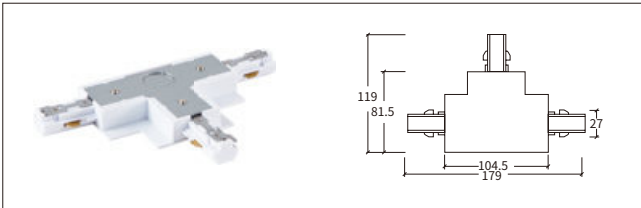


3线A嵌入式 三向连接器-右
T-Connector-R

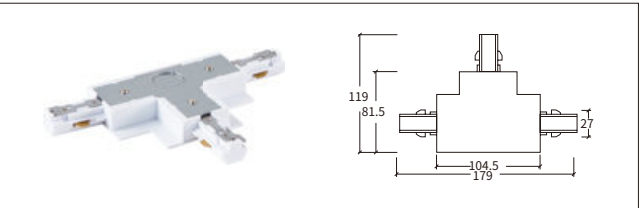


任意角度接驳器
Flexible Connector

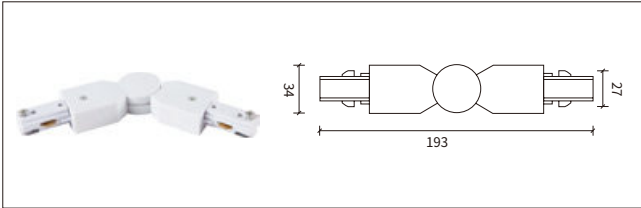


3线A 尾盖
End Cap

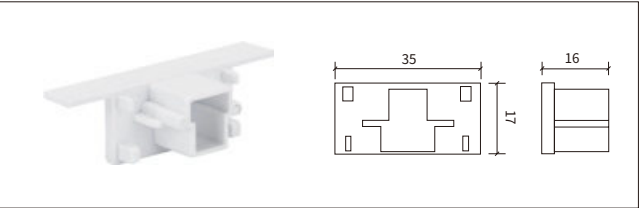

3线 短软连接器
Connector

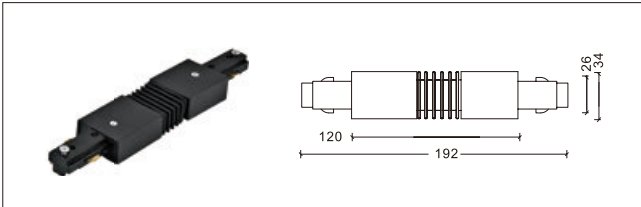

3线 挂件吊装线
Fitting

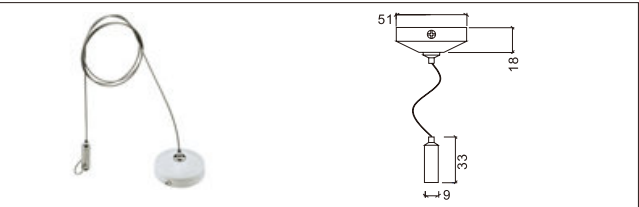


2线T型导轨条 Two Line Track System



COLOUR:
WH BK SL

LENGTH:
1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

2线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


2-circuit main voltage track in extruded aluminium Main voltage 220-240V. Electrical wiring is located in an extruded PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

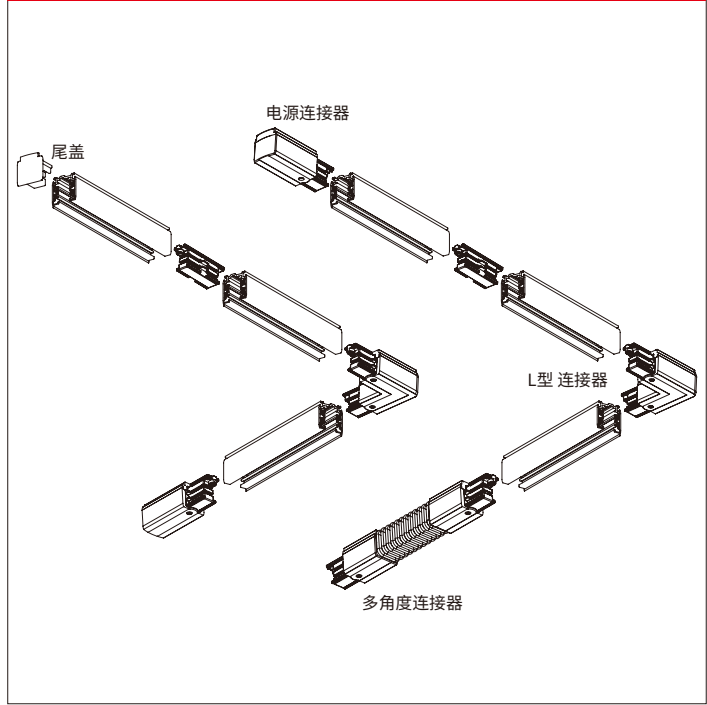


导轨连接器 Track Connectors


2线A 电源接头 Feeder

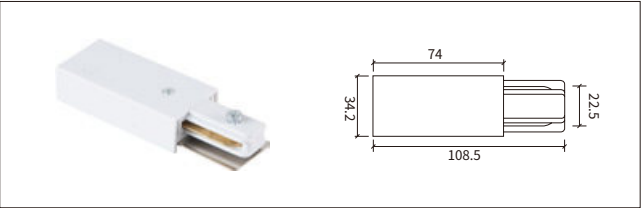


2线 尾盖 End Cap

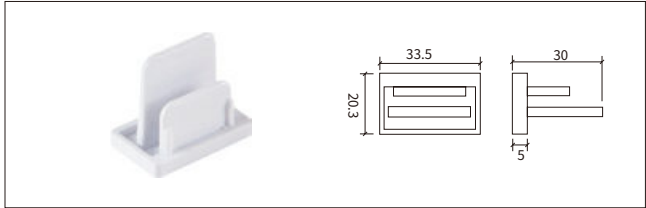


2线 直线连接器 Straight Connector

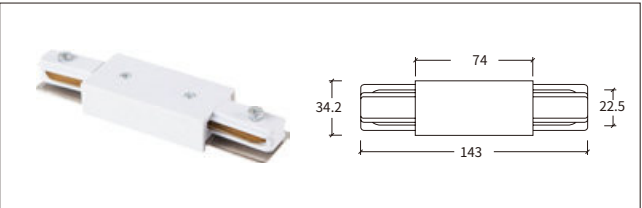


2线L型连接器 L-Connector

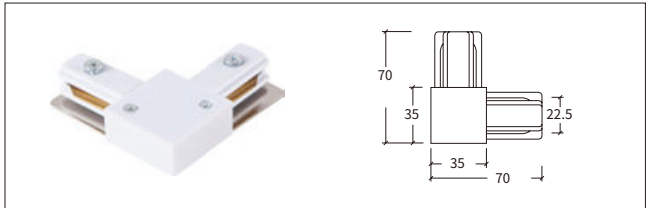


2线 三向连接器 T-Connector

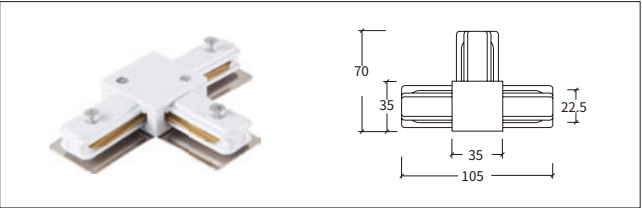


2线 四向连接器 X-Connector

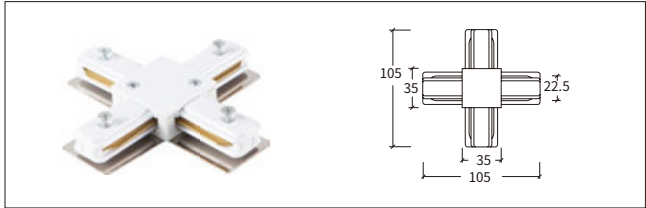

2线 内接 Straight Connector MINI

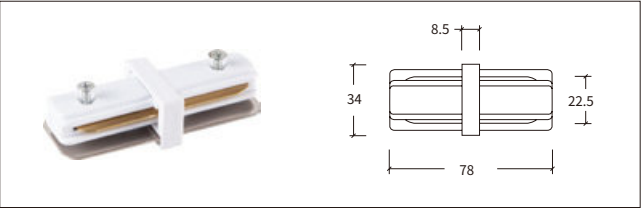

2线 多角度连接器(软接) Flexible Connector

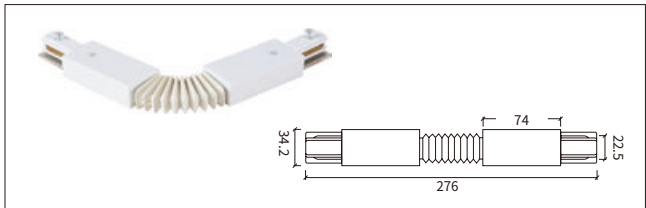

2线T型嵌入式导轨条 Two Line Recessed Track System




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




产品介绍 Product introduction

2线导轨采全铝材制造, 内置全新PVC绝缘材料压铜条导电。只要电压220-240V。多种安装连接器, 可根据设计师要求, 实施多种安装方式, 满足各种照明需要。


2-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extrude PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

安装示意图 Installation diagram

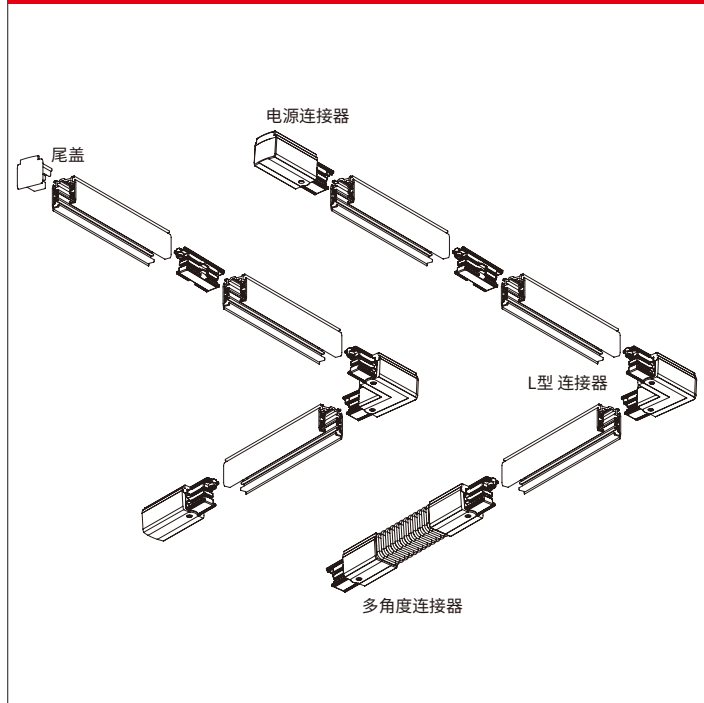


导轨连接器 Track Connectors


2线嵌入式 电源接头 Feeder

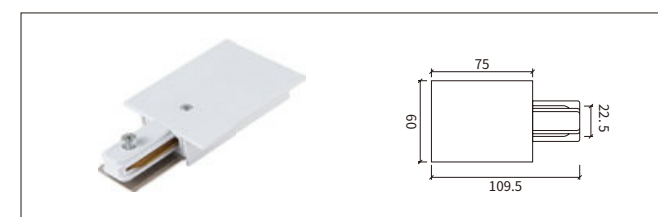


2线嵌入式尾盖 End Cap

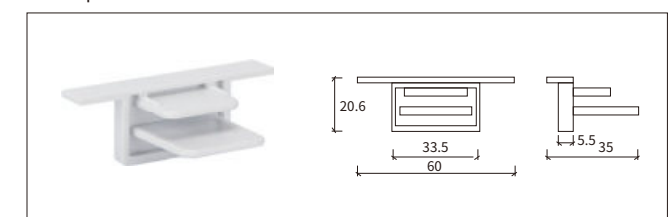


2线嵌入式直线连接器 Straight Connector

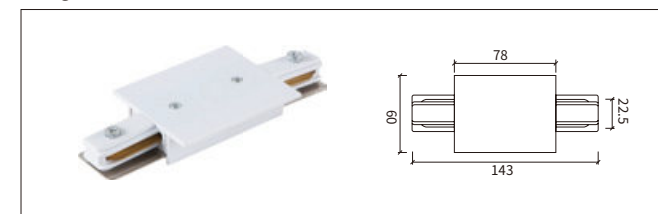


2线嵌入式L型连接器 L-Connector

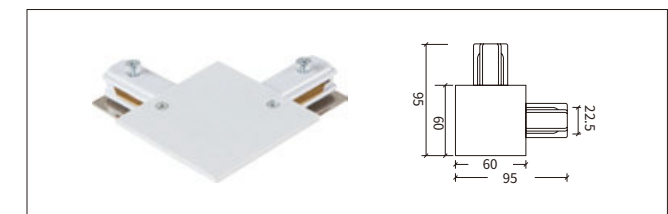

2线嵌入式三向连接器 T-Connector

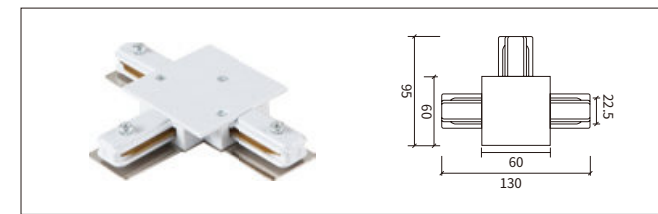


2线嵌入式四向连接器 X-Connector

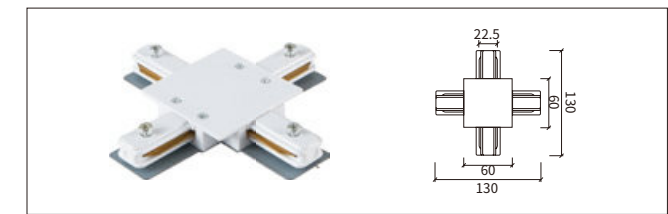

2线嵌入式内接 Straight Connector MINI



2 线嵌入式多角度连接器(软接) Flexible Connector

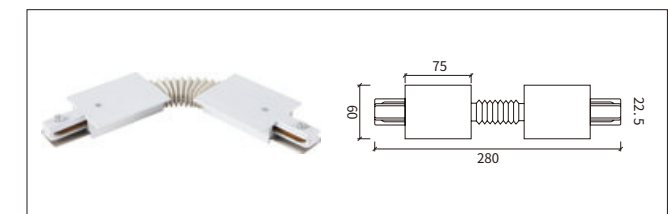


2线 T型挂件吊装线 Fitting




2 线迷你低压导轨条 New item low power of two line track system


NO: 2 线迷你导轨条

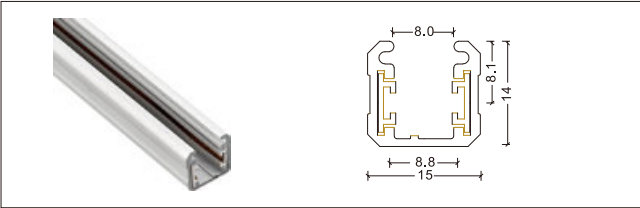


NO: YND-MINI-2-RE 嵌入式迷你导轨

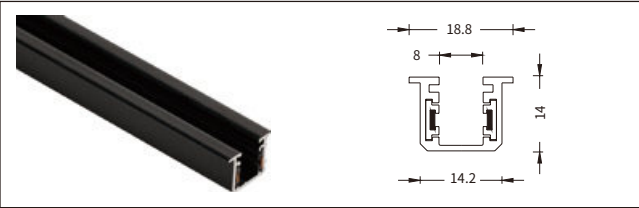


NO: 2 线迷你导轨头

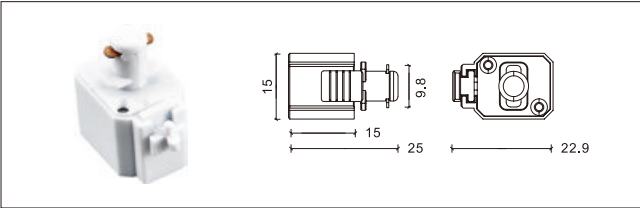


NO: 2 线迷你导轨条尾盖

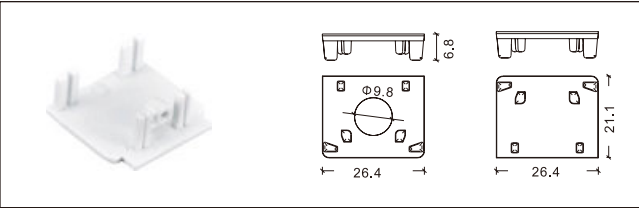


2 线迷你低压导轨条 - 迷你直接驳器

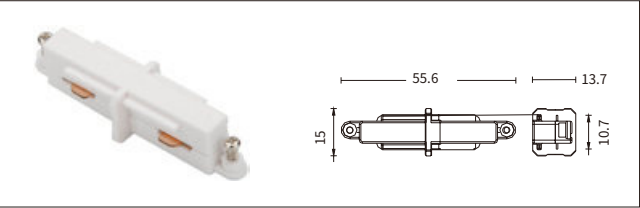


2 线迷你低压导轨条 -L 型接驳器

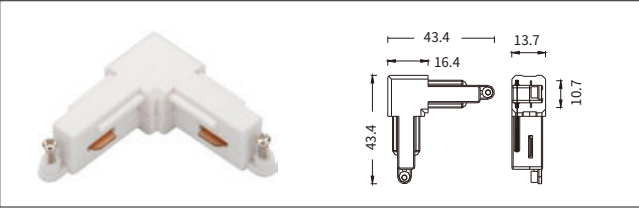

NO: 2 线迷你导轨电源头

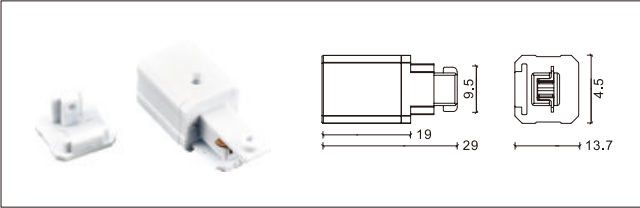


软接

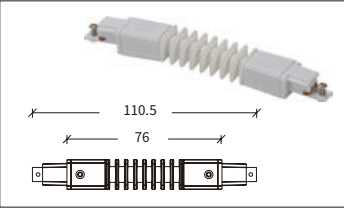


二线迷你导轨立座




可旋转电源头

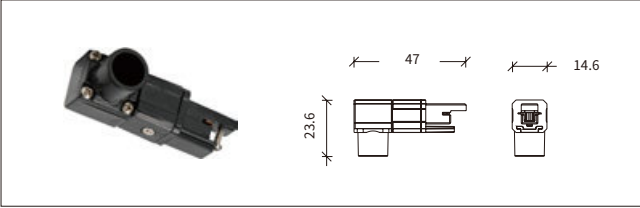


2 线低压导轨 (底部取电)

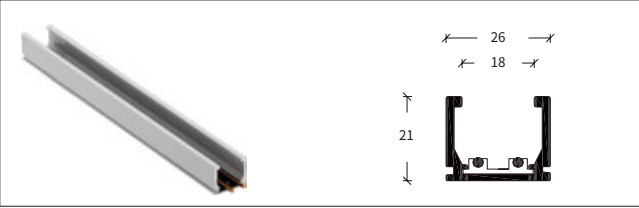

2 线低压导轨电源头

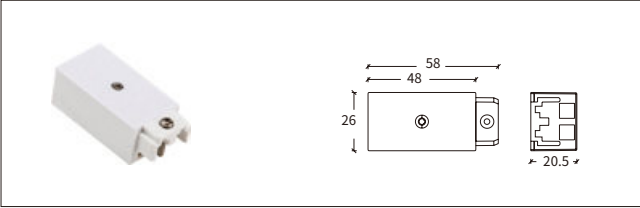


2 线低压导轨尾塞

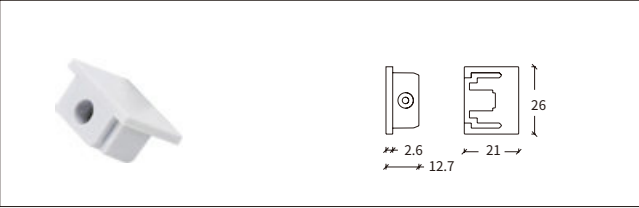


2 线低压软导轨条 New item low power of two line track system


NO: YND-2R-F 2 线软导轨

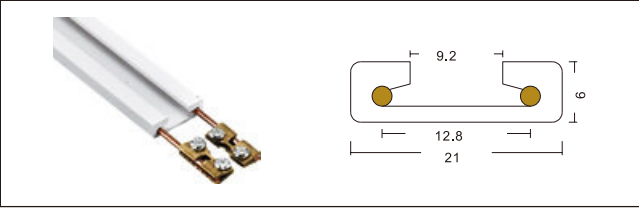


NO: YND-2R-E 2 线软导轨

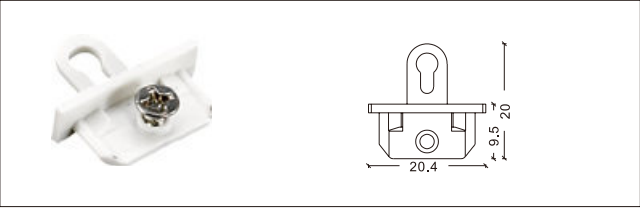

NO: YND-2R-2RO 2 线软导轨

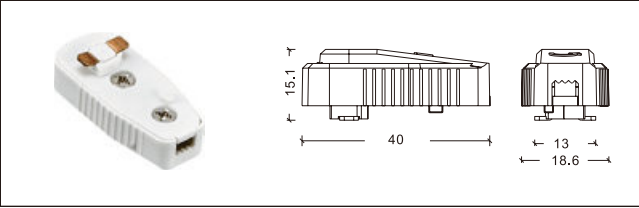


NO: YND-2R 2 线软导轨

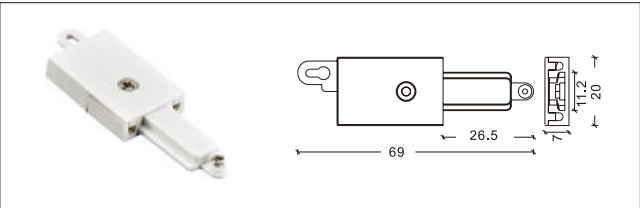

2 线软导轨




一体取电头 (软导轨)

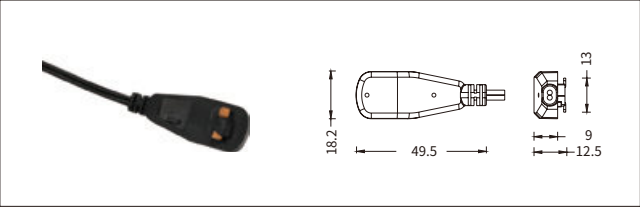


3 线系列 Three line series


3 线桥架导轨条

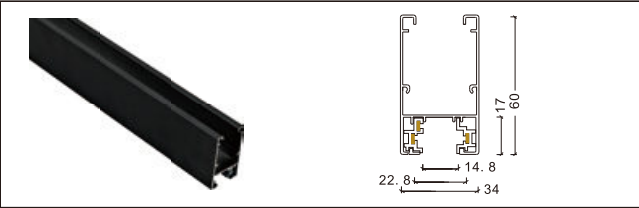

3 线高边导轨条

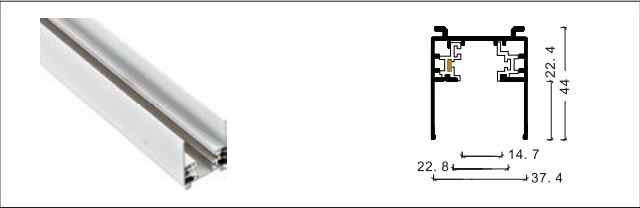

3 线桥架挂件

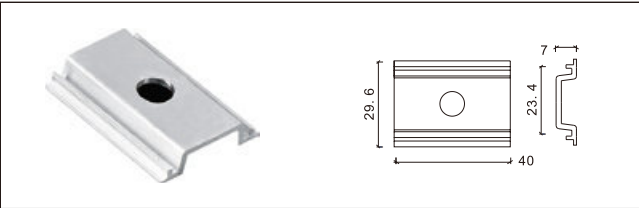

线条灯配件 (上下发光型)



3 线条转向灯 (双旋转 180 度)




3 线条转向灯 (双旋转 180 度)




二线外挂导轨条 Plug-in series


NO: YND-2-H 2 线外挂导轨条

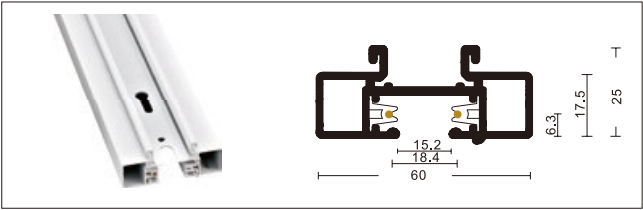


NO: YND-2-H-F 2 线外挂电源头

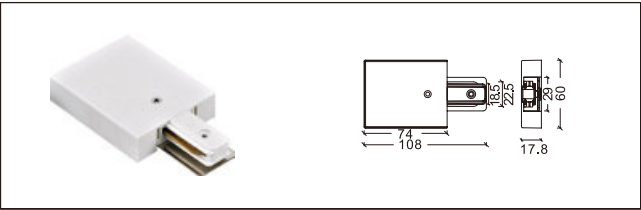

NO: YND-YND-2-H-E 2 线外挂尾塞

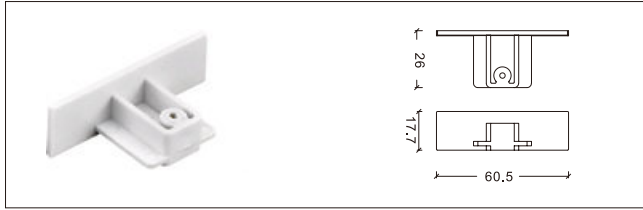


NO: YND-2-H-I 2 线外挂内接

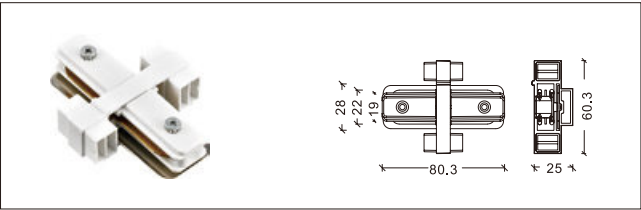

NO: YND-2-H-L 2 线外挂L接




二线、三线外挂导轨挂件

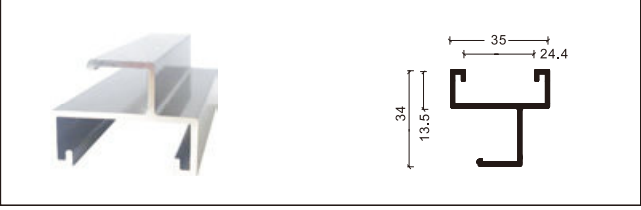


三线外挂导轨条 Plug-in series


NO: YND-3-H 3 线外挂导轨条

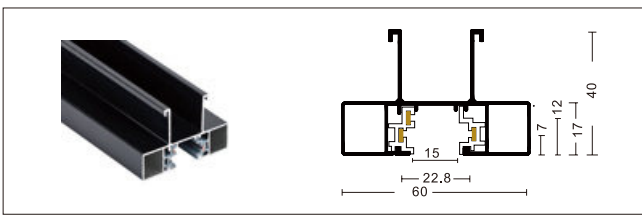


3 线外挂导轨条 (短款)

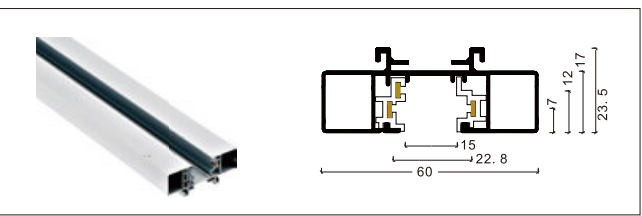

NO: YND-3-H-E 3 线外挂尾塞

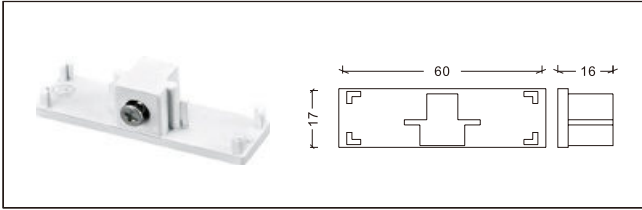


NO: YND-3-H-F 3 线外挂电源头

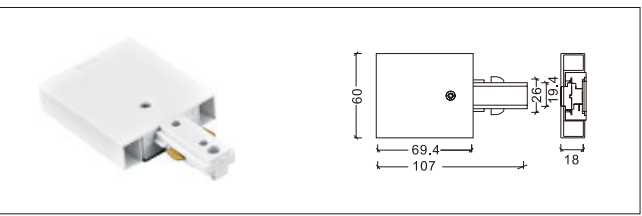

NO: YND-3-H-L 3 线外挂L接




NO: YND-3-H-MINI 3 线挂内接

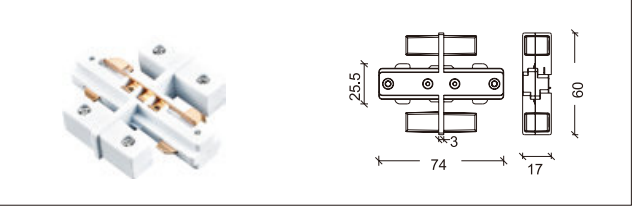


新型导轨条 New item track system


NO: YND B-02 假 3 线导轨条

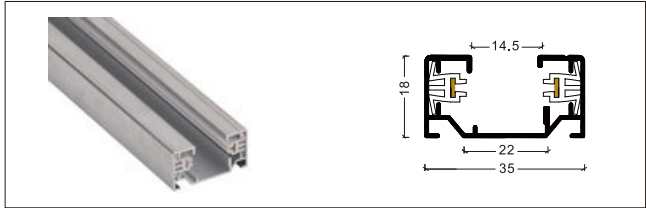


NO: YND B-02-X 假3线X接

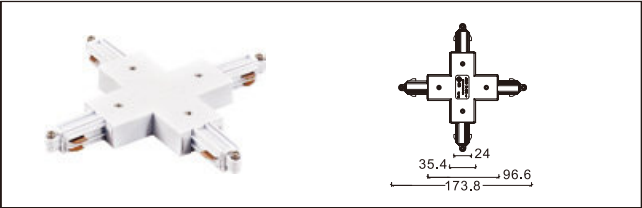


NO: YND B-02-L 假3线L接

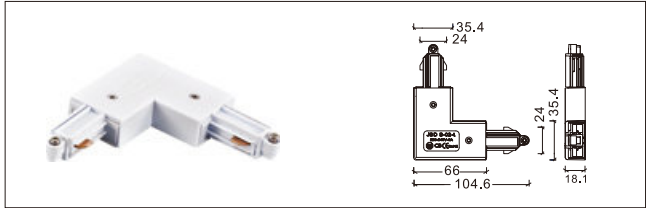


NO: YND B-02-T 假3线T接

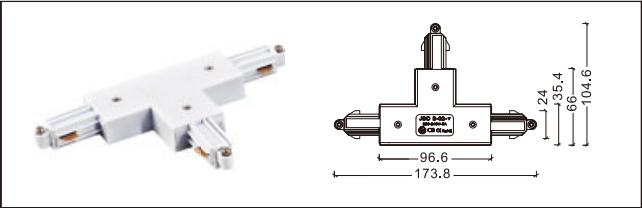


NO: YND B-02-I-NIMI 假 3 线内接

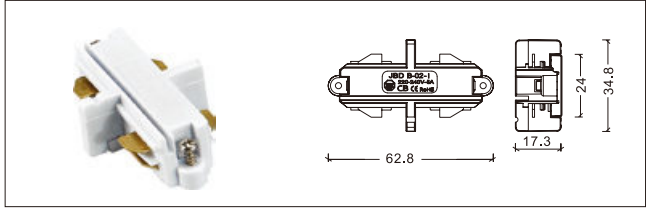


NO: YND B-02-Feeder 假 3 线电源头

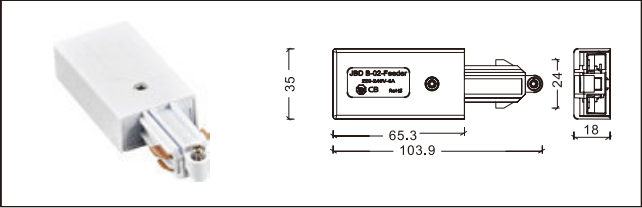


NO: YND B-02-End Cap 假 3 线尾塞

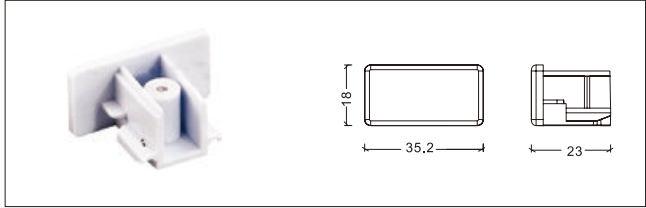

NO: YND B-02-K 假三线任意角度接驳 (硬接)

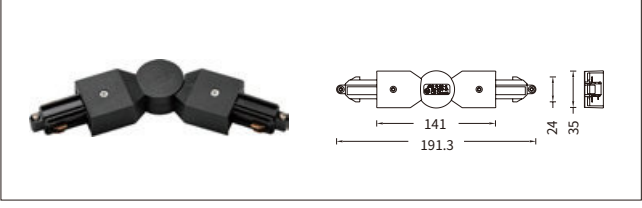


NO:YND-B-02-I 假三线 i 接 (直接)

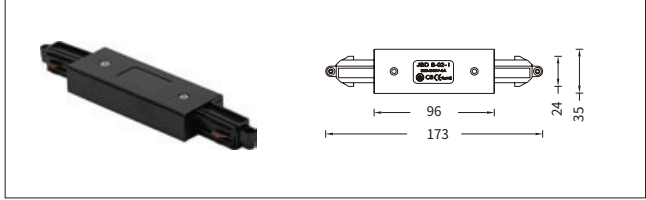


新型配件 New item fitting


NO: 导轨条铝支架

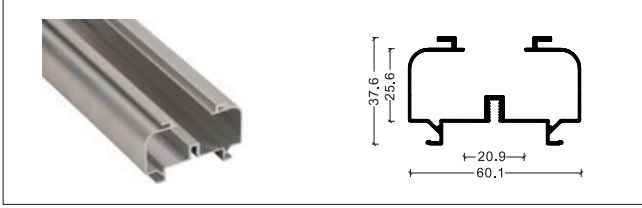

NO: P-03-R 展柜式导轨条

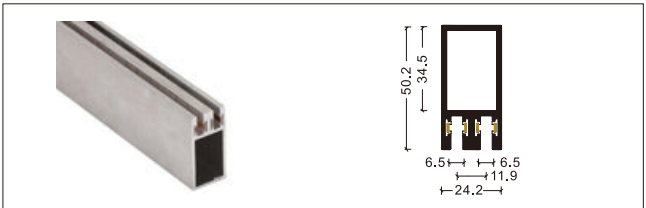

NO: 导轨夹

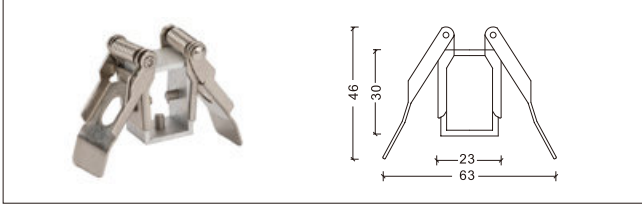

导轨通用吊挂件



NO: 360°筒灯套件




NO: 明装筒灯套件




NO: 三线高压多功能组合导轨条 (Three Wire Track)




NO: 隐藏式射灯支架

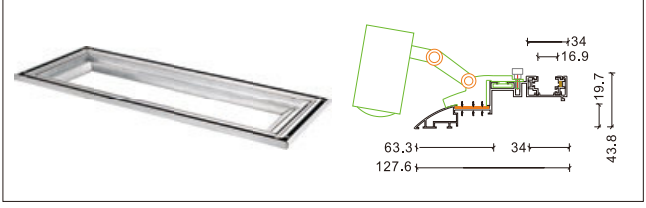


NO: YND-201

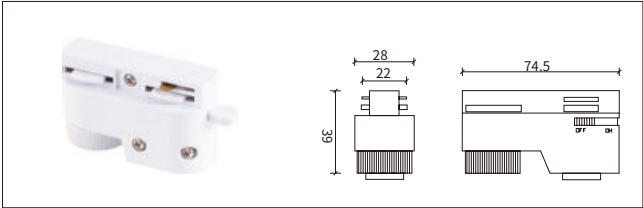


NO: YND-202

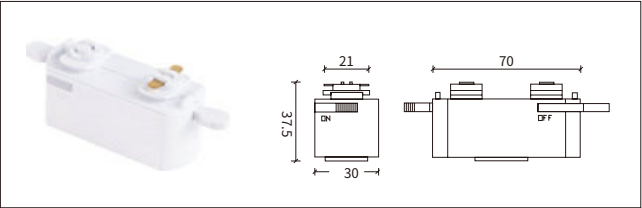


NO: YND-203

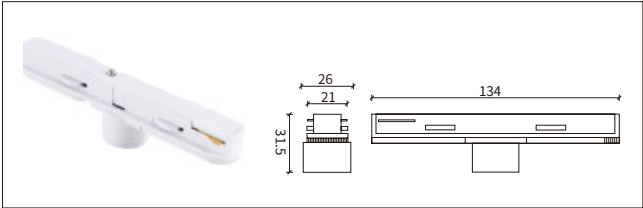


NO: YND-209

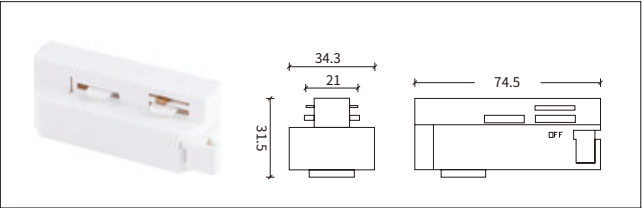


NO: YND-205

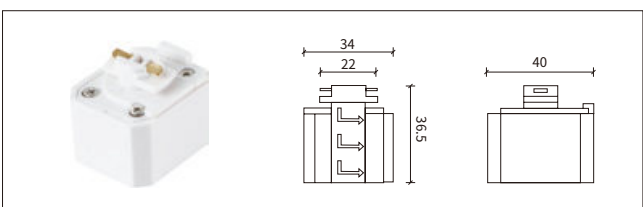


NO: YND-200

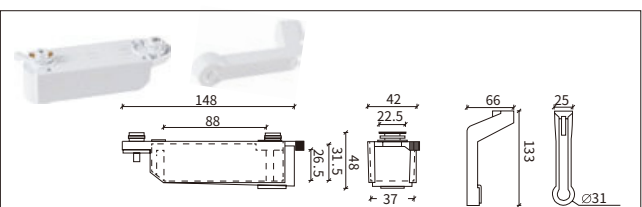


NO: J210 日本 2 线导轨头

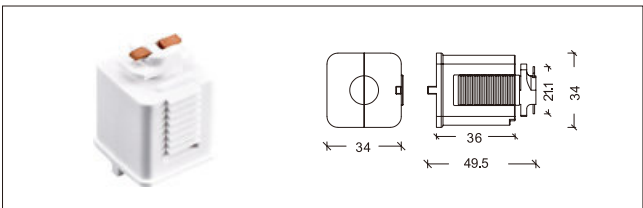


NO: K206 韩国 2 线导轨头

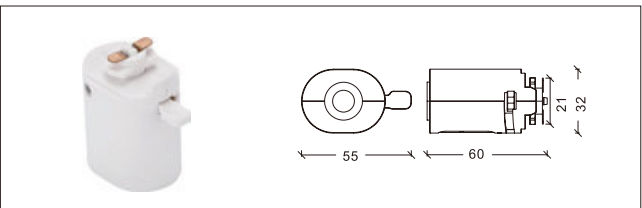


NO: YND-217

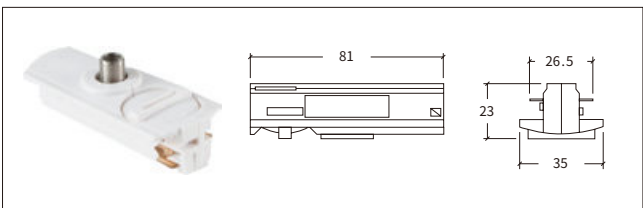


NO: YND-222

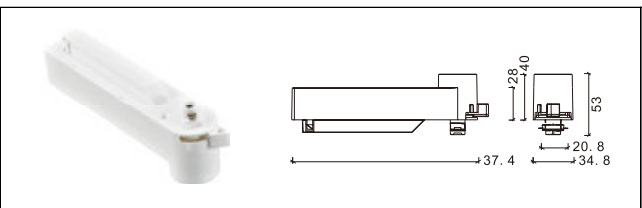


NO: YND-271小二线

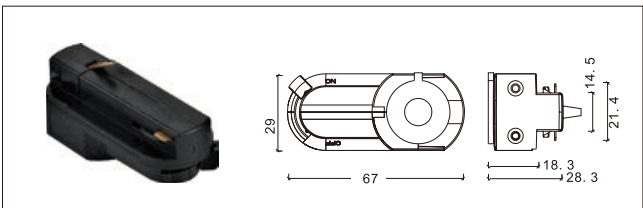


NO: YND-217S 2 线带地线导轨头

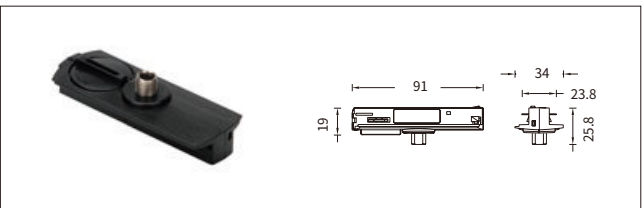


NO: YND-208 2 线小电器箱

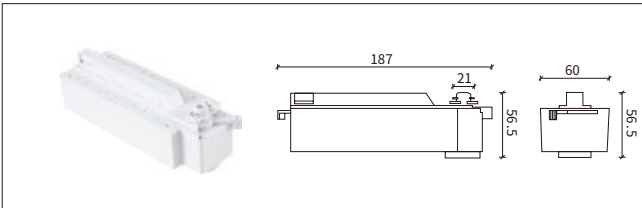


NO: YND-207 2 线大电器箱

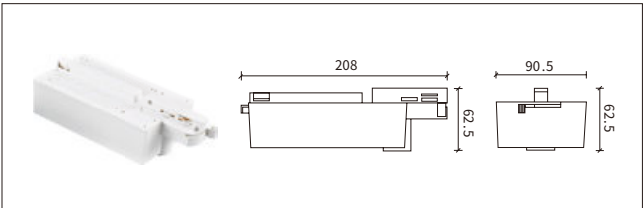


NO: YND-212 2 线一体电器箱

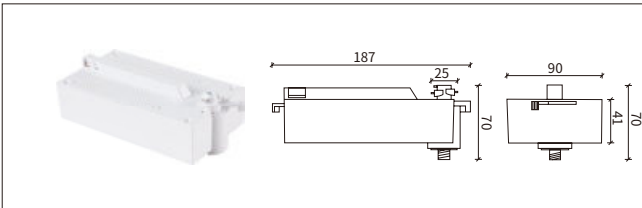


NO: YND-219 2 线短电器箱

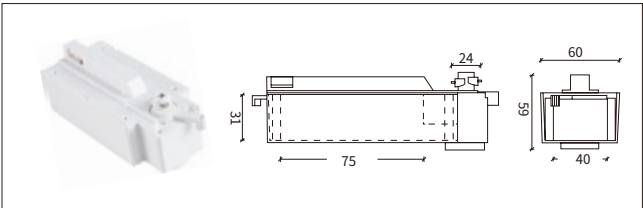


NO: YND-215 2 线长电器箱

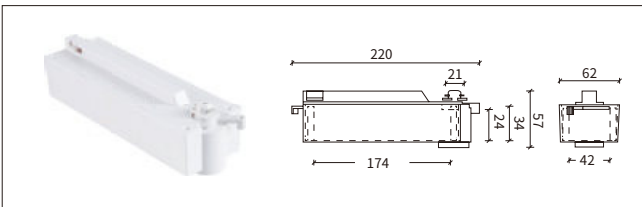


NO: YND-216 2 线筒体电器箱

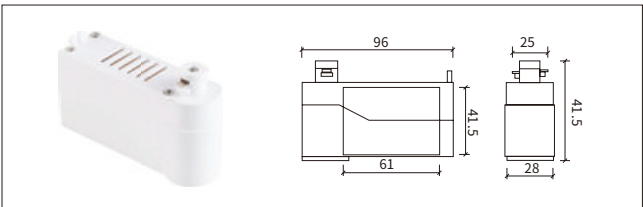


NO: YND-218 2 线简易电器箱

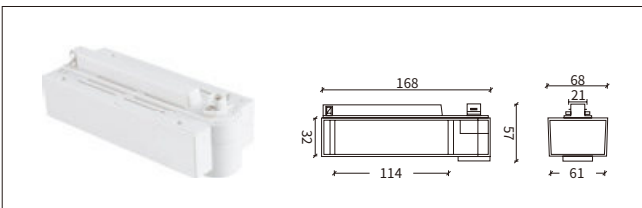


NO: YND-270

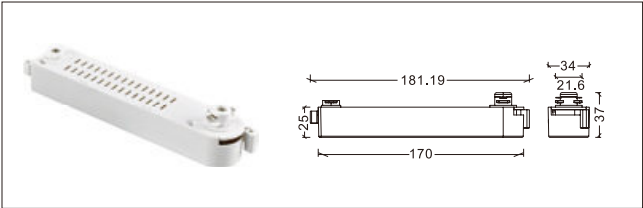


NO: YND-2112 线小电源盒

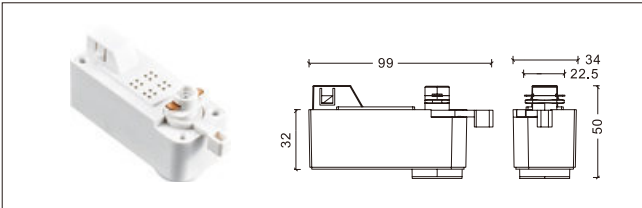


NO: YND-233

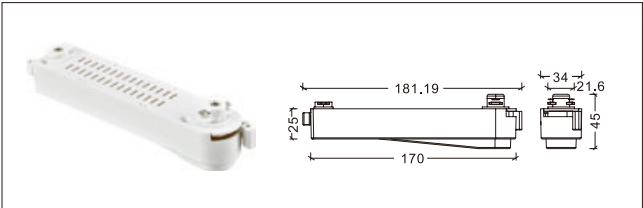

NO: YND-266 配 YND-209 导轨条

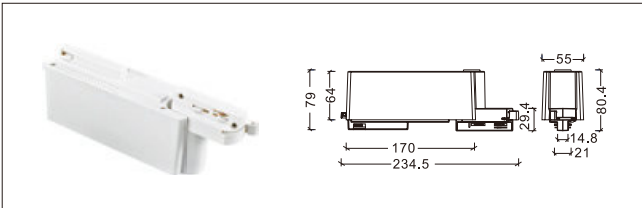


NO: YND-269 配 YND-209 导轨条

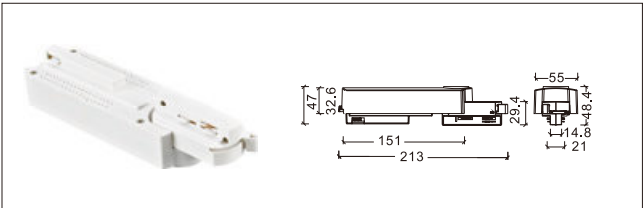




3 线电器盒连接器 Power box for Three line track system


NO: YND-328 3 线双柄电器盒

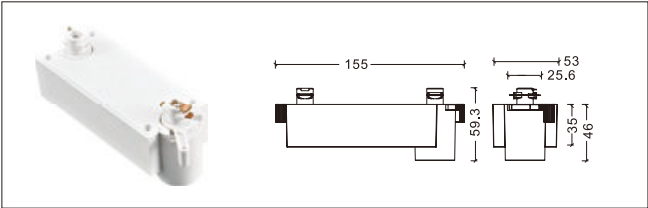


NO: YND-333 3 线长款电源盒

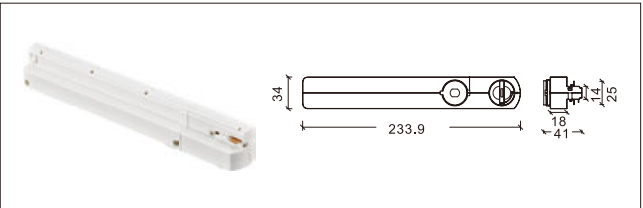


NO: YND-324 3 线长款电源盒 (手柄)

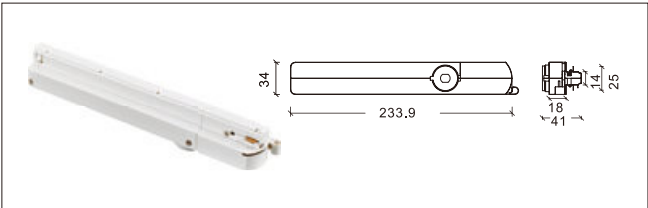


NO: YND-388

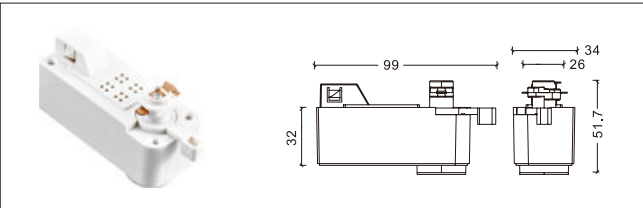


NO: YND-322 3 线简易小箱体

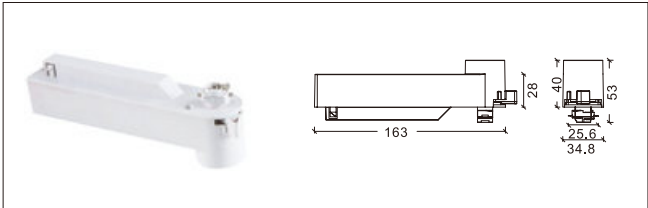


NO: YND-366 配 YND-303 导轨条

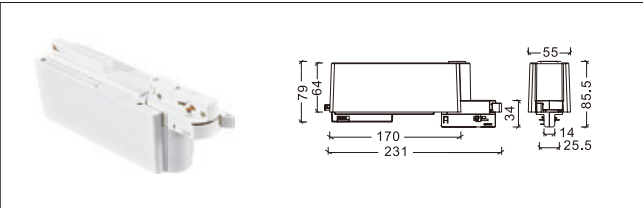


NO: YND-366 配 YND-310 导轨条

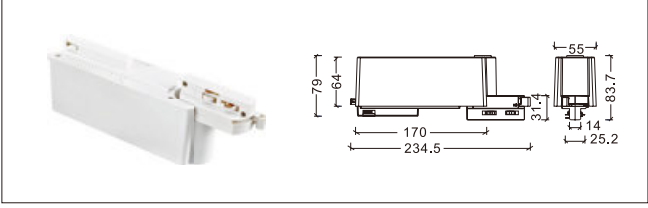


NO: YND-369 配 YND-310 导轨条

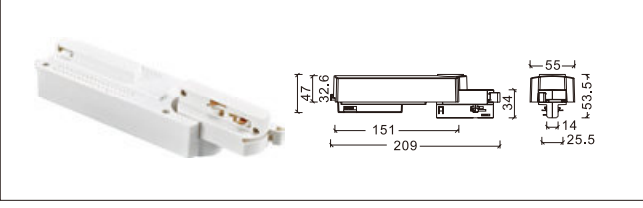


NO: YND-369 配 YND-303 导轨条

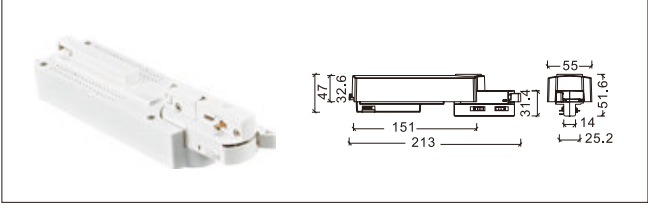


NO: YND-370

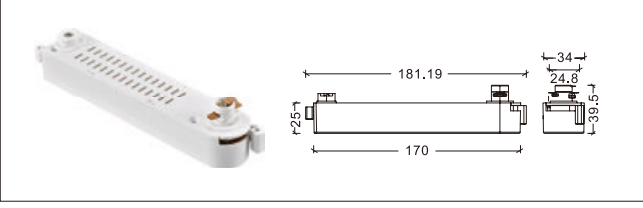

NO: YND-334

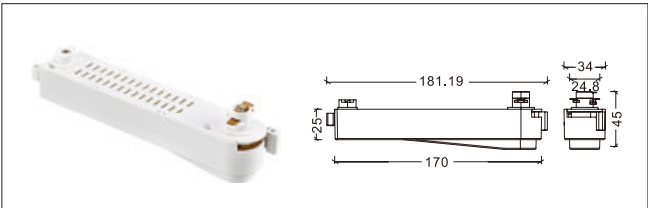


NO: YND-3003 线迷你电器盒

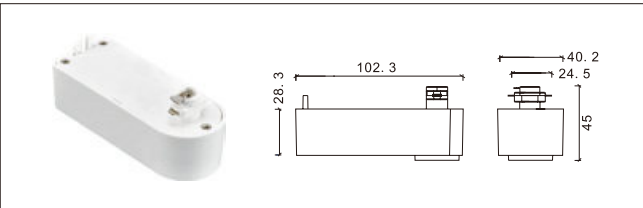




3 线电器盒连接器 Power box for Three line track system


NO: YND-304 3 线大电器箱

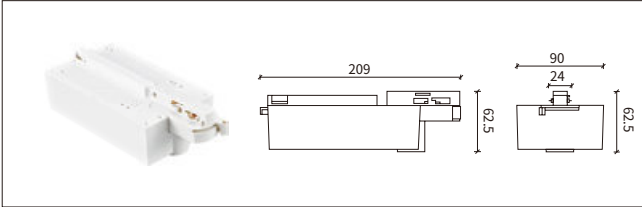


NO: YND-307 3 线小电器箱

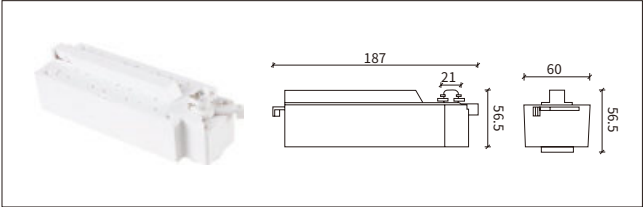


NO: YND-305 3 线一体电器箱

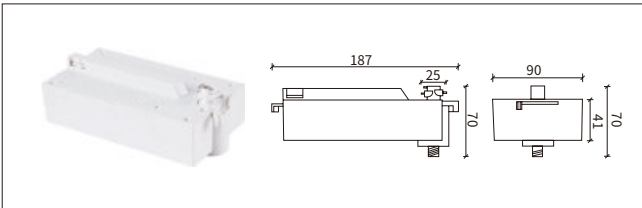


NO: YND-306 3 线短电器箱

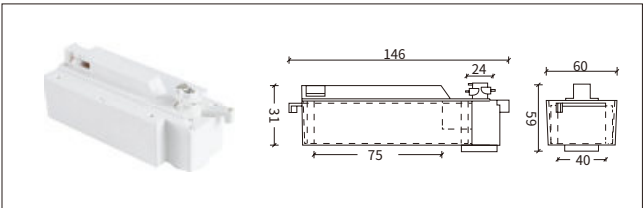


NO: YND-311 3 线长电器箱

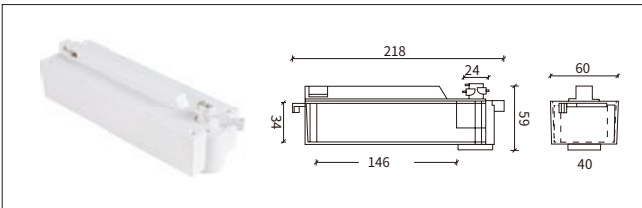


NO: YND-313 3 线筒体电器箱

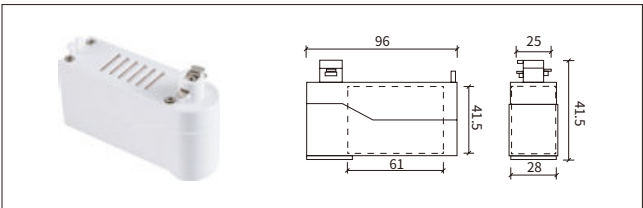


NO: YND-314 3 线简易电器箱

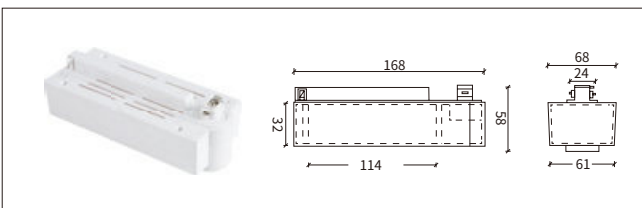


NO: YND-D3 3 线底座

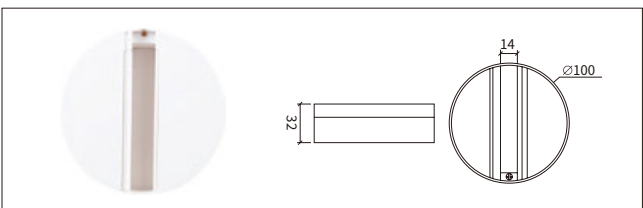


NO: YND-390

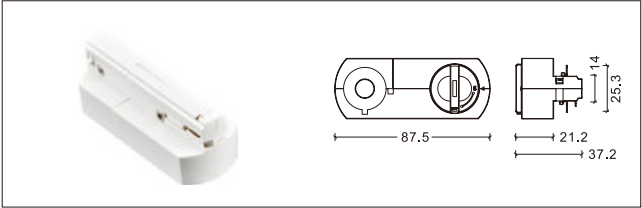


NO: YND-391

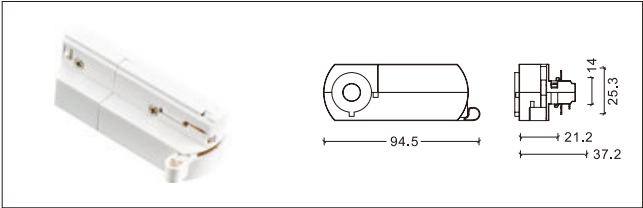








NO: YND-371 小三线

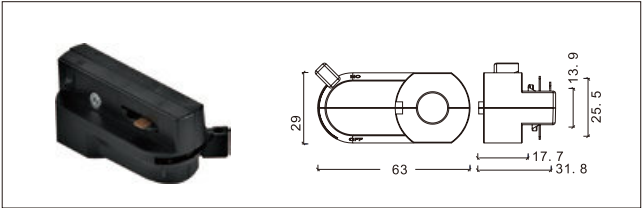













NO: YND-303-S 三线简易型

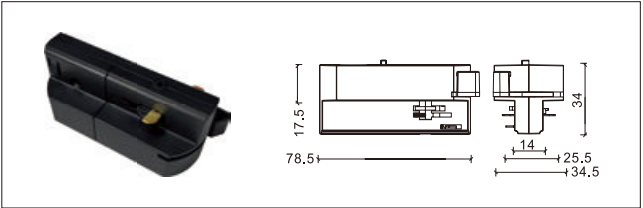

3 线导轨灯连接器 Power Connector for Three line track system

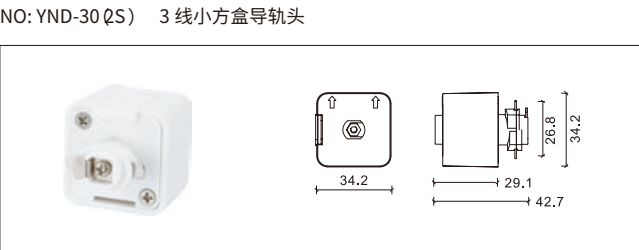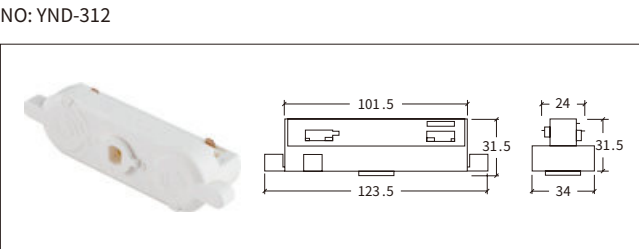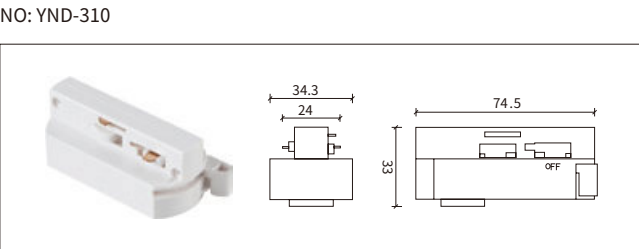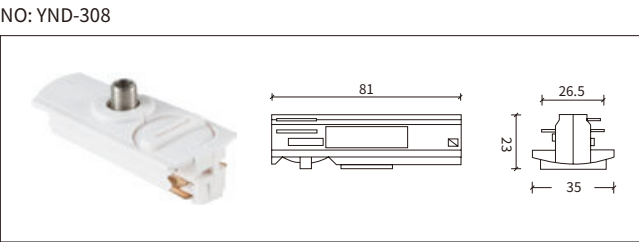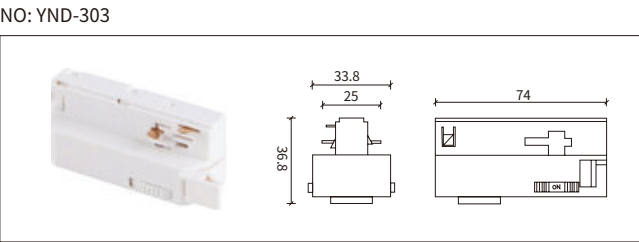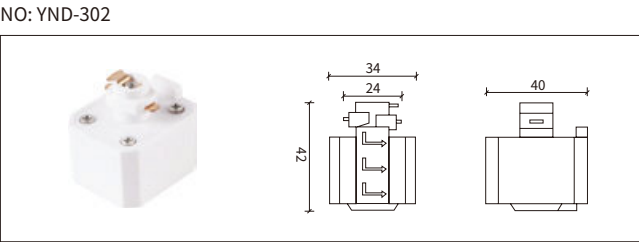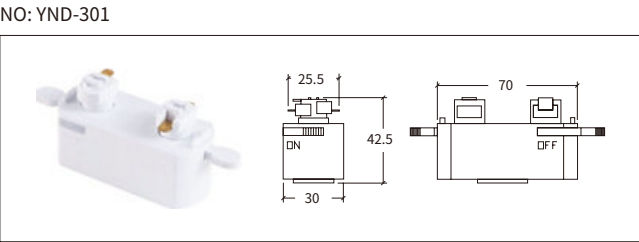

4 线电器盒连接器 Power box for Four line track system

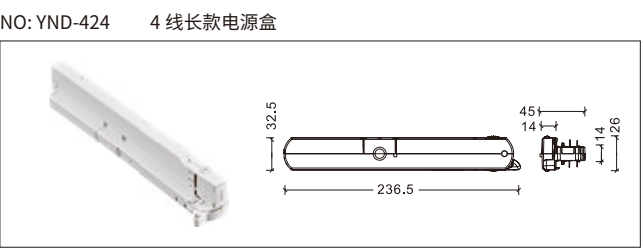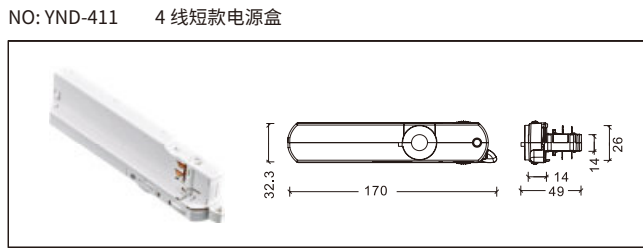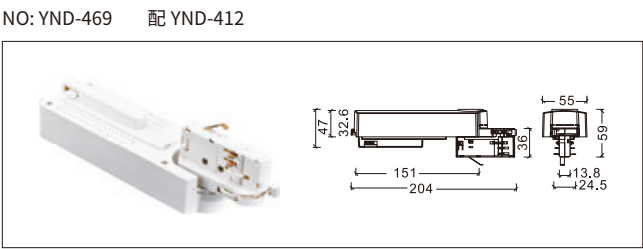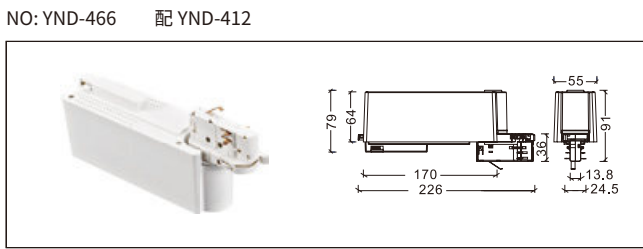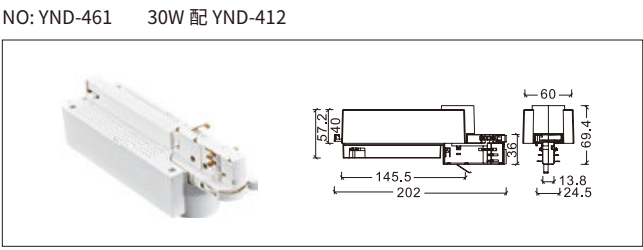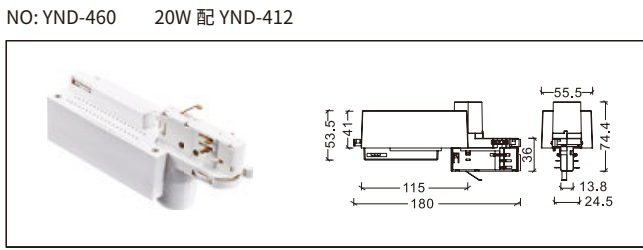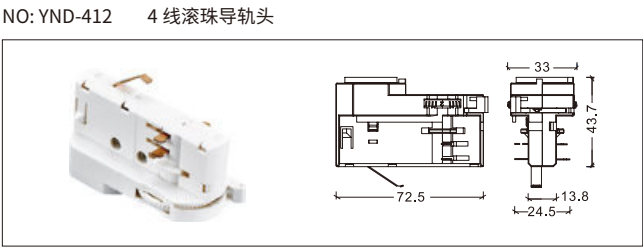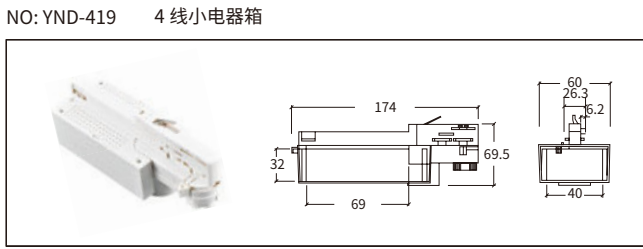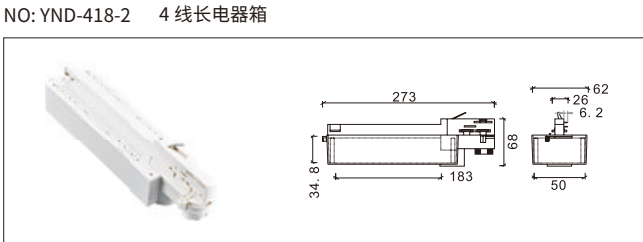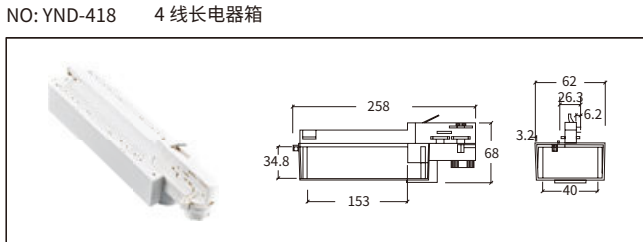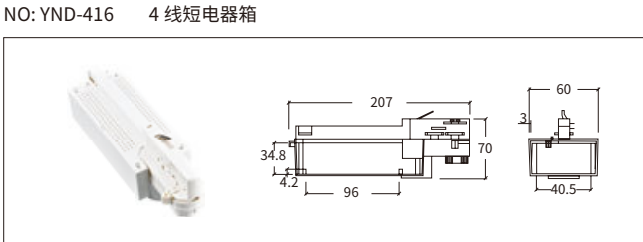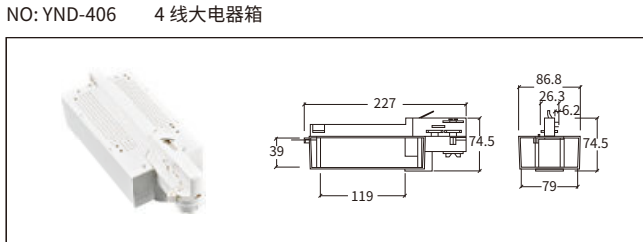

01

LATHE ALUMINUM SERIES

车铝系列



YND-GDT-001

YND-GDT001A/YND-GDT001B

瓦数	WATTS	材质/工艺	Material/Technic
20W 30W		铝材、车铝	Aluminum, Lathe Aluminum
光束角	BEAM ANGLE	颜色	COLOUR
12° 24° 36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating



YND-GDT001A 配电箱DX-207 Driver Box GX-207	30W	
YND-GDT001A 配导轨头GT-208 Adapter GT-208	30W	
YND-GDT001A 配电箱DX-405 Driver Box DX-405	30W	
YND-GDT001B 配电箱DX-208 Driver Box DX-208	20W	
YND-GDT001B 配导轨头GT-208 Adapte GT-208	20W	
YND-GDT001B 配电箱DX-406 Driver Box DX-406	20W	



YND-GDT002

瓦数	WATTS	材质/工艺	Material/Technic
30W		铝材、车铝	Aluminum, Lathe Aluminum
光束角	BEAM ANGLE	颜色	COLOUR
12° 24° 36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

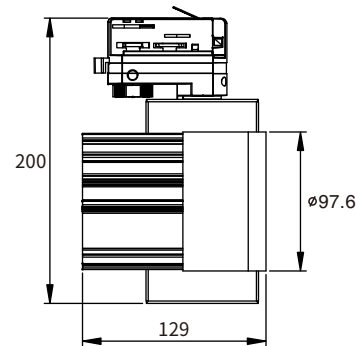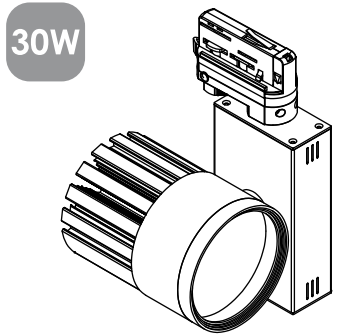





YND-GDT003A

瓦数	WATTS	材质/工艺	Material/Technic
30W		铝材、车铝	Aluminum, Lathe Aluminum
光束角	BEAM ANGLE	颜色	COLOUR
24°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

30W

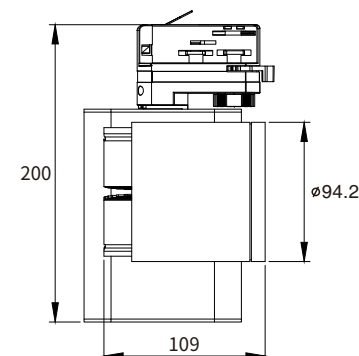



YND-GDT003B

瓦数	WATTS	材质/工艺	Material/Technic
30W		铝材、车铝	Aluminum, Lathe Aluminum
光束角	BEAM ANGLE	颜色	COLOUR
12° 24° 36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

30W

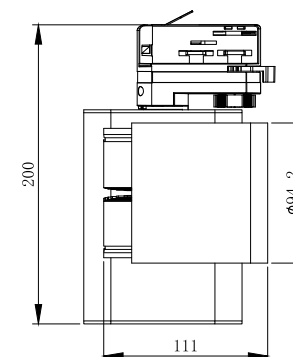





YND-GDT003C

瓦数	WATTS	材质/工艺	Material/Technic
30W		铝材、车铝	Aluminum, Lathe Aluminum
光束角	BEAM ANGLE	颜色	COLOUR
18°-38°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

30W

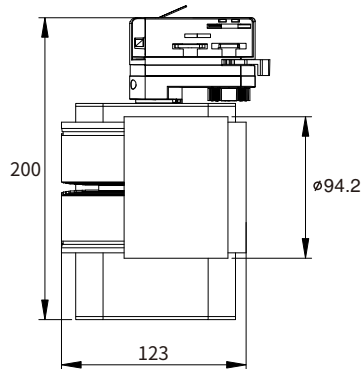





YND-GDT004

瓦数	WATTS	材质/工艺	Material/Technic
30W		铝材、车铝	Aluminum, Lathe Aluminum
光束角	BEAM ANGLE	颜色	COLOUR
15°- 50°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

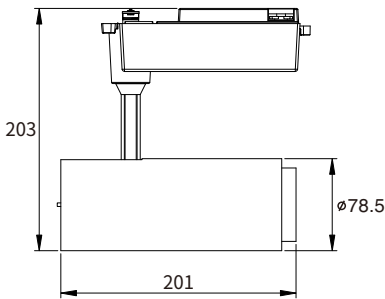

02 DIE CASTING SERIES 压铸系列







YND-GDT005

瓦数	WATTS	材质/工艺	Material/Technic
30W		铝材、压铸	Aluminum, Die casting
光束角	BEAM ANGLE	颜色	COLOUR
120° 超大广角	120° Wide Angle	沙白 / 沙黑	Black / White

30W



电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

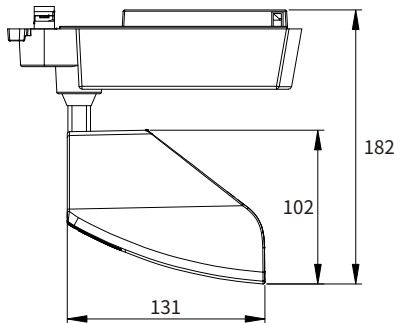



YND-GDT007


YND-GDT007-60/YND-GDT007-70/YND-GDT007-80/YND-GDT007-90

瓦数				WATTS	材质/工艺		Material/Technic
15-20W		20-25W		30-35W	40W	铝材、压铸	Aluminum,Die casting
光束角				BEAM ANGLE	颜色		COLOUR
12°		24°		36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating


YND-GDT007-60
配电箱 Φ60
Driver Box Φ60

15W-20W

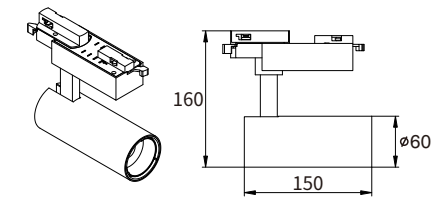


YND-GDT007-70
配电箱 Φ70
Driver Box Φ70

20W-25W

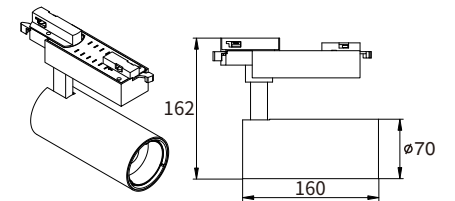


YND-GDT007-80
配电箱 Φ80
Driver Box Φ80

30W-35W

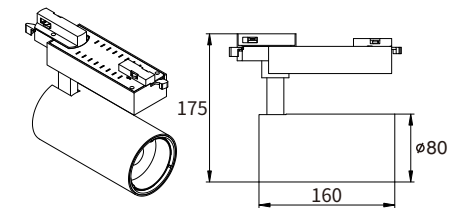

YND-GDT007-90
配电箱 Φ90
Driver Box Φ90

40W

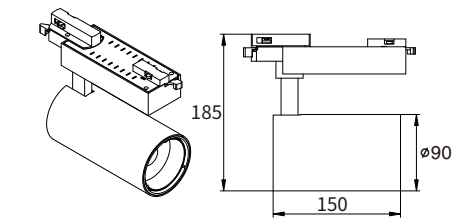



YND-GDT008


YND-GDT008-60/YND-GDT008-70/YND-GDT008-80

瓦数	WATTS		材质/工艺	Material/Technic
15-20W 20-25W 30-35W			铝材、压铸	Aluminum,Die casting
光束角	BEAM ANGLE		颜色	COLOUR
12° 24° 36°			沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线可选	2/3 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating


YND-GDT008-60
配电箱 Φ60
Driver Box Φ60

15W-20W

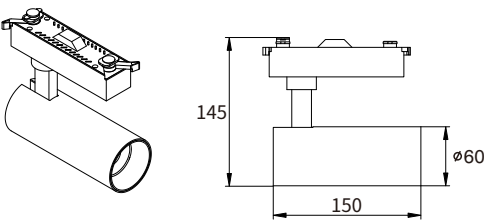


YND-GDT008-70
配电箱 Φ70
Driver Box Φ70

20W-25W

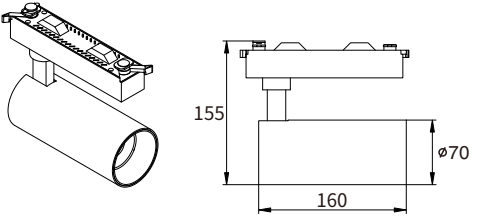

YND-GDT008-80
配电箱 Φ80
Driver Box Φ80

30W-35W

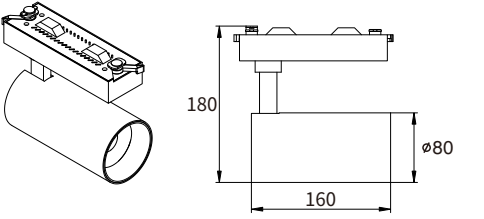



YND-GDT010

YND-GDT010-60/YND-GDT010-80G/YND-GDT010-80D/YND-GDT010-90



瓦数	WATTS	材质/工艺	Material/Technic
10-15W 30W 35W		铝材、压铸	Aluminum,Die casting
光束角	BEAM ANGLE	颜色	COLOUR
12° 24° 36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating





YND-GDT010-60

10-15W





YND-GDT010-80G

30W





YND-GDT010-80D

30W



YND-GDT010-90

35W



03

COLD FORGING SERIES

冷锻系列




YND-GDT006

YND-GDT006-62/YND-GDT006-72/YND-GDT006-80/YND-GDT006-94

瓦数				材质/工艺	Material/Technic
18W	25W	30W	40W	铝材、冷锻	Aluminum, Cold Forging
光束角				颜色	COLOUR
12°	24°	36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

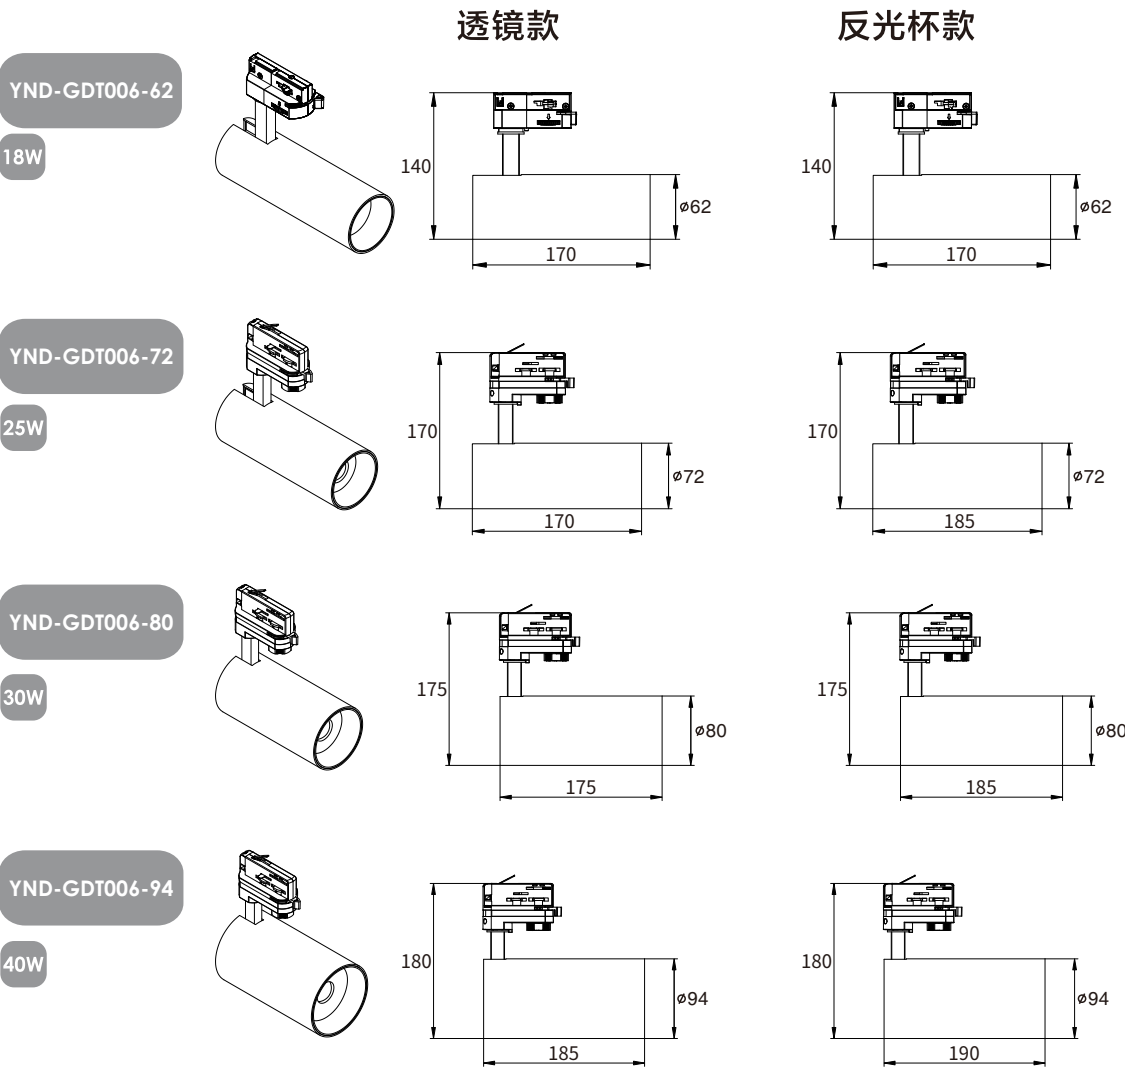





YND-GDT009

瓦数	WATTS	材质/工艺	Material/Technic
30-35W		铝材、冷锻	Aluminum, Cold Forging
光束角	BEAM ANGLE	颜色	COLOUR
12° 24° 36°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating

30W-35W





YND-GDT018



YND-GDT018-75105/YND-GDT018-90111/YND-GDT018-90130/YND-GDT018-90160

瓦数				WATTS	材质/工艺	Material/Technic
15W	25W	30W	40W		铝材、冷锻	Aluminum, Cold Forging
光束角				BEAM ANGLE	颜色	COLOUR
12°	24°	36°	60°		沙白 / 沙黑	Black / White

电箱类型	Driver Box
二线、三线、四线可选	2/3/4 Wires Driver Box
发光面	Emitting Area
D17	D17
电箱颜色	Color of Driver Box
黑/白	Black / White
光源类型	Light Source
COB	COB
表面处理	Finish
喷粉	Powder Coating



YND-GDT018-75105

15W





YND-GDT018-90111

25W



YND-GDT018-90130

30W



YND-GDT018-90160

40W

