

OLE can provide 7-10 years warranty

OLE FLEXI ST



FEATURES

- Input voltage: 220V~240V / Universal input
- Lumen Maintenance: L80 @ 50,000 hours
- Working Temperature: -25°C ~ 50°C
- Storage Temperature: -25°C ~ 80°C
- Power Factor: >0.95 at Full Load

MATERIALS

- Casing material: Die-Cast Aluminum
ADC12, Powder-Coated Finishing
- Cover: Tempered Glass
- Driver: Dimmable, Programmable
& DALI Compatible 1~10V (Optional)

IP
66IK
09CRI
>70-80THD
5-10%5
years
warrantyJKR
EMAL


SIRIM

Specification


Model No.	Power	Input current	Weight	CCT	Efficacy	Lumen
OLE Flexi ST 70	70W	0.30A	7.0kg	<3500K	144 lm/W	10080 lm
				4000K	148 lm/W	10360 lm
				5000K	148 lm/W	10360 lm
				5700K	146 lm/W	10220 lm
OLE Flexi ST 75	75W	0.32A	7.8kg	<3500K	144 lm/W	10800 lm
				4000K	148 lm/W	11100 lm
				5000K	148 lm/W	11100 lm
				5700K	146 lm/W	10950 lm
OLE Flexi ST 90	90W	0.39A	7.8kg	<3500K	144 lm/W	12960 lm
				4000K	148 lm/W	13320 lm
				5000K	148 lm/W	13320 lm
				5700K	146 lm/W	13140 lm
OLE Flexi ST 120	120W	0.52A	8.0kg	<3500K	145 lm/W	17400 lm
				4000K	150 lm/W	18000 lm
				5000K	150 lm/W	18000 lm
				5700K	148 lm/W	17760 lm
OLE Flexi ST 150	150W	0.65A	8.0kg	<3500K	142 lm/W	21300 lm
				4000K	145 lm/W	21750 lm
				5000K	144 lm/W	21600 lm
				5700K	143 lm/W	21450 lm
OLE Flexi ST 180	180W	0.78A	8.0kg	<3500K	130 lm/W	23400 lm
				4000K	134 lm/W	24120 lm
				5000K	133 lm/W	23940 lm
				5700K	131 lm/W	23580 lm

*Flux data based on Ta = 35°C, CCT & Lumen + - 10%


Photometric Data

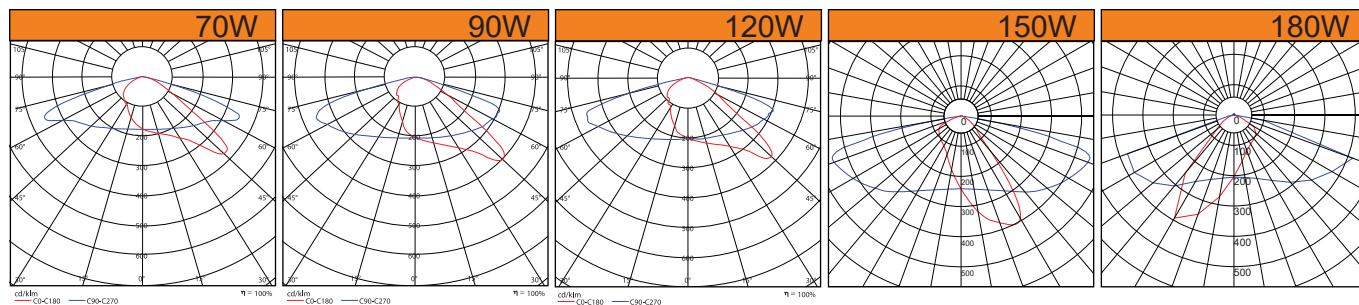

OLE Flexi ST

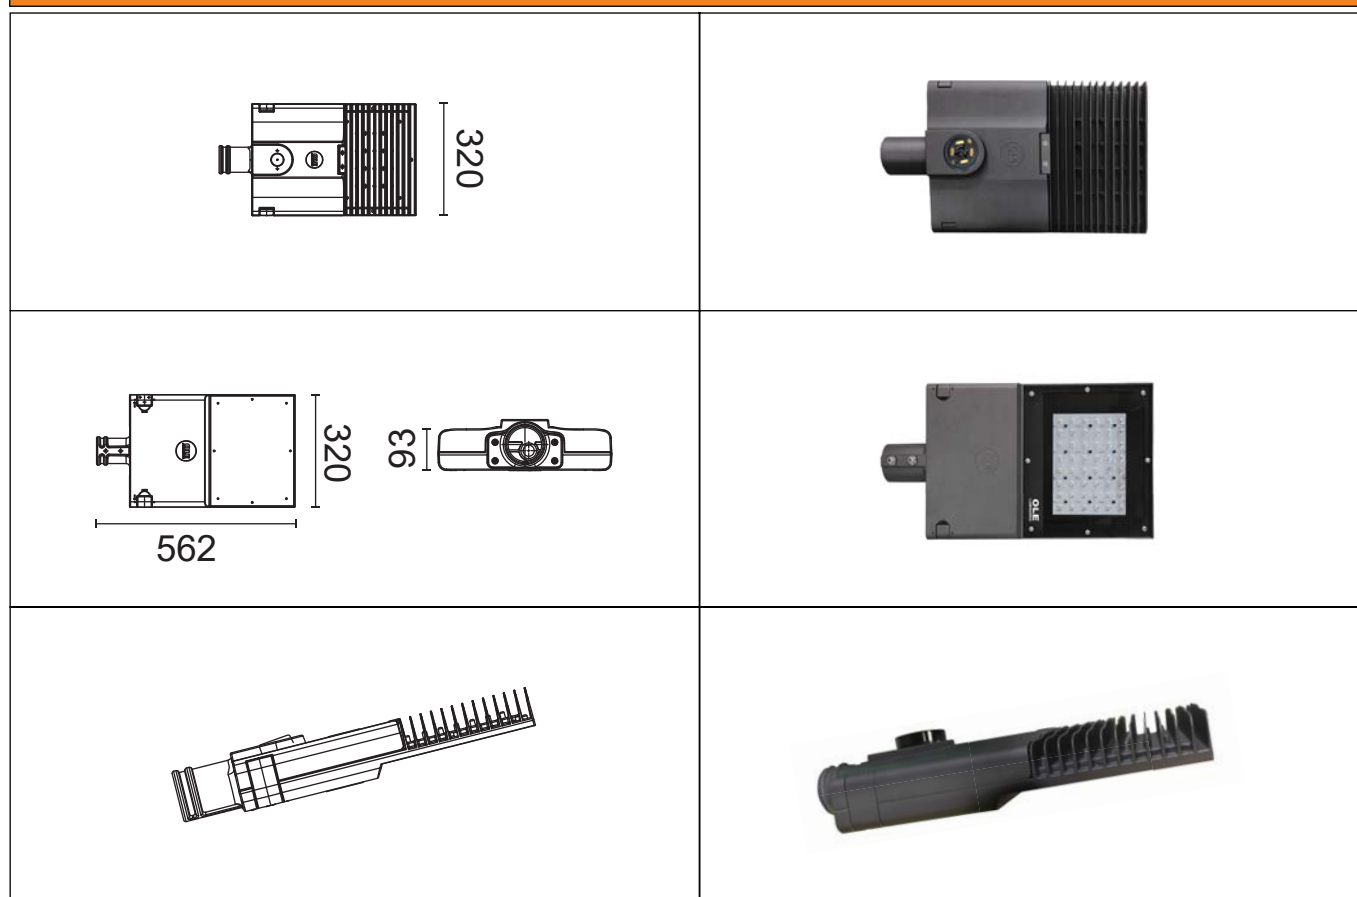

Construction of OLE FLEXI ST

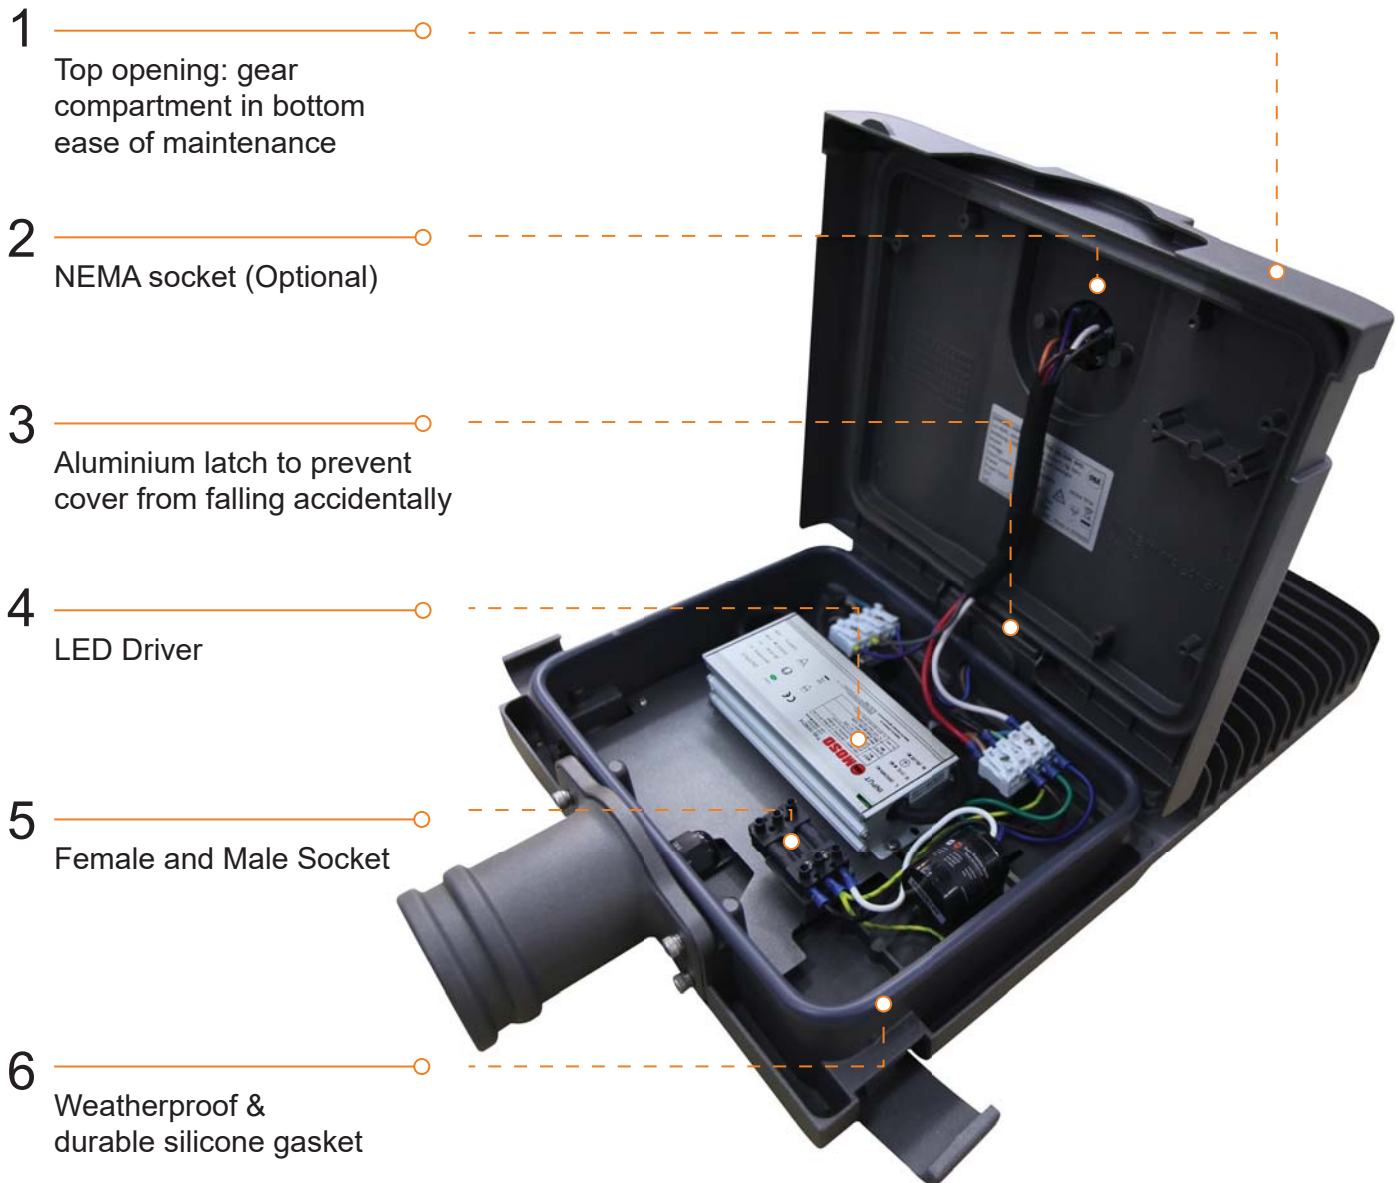


Cut - off connector
(Optional)



Clip lock to open and close
top opening cover



Safety switch cut off power
supply once cover opened
(optional)

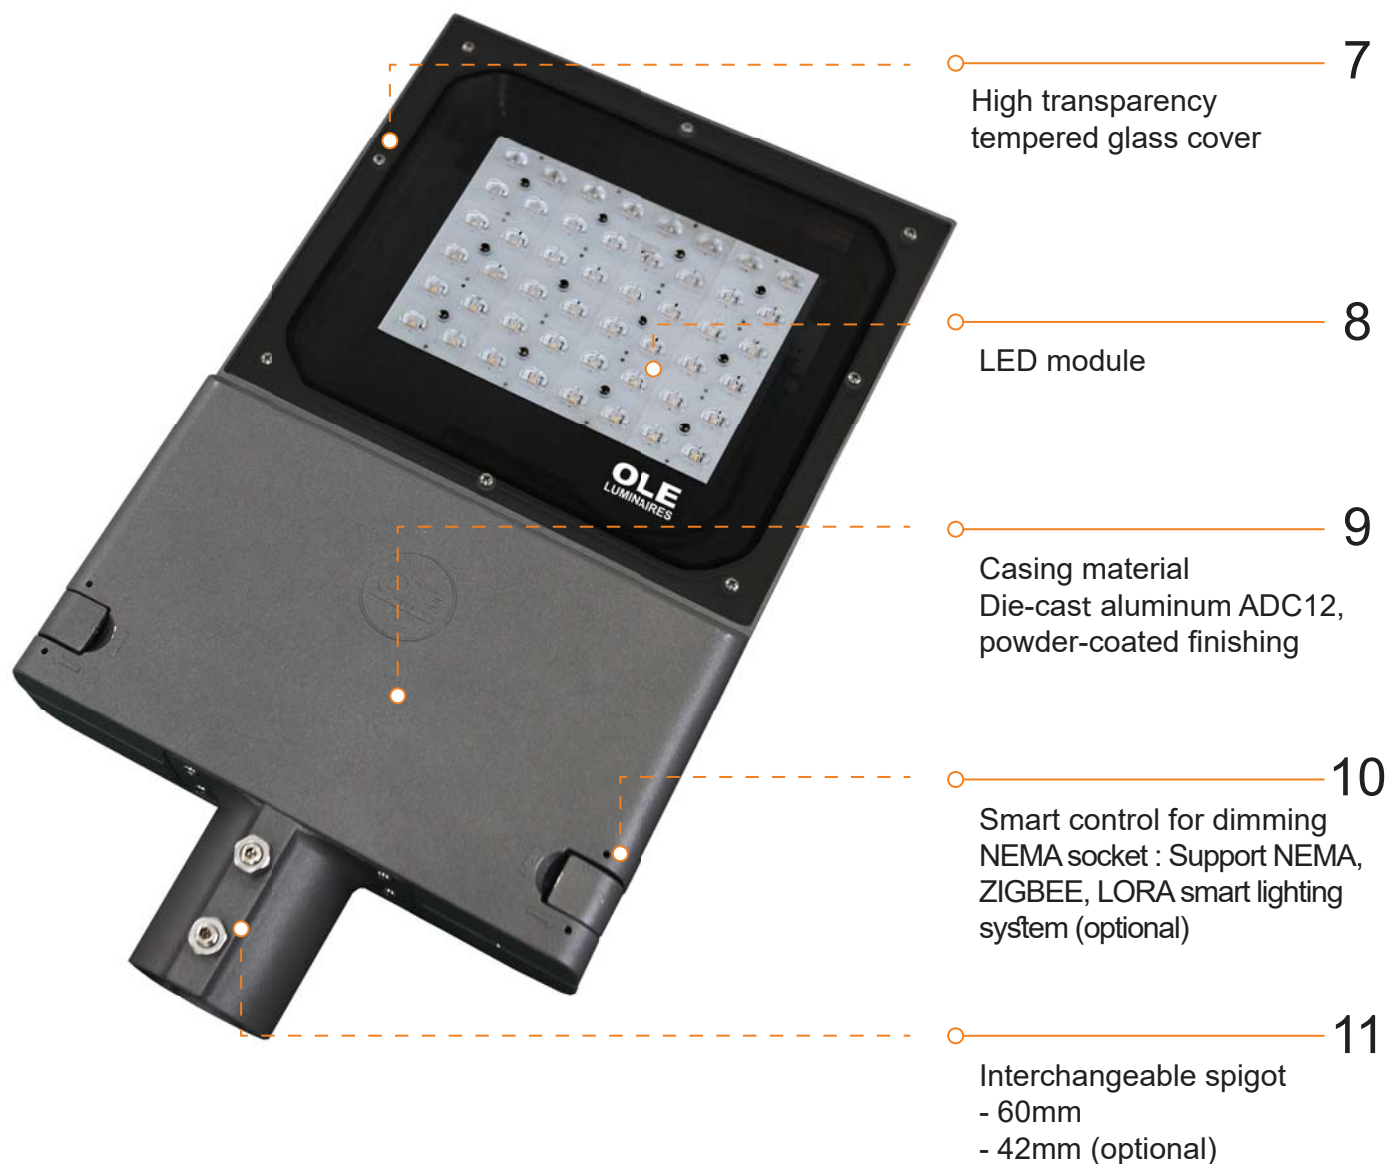

NEMA Socket
(Optional)



LED Module