




PLAYLITE®



IP67 IK06

3 Years Warranty



Replaceable LED module !

#### Parameter

##### General Data

|                |                                                              |
|----------------|--------------------------------------------------------------|
| Item No.       | DC: SP-006-0300-A PW / AC: SP-006-0300-AH PW                 |
| Power          | 3 Watts                                                      |
| LED type       | 1 PC CREE XPE LED (WWW, NVV, CWV.1 Watt to 3 Watt optional ) |
| Luminous flux  | 110~130lm                                                    |
| CCT            | 2700K, 3000K, 4000K, 6000K                                   |
| CRI            | 80+                                                          |
| Beam angle     | 30°                                                          |
| Dimension      | 70 x 34.5 (mm) Diameter x Height                             |
| Cut out        | 62 mm                                                        |
| Net weight     | 0.225 kgs                                                    |
| Warranty       | 3 years                                                      |
| Certifications | CE, RoHS                                                     |

##### Electrical Data

|                  |                                                                                                     |
|------------------|-----------------------------------------------------------------------------------------------------|
| Input voltage    | DC12V/DC24V (AC100-245V 50/60Hz optional)                                                           |
| Insulation class | Class III                                                                                           |
| Cable            | 1 x cable 0.3 M HO5RN-F 2x0.5mm square to open wires                                                |
| Driver           | Low voltage constant current output, excluding the transformer (With separately driver for options) |

##### Construction Data

|                      |                                                 |
|----------------------|-------------------------------------------------|
| IP rating            | IP65 Waterproof                                 |
| IK rating            | IK06                                            |
| Housing              | Powder coated painting in white color Aluminium |
| Protection finishing | Powder coated painting in white color           |
| Trim                 | Powder coated painting in white color Aluminium |
| Glass                | Tempered glass                                  |
| Loading capacity     | 320 kgs                                         |
| Cable Gland          | IP65 Aluminium part                             |
| Gasket               | O-ring PMQ silicone seal                        |


##### Accessories

|                 |                           |
|-----------------|---------------------------|
| Mounting Sleeve | Anti-corrosion PVC. Grey. |
|-----------------|---------------------------|


##### Packaging

|                |                                         |
|----------------|-----------------------------------------|
| Inner box size | 85*85*100 mm                            |
| Carton size    | 27*27*24.5 cm (18PCS items each carton) |

#### Dimension

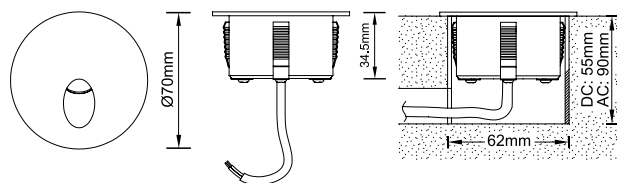

#### Light Distribution Curve (3000K, 30°)

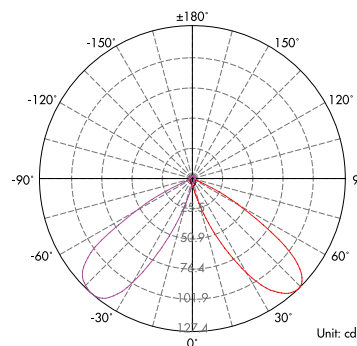

#### Lux distance Curve (3000K, 30°)

|          |         |          |         |
|----------|---------|----------|---------|
| 3.281ft  | 0.476fc | 4.998fc  | 1.933ft |
| 1.0m     | 5.127lx | 53.802lx | 0.589m  |
| 6.562ft  | 0.119fc | 1.250fc  | 3.865ft |
| 2.0m     | 1.282lx | 13.451lx | 1.178m  |
| 9.843ft  | 0.053fc | 0.555fc  | 5.798ft |
| 3.0m     | 0.570lx | 5.978lx  | 1.767m  |
| 13.123ft | 0.030fc | 0.312fc  | 7.731ft |
| 4.0m     | 0.320lx | 3.363lx  | 2.356m  |
| 16.404ft | 0.019fc | 0.200fc  | 9.663ft |
| 5.0m     | 0.205lx | 2.152lx  | 2.945m  |

Height Center E Beam Angle:32.8 Average E Diameter

#### Illumination Picture (30°)

