



CE RoHS COMPLIANT IP67 IK04

Passivated

3 Years Warranty

Parameter

General Data

Item No.	UL-1010-0800-AH / UL-1010-0800-BH
Power	8 Watts
LED type	1 PC 8W CREE COB LED
Luminous flux	560~640 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	AH: Reflector 10°, 23°, 38° lens : 15°, 24°, 36°, 60° +honey comb optional BH: lens 4°
Dimension	44 x 90 (mm) Diameter x Height
Cut out	/
Net weight	0.39 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	AC100-245V 50/60Hz sa standard (DC 12V or DC 24V as optional)
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer

Construction Data

IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined 20~25μm thickness anodized film for housing. Dark grey standard, silver color as options.
Protection finishing	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass. T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal


Accessories

Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)


Packaging

Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18 PCS / carton)


Dimension

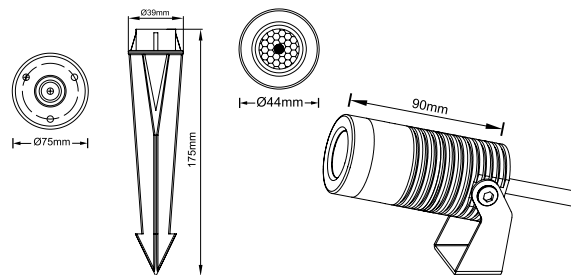

Light Distribution Curve (3000K, 25°)

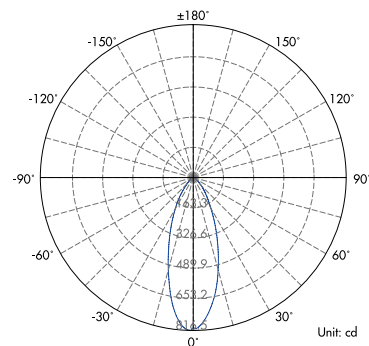

Lux distance Curve (3000K, 25°)

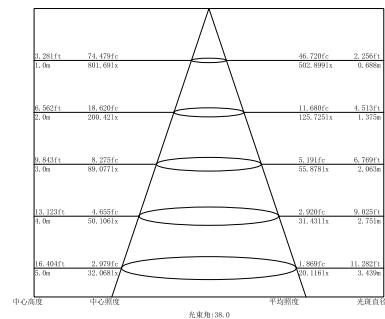

Illumination Picture (25°)

