

# Product catalogue



Over **10** years ' experience quality lighting beyond imagination

Billionaire Lighting Co., LTD




# ABOUT US

Billionaire Lighting Co., Ltd. was established in 2013 and belongs to Luvieu Industrial Technology Group. Its headquarter is located in Huayi Liwei Industrial Park, Longhua District, Shenzhen. It covers an area of more than 16,000 square meters and has 280 employees. Billionaire Lighting focuses on the field of commercial office lighting. Since its establishment, the company has always taken the idea of improving people's work and office lighting experience as its philosophy, providing global users with differentiated overall lighting solutions and diversified LED commercial office lighting products. Our LED floor lamps, panel lights and other products sell well in many countries and regions such as Germany, France, the United Kingdom, and the United States all year round.

Our business philosophy is to take customers as the center, to strive for excellence, and to pursue excellent products and services. We believe that only when our customers succeed can we have a chance to succeed. Starting from the interests of customers, providing better value services is the unchanging business tenet of Luvieu Group.



# Contents



*Rino*

(P1~6)




Rino-F



Rino-X



Rino-Q



*Nora*

(P7~14)



Nora-F1



Nora-F2



Nora-X



Nora-M



*Timo & Markus*

(P15~20)



Timo-D2



Timo-F



Timo-D



Markus-F



Markus-D



*Zakoy*

(P21~24)




Zakoy-S



Zakoy-F



Zakoy-D



*Tanko & Vatrix*

(P25~30)



Tanko-S



Tanko-F



Tanko-D



Vatrix-F



Vatrix-D



*Linear floor lamp*

(P31~38)



Natash-S



Natash-F



Natash-D



Siger-F



Siger-D



Kapla-F



Kapla-D



*Linear pendant lamp*

(P39~48)



Lina-A




Lina-B



Lina-C



Rotar



Lirod



*Round pendant lamp*

(P49~52)



Nora-M



Nora-X



Omic-C



Omic-T



*cabinet light bar*

(P53)




0.38m



0.85m



1.2m

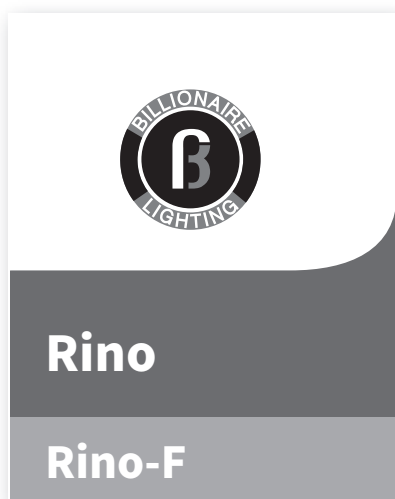

Colors optional     
black silver white

## Application



ERP



PHILIPS

TRIDONIC

SAMSUNG



DALI

## Product Details

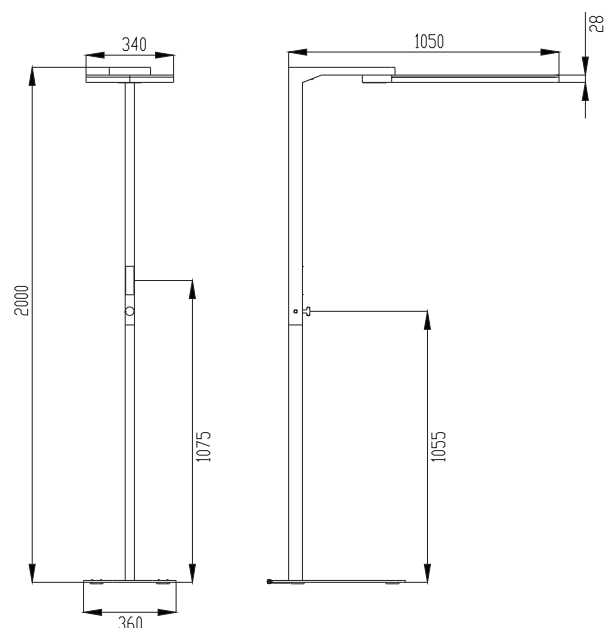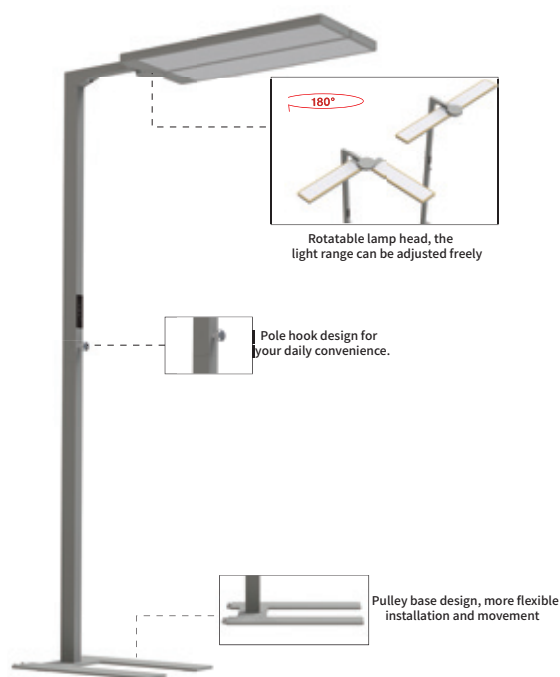

Rino-F

## Technical data

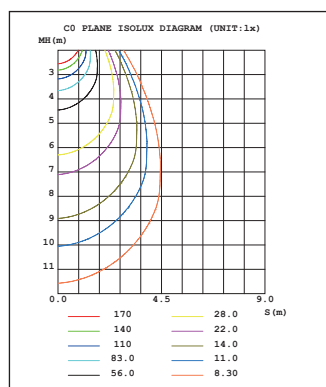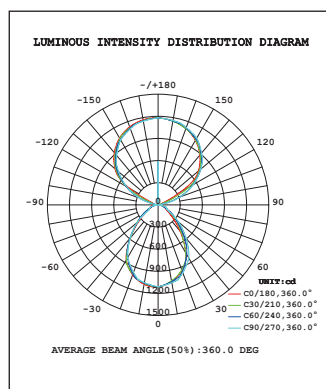


|                        |                                        |
|------------------------|----------------------------------------|
| Product Series         | Rino-F                                 |
| Model Number           | BR-FS0021-60W-F01                      |
| Size                   | 1050*340*2000mm                        |
| Input Voltage          | AC200-240V                             |
| Lighting effect        | 130LM/W                                |
| Input Power            | 60w                                    |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;          |
| Power Factor           | >0.9                                   |
| Housing Color          | RAL7038A(white/black available)        |
| Luminous Flux          | 7800LM                                 |
| CRI (Ra>)              | 80/90/95                               |
| UGR                    | <16/<19                                |
| Dimming type           | 1-10V                                  |
| Working Lifetime(Hour) | >36000                                 |
| Lamp Body Material     | Aluminum                               |
| Color Temperature      | 3000K/4000K/5000K/6000K                |
| Protection Level       | IP40                                   |
| Working Temperature    | -20°C~40°C                             |
| Application            | office/conference room/reception       |
| Light Source           | SMD2835 / Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                       |
| Surface Finished       | Powder painting                        |
| Feature                | Fashion brief                          |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;         |
| warranty               | 3years/5years                          |
| Packaging size         | 1100*390*2050mm                        |
| Outlet length          | 1.8m                                   |





**Rino**

**Rino-X**

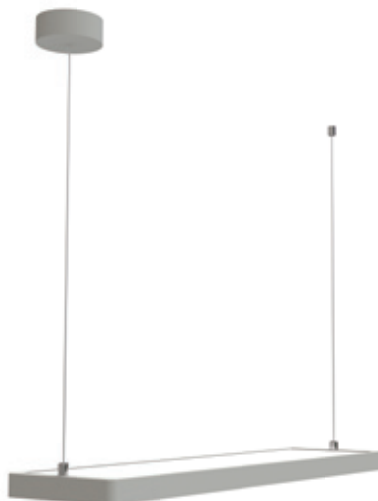

Colors optional     
black silver white

## Application



ERP

PHILIPS



TRIDONIC

SAMSUNG







## Product Details

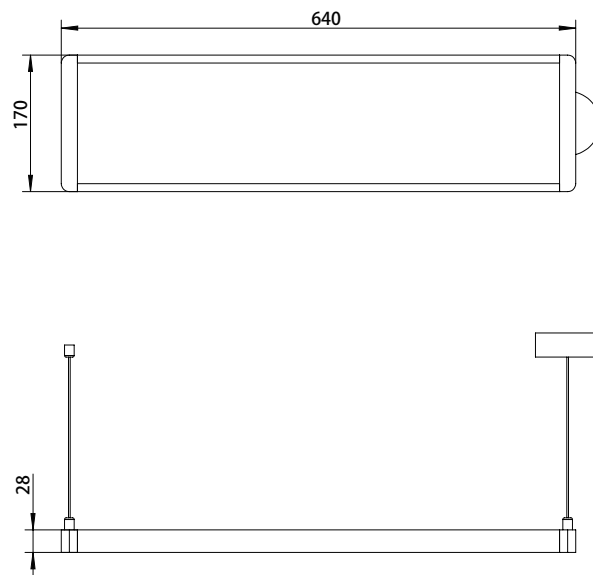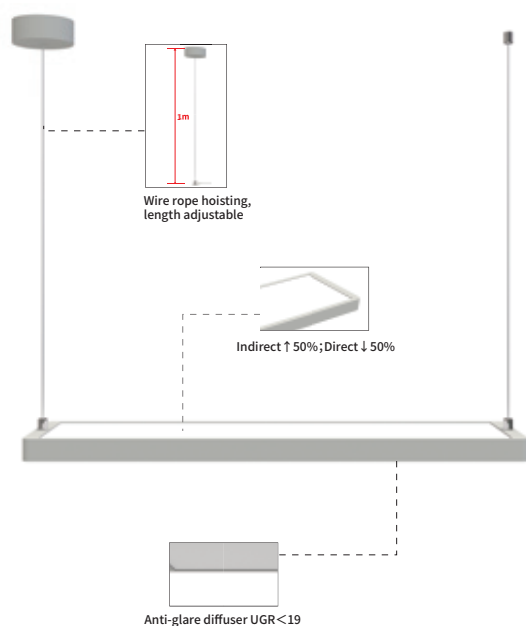

Rino-X

## Technical data

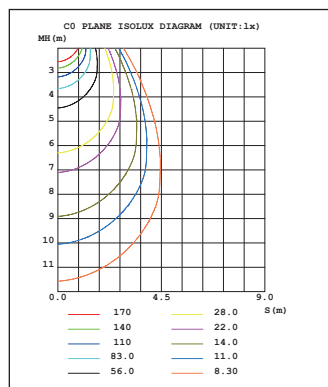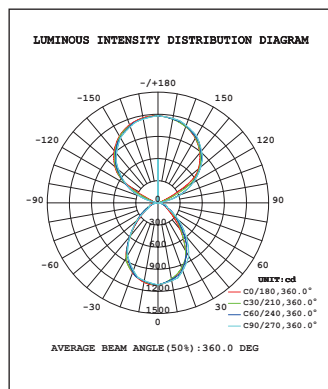

| Product Series         | Rino-X                                 | Rino-X                                 | Rino-X                                 |
|------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| Model Number           | BR-UD1764-30W-A07                      | BR-UD1790-40W-A07                      | BR-UD17120-60W-A07                     |
| Size                   | 640*170*28mm                           | 900*170*28mm                           | 120*170*28mm                           |
| Input Voltage          | AC200-240V                             | AC200-240V                             | AC200-240V                             |
| Lighting effect        | 130LM/W                                | 130LM/W                                | 130LM/W                                |
| Input Power            | 30w                                    | 40w                                    | 60w                                    |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;          | Indirect ↑ 50%; Direct ↓ 50%;          | Indirect ↑ 50%; Direct ↓ 50%;          |
| Power Factor           | > 0.9                                  | > 0.9                                  | > 0.9                                  |
| Housing Color          | RAL7038A(white/black available)        | RAL7038A(white/black available)        | RAL7038A(white/black available)        |
| Luminous Flux          | 3900LM                                 | 5200LM                                 | 7800LM                                 |
| CRI (Ra>)              | 80/90/95                               | 80/90/95                               | 80/90/95                               |
| UGR                    | < 16/<19                               | < 16/<19                               | < 16/<19                               |
| Dimming type           | N/A                                    | N/A                                    | N/A                                    |
| Working Lifetime(Hour) | > 36000                                | > 36000                                | > 36000                                |
| Lamp Body Material     | Aluminum/Iron                          | Aluminum/Iron                          | Aluminum/Iron                          |
| Color Temperature      | 3000K/4000K/5000K/6000K                | 3000K/4000K/5000K/6000K                | 3000K/4000K/5000K/6000K                |
| Protection Level       | IP40                                   | IP40                                   | IP40                                   |
| Working Temperature    | -20°C~40°C                             | -20°C~40°C                             | -20°C~40°C                             |
| Application            | office/conference room/reception       | office/conference room/reception       | office/conference room/reception       |
| Light Source           | SMD2835 / Everlight/sunlight/bridgelux | SMD2835 / Everlight/sunlight/bridgelux | SMD2835 / Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                       | CE/ROHS/FCC/BSCI                       | CE/ROHS/FCC/BSCI                       |
| Surface Finished       | Powder painting                        | Powder painting                        | Powder painting                        |
| Feature                | Fashion brief                          | Fashion brief                          | Fashion brief                          |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;         | Indirect ↑ 112°; Direct ↓ 77°;         | Indirect ↑ 112°; Direct ↓ 77°;         |
| warranty               | 3years/5years                          | 3years/5years                          | 3years/5years                          |
| Packaging size         | 690*200*50mm                           | 990*200*50mm                           | 1290*200*50mm                          |
| Outlet length          | 1.2m                                   | 1.2m                                   | 1.2m                                   |



**Rino**

**Rino-Q**



Colors optional



black



silver



white

## Application



ERP



PHILIPS

TRIDONIC

SAMSUNG





# Product Details

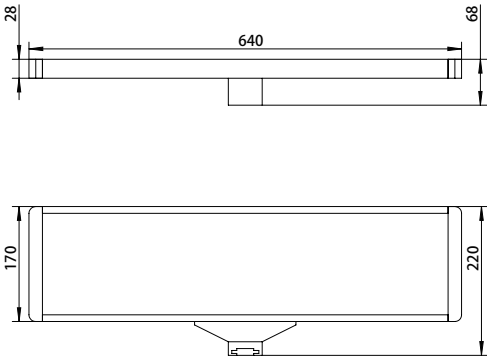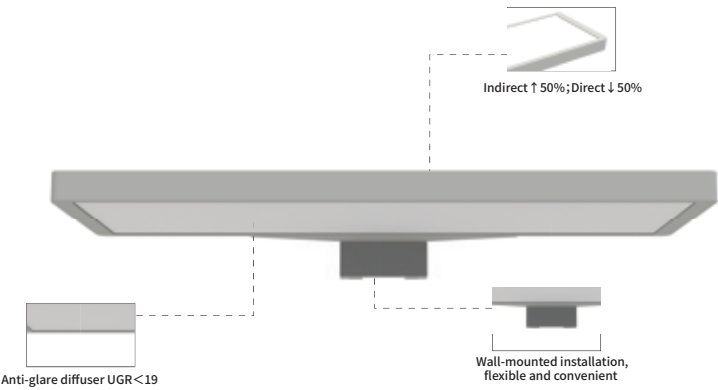

Rino-Q

# Technical data

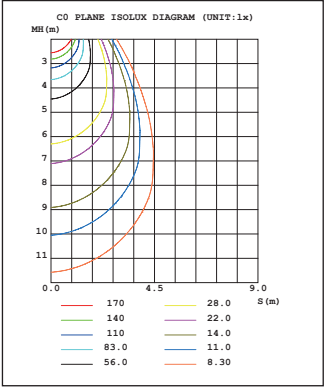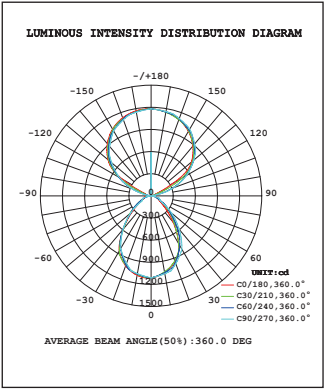

|                        |                                        |
|------------------------|----------------------------------------|
| Product Series         | Rino-Q                                 |
| Model Number           | BR-ML1764-30W-A07                      |
| Size                   | 640*220*68mm                           |
| Input Voltage          | AC200-240V                             |
| Lighting effect        | 130LM/W                                |
| Input Power            | 30w                                    |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;          |
| Power Factor           | >0.9                                   |
| Housing Color          | RAL7038A(white/black available)        |
| Luminous Flux          | 3900LM                                 |
| CRI (Ra>)              | 80/90/95                               |
| UGR                    | <16/<19                                |
| Dimming type           | N/A                                    |
| Working Lifetime(Hour) | >36000                                 |
| Lamp Body Material     | Aluminum/Iron                          |
| Color Temperature      | 3000K/4000K/5000K/6000K                |
| Protection Level       | IP40                                   |
| Working Temperature    | -20°C~40°C                             |
| Application            | office/conference room/reception       |
| Light Source           | SMD2835 / Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                       |
| Surface Finished       | Powder painting                        |
| Feature                | Fashion brief                          |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;         |
| warranty               | 3years/5years                          |
| Packaging size         | 690*270*100mm                          |
| Outlet length          | 300mm                                  |



**Nora**

**Nora-F1**



Colors optional

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| black                                                                               | silver                                                                              | white                                                                               |

## Application



ERP



PHILIPS

TRIDONIC

SAMSUNG



DALI 2

## Product Details

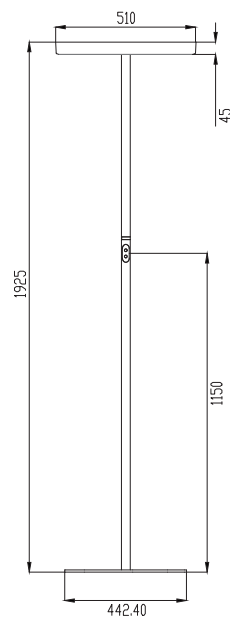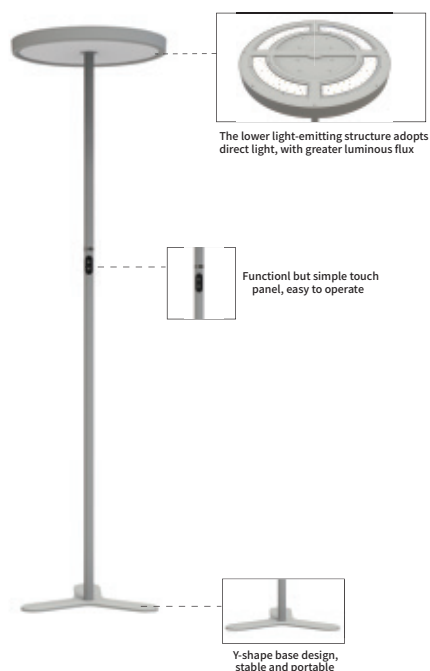

Nora-F1

## Technical data

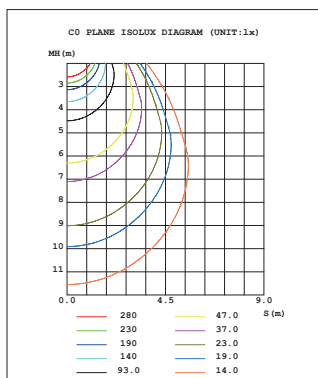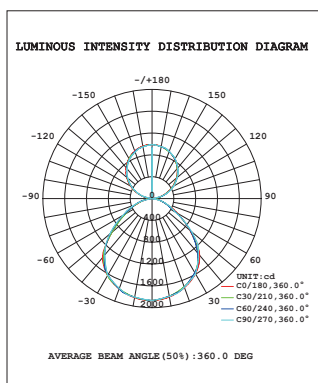

|                        |                                      |
|------------------------|--------------------------------------|
| Product Series         | Nora-F1                              |
| Model Number           | BR-FS0012-60W-Z10                    |
| Size                   | D510*1925mm                          |
| Input Voltage          | AC200-240V                           |
| Lighting effect        | 85LM/W                               |
| Input Power            | 60w                                  |
| Luminous ratio         | Indirect ↑ 40%; Direct ↓ 60%;        |
| Power Factor           | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)      |
| Luminous Flux          | 2040lm indirect/3060lm direct        |
| CRI (Ra>)              | 80/90/95                             |
| UGR                    | <16/<19                              |
| Dimming type           | PWM                                  |
| Working Lifetime(Hour) | >36000                               |
| Lamp Body Material     | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                 |
| Working Temperature    | -20°C~40°C                           |
| Application            | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                      |
| Feature                | Fashion brief                        |
| Beam angle             | Indirect ↑ 110°; Direct ↓ 100°;      |
| warranty               | 3years/5years                        |
| Packaging size         | 610*610*165/1340*119*82              |
| Outlet length          | 1.8m                                 |



**Nora**

**Nora-F2**



Colors optional

black silver white

## Application



ERP



PHILIPS

TRIDONIC

SAMSUNG





## Product Details

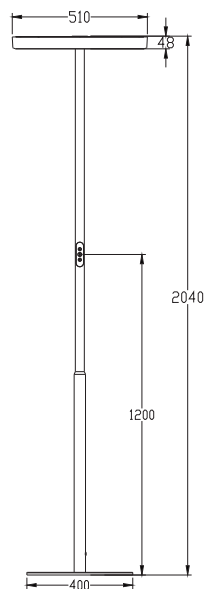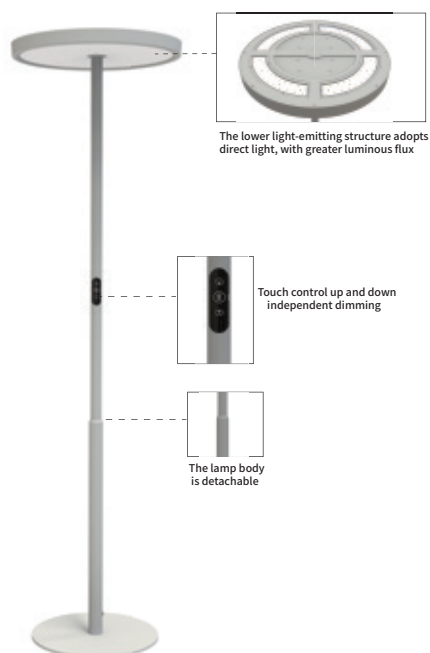

Nora-F2

## Technical data

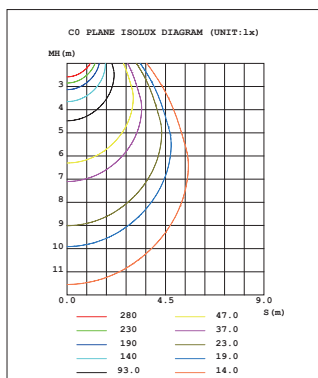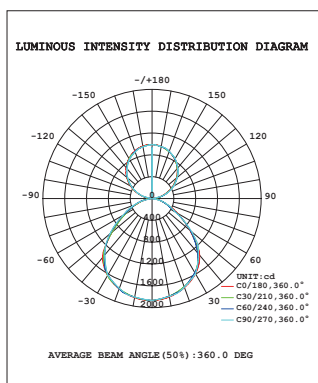

|                        |                                      |
|------------------------|--------------------------------------|
| Product Series         | Nora-F2                              |
| Model Number           | BR-FS0012-60W-G01                    |
| Size                   | D510*2040mm                          |
| Input Voltage          | AC200-240V, 100-270V                 |
| Lighting effect        | 125LM/W                              |
| Input Power            | 60w                                  |
| Luminous ratio         | Indirect ↑ 40%; Direct ↓ 60%;        |
| Power Factor           | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)      |
| Luminous Flux          | 3000lm indirect/4500lm direct        |
| CRI (Ra>)              | 80/90/95                             |
| UGR                    | <16/<19                              |
| Dimming type           | PWM                                  |
| Working Lifetime(Hour) | >36000                               |
| Lamp Body Material     | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                 |
| Working Temperature    | -20°C~40°C                           |
| Application            | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                      |
| Feature                | Fashion brief                        |
| Beam angle             | Indirect ↑ 110°; Direct ↓ 100°;      |
| warranty               | 3years/5years                        |
| Packaging size         | 610*610*165/1340*119*82              |
| Outlet length          | 1.8m                                 |





**Nora**

**Nora-X**



Colors optional



black



silver



white

## Application



ERP


PHILIPS

TRIDONIC



SAMSUNG

DALI

Product Details

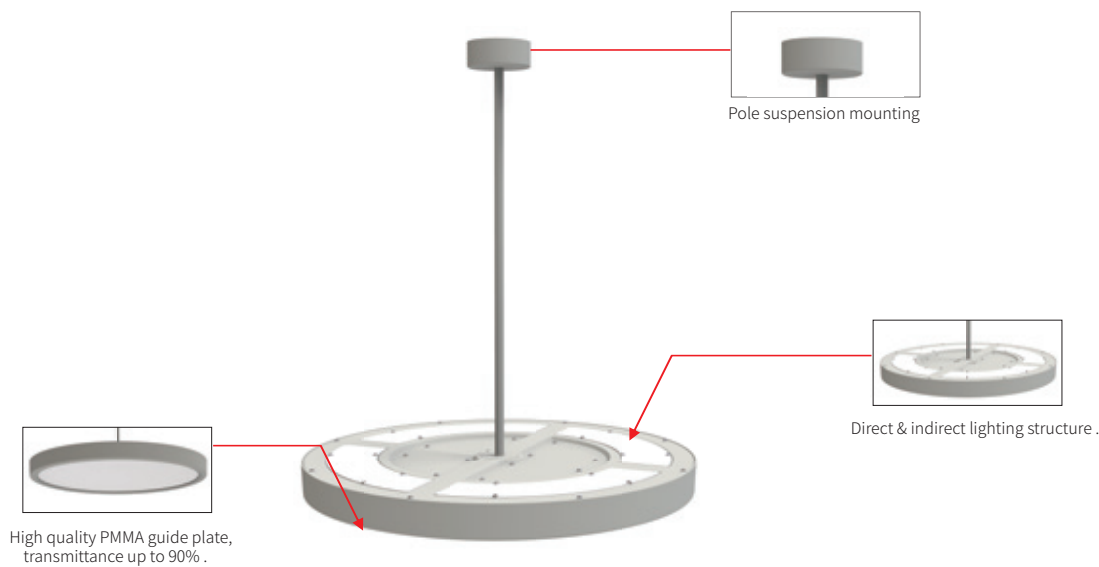

Technical data

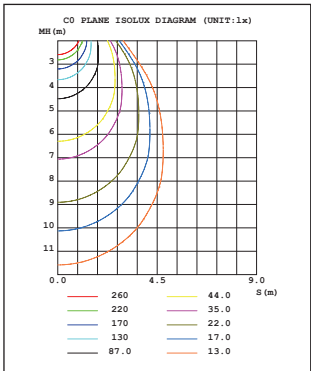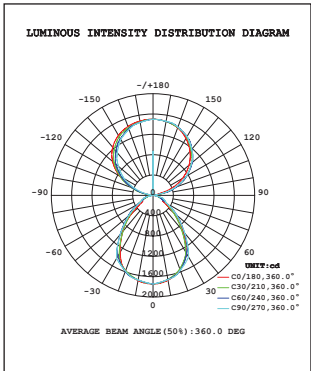

|                        |                                      |
|------------------------|--------------------------------------|
| Product Series         | Nora-X                               |
| Model Number           | BR-SF0500-60W-A07                    |
| Size                   | D510*45mm                            |
| Input Voltage          | AC200-240V                           |
| Lighting effect        | 125LM/W                              |
| Input Power            | 60w                                  |
| Luminous ratio         | Indirect ↑ 40%; Direct ↓ 60%;        |
| Power Factor           | > 0.9                                |
| Housing Color          | white                                |
| Luminous Flux          | 3000lm indirect/4500lm direct        |
| CRI (Ra>)              | 80/90/95                             |
| UGR                    | < 16/ < 19                           |
| Dimming type           | N/A                                  |
| Working Lifetime(Hour) | > 36000                              |
| Lamp Body Material     | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                 |
| Working Temperature    | -20°C~40°C                           |
| Application            | Office/library/art hall/etc.         |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/LVD/FCC/ROHS/BSCI                 |
| Surface Finished       | Powder painting                      |
| Feature                | Fashion brief                        |
| Beam angle             | Indirect ↑ 110°; Direct ↓ 100°;      |
| warranty               | 3years/5years                        |
| Packaging size         | 610*610*165mm                        |
| Outlet length          | 750mm                                |



**Nora**

**Nora-M**



Colors optional     
black silver white

## Application




ERP

PHILIPS



TRIDONIC



Product Details

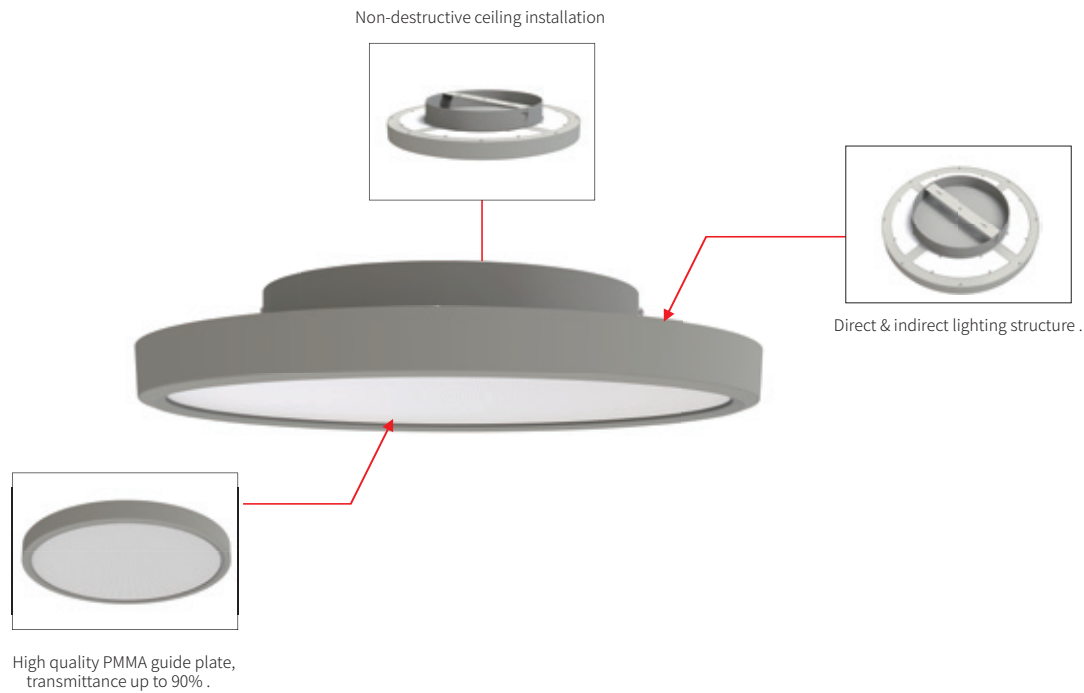

Technical data

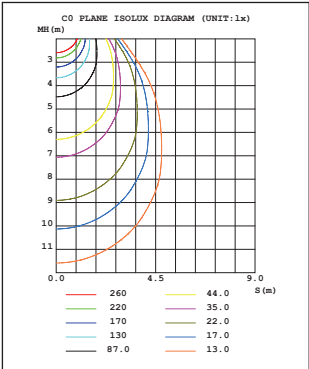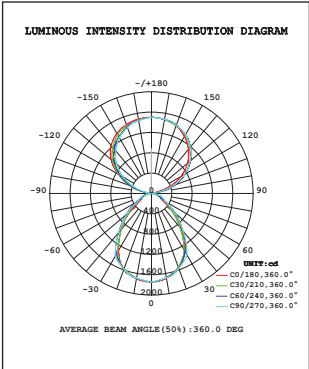

|                        |                                      |
|------------------------|--------------------------------------|
| Product Series         | Nora-M                               |
| Model Number           | BR-MF0500-60W-A07                    |
| Size                   | D510*95mm                            |
| Input Voltage          | AC200-240V                           |
| Lighting effect        | 125LM/W                              |
| Input Power            | 60w                                  |
| Luminous ratio         | Indirect ↑ 40%; Direct ↓ 60%;        |
| Power Factor           | >0.9                                 |
| Housing Color          | white                                |
| Luminous Flux          | 3000lm indirect/4500lm direct        |
| CRI (Ra>)              | 80/90/95                             |
| UGR                    | <16/<19                              |
| Dimming type           | N/A                                  |
| Working Lifetime(Hour) | >36000                               |
| Lamp Body Material     | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                 |
| Working Temperature    | -20°C~40°C                           |
| Application            | Office/library/art hall/etc.         |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/LVD/FCC/ROHS/BSCI                 |
| Surface Finished       | Powder painting                      |
| Feature                | Fashion brief                        |
| Beam angle             | Indirect ↑ 110°; Direct ↓ 100°;      |
| warranty               | 3years/5years                        |
| Packaging size         | 610*610*165mm                        |
| Outlet length          | 300mm                                |



**Timo & Markus**

**Timo-D2**



Colors optional



black



silver



white

## Application



ERP


PHILIPS

TRIDONIC



SAMSUNG



# Product Details

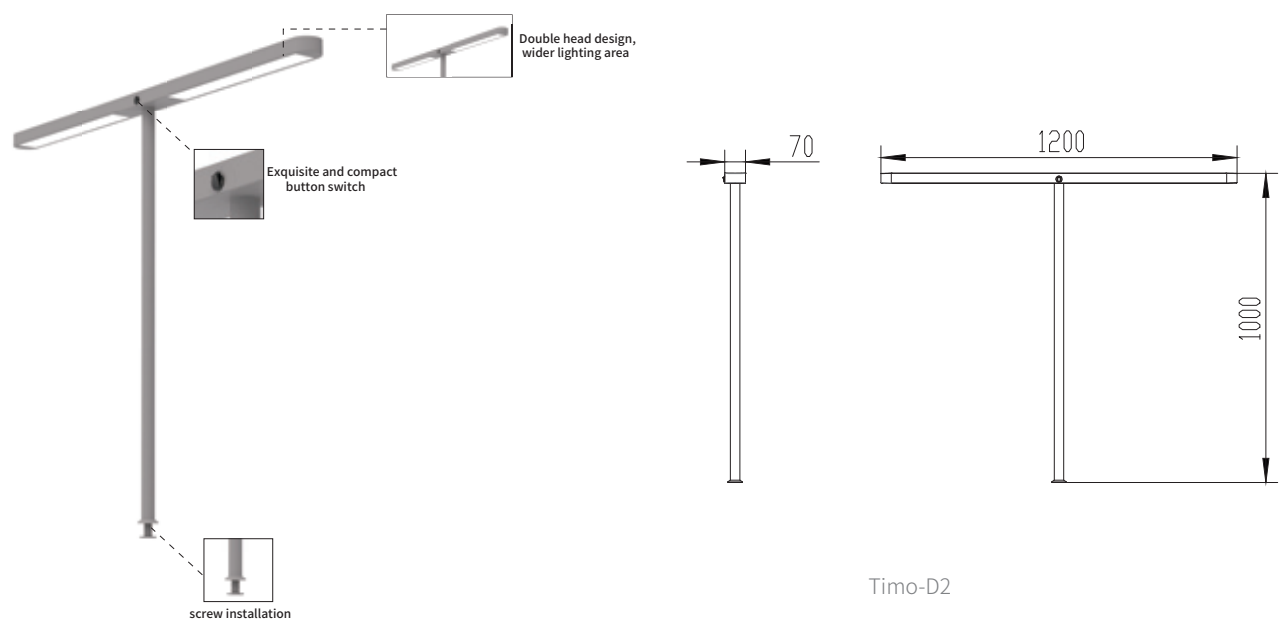

# Technical data

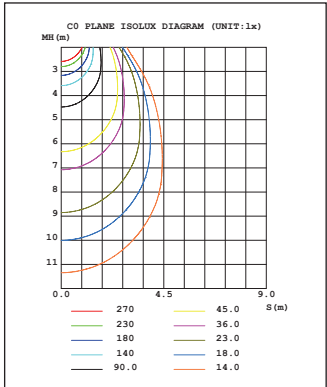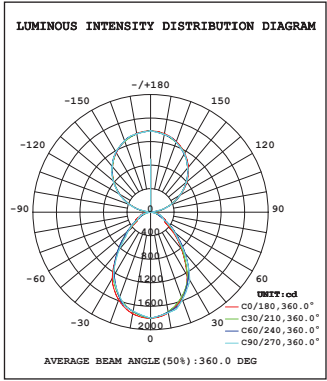

|                        |                                       |
|------------------------|---------------------------------------|
| Product Series         | Timo-D2                               |
| Model Number           | BR-FS0015-80W-X02                     |
| Size                   | 1200*1000*70*mm                       |
| Input Voltage          | AC200-240V                            |
| Lighting effect        | 130LM/W                               |
| Input Power            | 80W                                   |
| Luminous ratio         | Indirect ↑ 60%; Direct ↓ 40%;         |
| Power Factor           | >0.9                                  |
| Housing Color          | RAL7038A(white/black available)       |
| Luminous Flux          | 10400lm                               |
| CRI (Ra>)              | 80/90/95                              |
| UGR                    | <16/<19                               |
| Dimming type           | N/A                                   |
| Working Lifetime(Hour) | >36000                                |
| Lamp Body Material     | Aluminum                              |
| Color Temperature      | 3000K/4000K/5000K/6000K               |
| Protection Level       | IP40                                  |
| Working Temperature    | -20°C~40°C                            |
| Application            | office/conference room/reception      |
| Light Source           | SMD2835-Everlight /sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                      |
| Surface Finished       | Powder painting                       |
| Feature                | Fashion brief                         |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 70°;        |
| warranty               | 3years/5years                         |
| Packaging size         | 1230*150*55mm                         |
| Outlet length          | 1.8m                                  |





**Timo & Markus**

**Timo**



Colors optional



black



silver



white

## Application





ERP

PHILIPS



TRIDONIC



## Product Details

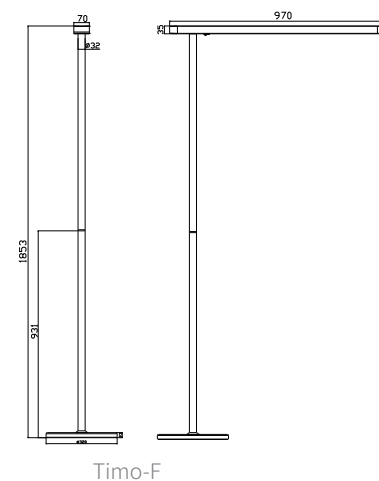

## Technical data

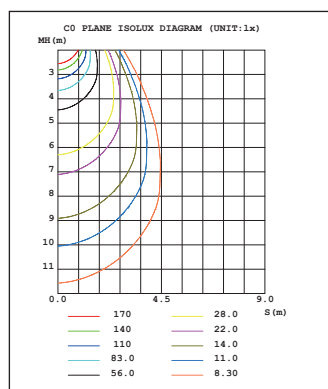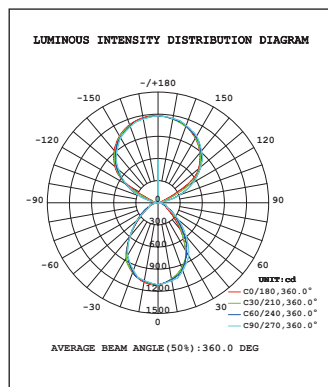

| Product Series         | Timo-F                                 | Timo-D                                 |
|------------------------|----------------------------------------|----------------------------------------|
| Model Number           | BR-FS0015-40W-X01                      | BR-FS0015-40W-X04                      |
| Size                   | 970*70*1853mm                          | 970*70*1263mm                          |
| Input Voltage          | AC200-240V                             | AC200-240V                             |
| Lighting effect        | 130LM/W                                | 130LM/W                                |
| Input Power            | 40w                                    | 40w                                    |
| Luminous ratio         | Indirect ↑ 60%; Direct ↓ 40%;          | Indirect ↑ 60%; Direct ↓ 40%;          |
| Power Factor           | >0.9                                   | >0.9                                   |
| Housing Color          | RAL7038A(white/black available)        | RAL7038A(white/black available)        |
| Luminous Flux          | 3120lm indirect/2080lm direct          | 3120lm indirect/2080lm direct          |
| CRI (Ra>)              | 80/90/95                               | 80/90/95                               |
| UGR                    | <16/<19                                | <16/<19                                |
| Dimming type           | N/A                                    | N/A                                    |
| Working Lifetime(Hour) | >36000                                 | >36000                                 |
| Lamp Body Material     | Aluminum/Iron                          | Aluminum/Iron                          |
| Color Temperature      | 3000K/4000K/5000K/6000K                | 3000K/4000K/5000K/6000K                |
| Protection Level       | IP40                                   | IP40                                   |
| Working Temperature    | -20°C~40°C                             | -20°C~40°C                             |
| Application            | office/conference room/reception       | office/conference room/reception       |
| Light Source           | SMD2835 / Everlight/sunlight/bridgelux | SMD2835 / Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                       | CE/ROHS/FCC/BSCI                       |
| Surface Finished       | Powder painting                        | Powder painting                        |
| Feature                | Fashion brief                          | Fashion brief                          |
| Beam angle             | Indirect ↑ 115°; Direct ↓ 70°;         | Indirect ↑ 112°; Direct ↓ 70°;         |
| warranty               | 3years/5years                          | 3years/5years                          |
| Packaging size         | 1025*355*125mm                         | 1292*160*122mm                         |
| Outlet length          | 1.8m                                   | 1.8m                                   |





**Timo & Markus**

**Markus**



Colors optional



black



silver



white

## Application





ERP

PHILIPS


TRIDONIC



## Product Details

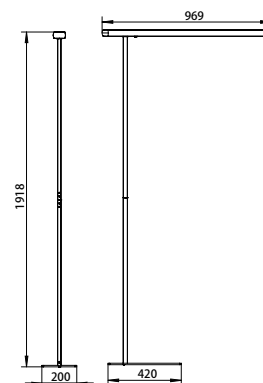
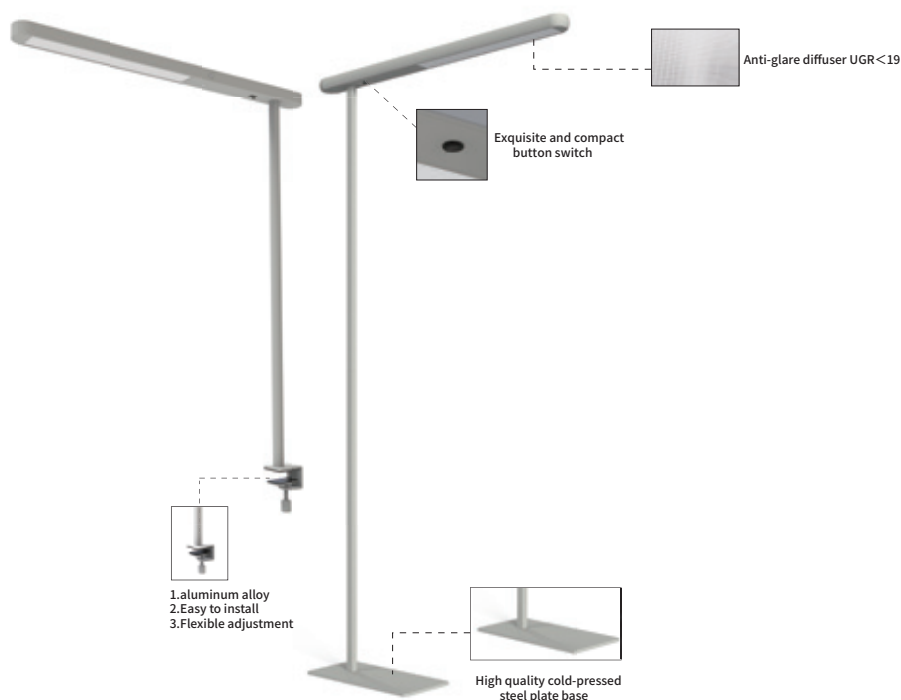


Markus-F

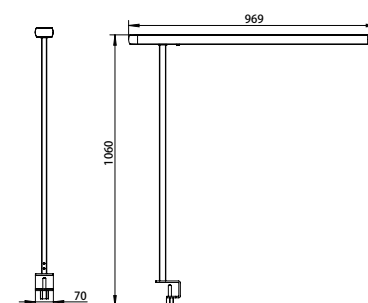

Markus-D

## Technical data

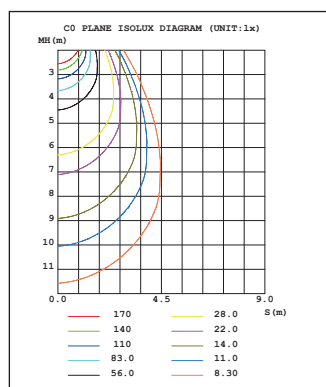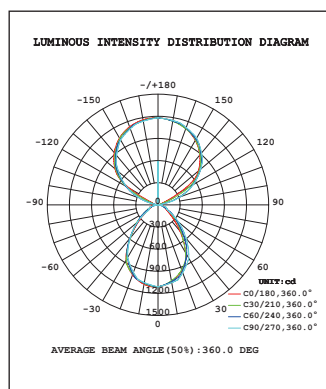

| Product Series         | Markus-F                               | Markus-D                               |
|------------------------|----------------------------------------|----------------------------------------|
| Model Number           | BR-FS0018-40W-X01                      | BR-FS0018-40W-X04                      |
| Size                   | 969*200*1918mm                         | 969*70*1060mm                          |
| Input Voltage          | AC200-240V                             | AC200-240V                             |
| Lighting effect        | 130LM/W                                | 130LM/W                                |
| Input Power            | 40w                                    | 40w                                    |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;          | Indirect ↑ 50%; Direct ↓ 50%;          |
| Power Factor           | >0.9                                   | >0.9                                   |
| Housing Color          | RAL7038A(white/black available)        | RAL7038A(white/black available)        |
| Luminous Flux          | 5200LM                                 | 5200LM                                 |
| CRI (Ra>)              | 80/90/95                               | 80/90/95                               |
| UGR                    | <16/<19                                | <16/<19                                |
| Dimming type           | N/A                                    | N/A                                    |
| Working Lifetime(Hour) | >36000                                 | >36000                                 |
| Lamp Body Material     | Aluminum/Iron                          | Aluminum/Iron                          |
| Color Temperature      | 3000K/4000K/5000K/6000K                | 3000K/4000K/5000K/6000K                |
| Protection Level       | IP40                                   | IP40                                   |
| Working Temperature    | -20°C~40°C                             | -20°C~40°C                             |
| Application            | office/conference room/reception       | office/conference room/reception       |
| Light Source           | SMD2835 / Everlight/sunlight/bridgelux | SMD2835 / Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                       | CE/ROHS/FCC/BSCI                       |
| Surface Finished       | Powder painting                        | Powder painting                        |
| Feature                | Fashion brief                          | Fashion brief                          |
| Beam angle             | Indirect ↑ 115°; Direct ↓ 70°;         | Indirect ↑ 115°; Direct ↓ 70°;         |
| warranty               | 3years/5years                          | 3years/5years                          |
| Packaging size         | 1025*355*125mm                         | 1292*160*122mm                         |
| Outlet length          | 1.8m                                   | 1.8m                                   |



**Zakoy**

**Zakoy-S**



Colors optional     
black silver white

## Application





ERP

PHILIPS

TRIDONIC





## Product Details

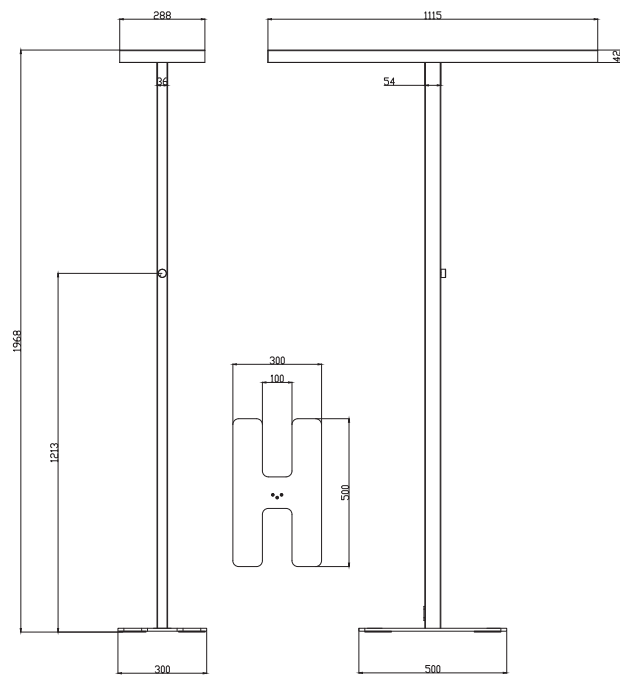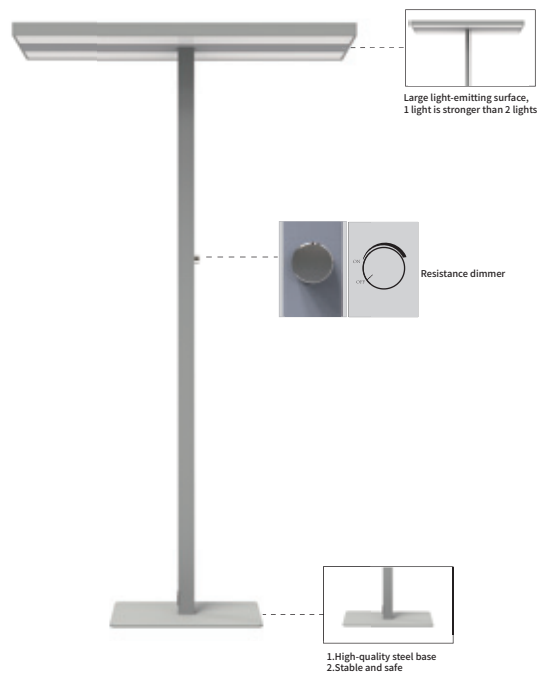

Zakoy-S

## Technical data

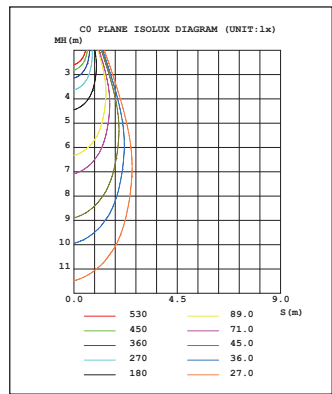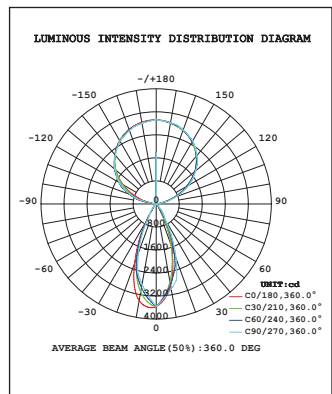

|                        |                                      |                                      |
|------------------------|--------------------------------------|--------------------------------------|
| Product Series         | Zakoy-S                              | Zakoy-S                              |
| Model Number           | BR-FS0005-120W-A02                   | BR-FS0005-140W-A02                   |
| Size                   | 1115*300*1968*mm                     | 1115*300*1968mm                      |
| Input Voltage          | AC200-240V                           | AC200-240V                           |
| Lighting effect        | 130LM/W                              | 130LM/W                              |
| Input Power            | 120w                                 | 140w                                 |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;        | Indirect ↑ 60%; Direct ↓ 40%;        |
| Power Factor           | >0.9                                 | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)      | RAL7038A(white/black available)      |
| Luminous Flux          | 15600 lm                             | 18200 lm                             |
| CRI (Ra>)              | 80/90/95                             | 80/90/95                             |
| UGR                    | <16/<19                              | <16/<19                              |
| Dimming type           | Rx                                   | Rx                                   |
| Working Lifetime(Hour) | >36000                               | >36000                               |
| Lamp Body Material     | Aluminum                             | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K              | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                 | IP40                                 |
| Working Temperature    | -20℃~40℃                             | -20℃~40℃                             |
| Application            | office/conference room/reception     | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                     | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                      | Powder painting                      |
| Feature                | Fashion brief                        | Fashion brief                        |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;       | Indirect ↑ 112°; Direct ↓ 77°;       |
| warranty               | 3years/5years                        | 3years/5years                        |
| Packaging size         | 1190*475*133mm                       | 1190*475*133mm                       |
| Outlet length          | 1.8m                                 | 1.8m                                 |



**Zakoy**

**Zakoy**



Colors optional     
black silver white

## Application



ERP


PHILIPS

TRIDONIC

SAMSUNG




## Product Details

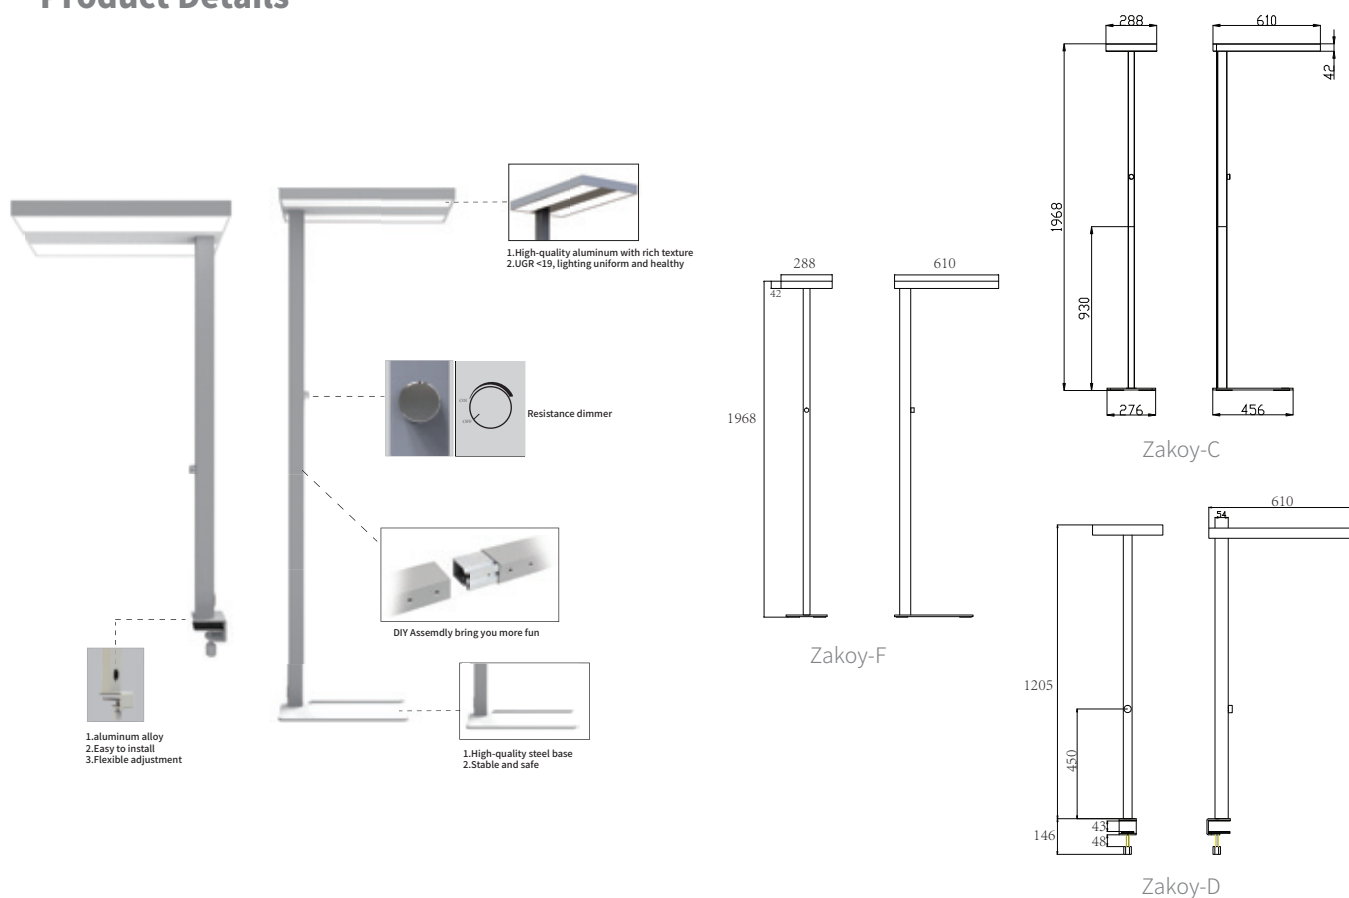


## Technical data

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



CD PLANE ISOLUX DIAGRAM (UNIT: lx)

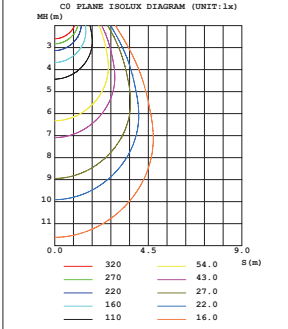

| Product Series         | Zakoy-F                                            | Zakoy-C                              | Zakoy-D                              |
|------------------------|----------------------------------------------------|--------------------------------------|--------------------------------------|
| Model Number           | BR-FS0005-60W-A01                                  | BR-FS0005-60W-A10                    | BR-FS0005-60W-A04                    |
| Size                   | 610*288*1968mm                                     | 610*288*1968mm                       | 610*288*1351mm                       |
| Input Voltage          | AC200-240V                                         | AC200-240V                           | AC200-240V                           |
| Lighting effect        | 130LM/W                                            | 130LM/W                              | 130LM/W                              |
| Input Power            | 60w                                                | 60w                                  | 60w                                  |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;                      | Indirect ↑ 50%; Direct ↓ 50%;        | Indirect ↑ 50%; Direct ↓ 50%;        |
| Power Factor           | >0.9                                               | >0.9                                 | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)                    | RAL7038A(white/black available)      | RAL7038A(white/black available)      |
| Luminous Flux          | 3900lm indirect/3900lm direct                      | 3900lm indirect/3900lm direct        | 3900lm indirect/3900lm direct        |
| CRI (Ra>)              | 80/90/95                                           | 80/90/95                             | 80/90/95                             |
| UGR                    | <16/<19                                            | <16/<19                              | <16/<19                              |
| Dimming type           | Rx                                                 | Rx                                   | Rx                                   |
| Working Lifetime(Hour) | >36000                                             | >36000                               | >36000                               |
| Lamp Body Material     | Aluminum                                           | Aluminum                             | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K                            | 3000K/4000K/5000K/6000K              | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                               | IP40                                 | IP40                                 |
| Working Temperature    | -20°C~40°C                                         | -20°C~40°C                           | -20°C~40°C                           |
| Application            | office/conference room/reception                   | office/conference room/reception     | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux               | SMD2835-Everlight/sunlight/bridgelux | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                                   | CE/ROHS/FCC/BSCI                     | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                                    | Powder painting                      | Powder painting                      |
| Feature                | Fashion brief                                      | Fashion brief                        | Fashion brief                        |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;                     | Indirect ↑ 112°; Direct ↓ 77°;       | Indirect ↑ 112°; Direct ↓ 77°;       |
| warranty               | 3years/5years                                      | 3years/5years                        | 3years/5years                        |
| Packaging size         | 2014*106*91mm Lamp pole<br>758*362*153mm Lampshade | 1090*472*137mm                       | 1360*230*160mm                       |
| Outlet length          | 1.8m                                               | 1.8m                                 | 1.8m                                 |



# Tanko & Vatrix

## Vatrix-S



Colors optional

black silver white

### Application



ERP

PHILIPS


TRIDONIC

SAMSUNG







# Product Details

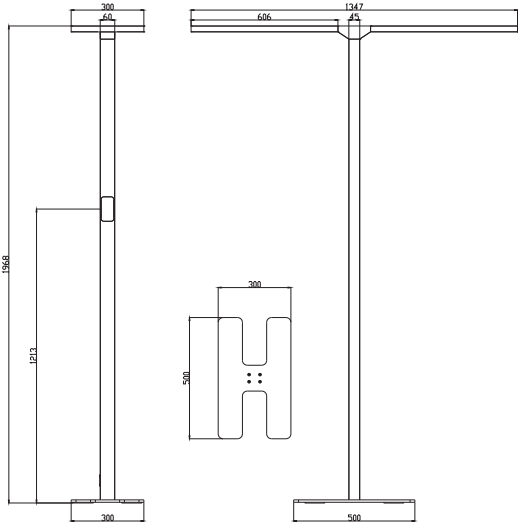

Vatrix-S

# Technical data

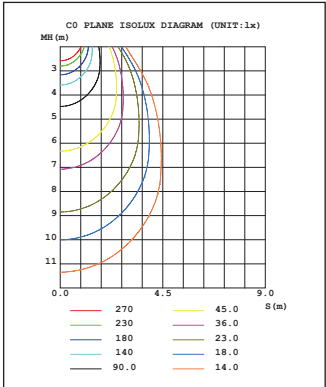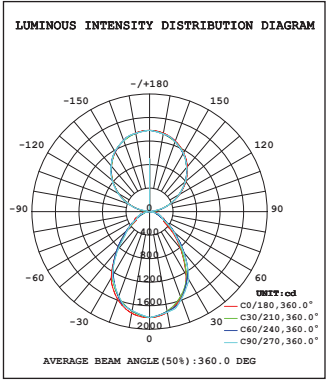

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Product Series         | Vatrix-S                                         |
| Model Number           | BR-FS0008-140W-F02                               |
| Size                   | 1347*300*1968*mm                                 |
| Input Voltage          | AC200-240V                                       |
| Lighting effect        | 100LM/W                                          |
| Input Power            | 140W                                             |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;                    |
| Power Factor           | >0.9                                             |
| Housing Color          | RAL7038A(white/black available)                  |
| Luminous Flux          | 14000lm                                          |
| CRI (Ra>)              | 80/90/95                                         |
| UGR                    | <16/<19                                          |
| Dimming type           | 1-10V/Daylight sensor/Motion Sensor              |
| Working Lifetime(Hour) | >36000                                           |
| Lamp Body Material     | Aluminum                                         |
| Color Temperature      | 3000K/4000K/5000K/6000K                          |
| Protection Level       | IP40                                             |
| Working Temperature    | -20°C~40°C                                       |
| Application            | office/conference room/reception                 |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux             |
| Certification          | CE/ROHS/FCC/BSCI                                 |
| Surface Finished       | Powder painting                                  |
| Feature                | Fashion brief                                    |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;                   |
| warranty               | 3years/5years                                    |
| Packaging size         | 2014*106*91mm lamp pole/1410*362*135mm lampshade |
| Outlet length          | 1.8m                                             |



**Tanko & Vatrix**

**Vatrix**



Colors optional     
black silver white

## Application



ERP



PHILIPS

TRIDONIC



SAMSUNG



## Product Details

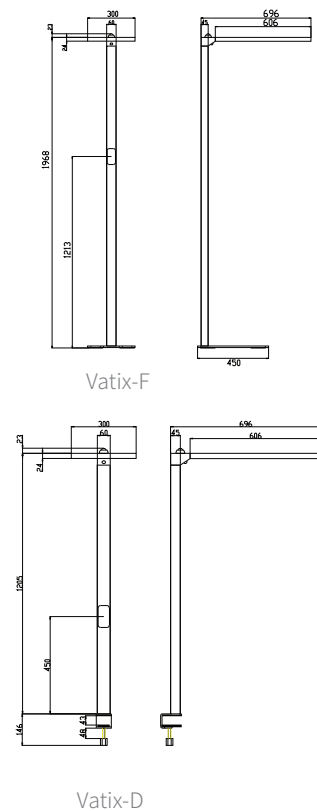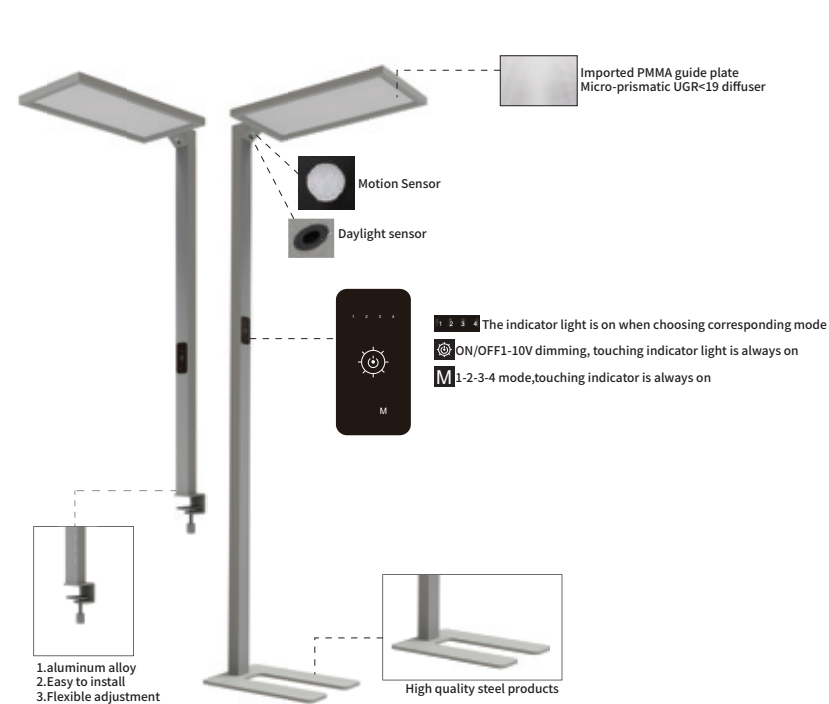

## Technical data

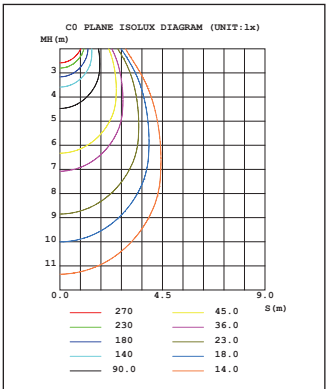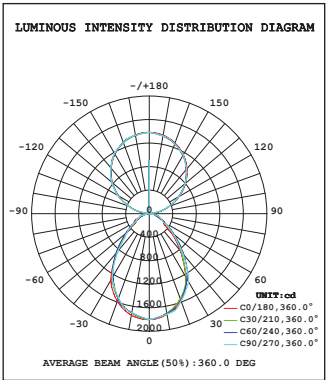

| Product Series         | Vatrix-F                                          | Vatrix-F                                          | Vatrix-D                             |
|------------------------|---------------------------------------------------|---------------------------------------------------|--------------------------------------|
| Model Number           | BR-FS0008-70W-F01                                 | BR-FS0008-100W-F01                                | BR-FS0008-70W-F04                    |
| Size                   | 696*300*1968mm                                    | 790*300*1968mm                                    | 696*300*1351mm                       |
| Input Voltage          | AC200-240V                                        | AC200-240V                                        | AC200-240V                           |
| Lighting effect        | 100LM/W                                           | 120LM/W                                           | 100LM/W                              |
| Input Power            | 70w                                               | 100w                                              | 70w                                  |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;                     | Indirect ↑ 65%; Direct ↓ 35%;                     | Indirect ↑ 50%; Direct ↓ 50%;        |
| Power Factor           | >0.9                                              | >0.9                                              | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)                   | RAL7038A(white/black available)                   | RAL7038A(white/black available)      |
| Luminous Flux          | 3500lm indirect/3500lm direct                     | 7800lm indirect/4200lm direct                     | 3500lm indirect/3500lm direct        |
| CRI (Ra>)              | 80/90/95                                          | 80/90/95                                          | 80/90/95                             |
| UGR                    | <16/<19                                           | <16/<19                                           | <16/<19                              |
| Dimming type           | 1-10V/Daylight sensor/Motion Sensor               | PWM/Motion sensor/Daylight sensor                 | 1-10V/Daylight sensor/Motion Sensor  |
| Working Lifetime(Hour) | >36000                                            | >36000                                            | >36000                               |
| Lamp Body Material     | Aluminum                                          | Aluminum                                          | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K                           | 3000K/4000K/5000K/6000K                           | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                              | IP40                                              | IP40                                 |
| Working Temperature    | -20°C~40°C                                        | -20°C~40°C                                        | -20°C~40°C                           |
| Application            | office/conference room/reception                  | office/conference room/reception                  | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux              | SMD2835-Everlight/sunlight/bridgelux              | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                                  | CE/ROHS/FCC/BSCI                                  | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                                   | Powder painting                                   | Powder painting                      |
| Feature                | Fashion brief                                     | Fashion brief                                     | Fashion brief                        |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 77°;                    | Indirect ↑ 112°; Direct ↓ 77°;                    | Indirect ↑ 112°; Direct ↓ 77°;       |
| warranty               | 3years/5years                                     | 3years/5years                                     | 3years/5years                        |
| Packaging size         | 2014*106*91mm Lamp pole / 758*362*153mm Lampshade | 2014*106*91mm Lamp pole / 858*362*153mm Lampshade | 1360*450*160mm                       |
| Outlet length          | 1.8m                                              | 1.8m                                              | 1.8m                                 |



**Tanko & Vatrix**

**Tanko**



Colors optional

black silver white

## Application



ERP


PHILIPS

TRIDONIC


SAMSUNG



Product Details


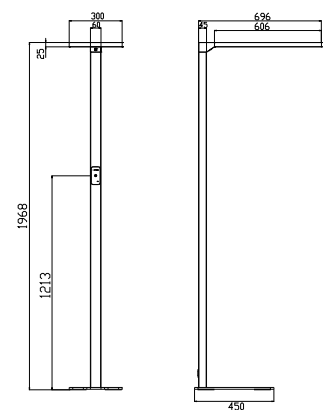


Tanko-F

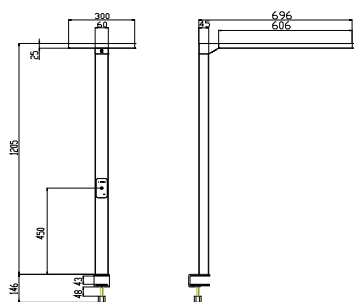

Tanko-D

Technical data

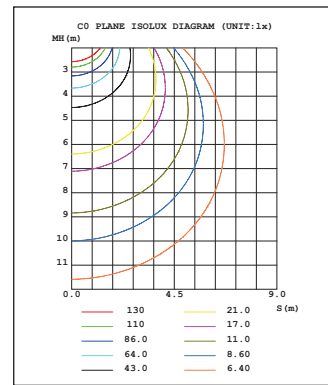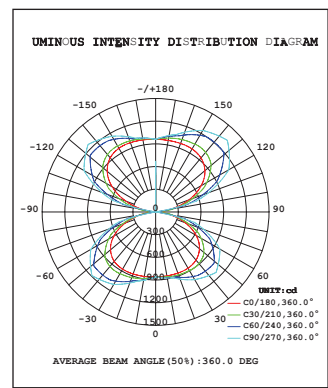

|                        |                                                  |                                      |
|------------------------|--------------------------------------------------|--------------------------------------|
| Product Series         | Tanko-F                                          | Tanko-D                              |
| Model Number           | BR-FS0009-70W-F01                                | BR-FS0009-70W-F04                    |
| Size                   | 696*300*1968mm                                   | 696*300*1351mm                       |
| Input Voltage          | AC200-240V                                       | AC200-240V                           |
| Lighting effect        | 120LM/W                                          | 120LM/W                              |
| Input Power            | 70w                                              | 70w                                  |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;                    | Indirect ↑ 50%; Direct ↓ 50%;        |
| Power Factor           | >0.9                                             | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)                  | RAL7038A(white/black available)      |
| Luminous Flux          | 8400lm                                           | 8400lm                               |
| CRI (Ra>)              | 80                                               | 80                                   |
| UGR                    | <16/<19/<22                                      | <16/<19/<22                          |
| Dimming type           | 1-10V/Daylight sensor/Motion Sensor              | 1-10V/Daylight sensor/Motion Sensor  |
| Working Lifetime(Hour) | >36000                                           | >36000                               |
| Lamp Body Material     | Aluminum                                         | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K                          | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                             | IP40                                 |
| Working Temperature    | -20°C~40°C                                       | -20°C~40°C                           |
| Application            | office/conference room/reception                 | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux             | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                                 | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                                  | Powder painting                      |
| Feature                | Fashion brief                                    | Fashion brief                        |
| Beam angle             | Indirect ↑ 120°; Direct ↓ 120°;                  | Indirect ↑ 120°; Direct ↓ 120°;      |
| warranty               | 3years                                           | 3years                               |
| Packaging size         | 2014*106*91mm Lamp pole /758*362*153mm Lampshade | 1360*450*160mm                       |
| Outlet length          | 1.8m                                             | 1.8m                                 |





## Linear floor lamp

Natash-S



Colors optional



black



silver



white

## Application



ERP


PHILIPS

TRIDONIC

SAMSUNG





## Product Details

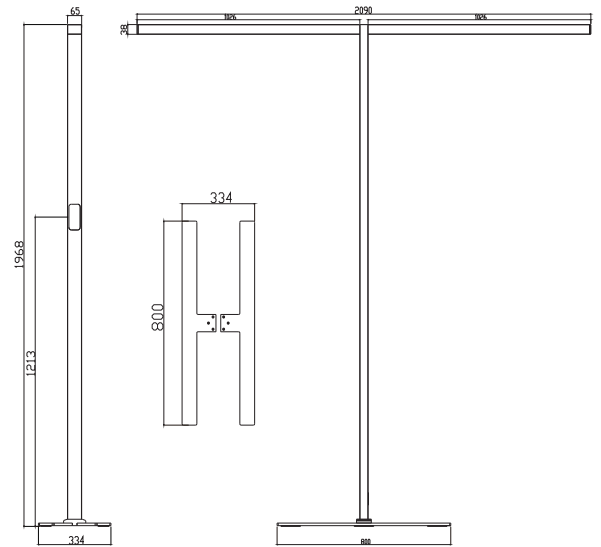

Natash-S

## Technical data

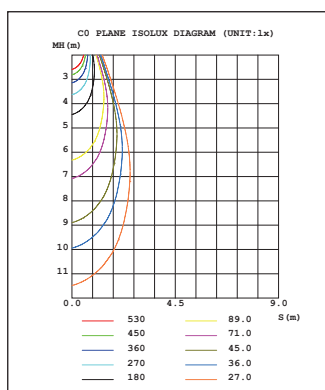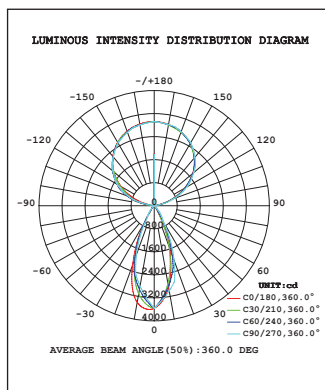

|                        |                                     |                                     |
|------------------------|-------------------------------------|-------------------------------------|
| Product Series         | Natash-S                            | Natash-S                            |
| Model Number           | BR-FS0006-120W-F02                  | BR-FS0006-120W-I02                  |
| Size                   | 2090*65*1968mm                      | 2090*65*1968mm                      |
| Input Voltage          | AC200-240V                          | AC200-240V                          |
| Lighting effect        | 130LM/W                             | 130LM/W                             |
| Input Power            | 120w                                | 120w                                |
| Luminous ratio         | Indirect ↑ 70%; Direct ↓ 30%;       | Indirect ↑ 70%; Direct ↓ 30%;       |
| Power Factor           | >0.9                                | >0.9                                |
| Housing Color          | RAL7038A(white/black available)     | RAL7038A(white/black available)     |
| Luminous Flux          | 15600 lm                            | 15600 lm                            |
| CRI (Ra>)              | 80                                  | 80                                  |
| UGR                    | <6                                  | <6                                  |
| Dimming type           | 1-10V/Daylight sensor/Motion Sensor | 1-10V/Daylight sensor/Motion Sensor |
| Working Lifetime(Hour) | >36000                              | >36000                              |
| Lamp Body Material     | Aluminum                            | Aluminum                            |
| Color Temperature      | 3000K/4000K/5000K/6000K             | CCT                                 |
| Protection Level       | IP40                                | IP40                                |
| Working Temperature    | -20°C~40°C                          | -20°C~40°C                          |
| Application            | office/conference room/reception    | office/conference room/reception    |
| Light Source           | SMD2835-Everlight / SMD3030-Philips | SMD2835-Everlight / SMD3030-Philips |
| Certification          | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    |
| Surface Finished       | Powder painting                     | Powder painting                     |
| Feature                | Fashion brief                       | Fashion brief                       |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 45°;      | Indirect ↑ 112°; Direct ↓ 45°;      |
| warranty               | 3years/5years                       | 3years/5years                       |
| Packaging size         | 2145*222*120mm                      | 2145*222*120mm                      |
| Outlet length          | 1.8m                                | 1.8m                                |





## Linear floor lamp

Natash



Colors optional



black



silver



white

### Application



ERP


PHILIPS

TRIDONIC



SAMSUNG

DALI

## Product Details

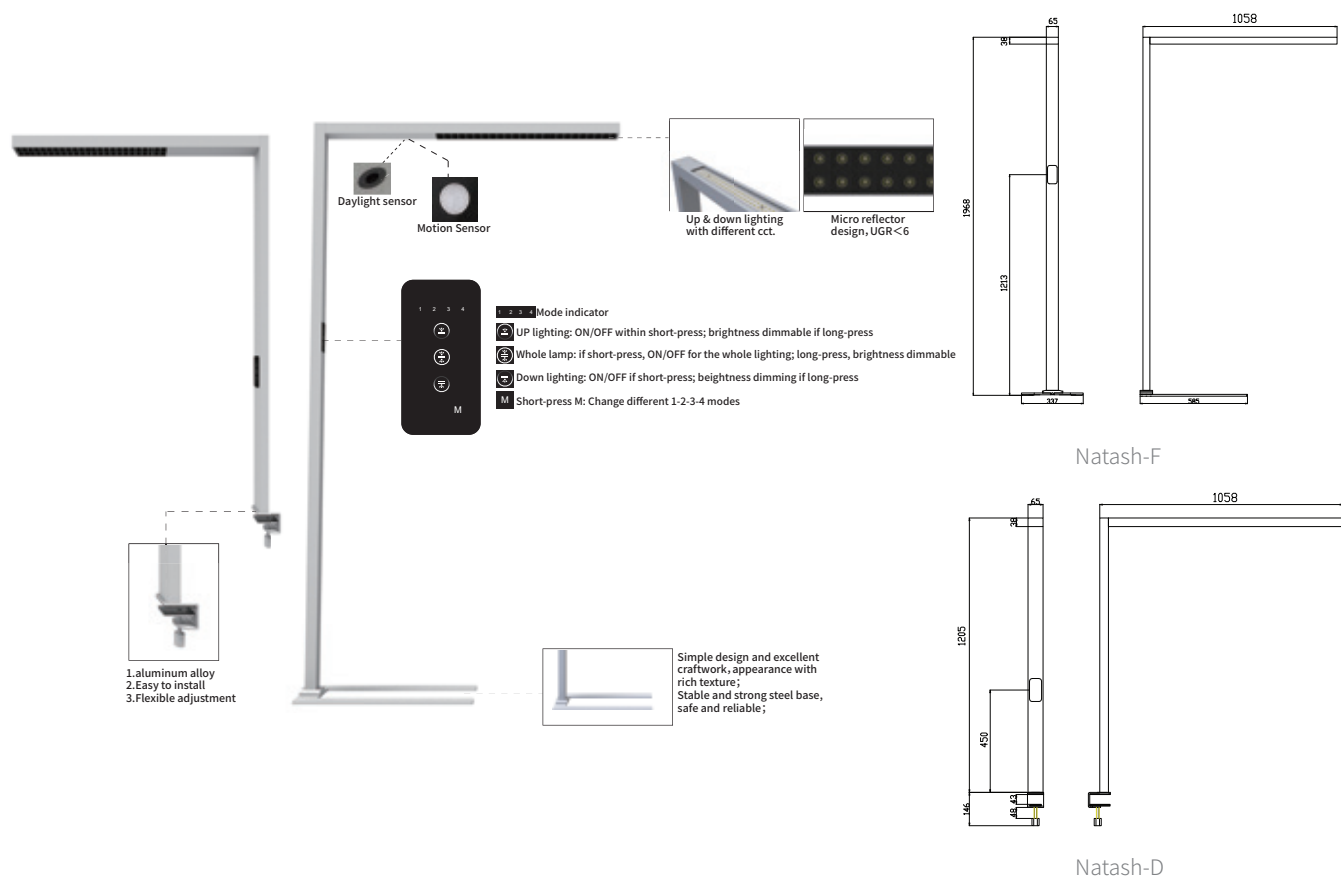

## Technical data

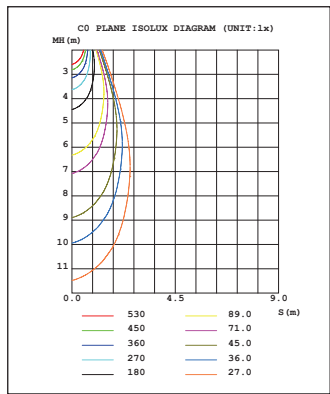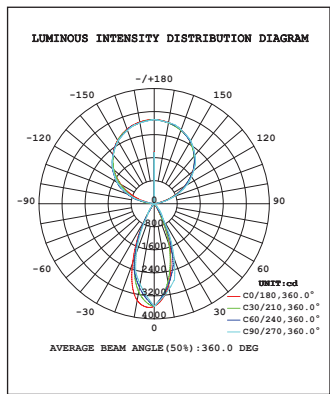

|                        |                                     |                                     |
|------------------------|-------------------------------------|-------------------------------------|
| Product Series         | Natash-F                            | Natash-D                            |
| Model Number           | BR-FS0006-60W-F01                   | BR-FS0006-60W-F04                   |
| Size                   | 1058*65*1968mm                      | 1058*65*1351mm                      |
| Input Voltage          | AC200-240V                          | AC200-240V                          |
| Lighting effect        | 130LM/W                             | 130LM/W                             |
| Input Power            | 60w                                 | 60w                                 |
| Luminous ratio         | Indirect ↑ 70%; Direct ↓ 30%;       | Indirect ↑ 70%; Direct ↓ 30%;       |
| Power Factor           | >0.9                                | >0.9                                |
| Housing Color          | RAL7038A(white/black available)     | RAL7038A(white/black available)     |
| Luminous Flux          | 5500 lm indirect/2300lm direct      | 5500 lm indirect/2300lm direct      |
| CRI (Ra>)              | 80                                  | 80                                  |
| UGR                    | <6                                  | <6                                  |
| Dimming type           | 1-10V/Daylight sensor/Motion Sensor | 1-10V/Daylight sensor/Motion Sensor |
| Working Lifetime(Hour) | >36000                              | >36000                              |
| Lamp Body Material     | Aluminum                            | Aluminum                            |
| Color Temperature      | 3000K/4000K/5000K/6000K             | 3000K/4000K/5000K/6000K             |
| Protection Level       | IP40                                | IP40                                |
| Working Temperature    | -20℃~40℃                            | -20℃~40℃                            |
| Application            | office/conference room/reception    | office/conference room/reception    |
| Light Source           | SMD2835-Everlight                   | SMD2835-Everlight                   |
| Certification          | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    |
| Surface Finished       | Powder painting                     | Powder painting                     |
| Feature                | Fashion brief                       | Fashion brief                       |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 45°;      | Indirect ↑ 112°; Direct ↓ 45°;      |
| warranty               | 3years/5years                       | 3years/5years                       |
| Packaging size         | 2023*222*120mm                      | 1360*230*160mm                      |
| Outlet length          | 1.8m                                | 1.8m                                |



## Linear floor lamp

Siger



Colors optional     
black silver white

### Application



ERP


PHILIPS

TRIDONIC



SAMSUNG



## Product Details

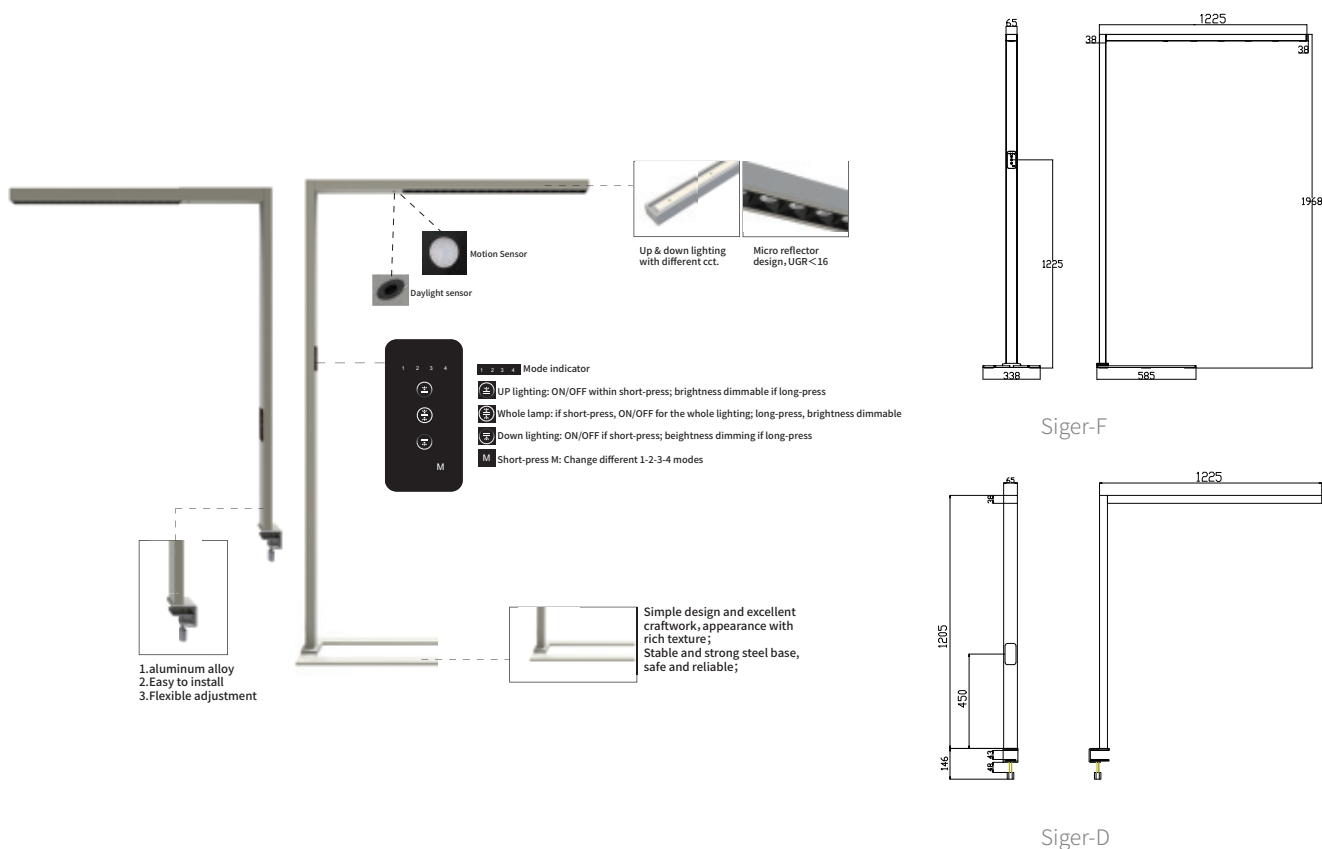

## Technical data

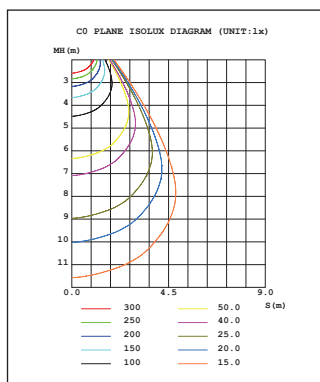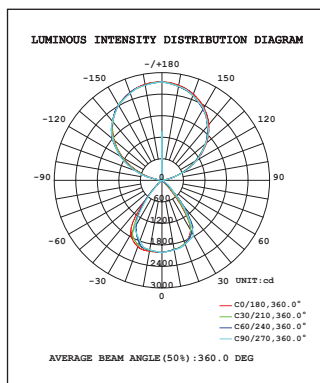

| Product Series         | Siger-F                             | Siger-D                             |
|------------------------|-------------------------------------|-------------------------------------|
| Model Number           | BR-FS0010-70W-F01                   | BR-FS0010-70W-F04                   |
| Size                   | 1225*65*1968mm                      | 1225*65*1351mm                      |
| Input Voltage          | AC200-240V                          | AC200-240V                          |
| Lighting effect        | 145LM/W                             | 145LM/W                             |
| Input Power            | 70w                                 | 70w                                 |
| Luminous ratio         | Indirect ↑ 75%; Direct ↓ 25%;       | Indirect ↑ 75%; Direct ↓ 25%;       |
| Power Factor           | > 0.9                               | > 0.9                               |
| Housing Color          | RAL7038A(white/black available)     | RAL7038A(white/black available)     |
| Luminous Flux          | 7600 lm indirect/2550lm direct      | 7600 lm indirect/2550lm direct      |
| CRI (Ra>)              | 80                                  | 80                                  |
| UGR                    | < 16                                | < 16                                |
| Dimming type           | 1-10V/Daylight sensor/Motion Sensor | 1-10V/Daylight sensor/Motion Sensor |
| Working Lifetime(Hour) | > 36000                             | > 36000                             |
| Lamp Body Material     | Aluminum                            | Aluminum                            |
| Color Temperature      | 3000K/4000K/5000K/6000K             | 3000K/4000K/5000K/6000K             |
| Protection Level       | IP40                                | IP40                                |
| Working Temperature    | -20°C~40°C                          | -20°C~40°C                          |
| Application            | office/conference room/reception    | office/conference room/reception    |
| Light Source           | SMD2835-Everlight                   | SMD2835-Everlight                   |
| Certification          | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    |
| Surface Finished       | Powder painting                     | Powder painting                     |
| Feature                | Fashion brief                       | Fashion brief                       |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 75°;      | Indirect ↑ 112°; Direct ↓ 75°;      |
| warranty               | 3years/5years                       | 3years/5years                       |
| Packaging size         | 2023*235*120mm                      | 1360*230*160mm                      |
| Outlet length          | 1.8m                                | 1.8m                                |



## Linear floor lamp

Kapla



Colors optional

black silver white

### Application



ERP

PHILIPS


TRIDONIC

SAMSUNG

DALI



# Product Details

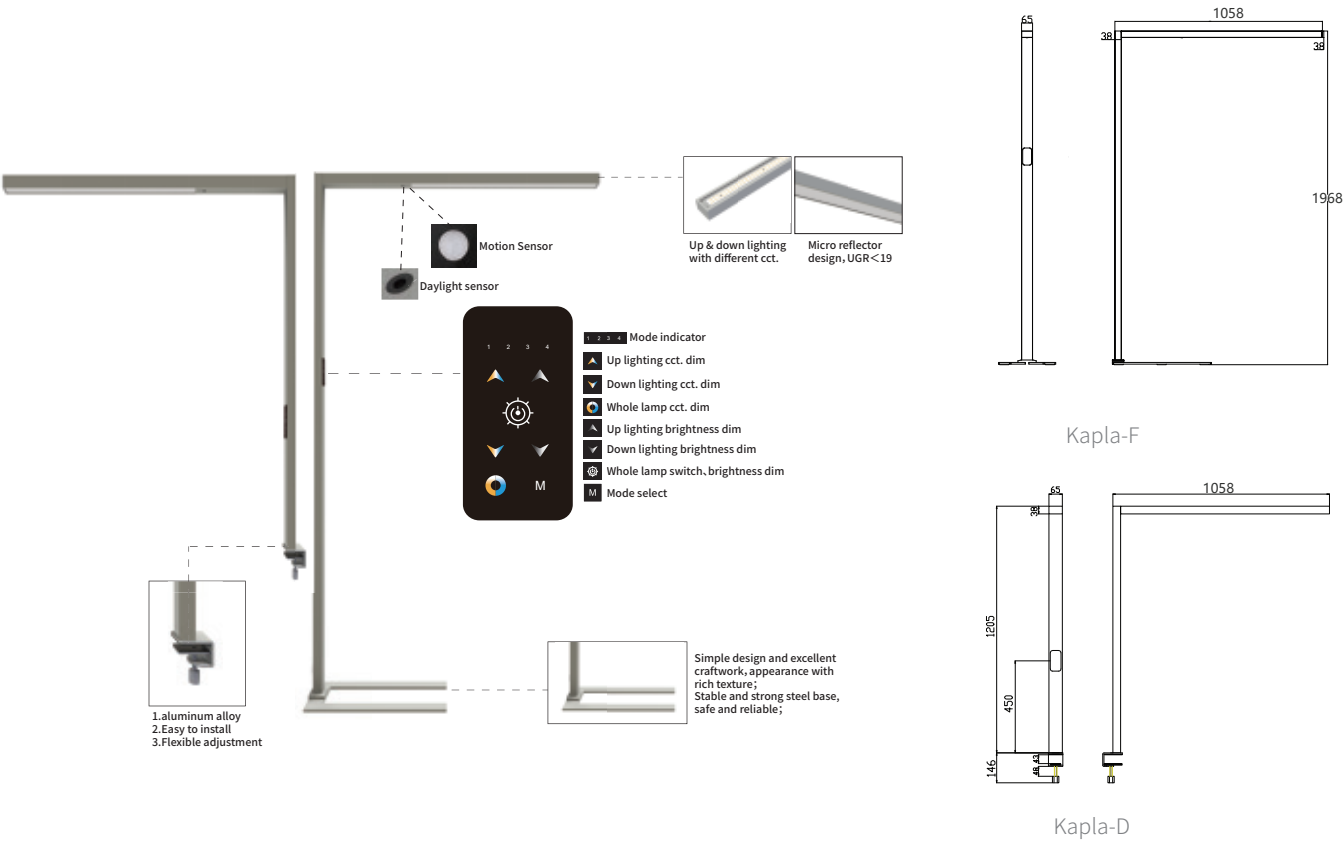





# Technical data

|                                                    |                        |                                      |                                      |
|----------------------------------------------------|------------------------|--------------------------------------|--------------------------------------|
| <b>LUMINOUS INTENSITY DISTRIBUTION DIAGRAM</b><br> | Product Series         | Kapla-F                              | Kapla-D                              |
|                                                    | Model Number           | BR-FS0011-60W-I01                    | BR-FS0011-60W-I04                    |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Size                   | 1058*65*1968mm                       | 1058*65*1351mm                       |
|                                                    | Input Voltage          | AC200-240V                           | AC200-240V                           |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Lighting effect        | 130LM/W                              | 130LM/W                              |
|                                                    | Input Power            | 60w                                  | 60w                                  |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Luminous ratio         | Indirect ↑ 55%; Direct ↓ 45%;        | Indirect ↑ 55%; Direct ↓ 45%;        |
|                                                    | Power Factor           | >0.9                                 | >0.9                                 |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Housing Color          | RAL7038A(white/black available)      | RAL7038A(white/black available)      |
|                                                    | Luminous Flux          | 4300 lm indirect/3500lm direct       | 4300 lm indirect/3500lm direct       |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | CRI (Ra>)              | 80/90/95                             | 80/90/95                             |
|                                                    | UGR                    | <16/<19                              | <16/<19                              |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Dimming type           | 1-10V/Daylight sensor/Motion Sensor  | 1-10V/Daylight sensor/Motion Sensor  |
|                                                    | Working Lifetime(Hour) | >36000                               | >36000                               |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Lamp Body Material     | Aluminum                             | Aluminum                             |
|                                                    | Color Temperature      | 3000K-6000K                          | 3000K-6000K                          |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Protection Level       | IP40                                 | IP40                                 |
|                                                    | Working Temperature    | -20°C~40°C                           | -20°C~40°C                           |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Application            | office/conference room/reception     | office/conference room/reception     |
|                                                    | Light Source           | SMD2835-Everlight/sunlight/bridgelux | SMD2835-Everlight/sunlight/bridgelux |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Certification          | CE/ROHS/FCC/BSCI                     | CE/ROHS/FCC/BSCI                     |
|                                                    | Surface Finished       | Powder painting                      | Powder painting                      |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Feature                | Fashion brief                        | Fashion brief                        |
|                                                    | Beam angle             | Indirect ↑ 112°; Direct ↓ 80°;       | Indirect ↑ 112°; Direct ↓ 80°;       |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | warranty               | 3years/5years                        | 3years/5years                        |
|                                                    | Packaging size         | 2023*222*120mm                       | 1360*230*160mm                       |
| <b>CO PLANE ISOLUX DIAGRAM (UNIT:lx)</b><br>       | Outlet length          | 1.8m                                 | 1.8m                                 |
|                                                    |                        |                                      |                                      |



## Linear pendant lamp

Lina-A

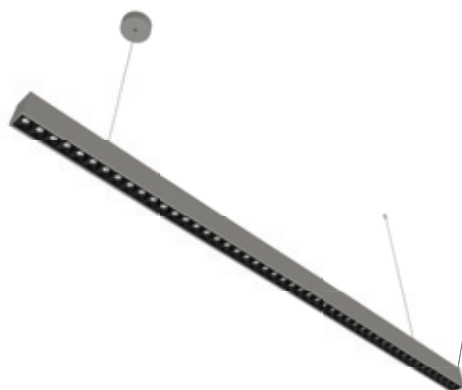

unique screwless linkable design

Colors optional



black



silver



white

## Application



ERP

PHILIPS



TRIDONIC

SAMSUNG



DALI 2



## Product Details

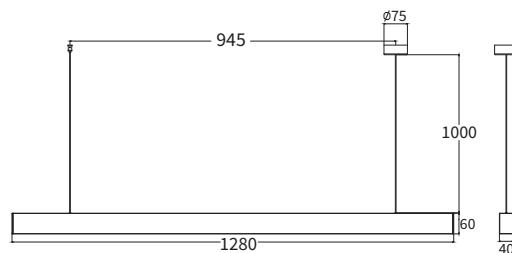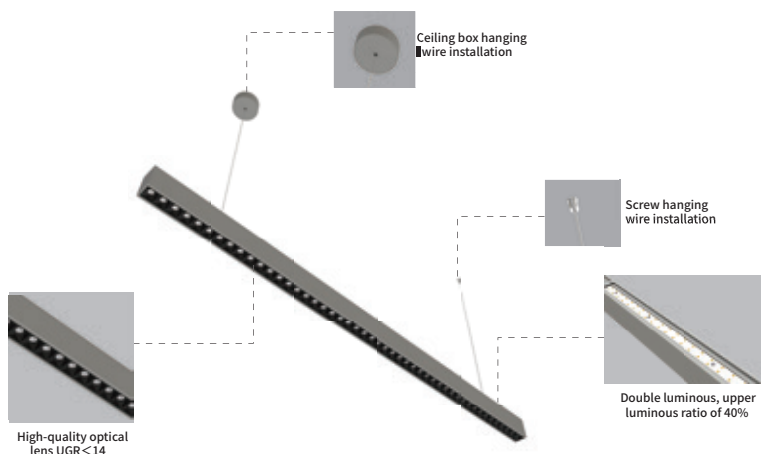

## Technical data

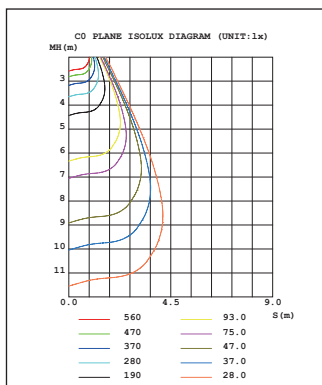
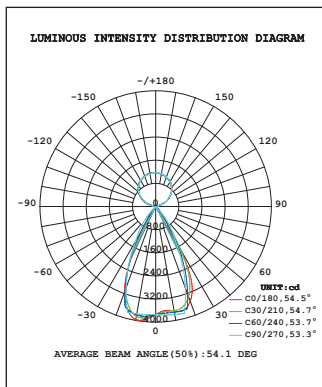


| Product Series         | Lina-A                              | Lina-A                              | Lina-A                              |
|------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Model Number           | BR-CL1226-54W-A09                   | BR-CL0926-40W-A09                   | BR-CL0626-28W-A09                   |
| Size                   | 1280*40*60mm                        | 960*40*60mm                         | 645*40*60mm                         |
| Input Voltage          | AC200-240V                          | AC200-240V                          | AC200-240V                          |
| Lighting effect        | 130LM/W                             | 130LM/W                             | 130LM/W                             |
| Input Power            | 54W                                 | 40W                                 | 28W                                 |
| Luminous ratio         | Indirect ↑ 60%; Direct ↓ 40%;       | Indirect ↑ 60%; Direct ↓ 40%;       | Indirect ↑ 60%; Direct ↓ 40%;       |
| Power Factor           | >0.9                                | >0.9                                | >0.9                                |
| Housing Color          | RAL7038A(white/black available)     | RAL7038A(white/black available)     | RAL7038A(white/black available)     |
| Luminous Flux          | 4200lm indirect ↑ /2820lm direct ↓  | 3120lm indirect ↑ /2080lm direct ↓  | 2190lm indirect ↑ /1450lm direct ↓  |
| CRI (Ra>)              | 80                                  | 80                                  | 80                                  |
| UGR                    | <14                                 | <14                                 | <14                                 |
| Dimming type           | N/A                                 | N/A                                 | N/A                                 |
| Working Lifetime(Hour) | >36000                              | >36000                              | >36000                              |
| Lamp Body Material     | Aluminum                            | Aluminum                            | Aluminum                            |
| Color Temperature      | 3000K/4000K/5000K/6000K             | 3000K/4000K/5000K/6000K             | 3000K/4000K/5000K/6000K             |
| Protection Level       | IP40                                | IP40                                | IP40                                |
| Working Temperature    | -20°C~40°C                          | -20°C~40°C                          | -20°C~40°C                          |
| Application            | office/conference room/reception    | office/conference room/reception    | office/conference room/reception    |
| Light Source           | SMD2835-Everlight / SMD3030-Philips | SMD2835-Everlight / SMD3030-Philips | SMD2835-Everlight / SMD3030-Philips |
| Certification          | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    |
| Surface Finished       | Powder painting                     | Powder painting                     | Powder painting                     |
| Feature                | Fashion brief                       | Fashion brief                       | Fashion brief                       |
| Beam angle             | Indirect ↑ 120°; Direct ↓ 50°;      | Indirect ↑ 120°; Direct ↓ 50°;      | Indirect ↑ 120°; Direct ↓ 50°;      |
| warranty               | 3years                              | 3years                              | 3years                              |
| Packaging size         | 1435*325*195mm                      | 1120*325*195mm                      | 820*325*195mm                       |
| Outlet length          | 1.2m                                | 1.2m                                | 1.2m                                |



## Linear pendant lamp

Lina-B



unique screwless linkable design

Colors optional



black



silver



white

## Application



ERP



PHILIPS

TRIDONIC



SAMSUNG



## Product Details

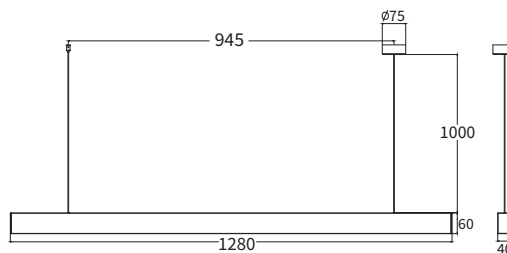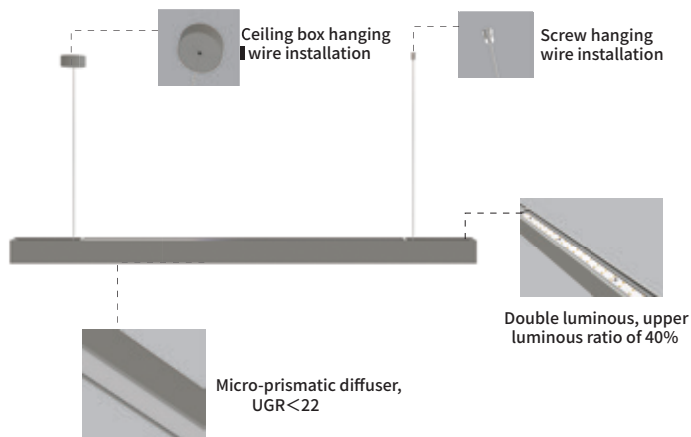

## Technical data

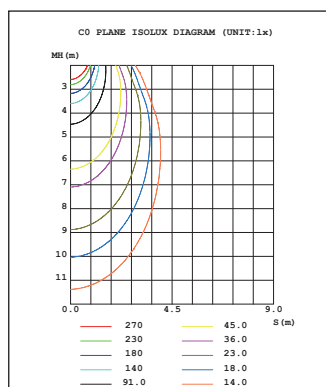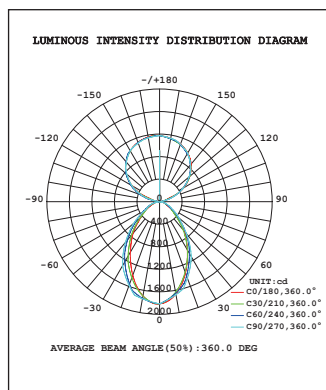


|                        |                                      |                                      |                                      |
|------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Product Series         | Lina-B                               | Lina-B                               | Lina-B                               |
| Model Number           | BR-CL1226-54W-A07                    | BR-CL0926-40W-A07                    | BR-CL0626-28W-A07                    |
| Size                   | 1280*40*60mm                         | 960*40*60mm                          | 645*40*60mm                          |
| Input Voltage          | AC200-240V                           | AC200-240V                           | AC200-240V                           |
| Lighting effect        | 130LM/W                              | 130LM/W                              | 130LM/W                              |
| Input Power            | 54W                                  | 40W                                  | 28W                                  |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;        | Indirect ↑ 50%; Direct ↓ 50%;        | Indirect ↑ 50%; Direct ↓ 50%;        |
| Power Factor           | >0.9                                 | >0.9                                 | >0.9                                 |
| Housing Color          | RAL7038A(white/black available)      | RAL7038A(white/black available)      | RAL7038A(white/black available)      |
| Luminous Flux          | 3510 indirect ↑ /3510lm direct ↓     | 2600lm indirect ↑ /2600lm direct ↓   | 1820lm indirect ↑ /1820lm direct ↓   |
| CRI (Ra>)              | 80/90/95                             | 80/90/95                             | 80/90/95                             |
| UGR                    | <16/<19/<22                          | <16/<19/<22                          | <16/<19/<22                          |
| Dimming type           | N/A                                  | N/A                                  | N/A                                  |
| Working Lifetime(Hour) | >36000                               | >36000                               | >36000                               |
| Lamp Body Material     | Aluminum                             | Aluminum                             | Aluminum                             |
| Color Temperature      | 3000K/4000K/5000K/6000K              | 3000K/4000K/5000K/6000K              | 3000K/4000K/5000K/6000K              |
| Protection Level       | IP40                                 | IP40                                 | IP40                                 |
| Working Temperature    | -20°C~40°C                           | -20°C~40°C                           | -20°C~40°C                           |
| Application            | office/conference room/reception     | office/conference room/reception     | office/conference room/reception     |
| Light Source           | SMD2835-Everlight/sunlight/bridgelux | SMD2835-Everlight/sunlight/bridgelux | SMD2835-Everlight/sunlight/bridgelux |
| Certification          | CE/ROHS/FCC/BSCI                     | CE/ROHS/FCC/BSCI                     | CE/ROHS/FCC/BSCI                     |
| Surface Finished       | Powder painting                      | Powder painting                      | Powder painting                      |
| Feature                | Fashion brief                        | Fashion brief                        | Fashion brief                        |
| Beam angle             | Indirect ↑ 115°; Direct ↓ 90°;       | Indirect ↑ 115°; Direct ↓ 90°;       | Indirect ↑ 115°; Direct ↓ 90°;       |
| warranty               | 3years/5years                        | 3years/5years                        | 3years/5years                        |
| Packaging size         | 1435*325*195mm                       | 1120*325*195mm                       | 820*325*195mm                        |
| Outlet length          | 1.2m                                 | 1.2m                                 | 1.2m                                 |



## Linear pendant lamp

Lina-C

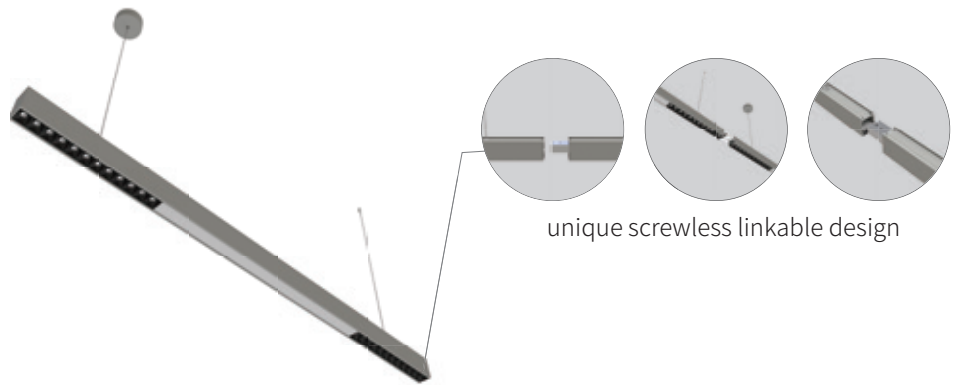

unique screwless linkable design

Colors optional



black

silver

white

## Application



ERP



PHILIPS

TRIDONIC



SAMSUNG



## Product Details

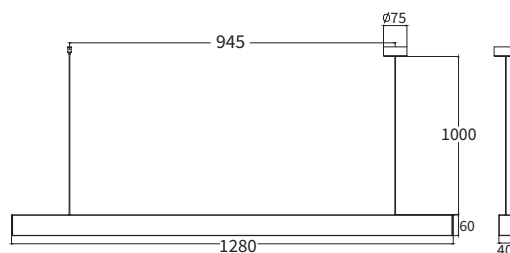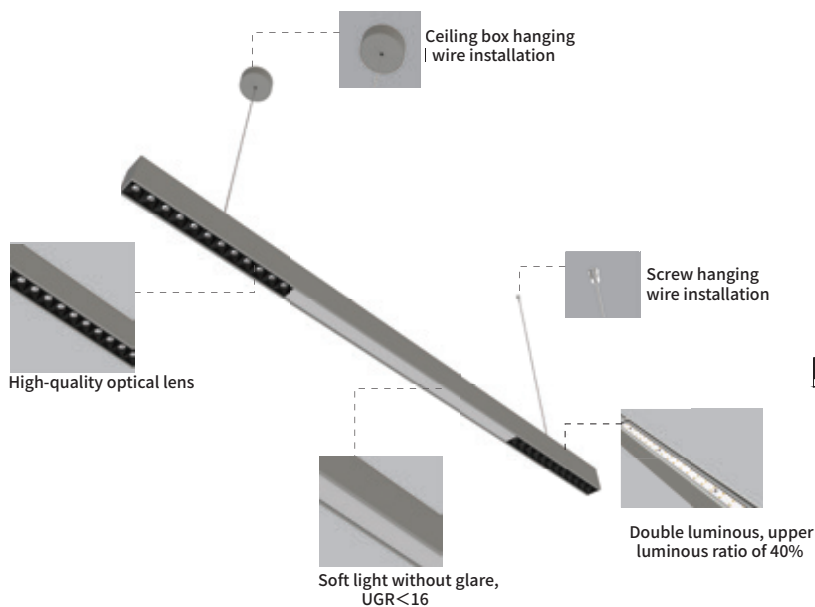

## Technical data

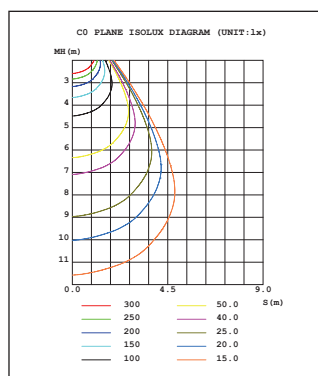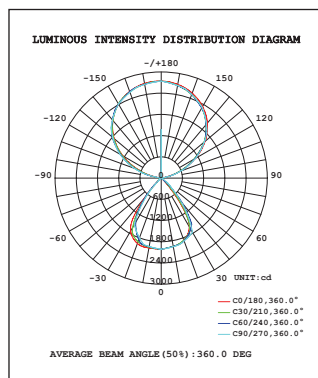

| Product Series         | Lina-C                              | Lina-C                              | Lina-C                              |
|------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Model Number           | BR-CL1226-54W-A10                   | BR-CL0926-40W-A10                   | BR-CL0626-28W-A10                   |
| Size                   | 1280*40*60mm                        | 960*40*60mm                         | 645*40*60mm                         |
| Input Voltage          | AC200-240V                          | AC200-240V                          | AC200-240V                          |
| Lighting effect        | 130LM/W                             | 130LM/W                             | 130LM/W                             |
| Input Power            | 54W                                 | 40W                                 | 28W                                 |
| Luminous ratio         | Indirect ↑ 60%; Direct ↓ 40%;       | Indirect ↑ 60%; Direct ↓ 40%;       | Indirect ↑ 60%; Direct ↓ 40%;       |
| Power Factor           | >0.9                                | >0.9                                | >0.9                                |
| Housing Color          | RAL7038A(white/black available)     | RAL7038A(white/black available)     | RAL7038A(white/black available)     |
| Luminous Flux          | 4200lm indirect ↑ /2800lm direct ↓  | 3120lm indirect ↑ /2080lm direct ↓  | 2190lm indirect ↑ /1450lm direct ↓  |
| CRI (Ra>)              | 80                                  | 80                                  | 80                                  |
| UGR                    | <16                                 | <16                                 | <16                                 |
| Dimming type           | N/A                                 | N/A                                 | N/A                                 |
| Working Lifetime(Hour) | >36000                              | >36000                              | >36000                              |
| Lamp Body Material     | Aluminum                            | Aluminum                            | Aluminum                            |
| Color Temperature      | 3000K/4000K/5000K/6000K             | 3000K/4000K/5000K/6000K             | 3000K/4000K/5000K/6000K             |
| Protection Level       | IP40                                | IP40                                | IP40                                |
| Working Temperature    | -20°C~40°C                          | -20°C~40°C                          | -20°C~40°C                          |
| Application            | office/conference room/reception    | office/conference room/reception    | office/conference room/reception    |
| Light Source           | SMD2835-Everlight / SMD3030-Philips | SMD2835-Everlight / SMD3030-Philips | SMD2835-Everlight / SMD3030-Philips |
| Certification          | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    | CE/ROHS/FCC/BSCI                    |
| Surface Finished       | Powder painting                     | Powder painting                     | Powder painting                     |
| Feature                | Fashion brief                       | Fashion brief                       | Fashion brief                       |
| Beam angle             | Indirect ↑ 115°; Direct ↓ 55°;      | Indirect ↑ 115°; Direct ↓ 55°;      | Indirect ↑ 115°; Direct ↓ 55°;      |
| warranty               | 3years/5years                       | 3years/5years                       | 3years/5years                       |
| Packaging size         | 1435*325*195mm                      | 1120*325*195mm                      | 820*325*195mm                       |
| Outlet length          | 1.2m                                | 1.2m                                | 1.2m                                |





Linear pendant lamp

Rotar



Colors optional



black



silver



white

## Application



ERP

PHILIPS


TRIDONIC

SAMSUNG







## Product Details

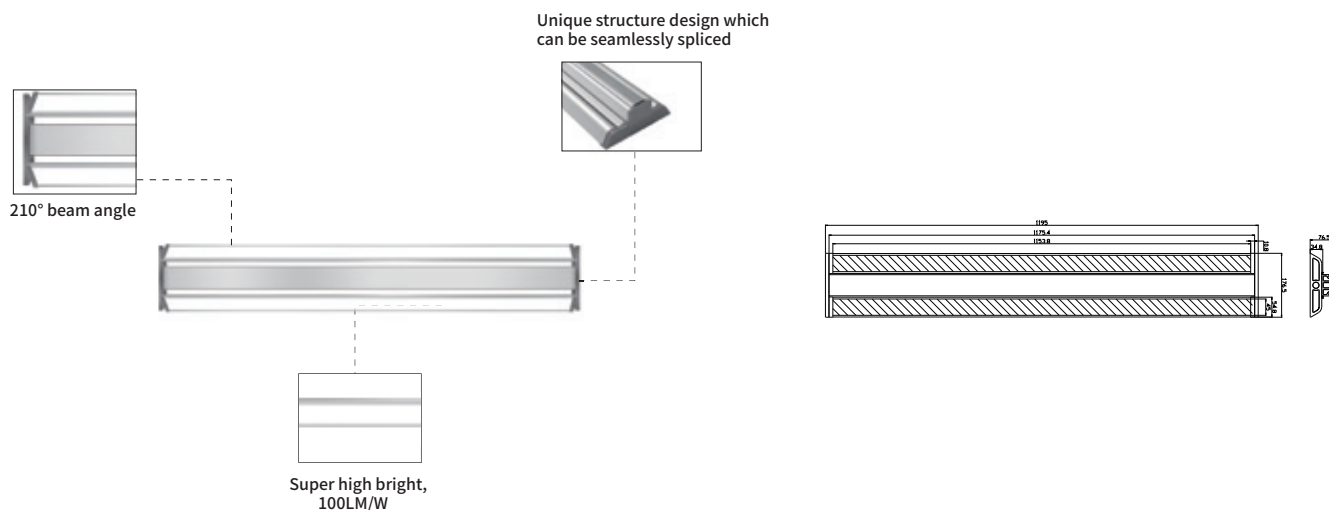

## Technical data

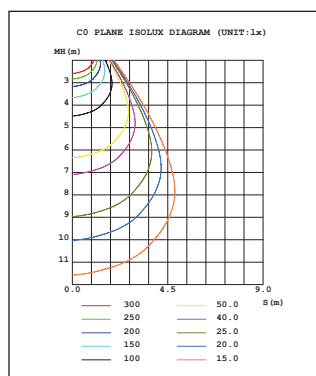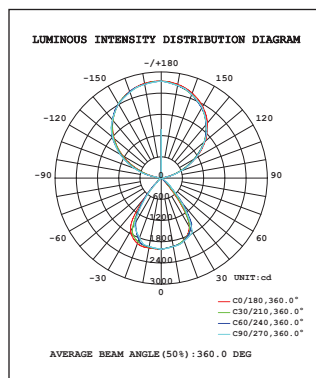


| Product Series         | Rotar                         | Rotar                         | Rotar                         |
|------------------------|-------------------------------|-------------------------------|-------------------------------|
| Model Number           | BR-CL0912-27W-A01             | BR-CL1212-40W-A01             | BR-CL1512-54W-A01             |
| Size                   | 900*176*77                    | 1200*176*77                   | 1500*176*77                   |
| Input Voltage          | AC200-240V                    | AC200-240V                    | AC200-240V                    |
| Lighting effect        | 100LM/W                       | 100LM/W                       | 100LM/W                       |
| Input Power            | 27W                           | 40W                           | 54W                           |
| Luminous ratio         | Direct ↓ 100%                 | Direct ↓ 100%                 | Direct ↓ 100%                 |
| Power Factor           | >0.9                          | >0.9                          | >0.9                          |
| Housing Color          | silver                        | silver                        | silver                        |
| Luminous Flux          | 2700lm                        | 4000lm                        | 5400lm                        |
| CRI (Ra>)              | 80                            | 80                            | 80                            |
| UGR                    | <22                           | <22                           | <22                           |
| Dimming type           | N/A                           | N/A                           | N/A                           |
| Working Lifetime(Hour) | >36000                        | >36000                        | >36000                        |
| Lamp Body Material     | Aluminum                      | Aluminum                      | Aluminum                      |
| Color Temperature      | 3000K/4000K/5000K/6000K       | 3000K/4000K/5000K/6000K       | 3000K/4000K/5000K/6000K       |
| Protection Level       | IP40                          | IP40                          | IP40                          |
| Working Temperature    | 0°C~40°C                      | 0°C~40°C                      | 0°C~40°C                      |
| Application            | Office/library/art hall, etc. | Office/library/art hall, etc. | Office/library/art hall, etc. |
| Light Source           | SMD2835/SANAN                 | SMD2835/SANAN                 | SMD2835/SANAN                 |
| Certification          | CE/ROHS/FCC/BSCI              | CE/ROHS/FCC/BSCI              | CE/ROHS/FCC/BSCI              |
| Surface Finished       | Powder painting               | Powder painting               | Powder painting               |
| Feature                | Fashion brief                 | Fashion brief                 | Fashion brief                 |
| Beam angle             | 120° - 210°                   | 120° - 210°                   | 120° - 210°                   |
| warranty               | 3years/5years                 | 3years/5years                 | 3years/5years                 |
| Packaging size         | 946*222*103mm                 | 1246*222*103mm                | 1546*222*103mm                |
| Outlet length          | 1m                            | 1m                            | 1m                            |



Linear pendant lamp

Lirod

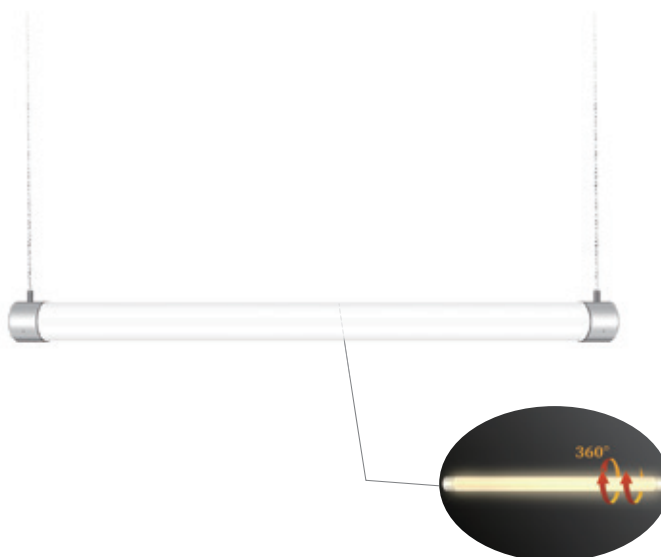




Colors optional

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| black                                                                               | silver                                                                              | white                                                                               |



## Application



## Product Details

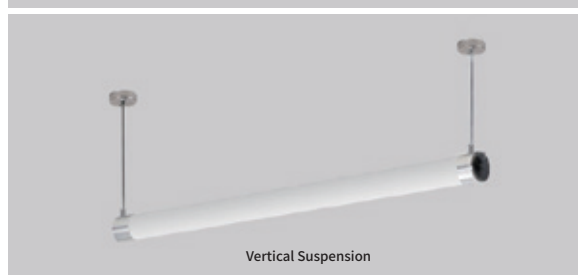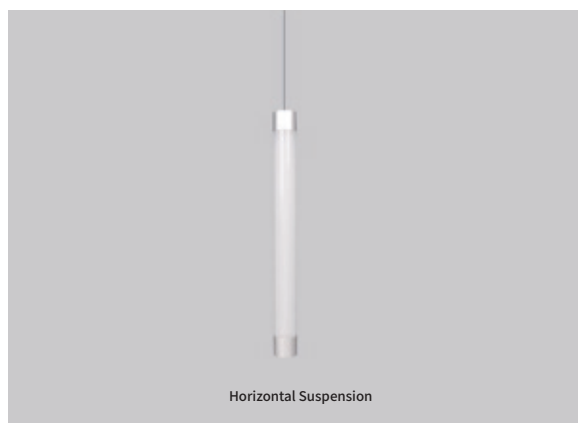

## Technical data

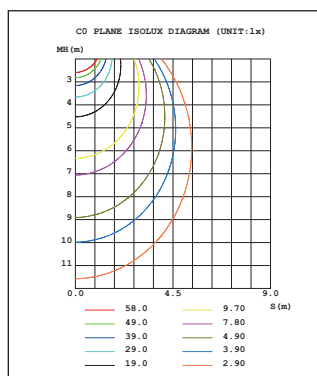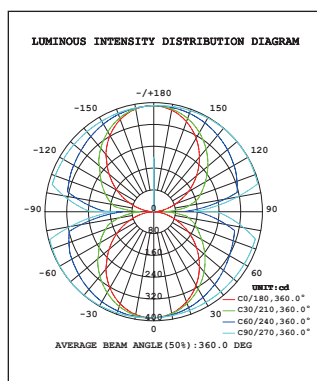

| Product Series         | Lirod                   | Lirod                   | Lirod                   | Lirod                   |
|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Model Number           | BR-CL0618-30            | BR-CL0918-36            | BR-CL1218-40            | BR-CL1518-60            |
| Size                   | 600*80mm                | 900*80mm                | 1200*80mm               | 1500*80mm               |
| Input Voltage          | AC200~240V              | AC200~240V              | AC200~240V              | AC200~240V              |
| Lighting effect        | 160LM/W                 | 160LM/W                 | 160LM/W                 | 160LM/W                 |
| Input Power            | 30W                     | 36W                     | 40W                     | 60W                     |
| Luminous ratio         | 360°                    | 360°                    | 360°                    | 360°                    |
| Power Factor           | >0.9                    | >0.9                    | >0.9                    | >0.9                    |
| Housing Color          | sand silver             | sand silver             | sand silver             | sand silver             |
| Luminous Flux          | 4800LM                  | 5760LM                  | 6400LM                  | 9600LM                  |
| CRI (Ra>)              | 80                      | 80                      | 80                      | 80                      |
| UGR                    | <22                     | <22                     | <22                     | <22                     |
| Dimming type           | N/A                     | N/A                     | N/A                     | N/A                     |
| Working Lifetime(Hour) | >36000                  | >36000                  | >36000                  | >36000                  |
| Lamp Body Material     | Aluminum                | Aluminum                | Aluminum                | Aluminum                |
| Color Temperature      | 3000K/4000K/5000K/6000K | 3000K/4000K/5000K/6000K | 3000K/4000K/5000K/6000K | 3000K/4000K/5000K/6000K |
| Protection Level       | IP40                    | IP40                    | IP40                    | IP40                    |
| Working Temperature    | -20°C~40°C              | -20°C~40°C              | -20°C~40°C              | -20°C~40°C              |
| Application            | office/KTV/bar          | office/KTV/bar          | office/KTV/bar          | office/KTV/bar          |
| Light Source           | SMD2835-Everlight       | SMD2835-Everlight       | SMD2835-Everlight       | SMD2835-Everlight       |
| Certification          | CE/ROHS/FCC             | CE/ROHS/FCC             | CE/ROHS/FCC             | CE/ROHS/FCC             |
| Surface Finished       | Powder painting         | Powder painting         | Powder painting         | Powder painting         |
| Feature                | Fashion brief           | Fashion brief           | Fashion brief           | Fashion brief           |
| Beam angle             | 360°                    | 360°                    | 360°                    | 360°                    |
| warranty               | 3years/5years           | 3years/5years           | 3years/5years           | 3years/5years           |
| Packaging size         | 680*343*242mm           | 980*343*242mm           | 1280*343*242mm          | 1580*343*242mm          |
| Outlet length          | 1m                      | 1m                      | 1m                      | 1m                      |



## Round pendant lamp

Omic-C



Colors optional

black silver white

## Application



ERP

PHILIPS

TRIDONIC

SAMSUNG




## Product details



Ceiling tray with high temperature baking varnish process





High-quality aviation aluminum with fine anodizing treatment



Personalized art pattern customization

## Technical data

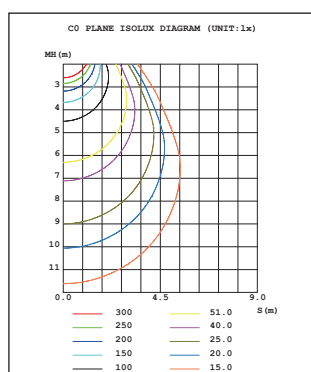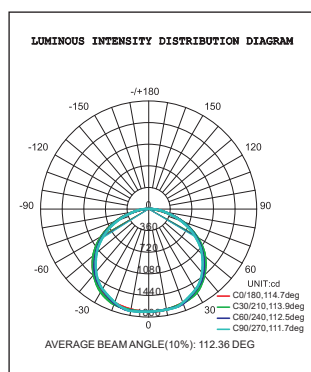

| Product Series         | Omic-C                        | Omic-C                        | Omic-C                        | Omic-C                        |
|------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Model Number           | BR-DD0400-36W                 | BR-DD0500-42W                 | BR-DD0600-48W                 | BR-DD0800-60W                 |
| Size                   | D400*25mm                     | D500*25mm                     | D592*25mm                     | D780*25mm                     |
| Input Voltage          | AC200-240V 50/60HZ            | AC200-240V 50/60HZ            | AC200-240V 50/60HZ            | AC200-240V 50/60HZ            |
| Lighting effect        | 80LM/W&100LM/W                | 80LM/W&100LM/W                | 80LM/W&100LM/W                | 80LM/W&100LM/W                |
| Input Power            | 36W                           | 42W                           | 48w                           | 60w                           |
| Luminous ratio         | Indirect ↑ 0%; Direct ↓ 100%; | Indirect ↑ 0%; Direct ↓ 100%; | Indirect ↑ 0%; Direct ↓ 100%; | Indirect ↑ 0%; Direct ↓ 100%; |
| Power Factor           | >0.9                          | >0.9                          | >0.9                          | >0.9                          |
| Housing Color          | white                         | white                         | white                         | white                         |
| Luminous Flux          | 2880lm/3600lm                 | 3360 lm /4200lm               | 3840lm/4800lm                 | 4800lm/6000lm                 |
| CRI (Ra>)              | 80                            | 80                            | 80                            | 80                            |
| UGR                    | <22                           | <22                           | <22                           | <22                           |
| Dimming type           | N/A                           | N/A                           | N/A                           | N/A                           |
| Working Lifetime(Hour) | >36000                        | >36000                        | >36000                        | >36000                        |
| Lamp Body Material     | Aluminum                      | Aluminum                      | Aluminum                      | Aluminum                      |
| Color Temperature      | 3000K/4000K/5000K/6000K       | 3000K/4000K/5000K/6000K       | 3000K/4000K/5000K/6000K       | 3000K/4000K/5000K/6000K       |
| Protection Level       | IP40                          | IP40                          | IP40                          | IP40                          |
| Working Temperature    | 0°C~40°C                      | 0°C~40°C                      | 0°C~40°C                      | 0°C~40°C                      |
| Application            | Office/library/art hall/ etc. | Office/library/art hall/ etc. | Office/library/art hall/ etc. | Office/library/art hall/ etc. |
| Light Source           | SMD2835-Everlight             | SMD2835-Everlight             | SMD2835-Everlight             | SMD2835-Everlight             |
| Certification          | CE/LVD/FCC/ROHS               | CE/LVD/FCC/ROHS               | CE/LVD/FCC/ROHS               | CE/LVD/FCC/ROHS               |
| Surface Finished       | Powder painting               | Powder painting               | Powder painting               | Powder painting               |
| Feature                | Fashion brief                 | Fashion brief                 | Fashion brief                 | Fashion brief                 |
| Beam angle             | 112°                          | 112°                          | 112°                          | 112°                          |
| warranty               | 3years/5years                 | 3years/5years                 | 3years/5years                 | 3years/5years                 |
| Packaging size         | 43.6*24.5*44cm                | 60*29*60cm                    | 72*29*70cm                    | 88.5*91.5*13.5cm              |
| Outlet length          | 1m                            | 1m                            | 1m                            | 1m                            |



Round pendant lamp

Omic-T



Colors optional



black



silver



white

## Application



ERP


PHILIPS

TRIDONIC






## Product details

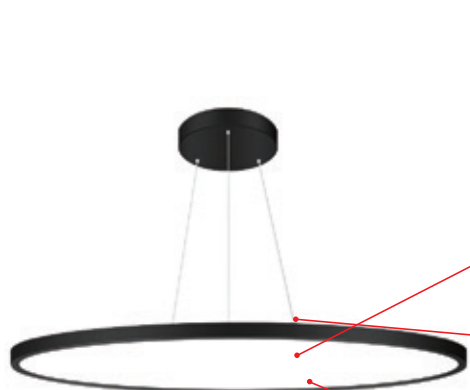

Up and down lighting and a ultra-thin design  
Suspension with strong cables





6063 aluminum extrusion with good heat-dissipation




Various customized lighting patterns can be made to  
create artistic lighting  
Diameter 600mm, 800mm, 1000mm, 1200mm optional

## Technical data

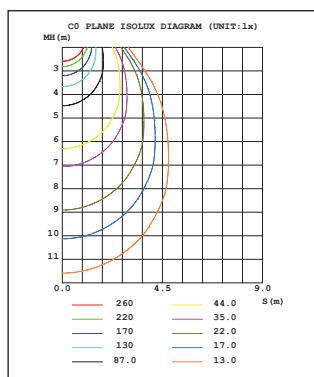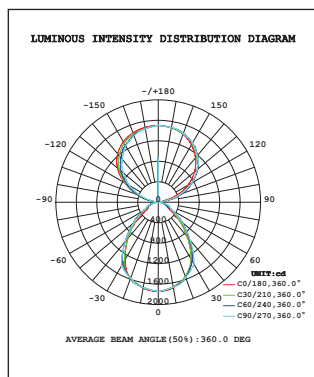

|                        |                                 |                                 |
|------------------------|---------------------------------|---------------------------------|
| Product Series         | Omic-T                          | Omic-T                          |
| Model Number           | BR-DT0500-42W                   | BR-DT0600-48W                   |
| Size                   | D500*25                         | D500*25                         |
| Input Voltage          | AC200-240V 50/60HZ              | AC200-240V 50/60HZ              |
| Lighting effect        | 80LM/W&100LM/W                  | 80LM/W&100LM/W                  |
| Input Power            | 42w                             | 48w                             |
| Luminous ratio         | Indirect ↑ 50%; Direct ↓ 50%;   | Indirect ↑ 50%; Direct ↓ 50%;   |
| Power Factor           | >0.9                            | >0.9                            |
| Housing Color          | white                           | white                           |
| Luminous Flux          | 3360lm/4200lm                   | 3840lm/4800lm                   |
| CRI (Ra>)              | 80                              | 80                              |
| UGR                    | <22                             | <22                             |
| Dimming type           | N/A                             | N/A                             |
| Working Lifetime(Hour) | >36000                          | >36000                          |
| Lamp Body Material     | Aluminum                        | Aluminum                        |
| Color Temperature      | 3000K/4000K/5000K/6000K         | 3000K/4000K/5000K/6000K         |
| Protection Level       | IP40                            | IP40                            |
| Working Temperature    | 0°C~40°C                        | 0°C~40°C                        |
| Application            | Office/library/art hall/ etc.   | Office/library/art hall/ etc.   |
| Light Source           | SMD2835-Everlight               | SMD2835-Everlight               |
| Certification          | CE/LVD/FCC/ROHS                 | CE/LVD/FCC/ROHS                 |
| Surface Finished       | Powder painting                 | Powder painting                 |
| Feature                | Fashion brief                   | Fashion brief                   |
| Beam angle             | Indirect ↑ 112°; Direct ↓ 112°; | Indirect ↑ 112°; Direct ↓ 112°; |
| warranty               | 3years/5years                   | 3years/5years                   |
| Packaging size         | 60*29*60cm                      | 72*29*70cm                      |
| Outlet length          | 1m                              | 1m                              |

Product details

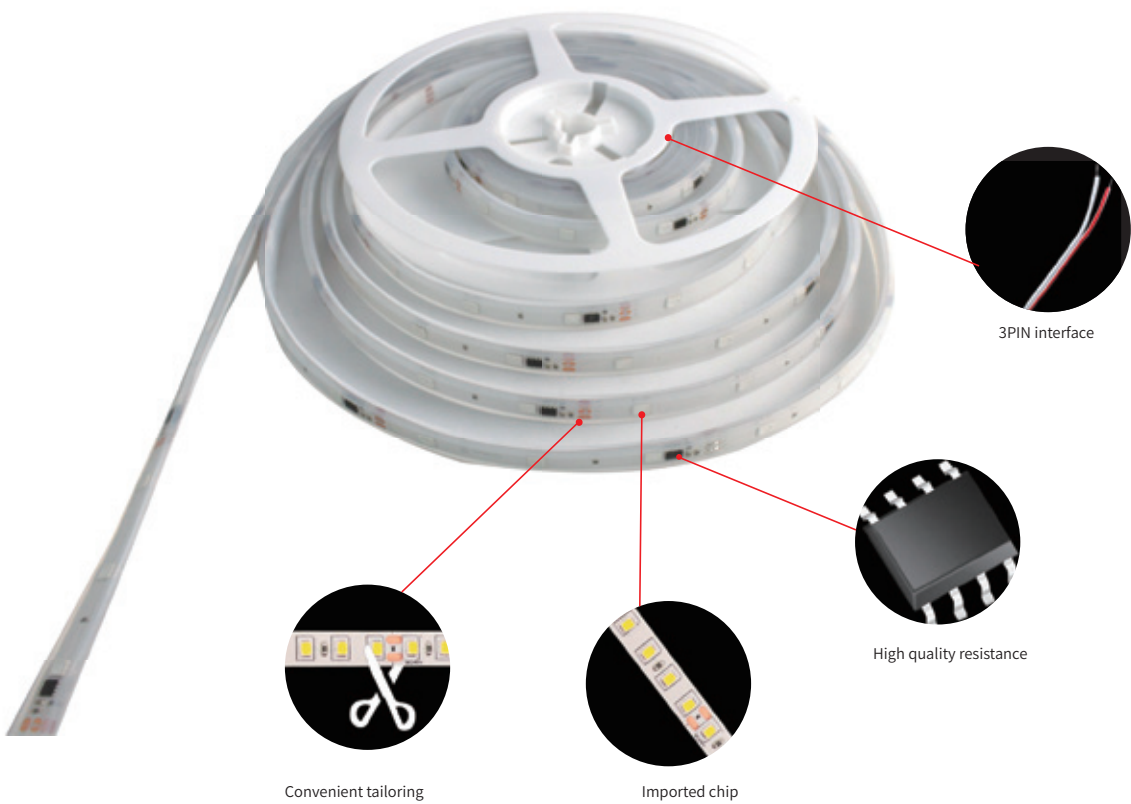

Technical data

|                                                                                    |                   |         |         |         |         |         |
|------------------------------------------------------------------------------------|-------------------|---------|---------|---------|---------|---------|
|  | Product Series:   | CL035   | CL065   | CL085   | CL105   | CL120   |
|                                                                                    | Power             | 4.0W    | 8.0W    | 10.0W   | 12.0W   | 13.0W   |
|                                                                                    | Length            | 0.35m   | 0.65m   | 0.85m   | 1.05m   | 1.20m   |
|                                                                                    | Color temperature | DC12V   | DC12V   | DC12V   | DC12V   | DC12V   |
|                                                                                    | LED Chip          | 4000k   | 4000k   | 4000k   | 4000k   | 4000k   |
|                                                                                    | CRI               | >80     | >80     | >80     | >80     | >80     |
|                                                                                    | Install method    | 3M tape | 3M tape | 3M tape | 3M tape | 3M tape |

# AWARD AND APPROVAL



# PATENT













## Billionaire Lighting Co., LTD

---

Tel: +86-755-21011239 / 21012009

Fax: +86-755-61110762

Web: [www.billionaireled.com](http://www.billionaireled.com)

E-mail: [sales@billighting.com](mailto:sales@billighting.com) / [sales@billionaireled.com](mailto:sales@billionaireled.com)

ADD: Building E, Huayi Liwei Industrial Park, Guanlan Town, Longhua District, Shenzhen, China