




Linear pendant lamp

Lina-C

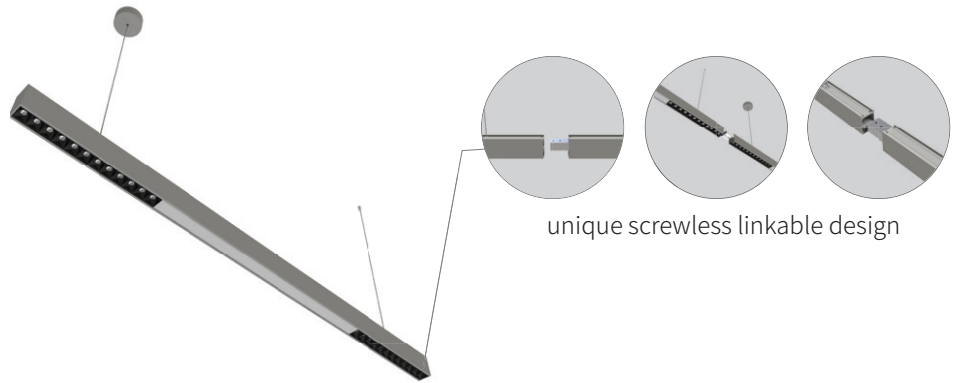

unique screwless linkable design

Colors optional



black

silver

white

Application





ERP



TRIDONIC



Product Details

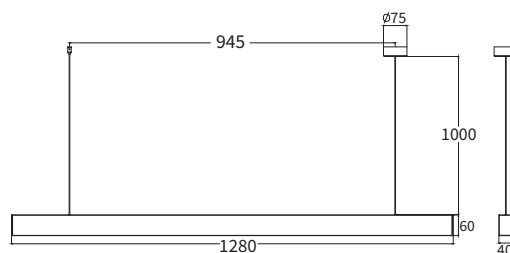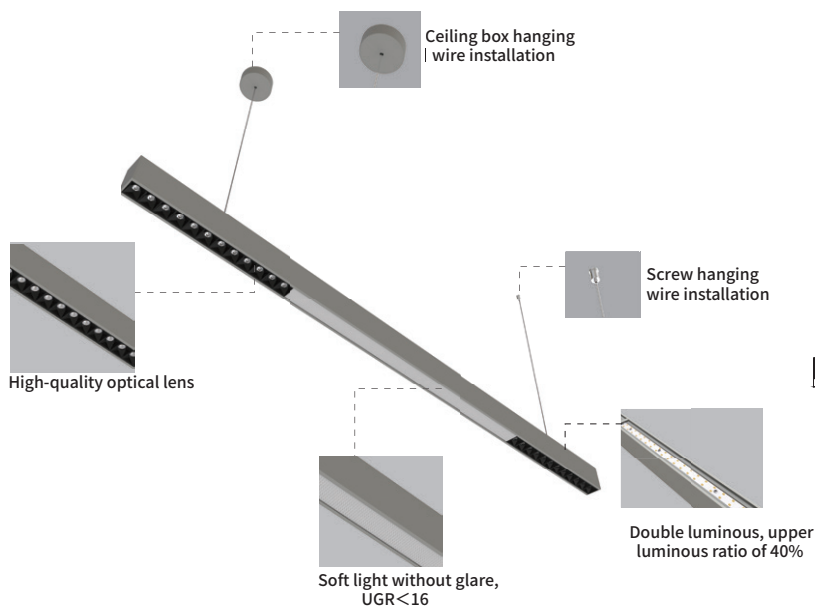

Technical data

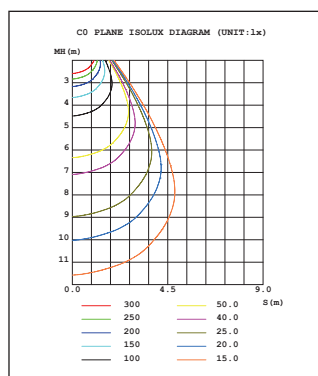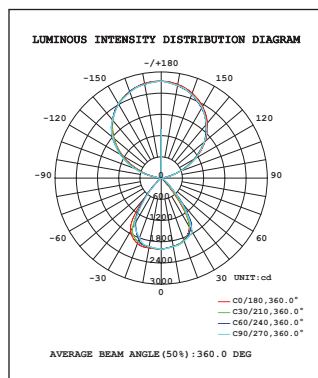

Product Series	Lina-C	Lina-C	Lina-C
Model Number	BR-CL1226-54W-A10	BR-CL0926-40W-A10	BR-CL0626-28W-A10
Size	1280*40*60mm	960*40*60mm	645*40*60mm
Input Voltage	AC200-240V	AC200-240V	AC200-240V
Lighting effect	130LM/W	130LM/W	130LM/W
Input Power	54W	40W	28W
Luminous ratio	Indirect ↑ 60%; Direct ↓ 40%;	Indirect ↑ 60%; Direct ↓ 40%;	Indirect ↑ 60%; Direct ↓ 40%;
Power Factor	>0.9	>0.9	>0.9
Housing Color	RAL7038A(white/black available)	RAL7038A(white/black available)	RAL7038A(white/black available)
Luminous Flux	4200lm indirect ↑ /2800lm direct ↓	3120lm indirect ↑ /2080lm direct ↓	2190lm indirect ↑ /1450lm direct ↓
CRI (Ra>)	80	80	80
UGR	<16	<16	<16
Dimming type	N/A	N/A	N/A
Working Lifetime(Hour)	>36000	>36000	>36000
Lamp Body Material	Aluminum	Aluminum	Aluminum
Color Temperature	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
Protection Level	IP40	IP40	IP40
Working Temperature	-20°C~40°C	-20°C~40°C	-20°C~40°C
Application	office/conference room/reception	office/conference room/reception	office/conference room/reception
Light Source	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips	SMD2835-Everlight / SMD3030-Philips
Certification	CE/ROHS/FCC/BSCI	CE/ROHS/FCC/BSCI	CE/ROHS/FCC/BSCI
Surface Finished	Powder painting	Powder painting	Powder painting
Feature	Fashion brief	Fashion brief	Fashion brief
Beam angle	Indirect ↑ 115°; Direct ↓ 55°;	Indirect ↑ 115°; Direct ↓ 55°;	Indirect ↑ 115°; Direct ↓ 55°;
warranty	3years/5years	3years/5years	3years/5years
Packaging size	1435*325*195mm	1120*325*195mm	820*325*195mm
Outlet length	1.2m	1.2m	1.2m