



XINNTEC TECHNOLOGY CO., LTD

PANEL LIGHT FAMILY

Your One-Stop-Solution Provider

Date: 05.05.2020

Panel Light **Family**



Edge light

Back light

Surface mount integrated

Colour temperature switchable

Smart Intelligent (Bluetooth/RF2.4G)

RGB-W

Waterproof IP65

Motion sensor with light sensor

OTHER Panel light



Standard Configuration Panel Light

Input Voltage

220-240Vac

Power

24/36/40W

CRI

>80

URG

<22

Material

Aluminium+PS

Efficiency

100lm/W

PF/Flicker Free

>0.9/YES

Driver

Lifud/AGT/BOKE

Colour Temperature CCT

4000K


Warranty

3-years/5-years


Panel Light Picture



Standard version

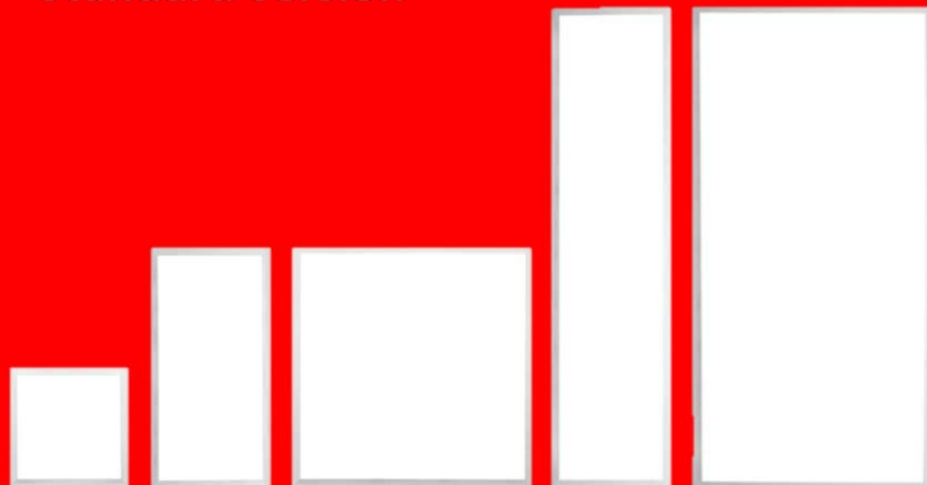


Back Light

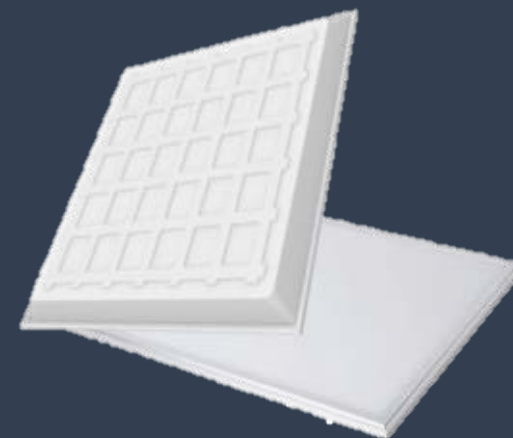

Surface Mount Integrated




Motion Sensor

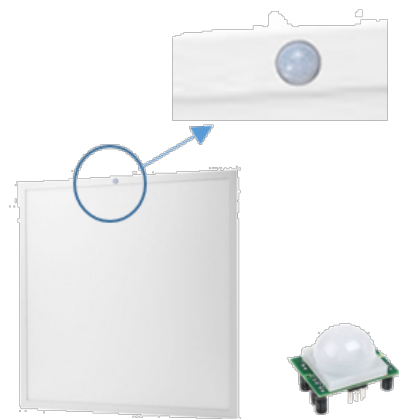



CCT Switchable



tuya RF 2.4G Bluetooth

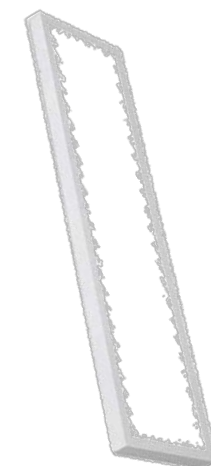


Panel Light Other Model Picture

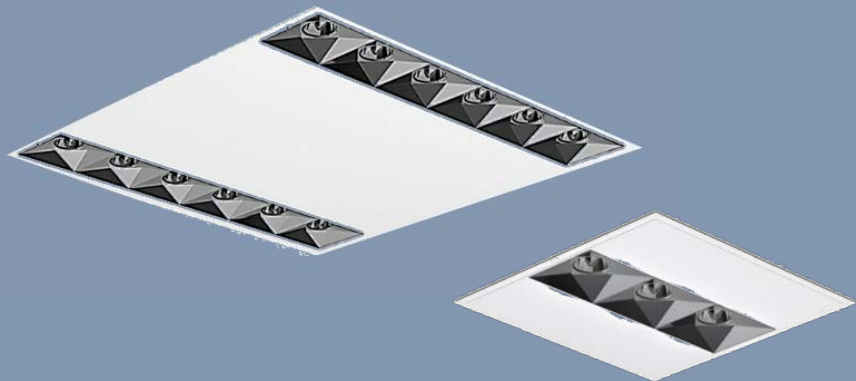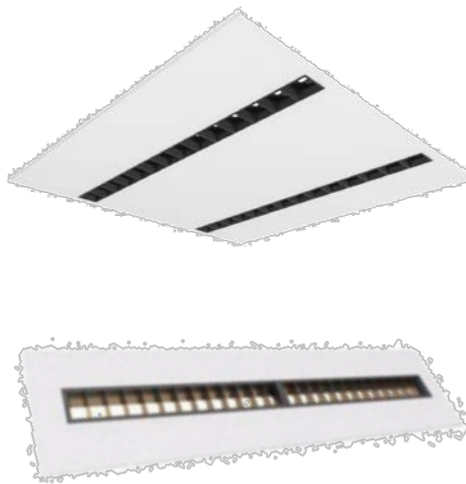



WIDE RANGE OF SIZE

EDGE LIGHT / BACK LIGHT

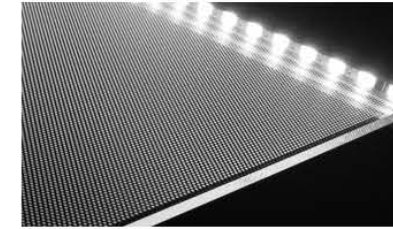

ENERGY SAVING




RELIABLE STABLE DRIVER



SMART FUNCTION



QUALITY PROOF

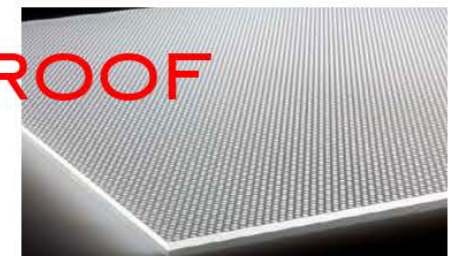

Dimension

300x300


600x600

620x620

675x675

300x1200

600x1200



120
lm/W

CRI
>80


UGR
<22

LGP
2.0T PMMA

3
YEAR WARRANTY

Structure


Edge Light

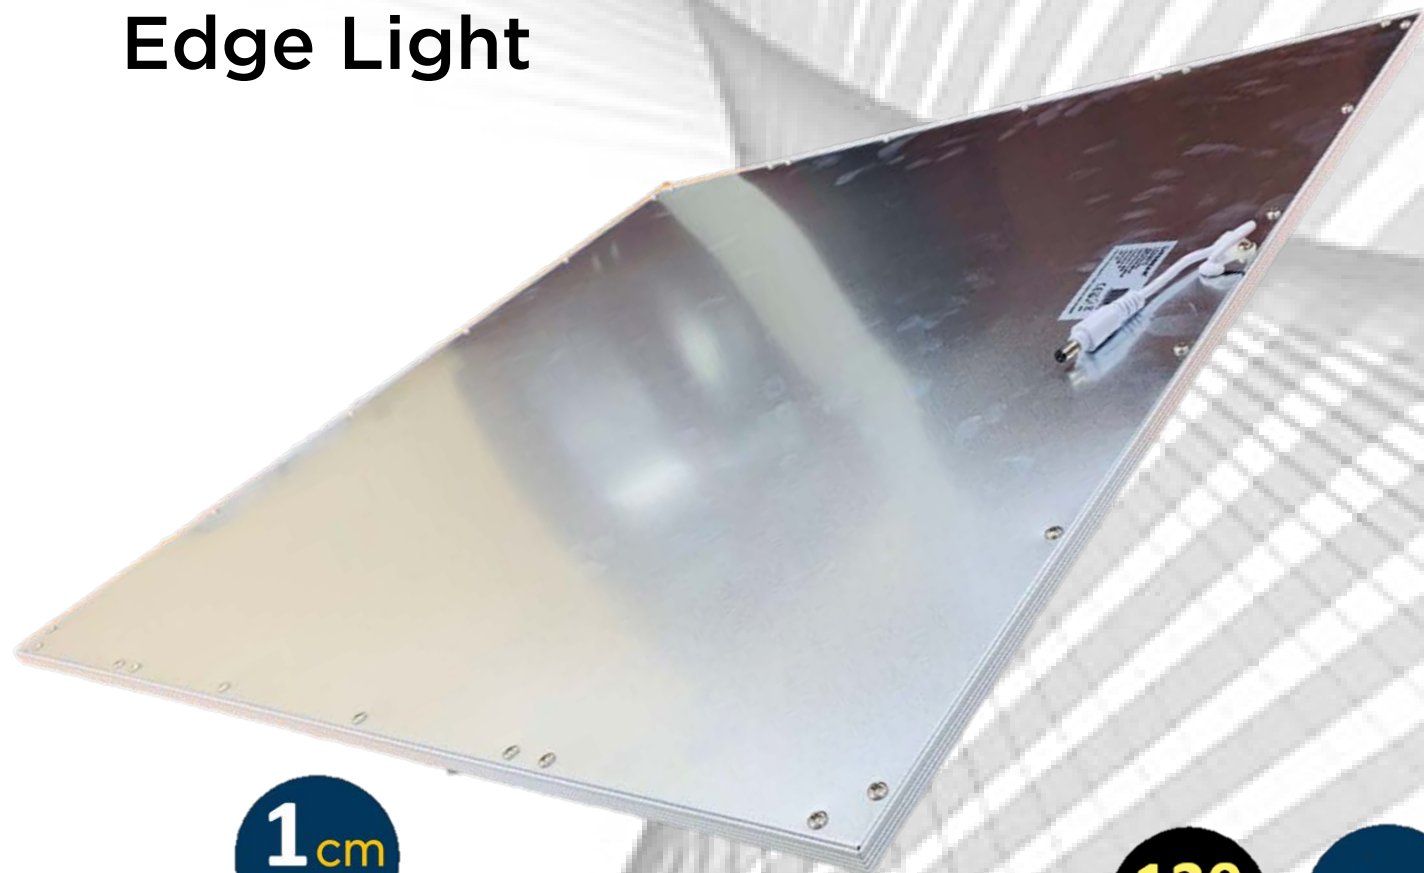

1cm
Height

120
lm/W

LGP
2.0T PMMA

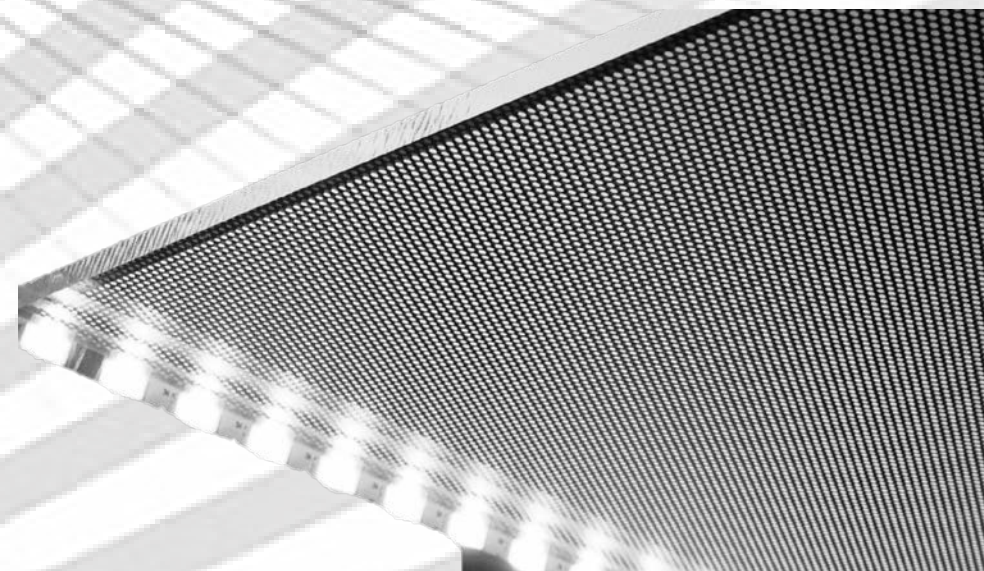

Structure

Back Light

Economics version - Lights is emitting directly to the Diffuser without Light Guide Plate (LGP), Save the cost of LGP

High quality Lens

Light emitting without yellow and no leaking lights



LED Driver

GreenSo
BOKE
Lifud

Specification:

Power Factor (PF): >0.9
Flicker Free: Yes / No
Warranty: 3-year / 5-year


Option: DALI / 1-10V Dimmable
Quick Wiring Terminals



Waterproof IP65

Wide range Application

Install the panel in office, bathroom, kitchen and Greenhouse, etc.

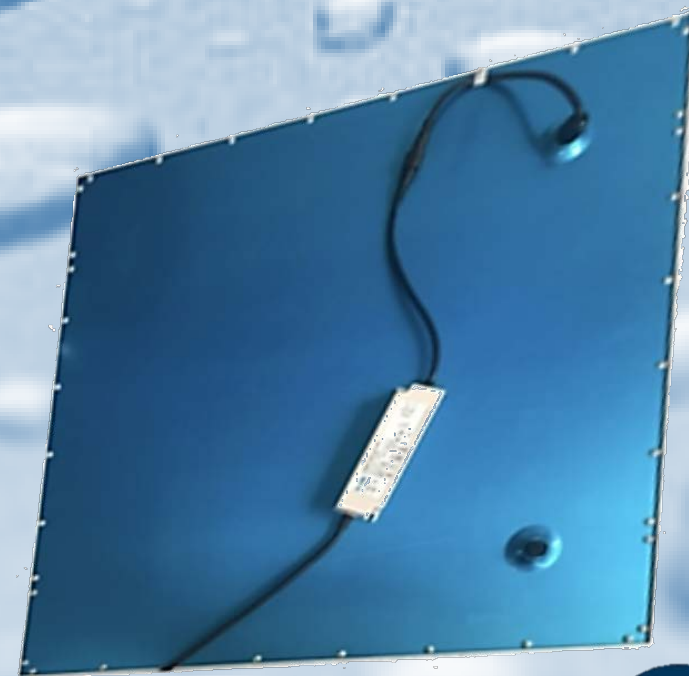

IP65

CCT Switchable

One Panel light has 3 CCT: 3000K, 4000K and 6000K.
Use the DIP switch to select your CCT




LED Driver with Quick plug-in/plug-out terminal



RGB+W

Create your favourite atmosphere

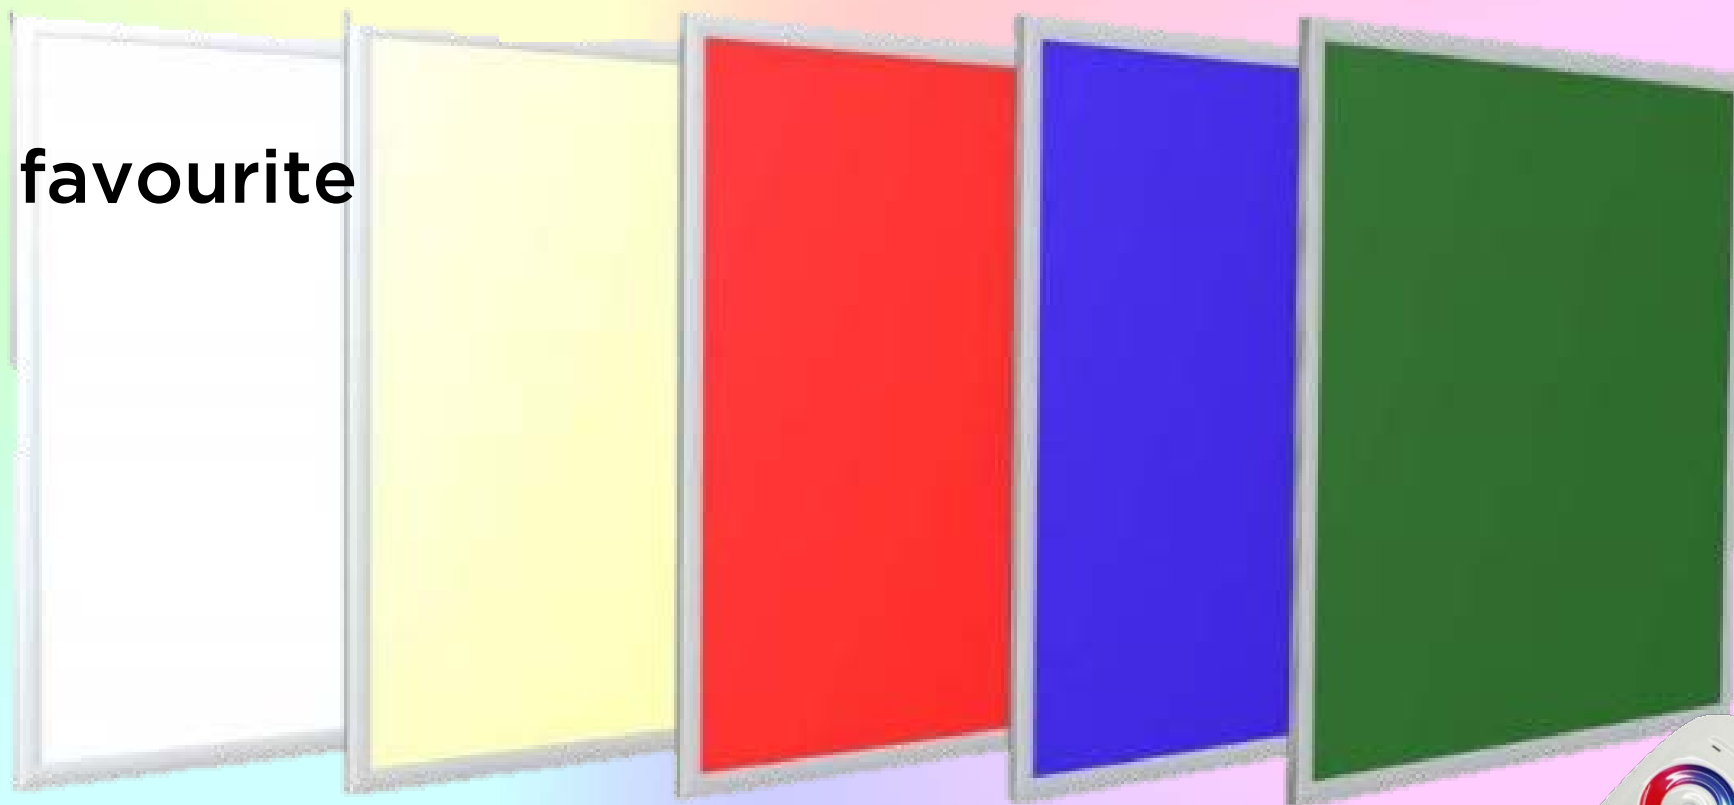

SMART




Turnable White and Dimming

Use the Multi-functional Remote to perform turnable white(from 2700K to 5000K) and Dimming Function through RF 2.4G or Bluetooth.

Multi-functional Remote

- Control up to 99 devices
- Grouping Control
- Scene Setting
- Dimming

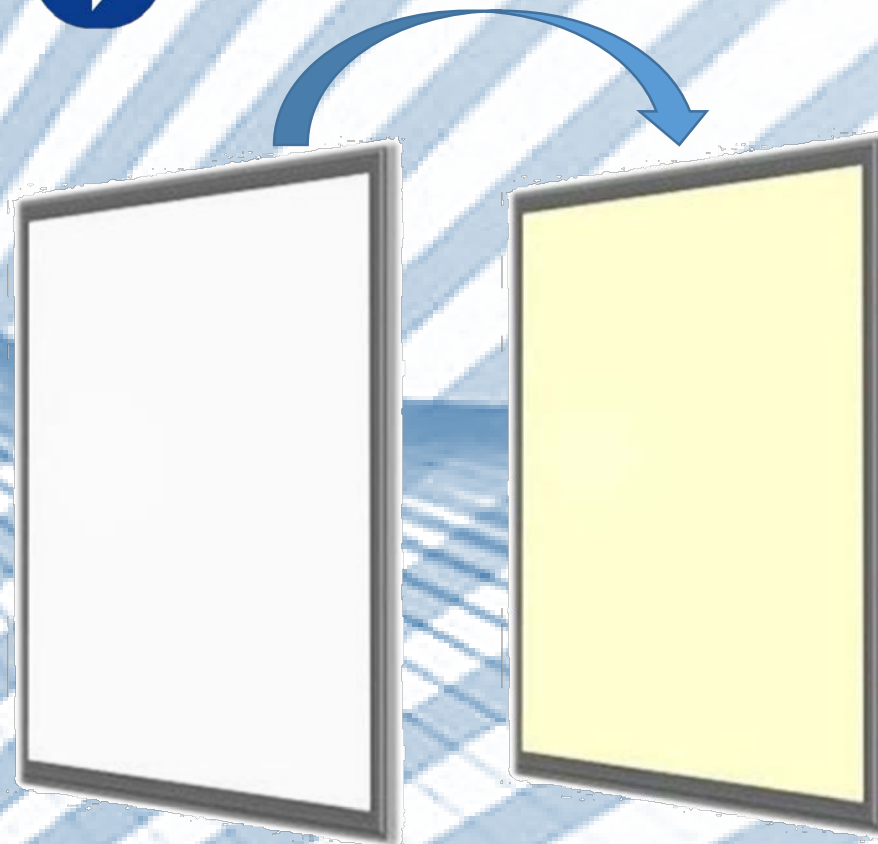

SMART


SCENE SETTING

Scene can be set by Scene Panel or Multi-function Remote or Smartphone, through RF 2.4G or Bluetooth signal.

RF 2.4G



tuya

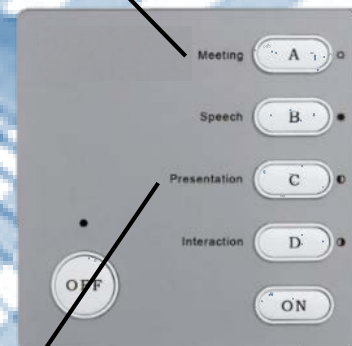


OR



MOTION SENSOR

ENERGY Saving

Panel light will automatically switch on when it sense somebody is moving in the induction area and off after the prolonged time is passed and no detected movement in the induction area.



Accessory



Suspension Cable kit



Surface Mount Stainless Brackets kit



600*600*70mm Outer Aluminium frame



300*1200*70mm Outer Aluminium frame

Panel Light Product Information



More Details Product Information, Please contact US:

XINNTEC TECHNOLOGY CO., LTD

Xin 86 138 2872 0072

xin@xinntec.com

Raymond 86 138 2332 6271

raymond@xinntec.com

Sampson 86 186 2084 1977

sampson@xinntec.com

Website: www.xinntec.com