

LED Pole Top Light



Hermoso



170
LM/W

.....
Die-cast Housing
With tempered glass
Surge Protection 6KV
With Anti-UV lens
.....



Smooth Surface
Eliminate the risk of dust and water accumulation

Streamlined design
minimize light loss




IP66






The symmetric light distribution is ideal for illuminating squares, plazas and other open areas while the asymmetric light distribution is ideal for illuminating streets and pathways.







Symmetric



Asymmetric



Professional Optics




IESNA STANDARD	Roadway width / Mounting Height	
	One side mounting	Both side mounting
Type II	Up to 1 times MH	Up to 2 times MH
Type III	Up to 1.5 times MH	Up to 3 times MH
Type IV	Up to 2 times MH	Up to 4 times MH





Features


Housing: Die-cast Aluminum
Thermal Conductivity: 96 W/m·K
Led: Philips
CRI: Ra>70
SDCM: <6
Power Factor: >0.95
THD: <15
Driver: Meanwell
Driver Efficiency: >93%
Protection: OTP, OCP, OVP, SCP
Surge Protection: 6KV
Waterproof: IP66
Impact Test: IK08
Electrical: 100-277V, 50/60Hz
Operating Temperature: -40~50°C
TM21: L90B10>50,000H
Lifetime: 50,000H

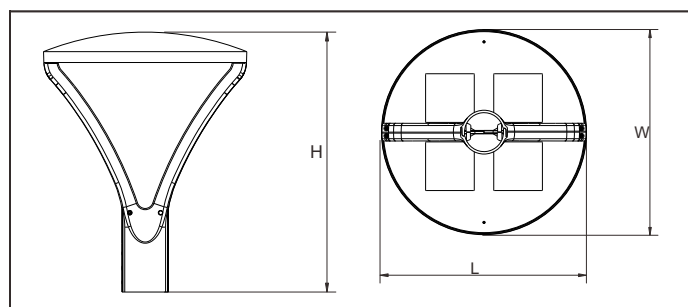

Functions

PWM · DALI · 0/1~10V

Optical options:



170 lm/w

5 YEARS WARRANTY

Meanwell Driver


Philips LED

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
LN030HE1H-PM	30W	100~277V	5100LM	>70	IP66	L422*W422*H539MM
LN040HE1H-PM	40W	100~277V	6800LM	>70	IP66	L422*W422*H539MM
LN060HE1H-PM	60W	100~277V	9600LM	>70	IP66	L422*W422*H539MM
LN090HE1H-PM	90W	100~277V	13500LM	>70	IP66	L422*W422*H539MM



Features


Housing: Die-cast Aluminum
Thermal Conductivity: 96 W/m·K
Led: Philips
CRI: Ra>70
SDCM: <6
Power Factor: >0.95
THD: <15
Driver: Meanwell
Driver Efficiency: >93%
Protection: OTP, OCP, OVP, SCP
Surge Protection: 6KV
Waterproof: IP66
Impact Test: IK08
Electrical: 100-277V, 50/60Hz
Operating Temperature: -40~50°C
TM21: L90B10>50,000H
Lifetime: 50,000H

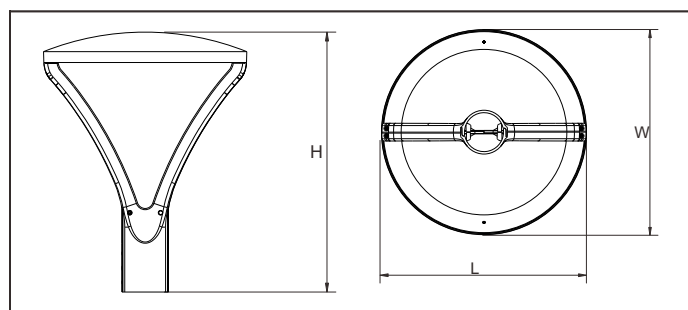

Functions

PWM · DALI · 0/1~10V

Optical options:



150lm/w


5 YEARS WARRANTY

Meanwell Driver

Philips LED

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
LN030HEGH-PM	30W	100~277V	4500LM	>70	IP66	L422*W422*H539MM
LN040HEGH-PM	40W	100~277V	6000LM	>70	IP66	L422*W422*H539MM
LN060HEGH-PM	60W	100~277V	9000LM	>70	IP66	L422*W422*H539MM
LN090HEGH-PM	90W	100~277V	13500LM	>70	IP66	L422*W422*H539MM

Packing

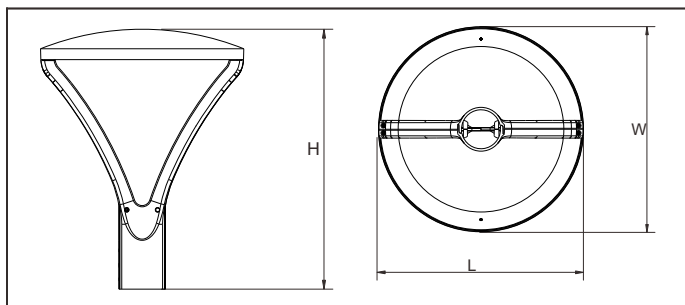

Model	Outer Carton (mm)			QTY/CTN	N.W. (kg)	G.W. (kg)
LN030HE	520	470	227	1	5.7	6.8
LN040HE	520	470	227	1	5.7	6.8
LN060HE	520	470	227	1	5.7	6.8
LN090HE	520	470	227	1	5.7	6.8