

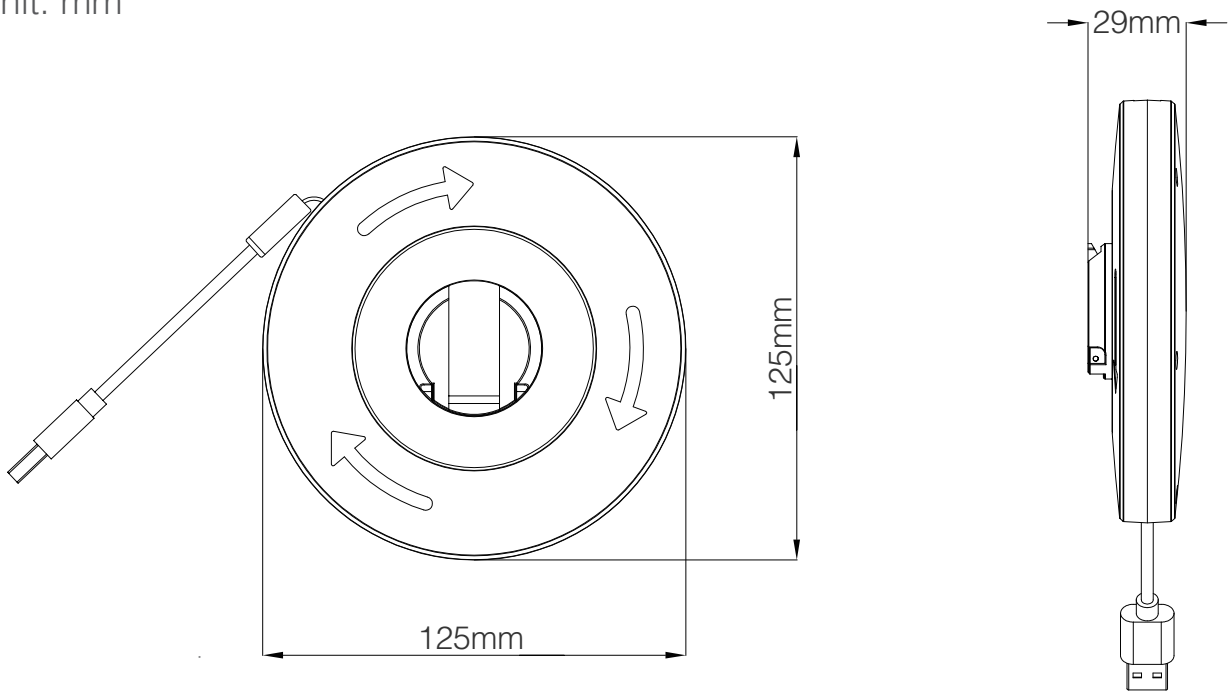


# Tape Light-5M

HL-125029-D05

SIZE

Unit: mm



PARAMETERS

Model	HL-125029-D05
Length	5 Meters
Voltage	USB(DC5V)
Power	3W
LM	330lm
CRI	>80
CCT	3000K
IP	IP65
Beam angle	120°
Light strip size	8mm
Warranty	2 years
Working temperature	-20~+50℃
N.W/G.W	0.19KG/0.234KG
Fire retardant	Yes

## Feature

- A professional appearance design that is clean and elegant, simple and stylish.
- It is more convenient to carry the light strip because of the rotating assembly.
- Advanced sealing technology, IP65 protection grade, suitable for multipurpose use.
- Powered by USB, low voltage, can be used safely.
- It's lightweight and practical, soft and flame-resistant, insulating, and corrosion-resistant.
- Available to operate remotely by using the mobile app.
- Applications: Temporary camping activities, outdoor temporary celebrations, construction sites, repair sites.

## LED Controller (Options)



### Feature

- The Supported languages:Chinese、 English、 Japanese、 German and so on.
- Constant voltage: MOS tube.
- APP function tutorial: switch on to adjust brightness, external microphone for capturing sound, candle function, delay function, light switch timers function, group function.





### Parameters

APP	ZENNGE
Domination Principle	BLUETOOTH 5.0
Operation Platform	Android 6.0 or IOS 11 or higher
Input Voltage	USB 5V
Max Output Power	36W
Connect Method	Common Anode
Working Temperature	-20~+55℃
Control Distance	Visible distance 20M
Warranty	2 Years


## PRODUCT PICTURE



## INSTRUCTIONS PRE-USE (Pull Out Strip)

			
1 Please turn the end cover in the right direction	2 Turn the handle 180 degrees, parallel to the turning end cap	3 Slowly pull out the light bar	4 Current status of work / Working a status

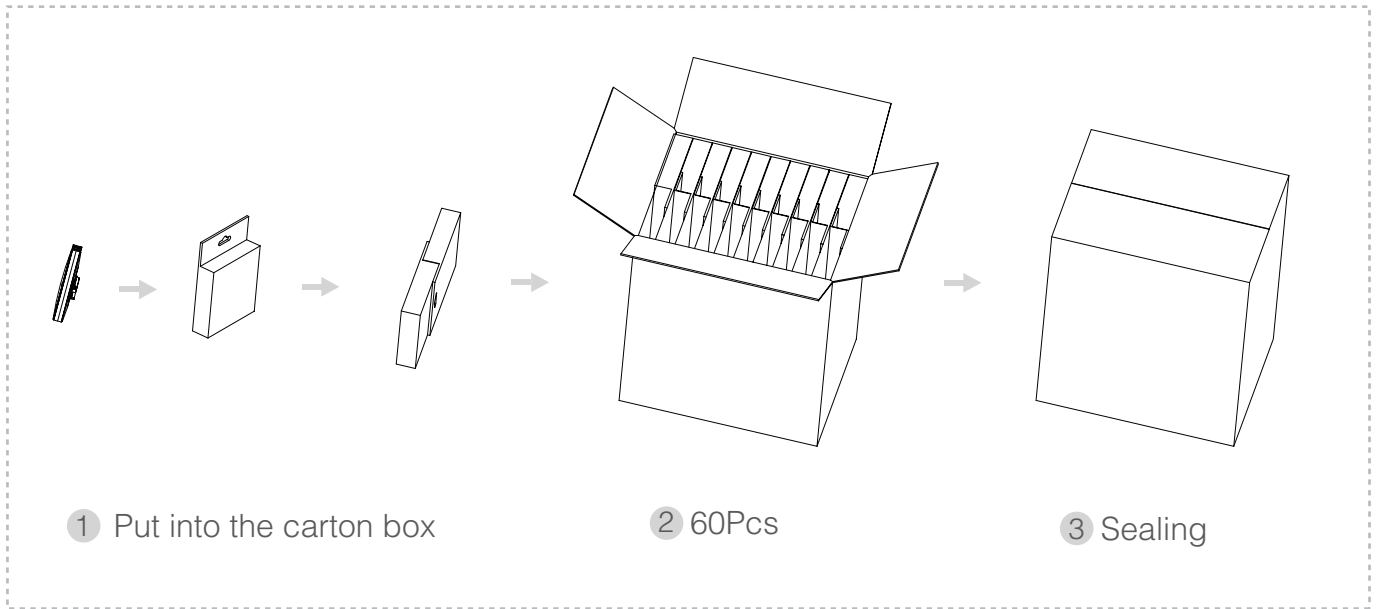
## INSTRUCTIONS AFTER USE (Pull Back Strip)

		
1 Please turn the end cap in the right direction.	2 Using the handle, rotate 180 degrees clockwise and slowly retract the strip light.	3 When the strip light is stored, the handle needs to be reset to its final state.

## APPLICATION PICTURE



## PACKAGING



Model	Inner box	Carton box	QTY/Carton	G.W
HL-125029-D05	130*188*35mm	405*320*405mm	60PCS	14.76KG/60PCS

## NOTICES

- During installation, please do not turn on the power switch. Ensure that the power supply is installed, secured, and maintained correctly.
- It is not recommended to hit, press, or knock light strips with blunt objects, weights, or other sharp objects.
- All connections must be tighten and safe from short-circuit hazards.
- Whenever you install and fix the light strip, avoid using iron wires and other metals, in order to prevent leakage, short circuits, and burning out of the lamps.
- In order to ensure good light radiation, please do not cover or block the light strip during use.
- Although this product isn't a toy, can easily attract children's interest.It should be installed in a location away from children's reach or under adult supervision.
- Not advisable to forcefully pull the light strip.
- Keep the USB interface away from water.

H E L I A N

**LED  
LIGHTING**



## Shenzhen Helian Electronics Co.,Ltd



3F, Tonggao building 2, Sanlian industrial area, Songbai Rd, Shiyan Town, Bao'an District, Shenzhen, Guangdong, China



**OUR EMAIL**

admin@hlled.com



**OUR PHONE**

(86)-755-27606785



**OUR WEBSITE**

www.hlled.com