

INDOOR LIGHTING





Ceiling lamp-----03



Downlight-----05



Recessed Ceiling-----09



T5 Fixture-----10



Mirror Light-----11



Desk Lamp-----14



Ring light-----16




Strip Light-----17



Holiday Light-----25

Slim Ceiling lamp


Regular ON/OFF Series



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-CL-R-12	12	960	3000-6500	>80	>0.5	215/255	55/60
OL-CL-R-18	18	1,440	3000-6500	>80	>0.5	325	60
OL-CL-R-24	24	1,920	3000-6500	>80	>0.5	370	60
OL-CL-R-36	36	2,880	3000-6500	>80	>0.9	480	65





Toggle Switch Series



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-CL-3CCTT-24	24	2,040	3000-6500	>80	>0.5	380	100
OL-CL-3CCTT-36	36	3,060	3000-6500	>80	>0.9	480	110


Decorative Ring Ceiling Lamp



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-CL-DR-12	12	1,050	3000-6500	>80	>0.5	280	39
OL-CL-DR-18	18	1,500	3000-6500	>80	>0.5	330	39
OL-CL-DR-24	24	2,150	3000-6500	>80	>0.5	380	39
OL-CL-DR-30	30	3,100	3000-6500	>80	>0.9	380	39
OL-CL-DR-36	36	3,600	3000-6500	>80	>0.9	380	39





Ultra Slim Plastic Ceiling Lamp





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-CL-P-24	24	1,920	3000-6500	>80	>0.5	230	25
OL-CL-P-30	30	2,400	3000-6500	>80	>0.9	300	25
OL-CL-P-40	40	3,200	3000-6500	>80	>0.9	400	25
OL-CL-P-50	50	4,000	3000-6500	>80	>0.9	500	25
OL-CL-P-60	60	4,800	3000-6500	>80	>0.9	600	25







Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-RDL-R3/S3	3	135	3000-6500	>80	>0.5	85	17	Φ75/75x75
OL-RDL-R6/S6	6	330	3000-6500	>80	>0.5	120	17	Φ105/105x105
OL-RDL-R9/S9	9	495	3000-6500	>80	>0.5	145	17	Φ130/130x130
OL-RDL-R12/S12	12	780	3000-6500	>80	>0.5	170	17	Φ155/155x155
OL-RDL-R18/S18	18	1,260	3000-6500	>80	>0.5	220	17	Φ205/205x205
OL-RDL-R24/S24	24	1,680	3000-6500	>80	>0.5	292	17	Φ280/280x280





Item No.	Power (W)	Lumen (lm)	CCT (K)	Ra	PF	D (mm)	H (mm)	Cutting size (mm)
OL-SDL-R6/S6	6	330	3000-6500	>80	>0.5	112	32	--
OL-SDL-R12/S12	12	780	3000-6500	>80	>0.5	160	32	--
OL-SDL-R18/S18	18	1,260	3000-6500	>80	>0.5	210	32	--
OL-SDL-R24/S24	24	1,680	3000-6500	>80	>0.5	282	32	--

Iron Downlight Series




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-IRDL-R3/S3	3	140	3000-6500	>70	>0.5	87	16	Φ65/65x65
OL-IRDL-R6/S6	6	330	3000-6500	>70	>0.5	118	16	Φ95/95x95
OL-IRDL-R9/S9	9	540	3000-6500	>70	>0.5	143	16	Φ120/120x120
OL-IRDL-R12/S12	12	840	3000-6500	>70	>0.5	170	16	Φ140/140x140
OL-IRDL-R15/S15	15	1050	3000-6500	>70	>0.5	192	16	Φ160/160x160
OL-IRDL-R18/S18	18	1350	3000-6500	>70	>0.5	223	16	Φ190/190x190
OL-IRDL-R24/S24	24	1800	3000-6500	>70	>0.5	300	16	Φ265/265x265



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-ISDL-R6/S6	6	330	3000-6500	>70	>0.5	90	28	--
OL-ISDL-R12/S12	12	840	3000-6500	>70	>0.5	142	28	--
OL-ISDL-R18/S18	18	1350	3000-6500	>70	>0.5	192	28	--
OL-ISDL-R24/S24	24	1800	3000-6500	>70	>0.5	265	28	--




Super Slim Downlight Series



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-LED-DL-5	5W	400lm	3000-6500	>80	>0.5	95	26	Φ75-90
OL-LED-DL-7	7W	560lm	3000-6500	>80	>0.5	120	26	Φ90-110
OL-LED-DL-9	9W	720lm	3000-6500	>80	>0.5	120	26	Φ90-110
OL-LED-DL-12	12W	1000lm	3000-6500	>80	>0.5	145	26	Φ120-135
OL-LED-DL-15	15w	1200lm	3000-6500	>80	>0.5	145	26	Φ120-135
OL-LED-DL-18	18W	1600lm	3000-6500	>80	>0.5	170	26	Φ140-160
OL-LED-DL-24	24W	2100lm	3000-6500	>80	>0.5	220	26	Φ190-210



2 in 1 frameless downlight series


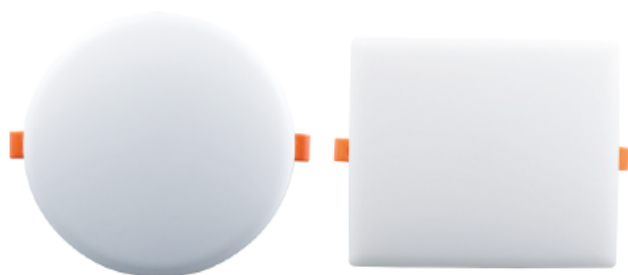


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-FLDL2-R8/S8	8	720	3000-6500	>70	>0.5	85	20	Φ50-75
OL-FLDL2-R10/S10	10	900	3000-6500	>70	>0.5	100	20	Φ50-80
OL-FLDL2-R15/S15	15	1350	3000-6500	>70	>0.5	120	20	Φ50-100
OL-FLDL2-R22/S22	22	1980	3000-6500	>70	>0.5	170	20	Φ50-150
OL-FLDL2-R32/S32	32	2880	3000-6500	>70	>0.5	225	20	Φ50-205

2 in 1: our product can be installed both in recessed and surface way. For the latter, we provide a bracket converter for easy transformation.






Frameless Downlight Series






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-RFLDL-R14	14	1400	3000-6500	>70	>0.5	130	25	--
OL-RFLDL-R22	22	2200	3000-6500	>70	>0.5	170	25	--
OL-RFLDL-R30	30	3000	3000-6500	>70	>0.5	220	25	--

Multi-angle Recessed Ceiling





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-TGU10-3	3	240	3000-6500	>80	>0.4	90	45	70-75
OL-TGU10-5	5	350	3000-6500	>80	>0.5	90	45	70-75
OL-TGU10-6.5	6.5	500	3000-6500	>80	>0.5	90	45	70-75



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)	Cutting size (mm)
OL-RC-3	3	240	3000-6500	>80	>0.4	75	45	55-60
OL-RC-7	7	500	3000-6500	>80	>0.5	120	50	90-95
OL-RC-10	10	800	3000-6500	>80	>0.5	120	50	90-95
OL-RC-12	12	1000	3000-6500	>80	>0.5	120	50	90-95
OL-RC-15	15	1200	3000-6500	>80	>0.5	145	55	120-125
OL-RC-18	18	1400	3000-6500	>80	>0.5	145	55	120-125



T5 Fixture

T5 Fixture - ON/OFF Switch





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-T5F-4	4	320	3000-6500	>80	>0.5	305	22.5	36.5
OL-T5F-8	8	640	3000-6500	>80	>0.5	570	22.5	36.5
OL-T5F-12	12	960	3000-6500	>80	>0.5	870	22.5	36.5
OL-T5F-14	14	1,120	3000-6500	>80	>0.5	970	22.5	36.5
OL-T5F-16	16	1,280	3000-6500	>80	>0.5	1170	22.5	36.5

T5 Fixture - CCT Switch





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-T5F-3CCT-4	4	320	3000-6500	>80	>0.5	305	22.5	36.5
OL-T5F-3CCT-8	8	640	3000-6500	>80	>0.5	570	22.5	36.5
OL-T5F-3CCT-12	12	960	3000-6500	>80	>0.5	870	22.5	36.5
OL-T5F-3CCT-14	14	1,120	3000-6500	>80	>0.5	970	22.5	36.5
OL-T5F-3CCT-16	16	1,280	3000-6500	>80	>0.5	1170	22.5	36.5

T5 Fixture - PIR Sensor






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-T5F-S-4	4	320	3000-6500	>80	>0.5	305	22.5	36.5
OL-T5F-S-8	8	640	3000-6500	>80	>0.5	570	22.5	36.5
OL-T5F-S-12	12	960	3000-6500	>80	>0.5	870	22.5	36.5
OL-T5F-S-14	14	1,120	3000-6500	>80	>0.5	970	22.5	36.5
OL-T5F-S-16	16	1,280	3000-6500	>80	>0.5	1170	22.5	36.5

Mirror Light Series





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-C40-400	8	800	3000-6500	>80	>0.5	400	128	68
OL-C40-600	15	1500	3000-6500	>80	>0.7	600	128	68
OL-C40-800	20	2000	3000-6500	>80	>0.7	800	128	68


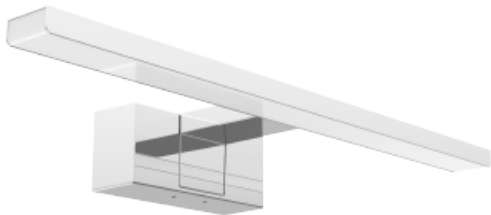


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-C01-300	6	420	3000-6500	>80	>0.5	300	128	51
OL-C01-400	8	560	3000-6500	>80	>0.5	400	128	51
OL-C01-600	12	840	3000-6500	>80	>0.7	600	128	51
OL-C01-800	15	1050	3000-6500	>80	>0.7	800	128	51

Mirror Light Series





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-C02-300	6	420	3000-6500	>80	>0.5	300	109	51
OL-C02-400	8	560	3000-6500	>80	>0.5	400	109	51
OL-C02-600	12	840	3000-6500	>80	>0.7	600	109	51
OL-C02-800	15	1050	3000-6500	>80	>0.7	800	109	51





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-C03-300	6	480	3000-6500	>80	>0.5	300	138	51
OL-C03-400	8	640	3000-6500	>80	>0.5	400	138	51
OL-C03-600	12	960	3000-6500	>80	>0.7	600	138	51
OL-C03-800	15	1200	3000-6500	>80	>0.7	800	138	51


Mirror Light Series




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-C04-300	6	420	3000-6500	>80	>0.5	300	119	52
OL-C04-400	8	560	3000-6500	>80	>0.5	400	119	52
OL-C04-600	12	840	3000-6500	>80	>0.7	600	119	52
OL-C04-800	15	1050	3000-6500	>80	>0.7	800	119	52



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-B01-600	15	1350	3000-6500	>80	>0.5	600	70	57
OL-B01-800	20	1800	3000-6500	>80	>0.5	800	70	57



Touch switch




Touch switch+AC Socket




Rocker Switch



Rocker Switch+AC Socket



PIR Sensor



PIR sensor+AC Rocker

Desk Lamp




OL-DKL-G01

Input: DC 24V 0.75A
Power: 7W
Lumen: 350lm
CCT: 3000-6500K
Color: White
Ra>90

Function:

- Touch Switch
- Stepless Dimming
- 3 CCT Changing
- Night Light




OL-DKL-G02

Input: DC 5V 2A
Power: 4W
Lumen: 200lm
CCT: 3000-6500K
Color: White/Black/Pink
Ra>90

Function:

- Touch Switch
- Stepless Dimming
- Clip Lamp
- Night Light




OL-DKL-G03

Input: DC 5V 2A
Power: 4W
Lumen: 200lm
CCT: 3000-6500K
Color: Black
Ra>90

Function:

- Touch Switch
- Stepless Dimming
- Clip Lamp

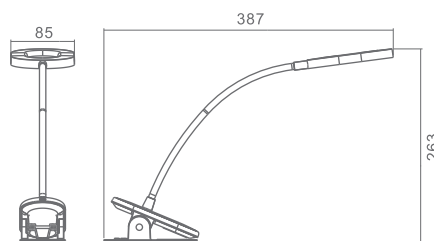

Desk Lamp




OL-DKL-T01

Input: DC 5V 2A
Power: 4W
Lumen: 220lm
CCT: 3000-6500K
Color: White/Green/Yellow
Ra>80
Battery: 1200mAh 18650Li-ion
Charging Time: 2-3Hrs

Function:

- Touch Switch
- 3-Step Dimming





OL-DKL-T02



Input: DC 5V 2A
Power: 8W
Lumen: 450lm
CCT: 3000-6500K
Color: White
Ra>80
Battery: 1200mAh 18650Li-ion*2
Charging Time: 3.5-4.5Hrs

Function:

- Touch Switch
- Stepless Dimming
- 3 CCT Changing
- Night light

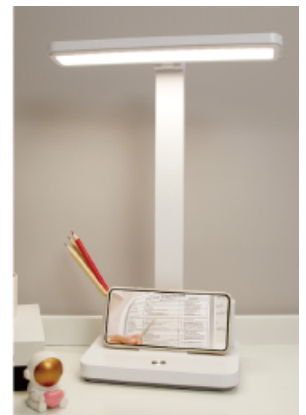


Ring light




Item No.	USB Input	Lumen (lm)	CCT (K)	CRI	PF	D (mm)
OL-RL-006IN	DC 5V 2A	560	3000-6500	>80	>0.5	160
OL-RL-010IN	DC 5V 2A	700	3000-6500	>80	>0.5	260
OL-RL-012IN	DC 5V 2A	720	3000-6500	>80	>0.5	300

Tripod

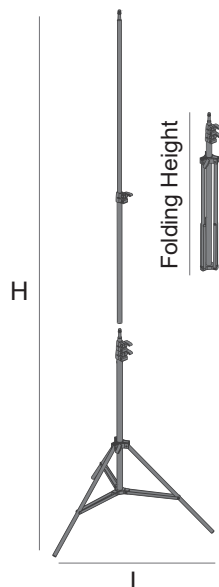

Item No.	L (mm)	H (mm)	Folding Height (mm)	Material
OL-TP050	380	500	320	Metal
OL-TP120	400	1,200	440	Metal
OL-TP160	500	1,600	560	Metal
OL-TP210	680	2,100	680	Metal


2835 Series



120V-240V 220V-240V VOLTAGE	IP20 IP rate	IP54 IP rate	IP65 IP rate	IP67 IP rate	IP68 IP rate	≥80 RA	≥90 RA	≥95 RA	25000h LIFE TIME	120° BEAM ANGLE
-----------------------------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------	-----------	-----------	---------------------	--------------------

Item No.	LED Type	LED QTY	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2835-A-60	2835	60LEDS/M	12V/24V	12W/M	1240lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-A-70	2835	70LEDS/M	12V/24V	12W/M	1440lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-A-120	2835	120LEDS/M	12V/24V	14.4W/M	1460lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-A-140	2835	140LEDS/M	12V/24V	14.4W/M	1700lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-A-238	2835	238LEDS/M	12V/24V	19.2W/M	2300lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-A-240	2835	240LEDS/M	12V/24V	19.2W/M	2020lm/M	2700K-6500K	L5000*W10*H1mm

5050 Series




120V-240V 220V-240V VOLTAGE	IP20 IP rate	IP54 IP rate	IP65 IP rate	IP67 IP rate	IP68 IP rate	≥80 RA	≥90 RA	≥95 RA	25000h LIFE TIME	120° BEAM ANGLE
-----------------------------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------	-----------	-----------	---------------------	--------------------

Item No.	LED Type	LED QTY	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST5050-B-30-6	5050	30LEDS/M	12V/24V	6W/M	570lm/M	2700K-6500K	L5000*W10*H2mm
OL-ST5050-B-30-7	5050	30LEDS/M	12V/24V	7.2W/M	630lm/M	2700K-6500K	L5000*W10*H2mm
OL-ST5050-B-60	5050	60LEDS/M	12V/24V	12W/M	1150lm/M	2700K-6500K	L5000*W10*H2mm


LED Flexible Strip

High Density Series




Item No.	LED Type	LED QTY	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2216-C-240-9	2216	240LED/M	12V/24V	9.6W/M	750lm/M	2700K-6500K	L5000*W6*H1mm
OL-ST2216-C-140	2216	140LED/M	12V/24V	9.6W/M	850lm/M	2700K-6500K	L5000*W8*H1mm
OL-ST2216-C-300-9	2216	300LED/M	12V/24V	9.6W/M	800lm/M	2700K-6500K	L5000*W6*H1mm
OL-ST2216-C-300-14	2216	300LED/M	12V/24V	14W/M	1080lm/M	2700K-6500K	L5000*W8*H1mm
OL-ST2216-C-240-14	2216	240LED/M	12V/24V	14W/M	1080lm/M	2700K-6500K	L5000*W8*H1mm

High Efficacy Series



Item No.	LED Type	LED QTY	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2835-D-70-4	2835	70LED/M	12V/24V	4.8W/M	670lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-D-70-7	2835	70LED/M	12V/24V	7.2W/M	1010lm/M	2700K-6500K	L5000*W8*H1mm
OL-ST2835-D-70-8	2835	70LED/M	12V/24V	8.5W/M	1130lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-D-140-9	2835	140LED/M	12V/24V	9.6W/M	1340lm/M	2700K-6500K	L5000*W8*H1mm
OL-ST2835-D-126	2835	126LED/M	12V/24V	12W/M	1680lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-D-140-14	2835	140LED/M	12V/24V	14.4W/M	2020lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-D-140-17	2835	140LED/M	12V/24V	17W/M	2260lm/M	2700K-6500K	L5000*W10*H1mm
OL-ST2835-D-168	2835	168LED/M	12V/24V	21W/M	2790lm/M	2700K-6500K	L5000*W10*H1mm

RGB Mixes-Light Series



120V-240V
220V-240V
VOLTAGE

IP20
IP rate

IP54
IP rate

IP65
IP rate


IP67
IP rate

IP68
IP rate

25000h
LIFE TIME

120°
BEAM ANGLE



Item No.	LED Type	LED QTY	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST5050RGB-E-30-5	5050RGB	30LED/M	12V/24V	5.28W/M	158lm/M	R/G/B	L5000*W10*H1mm
OL-ST5050RGB-E-30-6	5050RGB	30LED/M	12V/24V	6.34W/M	158lm/M	R/G/B	L5000*W10*H1mm
OL-ST5050RGB-E-60-10	5050RGB	60LED/M	12V/24V	10.56W/M	310lm/M	R/G/B	L5000*W12*H1mm
OL-ST5050RGB-E-60-13	5050RGB	60LED/M	12V/24V	13W/M	390lm/M	R/G/B/RGB	L5000*W12*H1mm

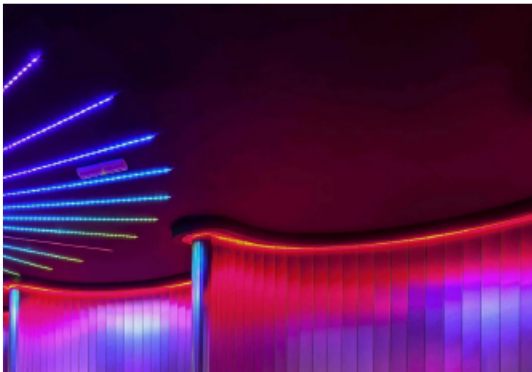

High Voltage Strip Series




AC Stream Line Series

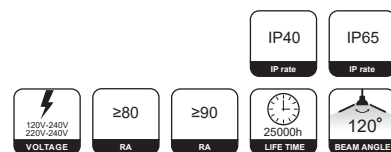

Item No.	LED Type	LED QTY	Power	Lumen	CCT	Dimension
OL-ST2835-A-12	2835	70LED/M	12W/M	1000LM/M	2700K-6500K	L5000*W16*H7.5mm
OL-ST2835-A-6	2835	84LED/M	6W/M	500LM/M	2700K-6500K	L5000*W16*H7.5mm

AC Glide Series

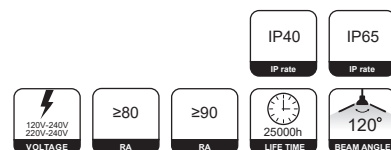

Standard




Item No.	LED Type	LED QTY	Power	Lumen	CCT	Dimension
OL-ST2835-B-6	2835	120LED/M	6W/M	450LM/M	2700K-6500K	L5000*W16.5*H7mm

High Efficacy&Dimmable

Item No.	LED Type	LED QTY	Power	Lumen	CCT	Dimension
OL-ST2835-C-12	2835	80LED/M	12W/M	1260LM/M	2700K-6500K	L5000*W16.5*H7mm
OL-ST2835-C-12	2835	80LED/M	12W/M	1100LM/M	2700K-6500K	L5000*W16.5*H7mm



LED Neon Strip Series

Dome series Top-Bend Free-Cutting

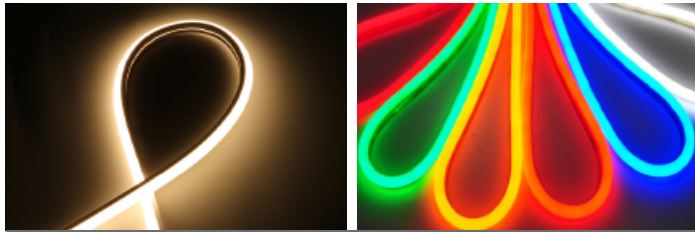

Item No.	Style	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2835-A-W-4	TOP-Bend	12V/24V	4W/M	260lm/M	2700-6500K	L5000*W16*H15mm
OL-ST2835-A-W-9	TOP-Bend	12V/24V	9W/M	580lm/M	2700-6500K	L5000*W16*H15mm
OL-ST2835-A-W-14	TOP-Bend	12V/24V	14W/M	890lm/M	2700-6500K	L5000*W16*H15mm
OL-ST2835-A-R-4	TOP-Bend	12V/24V	4W/M	100lm/M	Red	L5000*W16*H15mm
OL-ST2835-A-R-9	TOP-Bend	12V/24V	9W/M	200lm/M	Red	L5000*W16*H15mm
OL-ST2835-A-G-4	TOP-Bend	12V/24V	4W/M	223lm/M	Green	L5000*W16*H15mm
OL-ST2835-A-G-9	TOP-Bend	12V/24V	9W/M	500lm/M	Green	L5000*W16*H15mm
OL-ST2835-A-B-4	TOP-Bend	12V/24V	4W/M	64lm/M	Blue	L5000*W16*H15mm
OL-ST2835-A-B-9	TOP-Bend	12V/24V	9W/M	120lm/M	Blue	L5000*W16*H15mm
OL-ST2835-A-RGB	TOP-Bend	12V/24V	14W/M	380lm/M	RGB	L5000*W16*H15mm


Dome series Side-Bend Free-Cutting



Item No.	Style	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2835-B-W-4	Side-Bend	12V/24V	4W/M	110lm/M	2700-6500K	L5000*W10*H20mm
OL-ST2835-B-W-9	Side-Bend	12V/24V	9W/M	250lm/M	2700-6500K	L5000*W10*H20mm
OL-ST2835-B-W-14	Side-Bend	12V/24V	14W/M	385lm/M	2700-6500K	L5000*W10*H20mm
OL-ST2835-B-R-4	Side-Bend	12V/24V	4W/M	60lm/M	Red	L5000*W10*H20mm
OL-ST2835-B-R-9	Side-Bend	12V/24V	9W/M	110lm/M	Red	L5000*W10*H20mm
OL-ST2835-B-G-4	Side-Bend	12V/24V	4W/M	120lm/M	Green	L5000*W10*H20mm
OL-ST2835-B-G-9	Side-Bend	12V/24V	9W/M	250lm/M	Green	L5000*W10*H20mm
OL-ST2835-B-B-4	Side-Bend	12V/24V	4W/M	36lm/M	Blue	L5000*W10*H20mm
OL-ST2835-B-B-9	Side-Bend	12V/24V	9W/M	60lm/M	Blue	L5000*W10*H20mm
OL-ST2835-B-RGB	Side-Bend	12V/24V	14W/M	150lm/M	RGB	L5000*W10*H20mm



LED Neon Strip Series

Plane series Top-Bend Free-Cutting



Item No.	Style	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2835-C-W-4	TOP-Bend	12V/24V	4W/M	200lm/M	2700-6500K	L5000*W16*H12mm
OL-ST2835-C-W-9	TOP-Bend	12V/24V	9W/M	450lm/M	2700-6500K	L5000*W16*H12mm
OL-ST2835-C-W-14	TOP-Bend	12V/24V	14W/M	700lm/M	2700-6500K	L5000*W16*H12mm
OL-ST2835-C-R-4	TOP-Bend	12V/24V	4W/M	75lm/M	Red	L5000*W16*H12mm
OL-ST2835-C-R-9	TOP-Bend	12V/24V	9W/M	160lm/M	Red	L5000*W16*H12mm
OL-ST2835-C-G-4	TOP-Bend	12V/24V	4W/M	160lm/M	Green	L5000*W16*H12mm
OL-ST2835-C-G-9	TOP-Bend	12V/24V	9W/M	330lm/M	Green	L5000*W16*H12mm
OL-ST2835-C-B-4	TOP-Bend	12V/24V	4W/M	32lm/M	Blue	L5000*W16*H12mm
OL-ST2835-C-B-9	TOP-Bend	12V/24V	9W/M	70lm/M	Blue	L5000*W16*H12mm
OL-ST2835-C-RGB	TOP-Bend	12V/24V	14W/M	310lm/M	RGB	L5000*W16*H12mm



Plane series Side-Bend Free-Cutting



Item No.	Style	Voltage	Power	Lumen @4000K&Ra80@IP20	CCT	Dimension @IP20
OL-ST2835-D-W-4	Side-Bend	12V/24V	4W/M	80lm/M	2700-6500K	L5000*W8.8*H16.5mm
OL-ST2835-D-W-9	Side-Bend	12V/24V	9W/M	175lm/M	2700-6500K	L5000*W8.8*H16.5mm
OL-ST2835-D-W-14	Side-Bend	12V/24V	14W/M	270lm/M	2700-6500K	L5000*W8.8*H16.5mm
OL-ST2835-D-R-4	Side-Bend	12V/24V	4W/M	30lm/M	Red	L5000*W8.8*H16.5mm
OL-ST2835-D-R-9	Side-Bend	12V/24V	9W/M	68lm/M	Red	L5000*W8.8*H16.5mm
OL-ST2835-D-G-4	Side-Bend	12V/24V	4W/M	55lm/M	Green	L5000*W8.8*H16.5mm
OL-ST2835-D-G-9	Side-Bend	12V/24V	9W/M	130lm/M	Green	L5000*W8.8*H16.5mm
OL-ST2835-D-B-4	Side-Bend	12V/24V	4W/M	12lm/M	Blue	L5000*W8.8*H16.5mm
OL-ST2835-D-B-9	Side-Bend	12V/24V	9W/M	30lm/M	Blue	L5000*W8.8*H16.5mm
OL-ST2835-D-RGB	Side-Bend	12V/24V	14W/M	100lm/M	RGB	L5000*W8.8*H16.5mm


High Voltage Neon Strip Series

Normal Neon Strip

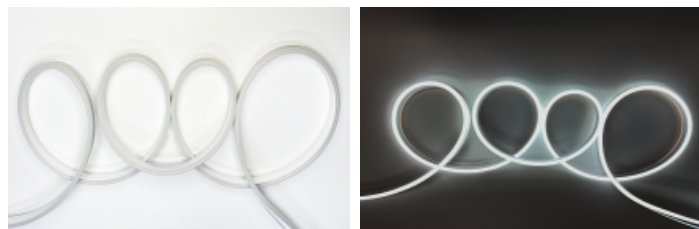




Item No.	LED Type	LED Qty	Power	Lumen	CCT	Dimension
OL-ST2835-A-W	2835	120LED/M	8W/M	240lm/M	2700-6500K	L5000*W6.5*H16mm
OL-ST2835-A-R	2835	120LED/M	8W/M	160lm/M	Red	L5000*W6.5*H16mm
OL-ST2835-A-G	2835	120LED/M	8W/M	400lm/M	Green	L5000*W6.5*H16mm
OL-ST2835-A-B	2835	120LED/M	8W/M	96lm/M	Blue	L5000*W6.5*H16mm
OL-ST2835-A-P	2835	120LED/M	8W/M	30lm/M	Pink	L5000*W6.5*H16mm
OL-ST2835-A-RGB	2835	120LED/M	8W/M	209lm/M	RGB	L5000*W6.5*H17.5mm

Top-Bend Dot Free Linear



Item No.	LED Type	LED Qty	Power	Lumen	CCT	Dimension
OL-ST2835-B-140	2835	140LED/M	12W/M	690lm/M	2700-6500K	L5000*W21*H15mm
OL-ST2835-B-180	2835	180LED/M	12W/M	690lm/M	2700-6500K	L5000*W21*H15mm


Side-Bend Dot Free Linear

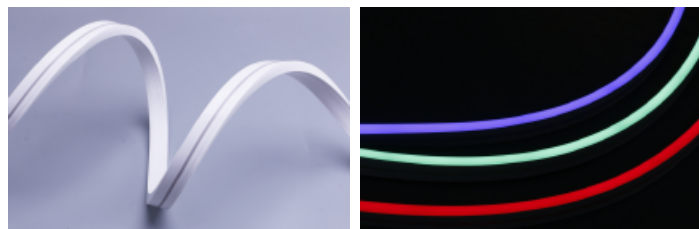

Item No.	LED Type	LED Qty	Power	Lumen	CCT	Dimension
OL-ST2835-C-140	2835	140LED/M	12W/M	415lm/M	2700-6500K	L5000*W10*H20mm
OL-ST2835-C-180	2835	180LED/M	12W/M	415lm/M	2700-6500K	L5000*W10*H20mm



Halo Series

360° Omni Directional Strip




Item No.	LED Type	LED Qty	Power	Lumen	CCT	D(mm)	L(mm)
OL-ST2835-360°	2835	120LED/M	12W/M	1150lm/M	2700-6500K	15	50000

TV Background RGB Strip Kit



Item No.	LED Type	LED Qty	Voltage	Power	Lumen	Dimension
OL-ST5050-60	5050	12LED*4PCS	5V DC	2W/Pcs	/	L5000mm*W8mm


RGBIC Coner Floor lamp



Item No.	LED Type	LED Qty	Voltage	Power	Lumen	Dimension
OL-ST5050-60	5050	60LED	5V DC	7.6W/PCS	/	H1316*L295*W295mm


Holiday Light

Fairy String Light



Item No.	Power Supply	Output	Color	L (m)	Lamp Space (cm)	Lamp Qty (pcs)
OL-SL-10	USB Plug	DC 5V	RGB	10	0.1	100

White Ball String Light




Item No.	Power Supply	Output	Color	L (m)	Lamp Space (cm)	Lamp Qty (pcs)
OL-SLB-10	USB Plug	DC 5V	RGB	10	0.2	66



Holiday Light

String Light-Milky Bulb

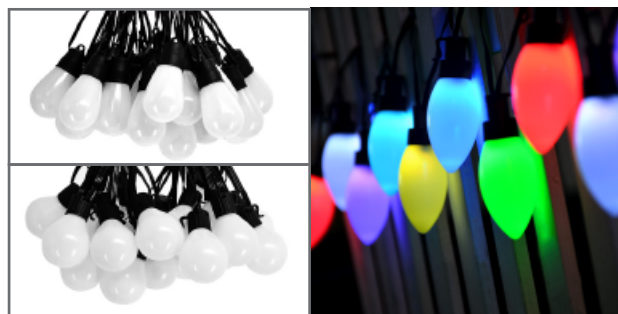


Item No.	Power Supply	Output	Color	Lamp Shape	L (m)	Lamp Space (m)	Lamp Qty (pcs)
OL-SLM	Adapter 100~240V	DC 5V	RGB	G40/S14	7.5	0.3	25

String Light-Clear Bulb



Item No.	Power Supply	Output	Color	Lamp Shape	L (m)	Lamp Space (m)	Lamp Qty (pcs)
OL-SLC	Adapter 100~240V	DC 5V	RGB	G40/C7/C9	7.5	0.3	25

Connectable LED Pixel Curtain String Light

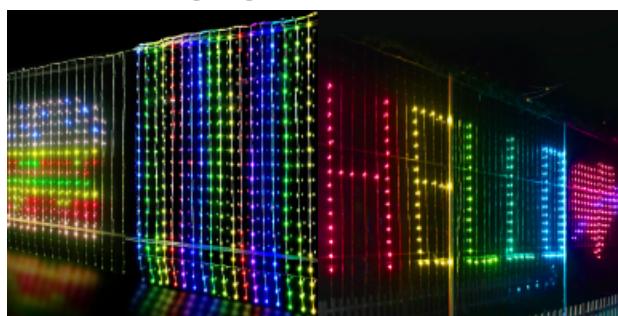

Item No.	Power Supply	Output	Color	Size	Lamp Space (cm)	String Qty (pcs)	Lamp Qty (pcs)
OL-SLC9	Adapter 100~240V	DC 5V	RGB	W2m*H2m	0.1	20	400



HANGZHOU YIDENG LIGHTING CO., LTD.


Address: Room 901-9, Building 4, NO.859, West Shixiang Road,
Hangzhou, Zhejiang, China


Tel: +86 571-8813-8056 Fax: +86 571-8813-8056

E-mail: info@onelightchina.com



www.onelightchina.com

COMMERCIAL LIGHTING

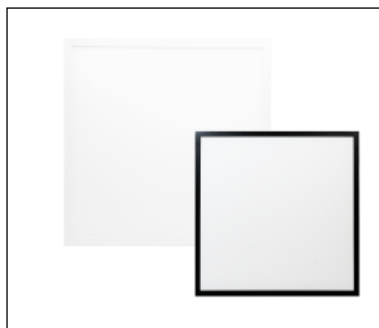


	LED Track Light	03
	LED Track Panel Light	09
	Four Wires Tracks and Connectors	10
	LED Magnetic Track Light	11
	LED Swivel Spot Light	18
	LED Downlight	19
	LED Panel Light	24
	LED Batten Light	27
	LED Linear Light	28

LED Track Light





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-R-5	5	400	3000-6500	>80	>0.5	60	86
OL-TL-R-7	7	560	3000-6500	>80	>0.5	60	86
OL-TL-R-9	9	720	3000-6500	>80	>0.5	70	86

LED Track Light






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-TL-L-10	10	1200	3000-6500	>80	>0.5	300	50	33
OL-TL-L-15	15	1800	3000-6500	>80	>0.5	600	50	33
OL-TL-L-20	20	2400	3000-6500	>80	>0.5	900	50	33
OL-TL-L-24	24	2880	3000-6500	>80	>0.5	1200	50	33

LED Track Light





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-P-C-10	10	850	3000-6500	>80	>0.5	55	110
OL-TL-P-C-20	20	1700	3000-6500	>80	>0.5	65	125
OL-TL-P-C-30	30	2550	3000-6500	>80	>0.5	75	140
OL-TL-P-C-40	40	3400	3000-6500	>80	>0.5	85	155





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-S-10	10	800	3000-6500	>80	>0.5	55	120
OL-TL-S-20	20	1600	3000-6500	>80	>0.5	65	130
OL-TL-S-30	30	2400	3000-6500	>80	>0.9	75	140
OL-TL-S-40	40	3200	3000-6500	>80	>0.9	85	150

LED Track Light





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-E-10	10	850	3000-6500	>80	>0.5	55	110
OL-TL-E-20	20	1700	3000-6500	>80	>0.5	65	125
OL-TL-E-30	30	2550	3000-6500	>80	>0.5	75	140
OL-TL-E-40	40	3400	3000-6500	>80	>0.5	85	155






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-P-A-8	8	700	3000-6500	>90	>0.5	50	135
OL-TL-P-A-15	15	1300	3000-6500	>90	>0.5	62	170
OL-TL-P-A-24	24	2100	3000-6500	>90	>0.5	72	188
OL-TL-P-A-30	30	2700	3000-6500	>90	>0.9	80	188
OL-TL-P-A-36	36	3200	3000-6500	>90	>0.9	94	190

LED Track Light






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-P-B-20	20	1800	3000-6500	>90	>0.5	85	104
OL-TL-P-B-30	30	2700	3000-6500	>90	>0.9	95	112
OL-TL-P-B-40	40	3600	3000-6500	>90	>0.9	106	123






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-Z-8	8	600	3000-6500	>90	>0.5	50	135
OL-TL-Z-15	15	1100	3000-6500	>90	>0.5	62	170
OL-TL-Z-24	24	1900	3000-6500	>90	>0.5	72	172
OL-TL-Z-30	30	2400	3000-6500	>90	>0.9	80	178
OL-TL-Z-36	36	2800	3000-6500	>90	>0.9	94	190







LED Track Light



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-M-10	10	900	3000-6500	>80	>0.8	50	120
OL-TL-M-18	18	1620	3000-6500	>80	>0.8	60	130




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-TL-N-12	12	1080	3000-6500	>90	>0.9	81	40
OL-TL-N-24	24	2160	3000-6500	>90	>0.9	110	46

						
OL-TLH-A	OL-TLH-B	OL-TLH-C	OL-TLH-D	OL-TLH-E	OL-TLH-F	
						
Item No.	Material	Base	D (mm)	H (mm)	Adaptor	Color
OL-TLH-A	Iron	GU10	60	55	2 wires / 3 wires / 4 wires	Black/White
OL-TLH-B	Iron	GU10	55	80	2 wires / 3 wires / 4 wires	Black/White
OL-TLH-C	Aluminum	GU10	60	120	2 wires / 3 wires / 4 wires	Wood Grain
OL-TLH-D	Iron	GU10	60	120	2 wires / 3 wires / 4 wires	Nickel Gold
OL-TLH-E	Iron	E27	116	140	2 wires / 3 wires / 4 wires	Black/White
OL-TLH-F	Aluminum	E14	120	138	2 wires / 3 wires / 4 wires	Black/White





Recessed Ceiling Housing

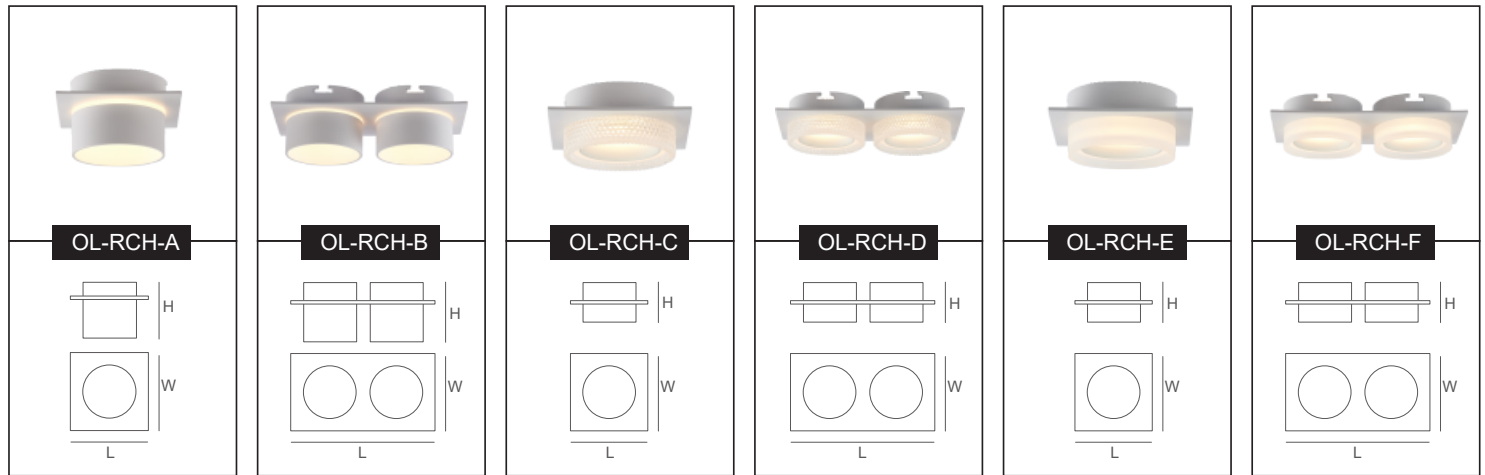


Item No.	Material	Base	L (mm)	W (mm)	H (mm)	Shape	Color
OL-RCH-A	Aluminum	GU10	92	92	57	Round/Square	Black/White
OL-RCH-B	Aluminum	GU10	92	175	57	Round/Square	Black/White
OL-RCH-C	Aluminum	GU10	92	92	40	Round/Square	Black/White
OL-RCH-D	Aluminum	GU10	92	175	40	Round/Square	Black/White
OL-RCH-E	Aluminum	GU10	92	92	40	Round/Square	Black/White
OL-RCH-F	Aluminum	GU10	92	175	40	Round/Square	Black/White

LED Track Panel Light

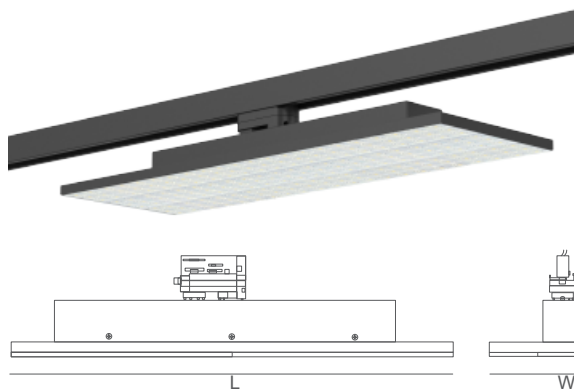


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-TPL-40	40	6400	3000-6500	>80	>0.9	588	188	75
OL-TPL-50	50	8000	3000-6500	>80	>0.9	588	188	75
OL-TPL-60	60	9600	3000-6500	>80	>0.9	588	188	75
OL-TPL-70	70	11200	3000-6500	>80	>0.9	588	188	75

Four Wires Tracks




track(Flat copper)



Item No.	Color
OL-4WLTf-B	Black
OL-4WLTf-W	White
OL-4WLTf-S	Sliver



track(Round copper)




Item No.	Color
OL-4WLTR-B	Black
OL-4WLTR-W	White
OL-4WLTR-S	Sliver

Four Wires Track Connectors




power connector



Item No.	Color
OL-4WLTP-B	Black
OL-4WLTP-W	White
OL-4WLTP-S	Sliver




end cap



Item No.	Color
OL-4WLTE-B	Black
OL-4WLTE-W	White
OL-4WLTE-S	Sliver




I mini connector



Item No.	Color
OL-4WMI-W	Black
OL-4WMI-B	White
OL-4WMI-S	Sliver




I connector



Item No.	Color
OL-4WI-W	Black
OL-4WI-B	White
OL-4WI-S	Sliver




L connector



Item No.	Color
OL-4WL-W	Black
OL-4WL-B	White
OL-4WL-S	Sliver




T connector



Item No.	Color
OL-4WT-W	Black
OL-4WT-B	White
OL-4WT-S	Sliver




X connector



Item No.	Color
OL-4WX-W	Black
OL-4WX-B	White
OL-4WX-S	Sliver




adjustable connector



Item No.	Color
OL-4WA-W	Black
OL-4WA-B	White
OL-4WA-S	Sliver




flexible connector





Item No.	Color
OL-4WF-W	Black
OL-4WF-B	White
OL-4WF-S	Sliver



Magnetic Track Light

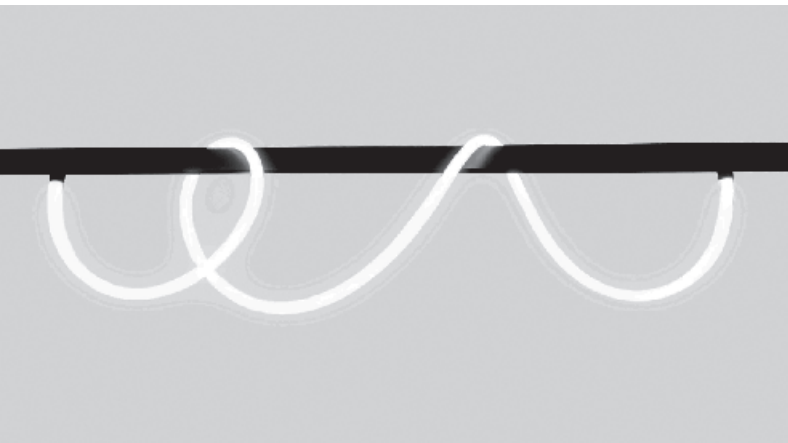

LED Magnetic Accessories

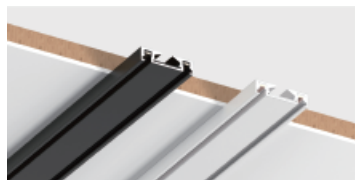


OL-TLRS Installation: Surface
Dimension: L1000*W26*H6mm Color: Black/White




OL-TLC-A-LV
90° vertical connector pieces
Dimension: 26*26*26mm
Color: Black/White




OL-TLC-A-I
direct connector
Dimension: 46*26*6mm
Color: Black/White






OL-TLC-A-L
90° horizontal connector
Dimension: 36*36*6mm
Color: Black/White



OL-TLC-A-T
T connector
Dimension: 46*36*6mm
Color: Black/White



OL-TLC-A-X
X connector
Dimension: 46*46*6mm
Color: Black/White

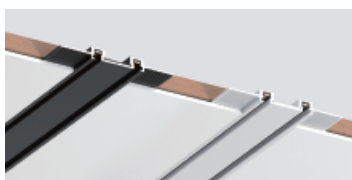




OL-TLRR Installation: Recessed
Dimension: L1000*W56*H6mm Color: Black/White Cutting size: 32mm



OL-TLC-B-LV
90° vertical connector
Dimension: xxxxxxxmm
Color: Black/White



OL-TLC-B-L
90° horizontal connector
Dimension: xxxxxxxmm
Color: Black/White





OL-TLRH Installation: Suspension
Dimension: L1000*W29.5*H50mm Cutting size: 32mm Color: Black/White



OL-TLC-C-LV
90° vertical connector
Dimension: xxxxxxxmm
Color: Black/White



OL-TLC-C-L
90° horizontal connector
Dimension: xxxxxxxmm
Color: Black/White

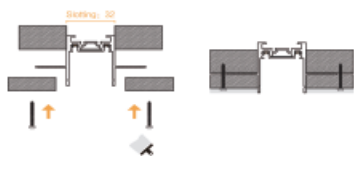

OL-TLRR2 Installation: Recessed
Dimension: L1000*W67*H35mm Cutting size: 32mm Color: Black/White



OL-TLC-D-LV
90° vertical connector
Dimension: xxxxxxxmm
Color: Black/White



OL-TLC-D-L
90° vertical connector
Dimension: xxxxxxxmm
Color: Black/White









OL-TLPS-100
100W LED Driver AC220V to 48V
Dimension: 210*26*24mm Color: Black/White



OL-TLPS-200
200W LED Driver AC220V to 48V
Dimension: 210*26*24mm Color: Black/White



OL-CSB
Cable Storage Box
Dimension: 100*26*29mm Color: Black/White



OL-IM
Input Model
The end of the line is connected to an external transformer
Module to track strip
Color: Black/White




OL-TI
Type I bidirectional conductive module
Two straight-track connector to take power



OL-TI2
Type I Corner Conductive Module
connector two vertical tracks to take power




MT-PJ
Two straight track connection fixtures





MT-DX
Suspension wire package



LED Magnetic Linear Light Series




Item No.	Power (W)	CCT (K)	CRI	L (mm)	W (mm)	H (mm)
OL-TL-M-A-6	6W	3000/4000/5700	≥90	122	26	24
OL-TL-M-A-12	12W	3000/4000/5700	≥90	230	26	24
OL-TL-M-A-18	18W	3000/4000/5700	≥90	338	26	24
OL-TL-M-A-24	24W	3000/4000/5700	≥90	445	26	24
OL-TL-M-A-30	30W	3000/4000/5700	≥90	555	26	24

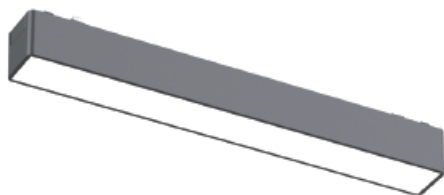



Item No.	Power (W)	CCT (K)	CRI	L (mm)	W (mm)	H (mm)
OL-TL-M-B-5	5W	3000/4000/5700	≥90	122	26	24
OL-TL-M-B-10	10W	3000/4000/5700	≥90	230	26	24
OL-TL-M-B-10	10W	3000/4000/5700	≥90	315	26	24
OL-TL-M-B-20	20W	3000/4000/5700	≥90	615	26	24
OL-TL-M-B-30	30W	3000/4000/5700	≥90	915	26	24



LED Magnetic Folding Lamp Series





Item No.	Power (W)	CCT (K)	CRI	L (mm)	W (mm)	H (mm)
OL-TL-M-C-6	6W	3000/4000/5700	≥90	122	26	80
OL-TL-M-C-12	12W	3000/4000/5700	≥90	230	26	80

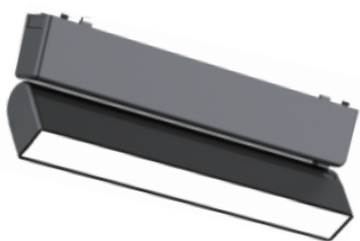


Item No.	Power (W)	CCT (K)	CRI	L (mm)	W (mm)	H (mm)
OL-TL-M-D-5	5W	3000/4000/5700	≥90	122	26	80
OL-TL-M-D-10	10W	3000/4000/5700	≥90	230	26	80

LED Magnetic Spotlight Series





Item No.	Power (W)	CCT (K)	CRI	L (mm)	W (mm)	H (mm)
OL-TL-M-E-6	6W	3000/4000/5700	≥90	75	75	75
OL-TL-M-E-6-A	6W	3000/4000/5700	≥90	75	75	75
OL-TL-M-D-6	6W	3000/4000/5700	≥90	126	26	55


LED Magnetic Track Light Series



Item No.	Power (W)	CCT (K)	CRI	D (mm)	H (mm)
OL-TL-M-E-9	9W	3000/4000/5700	≥90	44	110
OL-TL-M-E-9T	9W*2	3000/4000/5700	≥90	44	110
OL-TL-M-F-18	18W	3000/4000/5700	≥90	55	135
OL-TL-M-G-6	6W	3000/4000/5700	≥90	35	80
OL-TL-M-G-10	10W	3000/4000/5700	≥90	45	100
OL-TL-M-G-18	18W	3000/4000/5700	≥90	55	125




Item No.	Power (W)	CCT (K)	CRI	Beam Angle	D (mm)	W (mm)
OL-TL-M-H-9	9W	3000/4000/5700	≥90	150°	95	40
OL-TL-M-I-9	9W	3000/4000/5700	≥90	150°	95	30
OL-TL-M-J-9	9W	3000/4000/5700	≥90	24°	95	30
OL-TL-M-K-6	6W	3000/4000/5700	≥90	180°	100	100

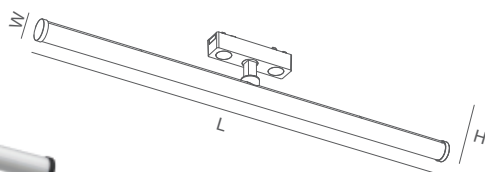


Item No.	Power (W)	CCT (K)	CRI	L (mm)	W (mm)	H (mm)
OL-TL-M-L-10	10W	3000/4000/5700	≥90	300	25	87
OL-TL-M-L-20	20W	3000/4000/5700	≥90	600	25	87
OL-TL-M-L-30	30W	3000/4000/5700	≥90	900	25	87

LED Magnetic Pendant Light Series





Item No.	Power (W)	CCT (K)	CRI	Beam Angle	Color	D (mm)	H (mm)
OL-TL-M-M-6	6W	3000/4000/5700	≥90	360°	/	150	150
OL-TL-M-N-6	6W	3000/4000/5700	≥90	360°	/	150	150
OL-TL-M-O-6	6W	3000/4000/5700	≥90	180°	Black/White	100	100
OL-TL-M-P-6	6W	3000/4000/5700	≥90	24°	Black/White	30	300




Item No.	Power (W)	CCT (K)	CRI	L (mm)
OL-TL-M-Q-8	8W	3000/4000/5700	≥90	500
OL-TL-M-Q-16	16W	3000/4000/5700	≥90	1000
OL-TL-M-Q-32	32W	3000/4000/5700	≥90	2000
OL-TL-M-Q-48	48W	3000/4000/5700	≥90	3000
OL-TL-M-Q-64	64W	3000/4000/5700	≥90	4000
OL-TL-M-Q-80	80W	3000/4000/5700	≥90	5000

LED Swivel Spot Light





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D1-5	5	400	3000-6500	>80	>0.5	90	50
OL-D1-12	12	1000	3000-6500	>80	>0.5	110	56
OL-D1-15	15	1300	3000-6500	>80	>0.5	140	66





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D2-9	9	900	3000-6500	>80	>0.5	90	80
OL-D2-15	15	1500	3000-6500	>80	>0.5	115	95
OL-D2-20	20	2000	3000-6500	>80	>0.5	138	125
OL-D2-30	30	3000	3000-6500	>80	>0.9	165	155
OL-D2-35	35	3500	3000-6500	>80	>0.9	165	155

LED Downlight




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D3-5	5	400	3000-6500	>80	>0.5	90	49
OL-D3-12	12	960	3000-6500	>80	>0.5	110	55
OL-D3-16	16	1280	3000-6500	>80	>0.5	130	62



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D4-5	5	400	3000-6500	>80	>0.5	90	49
OL-D4-12	12	960	3000-6500	>80	>0.5	110	55
OL-D4-16	16	1280	3000-6500	>80	>0.5	130	62



LED Downlight

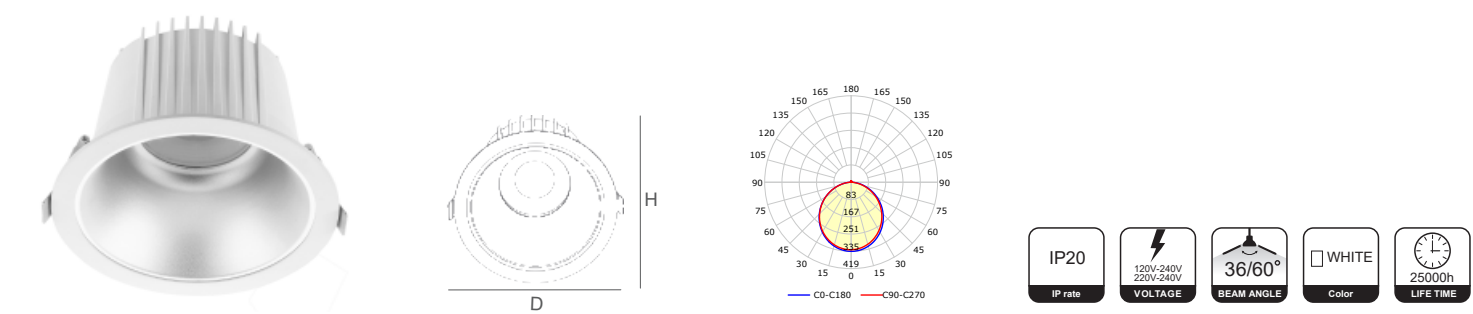




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D5-7	7	560	3000-6500	>90	>0.5	90	65
OL-D5-15	15	1350	3000-6500	>90	>0.5	110	72
OL-D5-24	24	2160	3000-6500	>90	>0.5	130	90
OL-D5-30	30	2700	3000-6500	>90	>0.9	172	112
OL-D5-40	40	3600	3000-6500	>90	>0.9	230	124



LED Downlight





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D6-3	3	210	3000/4000/6500	>80	>0.5	90	55
OL-D6-5	5	350	3000/4000/6500	>80	>0.5	90	55
OL-D6-7	7	490	3000/4000/6500	>80	>0.5	90	55
OL-D6-10	10	800	3000/4000/6500	>80	>0.5	109	65
OL-D6-12	12	960	3000/4000/6500	>80	>0.5	109	65
OL-D6-15	15	1200	3000/4000/6500	>80	>0.5	140	70
OL-D6-20	20	1600	3000/4000/6500	>80	>0.5	140	70





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D7-3	3	195	3000/4000/6500	>80	>0.5	88.5	42
OL-D7-5	5	325	3000/4000/6500	>80	>0.5	88.5	42
OL-D7-7	7	455	3000/4000/6500	>80	>0.5	88.5	42
OL-D7-10	10	700	3000/4000/6500	>80	>0.5	120	43
OL-D7-15	15	1050	3000/4000/6500	>80	>0.5	120	43
OL-D7A-15	15	1050	3000/4000/6500	>80	>0.5	170	43
OL-D7-20	20	1400	3000/4000/6500	>80	>0.5	195	44
OL-D7-30	30	2100	3000/4000/6500	>80	>0.5	225	45
OL-D7-40	40	2800	3000/4000/6500	>80	>0.5	225	45
OL-D7-50	50	3500	3000/4000/6500	>80	>0.5	225	51.5
OL-D7-60	60	4200	3000/4000/6500	>80	>0.5	225	51.5

LED Downlight





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D8-10	10	800	3000/4000/6500	>80	>0.5	105	65
OL-D8-15	15	1200	3000/4000/6500	>80	>0.5	145	75
OL-D8-20	20	1600	3000/4000/6500	>80	>0.5	170	70
OL-D8-25	25	2000	3000/4000/6500	>80	>0.5	195	95
OL-D8-30	30	2400	3000/4000/6500	>80	>0.5	230	108
OL-D8-40	40	3200	3000/4000/6500	>80	>0.5	230	108
OL-D8-50	50	4000	3000/4000/6500	>80	>0.5	230	108
OL-D8-60	60	4800	3000/4000/6500	>80	>0.5	230	108
OL-D8-80	80	6400	3000/4000/6500	>80	>0.5	230	140





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-D9-10	10	800	3000/4000/6500	>80	>0.5	105	105	65
OL-D9-15	15	1200	3000/4000/6500	>80	>0.5	145	145	75
OL-D9-20	20	1600	3000/4000/6500	>80	>0.5	195	195	95
OL-D9-25	25	2000	3000/4000/6500	>80	>0.5	195	195	95
OL-D9-30	30	2400	3000/4000/6500	>80	>0.5	230	230	108
OL-D9-40	40	3200	3000/4000/6500	>80	>0.5	230	230	108
OL-D9-50	50	4000	3000/4000/6500	>80	>0.5	230	230	108
OL-D9-60	60	4800	3000/4000/6500	>80	>0.5	230	230	108
OL-D9-80	80	6400	3000/4000/6500	>80	>0.5	230	230	140

LED Downlight





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D10-10	10	700	3000/4000/6500	>80	>0.5	85	50
OL-D10-15	15	1050	3000/4000/6500	>80	>0.5	110	58
OL-D10-20	20	1400	3000/4000/6500	>80	>0.5	130	58
OL-D10-30	30	2100	3000/4000/6500	>80	>0.5	170	70



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-D11-7	7	490	3000/4000/6500	>80	>0.5	90	30
OL-D11-12	12	840	3000/4000/6500	>80	>0.5	107	33.5
OL-D11-18	18	1260	3000/4000/6500	>80	>0.5	136	37
OL-D11-24	24	1680	3000/4000/6500	>80	>0.5	170	43
OL-D11-30	30	2100	3000/4000/6500	>80	>0.5	220	48






Edge-lit Panel Light




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-PL-EI1-3030-18	18	1440	3000-6500	≥80	>0.9	295	295	8
OL-PL-EI1-3060-20	20	1800	3000-6500	≥80	>0.9	295	595	8
OL-PL-EI1-6060-40	40	4000	3000-6500	≥80	>0.9	595	595	8
OL-PL-EI1-6262-40	40	4000	3000-6500	≥80	>0.9	620	620	8
OL-PL-EI1-30120-40	40	4800	3000-6500	≥80	>0.9	295	1195	8
OL-PL-EI1-60120-60	60	6000	3000-6500	≥80	>0.9	595	1195	10

Edge-lit Panel Light-GER




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-PL-EI2-3030-12	12	960	3000-6500	≥80	>0.9	300	300	45
OL-PL-EI2-4545-30	30	2400	3000-6500	≥80	>0.9	450	450	45
OL-PL-EI2-6060-40	40	3200	3000-6500	≥80	>0.9	595	595	45
OL-PL-EI2-30120-40	40	3200	3000-6500	≥80	>0.9	295	1195	45

Backlit Panel Light

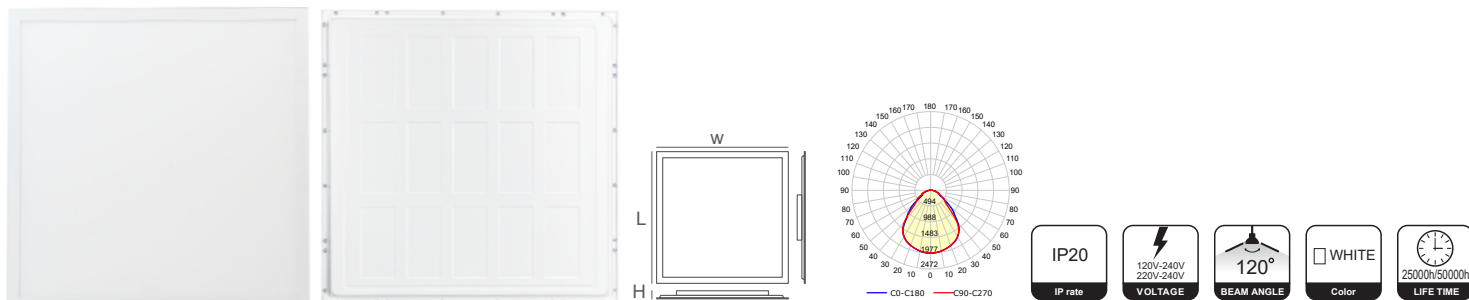


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-PL-BL1-3030-15	15	1200	3000-6500	≥80	>0.5	295	295	26
OL-PL-BL1-3060-24	24	2160	3000-6500	≥80	>0.9	295	595	26
OL-PL-BL1-6060-36	36	4320	3000-6500	≥80	>0.9	595	595	30
OL-PL-BL1-30120-36	36	4320	3000-6500	≥80	>0.9	295	1195	30
OL-PL-BL1-6262-36	36	4320	3000-6500	≥80	>0.9	620	620	24

Backlit Panel Light-GER

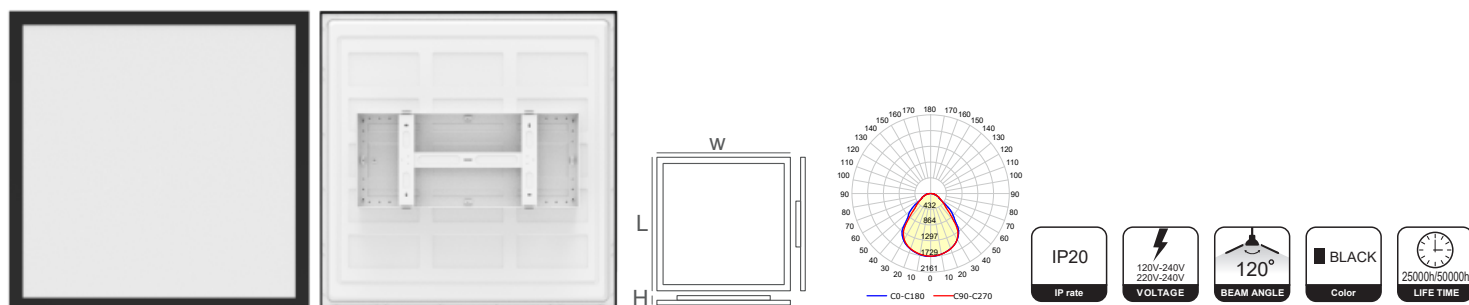

Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-PL-BL2-3030-15	15	1200	3000-6500	≥80	>0.5	295	295	58
OL-PL-BL2-6060-40	40	4000	3000-6500	≥80	>0.5	595	595	58
OL-PL-BL2-30120-40	40	4000	3000-6500	≥80	>0.9	295	1195	58



Frameless Panel Light

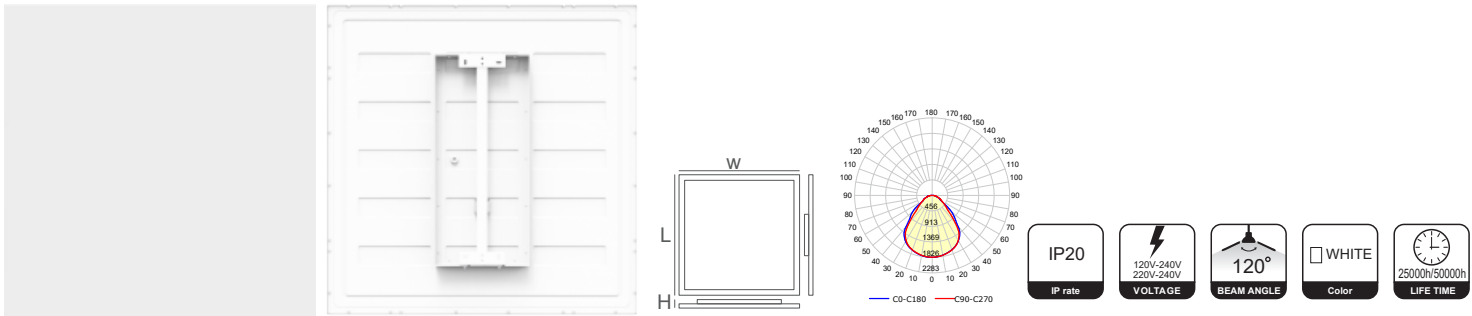

Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-PL-FL-3030-15	15	1500	3000-6500	≥80	>0.9	295	295	66
OL-PL-FL-6060-40	40	4000	3000-6500	≥80	>0.9	595	595	66
OL-PL-FL-30120-40	40	4000	3000-6500	≥80	>0.9	295	1195	66





Batten Aluminum-PC Type

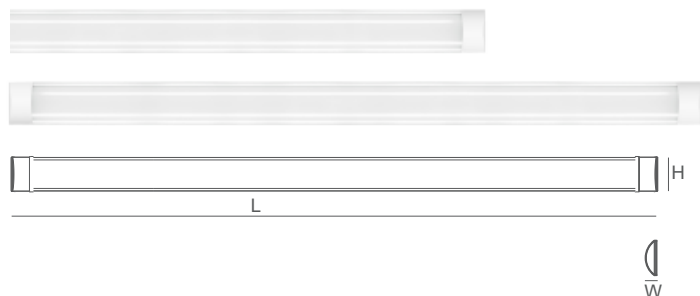

Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-BATTEN-ALPC-9	9	720	3000-6500	>80	>0.5	300	75	23
OL-BATTEN-ALPC-18	18	1440	3000-6500	>80	>0.5	600	75	23
OL-BATTEN-ALPC-27	27	2160	3000-6500	>80	>0.9	900	75	23
OL-BATTEN-ALPC-36	36	2880	3000-6500	>80	>0.9	1200	75	23
OL-BATTEN-ALPC-45	45	3600	3000-6500	>80	>0.9	1500	75	23
OL-BATTEN-ALPC-60	60	4800	3000-6500	>80	>0.9	1800	75	23
OL-BATTEN-ALPC-72	72	5780	3000-6500	>80	>0.9	2400	75	23

Batten PC Type

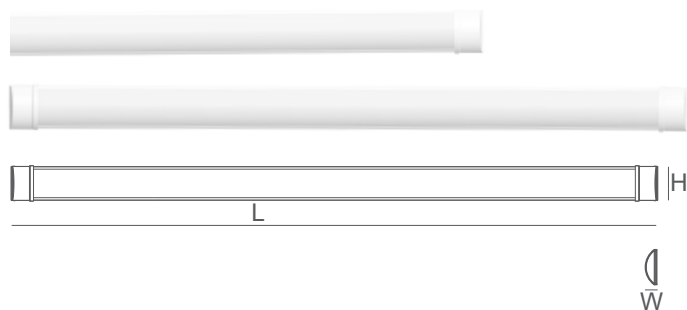



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-BATTEN-PC-9	9	720	3000-6500	>80	>0.5	300	75	23
OL-BATTEN-PC-18	18	1440	3000-6500	>80	>0.5	600	75	23
OL-BATTEN-PC-27	27	2160	3000-6500	>80	>0.9	900	75	23
OL-BATTEN-PC-36	36	2880	3000-6500	>80	>0.9	1200	75	23
OL-BATTEN-PC-45	45	3600	3000-6500	>80	>0.9	1500	75	23

LED Linear Light



NO SCREW CONNECTION

Seamless Stitching
Sturdy And Durable

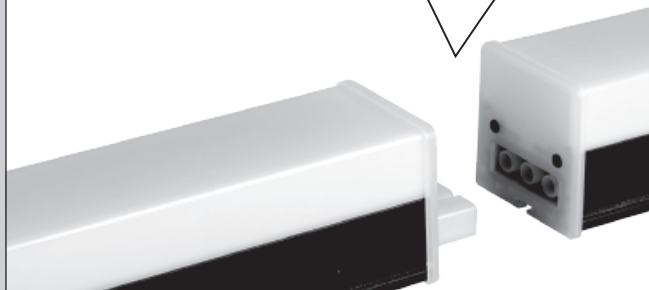

FANGTONG ASSEMBLY KIT

- Hanging board*2
- 5*80 machine line*2
- M5*5 flange female*5



EXPOSED ACCESSORY PACKAGE

- Board*2
- Screw bag*1





HOISTING KIT

- Rally head*2
- 1.5m steel cable bagging*2
- 75*5M4*2
- 60 cover *2
- Screw accessories package*1






LED Linear Light

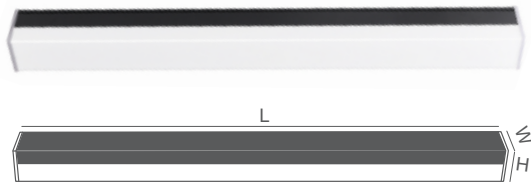



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-LL-10	10	1000	3000-6500	>80	>0.9	300	54	58
OL-LL-20	20	2000	3000-6500	>80	>0.9	600	54	58
OL-LL-30	30	3000	3000-6500	>80	>0.9	900	54	58
OL-LL-40	40	4000	3000-6500	>80	>0.9	1200	54	58
OL-LL-50	50	5000	3000-6500	>80	>0.9	1500	54	58
OL-LL-80	68	6800	3000-6500	>80	>0.9	2000	54	58

LED Linear Light-single-sided illuminated

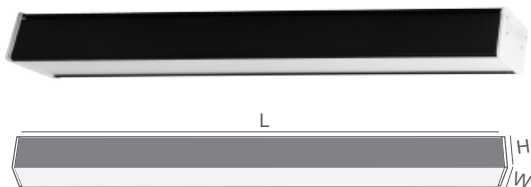



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-LL-SS-10	10	800	3000-6500	>80	>0.9	300	50	55
OL-LL-SS-20	20	1600	3000-6500	>80	>0.9	600	50	55
OL-LL-SS-30	30	2400	3000-6500	>80	>0.9	900	50	55
OL-LL-SS-40	40	3200	3000-6500	>80	>0.9	1200	50	55
OL-LL-SS-50	50	4000	3000-6500	>80	>0.9	1500	50	55
OL-LL-SS-68	68	5440	3000-6500	>80	>0.9	2000	50	55

LED Linear Light-CCT

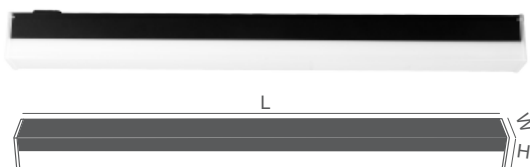



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-LL-CCT-10	10	800	3000/4000/6500	>80	>0.9	300	50	55
OL-LL-CCT-20	20	1600	3000/4000/6500	>80	>0.9	600	50	55
OL-LL-CCT-30	30	2400	3000/4000/6500	>80	>0.9	900	50	55
OL-LL-CCT-40	40	3200	3000/4000/6500	>80	>0.9	1200	50	55
OL-LL-CCT-50	50	4000	3000/4000/6500	>80	>0.9	1500	50	55
OL-LL-CCT-68	68	5440	3000/4000/6500	>80	>0.9	2000	50	55

LED Linear Light-Lens

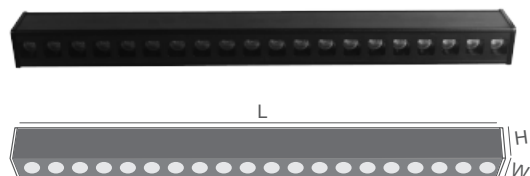


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-LL-Lens-10	10	800	3000-6500	>80	>0.9	300	50	55
OL-LL-Lens-20	20	1600	3000-6500	>80	>0.9	600	50	55
OL-LL-Lens-30	30	2400	3000-6500	>80	>0.9	900	50	55
OL-LL-Lens-40	40	3200	3000-6500	>80	>0.9	1200	50	55
OL-LL-Lens-50	50	4000	3000-6500	>80	>0.9	1500	50	55

LED Linear Light-10% Wattage

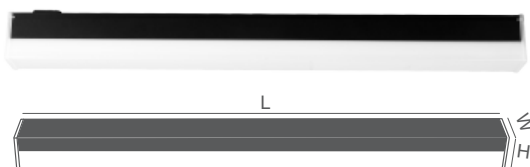


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-LL-10%W-10	10	1000	3000-6500	>80	>0.9	300	50	55
OL-LL-10%W-20	20	2000	3000-6500	>80	>0.9	600	50	55
OL-LL-10%W-30	30	3000	3000-6500	>80	>0.9	900	50	55
OL-LL-10%W-40	40	4000	3000-6500	>80	>0.9	1200	50	55
OL-LL-10%W-50	50	5000	3000-6500	>80	>0.9	1500	50	55
OL-LL-10%W-68	68	6800	3000-6500	>80	>0.9	2000	50	55

LED Linear Light Connector

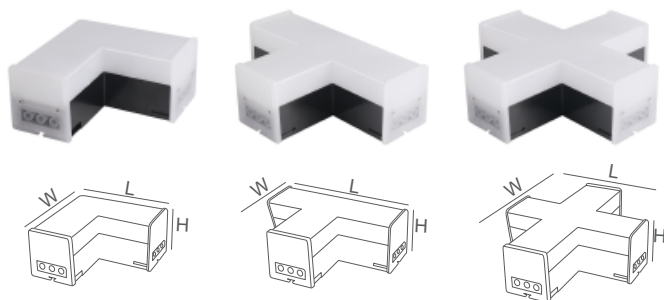

Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-LL-L-8	8	800	3000-6500	>80	>0.9	116.5	116.5	58
OL-LL-T-10	10	1000	3000-6500	>80	>0.9	181	116.5	58
OL-LL-X-12	12	1200	3000-6500	>80	>0.9	181	181	58

Extended Connector



OL-LL-EC


Surface Mounted Kits



OL-LL-SMK-ET




OL-LL-SMT-ES




OL-LL-SMK-HB

Power Cable




OL-LL-PC-0.3 OL-LL-PC-1.5




OL-LL-PDC


Suspended Kits




OL-LL-SK-SCL



OL-LL-SK-RH




OL-LL-SK-CL




OL-LL-SK-C

End Cap



OL-LL-EP

Recessed Kits



OL-LL-RK-HB



OL-LL-RK-ML



OL-LL-RK-FF



HANGZHOU YIDENG LIGHTING CO., LTD.

Address: Room 901-9, Building 4, NO.859, West Shixiang Road,
Hangzhou, Zhejiang, China


Tel: +86 571-8813-8056 Fax: +86 571-8813-8056

E-mail: info@onelightchina.com

www.onelightchina.com

OUTDOOR LIGHTING





LED Flood Light-----03



LED High Bay-----06



LED Street Light-----07



LED Tri-Proof Light-----08



Damp-proof LED Light-----09



LED Wall Light-----11



Automatic Chasing-Sun LED Wall Light-----16



Solar LED Flood Light-----17



Solar LED Street Light-----18





Solar LED Wall Light-----19






Solar LED Garden Light-----21

Super Slim Flood Light-PC





Item No.	Power (W)	Lumen (lm)	Luminous Efficacy (lm/w)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-FL-30-SP	30	2,700	90	3000-6500	>80	130*100*25
OL-LED-FL-50-SP	50	4,500	90	3000-6500	>80	255*160*25
OL-LED-FL-100-SP	100	9,000	90	3000-6500	>80	270*205*25
OL-LED-FL-200-SP	200	18,000	90	3000-6500	>80	330*250*29
OL-LED-FL-300-SP	300	27,000	90	3000-6500	>80	400*280*29

Super Slim Flood Light-Glass





LED Flood Light-Value





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-FL-10-V	10	850	3000-6500	>70	90*86*27
OL-LED-FL-20-V	20	1,770	3000-6500	>70	120*105*27
OL-LED-FL-30-V	30	2,830	3000-6500	>70	150*122*27
OL-LED-FL-50-V	50	4,770	3000-6500	>70	180*150*27
OL-LED-FL-100-V	100	10,070	3000-6500	>70	270*222*27
OL-LED-FL-150-V	150	15,200	3000-6500	>70	330*274*32.5
OL-LED-FL-200-V	200	20,300	3000-6500	>70	400*333*32.5

LED Flood Light-Standard




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-FL-10-S	10	900	3000-6500	>80	90*65*28
OL-LED-FL-20-S	20	1,800	3000-6500	>80	110*90*28
OL-LED-FL-30-S	30	2,700	3000-6500	>80	140*120*28
OL-LED-FL-50-S	50	4,500	3000-6500	>80	175*140*28
OL-LED-FL-75-S	75	6,750	3000-6500	>80	210*180*28
OL-LED-FL-100-S	100	9,000	3000-6500	>80	260*215*30
OL-LED-FL-150-S	150	13,500	3000-6500	>80	320*255*31.5
OL-LED-FL-200-S	200	18,000	3000-6500	>80	380*290*31.5



LED Flood Light-Premium



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-FL-10-P	10	850	3000-6500	>80	87*83**27
OL-LED-FL-20-P	20	1,700	3000-6500	>80	103*99*27
OL-LED-FL-30-P	30	2,550	3000-6500	>80	115*111*29
OL-LED-FL-50-P	50	4,250	3000-6500	>80	139*135*29
OL-LED-FL-70-P	70	5,950	3000-6500	>80	170*165*30
OL-LED-FL-100-P	100	8,500	3000-6500	>80	256*246*31.6
OL-LED-FL-150-P	150	12,750	3000-6500	>80	305*295*36.5
OL-LED-FL-200-P	200	17,000	3000-6500	>80	350*340*37.5


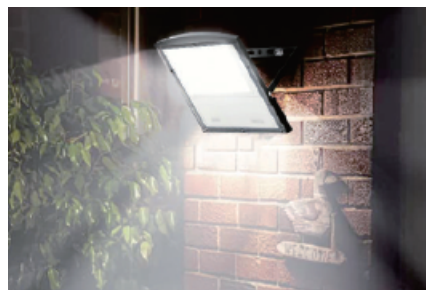


LED High Bay-Value





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	D (mm)	H (mm)
OL-UFO-HB-100-V	100	10,000	3000-6500	>80	254	72
OL-UFO-HB-150-V	150	15,000	3000-6500	>80	300	72
OL-UFO-HB-200-V	200	20,000	3000-6500	>80	330	72

LED High Bay-Standard





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	D (mm)	H (mm)
OL-UFO-HB-100-S	100	10,000	3000-6500	>80	271	90
OL-UFO-HB-150-S	150	15,000	3000-6500	>80	310	90
OL-UFO-HB-200-S	200	20,000	3000-6500	>80	380	90

LED High Bay-Premium





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	D (mm)	H (mm)
OL-UFO-HB-100-P	100	15,000	3000-6500	>80	270	120
OL-UFO-HB-150-P	150	22,500	3000-6500	>80	310	120
OL-UFO-HB-200-P	200	30,000	3000-6500	>80	360	120

LED Street Light-Value





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-SL-30-V	30	3,000	3000-6500	>70	266*129*37
OL-LED-SL-50-V	50	5,000	3000-6500	>70	306*150*37
OL-LED-SL-70-V	70	7,000	3000-6500	>70	306*150*37
OL-LED-SL-100-V	100	10,000	3000-6500	>70	437*200*40
OL-LED-SL-120-V	120	12,000	3000-6500	>70	437*200*40

LED Street Light-Premium





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-SL-50-P	50	5,000	3000-6500	>80	467*160*73
OL-LED-SL-100-P	100	10,000	3000-6500	>80	528*180*83
OL-LED-SL-150-P	150	15,000	3000-6500	>80	600*200*83

LED Tri-Proof Light-Value

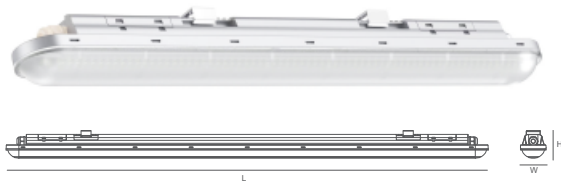



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-TP-18-V	18	1,800	3000-6500	>80	600*64*60
OL-LED-TP-36-V	36	3,600	3000-6500	>80	1200*64*60
OL-LED-TP-48-V	48	4,800	3000-6500	>80	1500*64*60

LED Tri-Proof Light-Premium

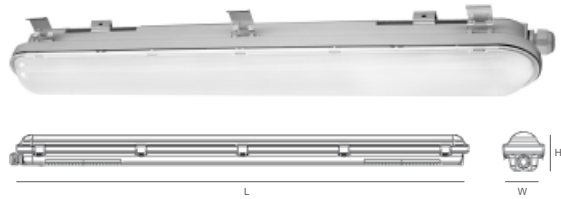



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions L*W*H(mm)
OL-LED-TP-18-P	18	2,520	3000-6500	>80	670*85*80
OL-LED-TP-36-P	36	5,040	3000-6500	>80	1220*85*80
OL-LED-TP-55-P	55	7,700	3000-6500	>80	1520*85*80

LED Tri-Proof Light-Extrude

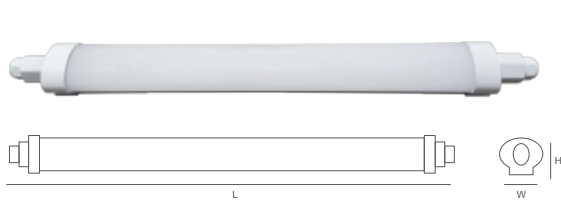


Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions (L*W*H)
OL-LED-TP-18-E	18	1,800	3000-6500	>80	600*70*50
OL-LED-TP-36-C	36	3,600	3000-6500	>80	1200*70*50
OL-LED-TP-50-C	50	4,800	3000-6500	>80	1500*70*50

Damp-proof LED Light





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-BH01-15	15	1050	3000-6500	>80	>0.7	195	95	56
OL-BH01-18	18	1260	3000-6500	>80	>0.7	225	99	54




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-BH02-15	15	1050	3000-6500	>80	>0.7	175	58
OL-BH02-18	18	1260	3000-6500	>80	>0.7	210	58

Damp-proof LED Light





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-BH03-8	8	560	3000-6500	>80	>0.5	160	85	35
OL-BH03-12	12	840	3000-6500	>80	>0.5	160	85	35
OL-BH03-15	15	1050	3000-6500	>80	>0.5	195	95	35
OL-BH03-18	18	1260	3000-6500	>80	>0.5	195	95	35
OL-BH03-20	20	1400	3000-6500	>80	>0.5	195	95	35
OL-BH03-23	23	1610	3000-6500	>80	>0.5	230	105	35





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-BH04-8	8	560	3000-6500	>80	>0.5	140	37
OL-BH04-12	12	840	3000-6500	>80	>0.5	140	37
OL-BH04-15	15	1050	3000-6500	>80	>0.5	155	37
OL-BH04-18	18	1260	3000-6500	>80	>0.5	175	37
OL-BH04-20	20	1400	3000-6500	>80	>0.5	175	37
OL-BH04-24	24	1680	3000-6500	>80	>0.5	210	37



LED Wall Light



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-WL-A-11W	11	600	2700-6500	>80	≥0.5	150	57
OL-WL-A-16W	16	950	2700-6500	>80	≥0.5	250	50





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-WL-B-7	7	350	2700-6500	>80	≥0.5	233	77	90






Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-WL-C-12	12	700	2700-6500	>80	≥0.5	180	108	115





LED Wall Light



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-WL-D-21	21	1000	2700-6500	>80	≥0.5	250	250	60





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-WL-E-10	10	650	2700-6500	>80	≥0.5	240	56	120

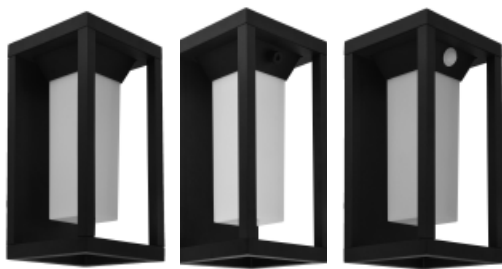

Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-WL-F1-14	14	500	2700K-6500	80	≥0.5	163	148.5	281
OL-WL-F2-14	14	500	2700K-6500	80	≥0.5	163	148.5	281
OL-WL-F3-14	14	500	2700K-6500	80	≥0.5	163	148.5	281

OL-WL-F1-14: Regular Wall Light OL-WL-F2-14: Photosensitive Wall Light OL-WL-F3-14: Sensor Wall Light

LED Wall Light



IP54
IP rate

VOLTAGE
110V
240V

BEAM ANGLE
120°

Color
Dark Gray
Black
Silver Gray



LIFE TIME
30000h

Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	L (mm)	W (mm)	H (mm)
OL-WL-G-14	14	750	2700-6500	>80	≥0.5	163	148.5	281





Item No.	Material	Base	L (mm)	W (mm)	H (mm)	Color
OL-WLH-A	Aluminium+glass	GU10	68	120	150	Sand black
OL-WLH-B	Aluminium+glass	E27/ E14	110	149	240	Sand black
OL-WLH-C	Iron+glass	E27/ E14	150	195	350	Sand black
OL-WLH-D	Iron+glass	E27/ E14	150	150	230	Sand black
OL-WLH-E	Iron+glass	E27/ E14	150	150	240	Sand black

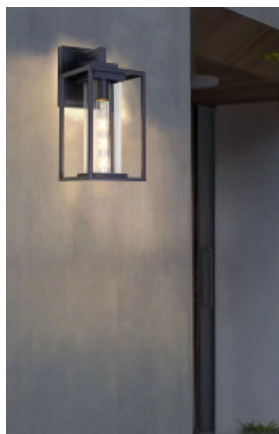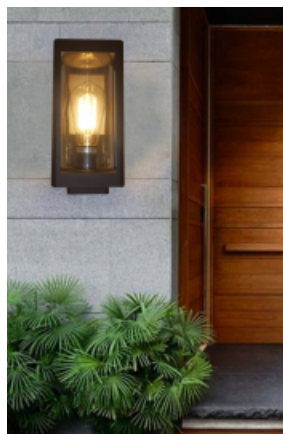



SOLAR LED LIGHTING





Automatic Chasing-Sun Wall Lamp

● **Patent Technology**
Automatic chasing sun solar panel


● **PIR Sensor**
Sensing presence, illuminate your path

● **Constant Light Mode**
Motion detected, lights up for 20 seconds

● **Efficient Energy Storage**
Fully charged used for five rainy days

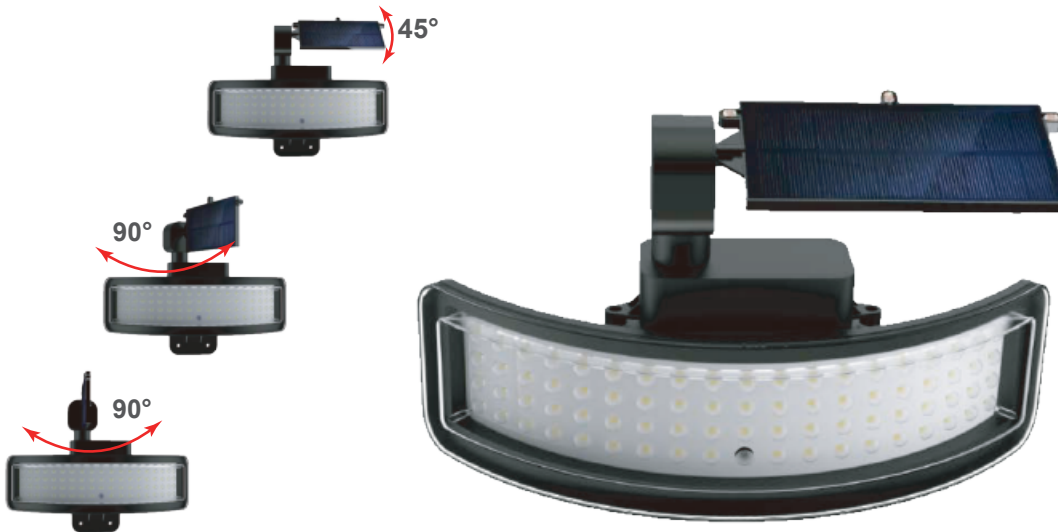

Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	charging Time (H)	Working Time (H)	Dimensions L*H*W(mm)
OL-LED-CSWL-01	5	800	3000-6500	5.5V/1.4W	3.7V/3.6AH	8-12	48-72	285*182*155

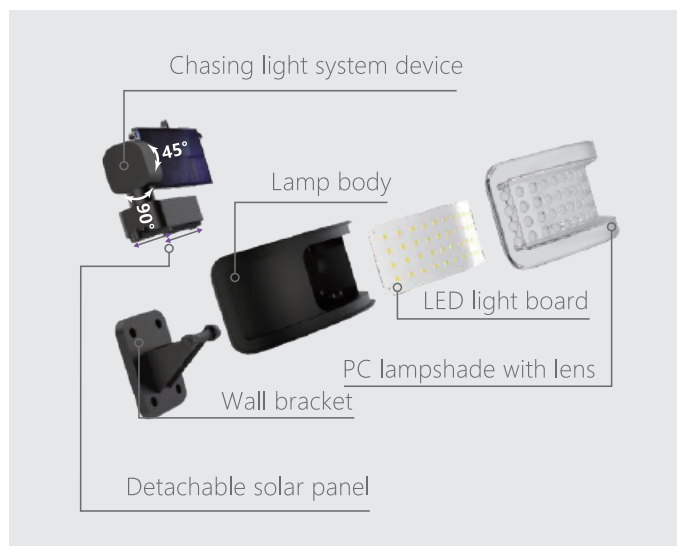




Light/PIR sensor



Charging during daytime






Auto turn on at night



Solar LED Flood Light




Item No.	Power (W)	Lumen (lm)	Solar Panel Output	Lithium Battery	Charging Time (H)	Working Time (H)	Dimensions L*W*H(mm)	Panel Size L*W*H(mm)
OL-LED-SFL-50	50	500	6V/8W	3.7V/5Ah	5	15	200*226*30	180*220*16
OL-LED-SFL-100	100	1,000	6V/10W	3.7V/10Ah	5	15	200*226*30	235*350*16
OL-LED-SFL-150	150	1,500	6V/15W	3.7V/15Ah	5	15	200*226*30	350*290*16
OL-LED-SFL-200	200	2,000	6V/20W	3.7V/ 20Ah	5	15	286*258*30	350*350*16
OL-LED-SFL-300	300	3,000	6V/30W	3.7V/30Ah	5	15	286*258*30	350*580*20

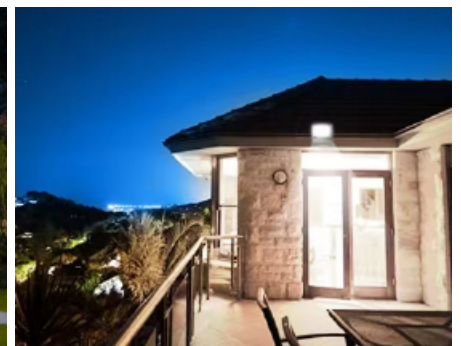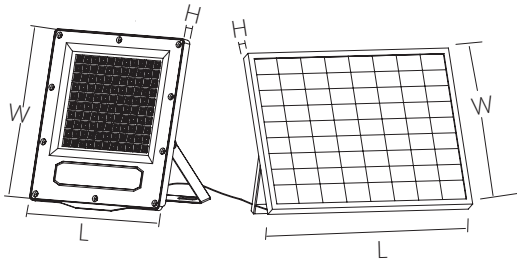

Solar LED Street Light



Item No.	Power (W)	Lumen (lm)	Solar Panel Output	Lithium Battery	Charging Time (H)	Working Time (H)	Dimensions L*H*W(mm)	Panel Size L*H*W(mm)
OL-LED-SSL-50-A	50	1,200	6V / 25W	3.2V/12Ah	5	48	467*160*73	530*350*17
OL-LED-SSL-100-A	100	1,800	6V / 30W	3.2V/18Ah	5	48	528*180*83	630*350*17
OL-LED-SSL-150-A	150	2,400	6V / 35W	3.2V/24Ah	5	48	600*200*83	700*350*17
OL-LED-SSL-50-B	50	2,200	6V / 15W	3.7V/22Ah	5	48	467*160*73	350*350*17
OL-LED-SSL-100-B	100	2,600	6V / 20W	3.7V/26Ah	5	48	528*180*83	450*350*17
OL-LED-SSL-150-B	150	3,100	6V / 25W	3.7V/31Ah	5	48	600*200*83	530*350*17

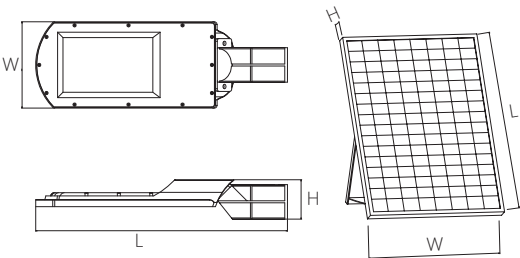

DIMMABLE

IP rate

3000K-6500K
CCT


>80
CRI

120°
BEAM ANGLE



25000h
LIFE TIME



Solar LED Wall Light



Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	Dimensions L*H*W(mm)
OL-LED-WL-01	1.5	200	3000-6500+Yellow	5V/0.55W	3.7V/1.2AH	11	48-72	142.5*92*80




Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	D (mm)	H (mm)
OL-LED-WL-02A	1.5	200	3000-6500	5V/0.5W	3.7V/1.2AH	12	48-72	101	213
OL-LED-WL-02B	1.5	200	3000-6500	5V/0.5W	3.7V/1.2AH	12	48-72	101	170
OL-LED-WL-02C	1.5	200	3000-6500	5V/0.5W	3.7V/1.2AH	12	48-72	101	148




Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	D (mm)	H (mm)
OL-LED-WL-03	0.8	100	3000-6500	5V/0.45W	3.7V/1.8AH	20	48-72	86	235

Solar LED Wall Light




Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	Dimensions L*H*W(mm)	
OL-LED-WL-04A	0.8	100	3000-6500	5.5V/1W	3.7V/1.2AH	6	24-30	230*150*140	
OL-LED-WL-04B	0.8	100	3000-6500	5.5V/1W	3.7V/1.2AH	6	24-30	230*150*140	




Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	D (mm)	H (mm)
OL-LED-RWL-01	0.8	150	3000-6500	5V/1.3W	3.7V/1.2AH	5	24-30	160	213
OL-LED-TWL-01	0.8	150	3000-6500	5V/1.3W	3.7V/1.2AH	5	24-30	173	213
OL-LED-SWL-01	0.8	150	3000-6500	5V/1.3W	3.7V/1.2AH	5	24-30	160	213
OL-LED-HWL-01	0.8	150	3000-6500	5V/1.3W	3.7V/1.2AH	5	24-30	185	209

Solar LED Garden Light



Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	Dimensions L*W*H(mm)
OL-LED-GL-01	0.8	130	3000-6500	5V/1.5W	3.7V/2.6AH	8	24-30	165*165*245



Item No.	Power (W)	Lumen (lm)	CCT (K)	Solar Panel	Lithium Battery	Charging Time (H)	Working Time (H)	D (mm)	H (mm)
OL-LED-GL-02	0.7	70	3000-6500/RGB	5V/0.5W	3.7V/0.8AH	20	40	112	150





HANGZHOU YIDENG LIGHTING CO., LTD.


Address: Room 901-9, Building 4, NO.859, West Shixiang Road,
Hangzhou, Zhejiang, China

Tel: +86 571-8813-8056 Fax: +86 571-8813-8056

E-mail: info@onelightchina.com



www.onelightchina.com

LIGHT SOURCE

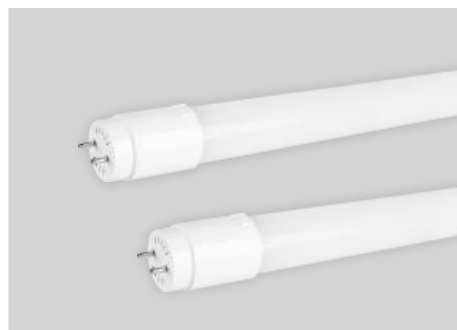



	A Bulb	03
	T Bulb	03
	UFO Bulb	04
	Fanlight	05
	Candle & Mini T & Global	06
	Spot Light	08
	Reflector Bulb	09
	GX53	09
	S14 S15 S19	10
	T8 Tube	10
	Decorative Light	11
	Filament A bulb	14
	Filament Candle and Global	14
	Filament ST64	16
	A Class Filament Bulb	17

A Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-A55-5	5	450	2700-6500	>80	>0.4	55	100
OL-A60-7	7	650	2700-6500	>80	>0.5	60	108
OL-A60-9	9	830	2700-6500	>80	>0.5	60	108
OL-A60-10	10	930	2700-6500	>80	>0.5	60	111
OL-A60-12	12	1160	2700-6500	>80	>0.5	60	111
OL-A60-15	15	1490	2700-6500	>80	>0.5	60	120
OL-A67-18	18	1820	2700-6500	>80	>0.5	67	128
OL-A80-20	20	2050	2700-6500	>80	>0.5	80	150
OL-A95-25	25	2600	2700-6500	>80	>0.5	95	188

T Bulb





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-T80-20	20	2050	2700-6500	>80	>0.5	80	136
OL-T100-30	30	3160	2700-6500	>80	>0.9	100	168
OL-T120-40	40	4500	2700-6500	>80	>0.9	120	185
OL-T140-50	50	5400	2700-6500	>80	>0.9	140	215

Die-casting Aluminium T Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-T120-01-20W	10	1000	2700-6500	>80	PF>0.5/PF>0.9	80	156
OL-T130-01-30W	30	3000	2700-6500	>80	PF>0.5/PF>0.9	100	185
OL-T140-01-40W	40	4000	2700-6500	>80	PF>0.5/PF>0.9	120	200
OL-T150-01-50W	50	5000	2700-6500	>80	PF>0.5/PF>0.9	120	200
OL-T160-01-60W	60	6000	2700-6500	>80	PF>0.5/PF>0.9	120	210
OL-T180-01-75W	75	7500	2700-6500	>80	PF>0.5/PF>0.9	135	245
OL-T1100-01-95W	95	9500	2700-6500	>80	PF>0.5/PF>0.9	150	263
OL-T1125-01-120W	120	12000	2700-6500	>80	PF>0.5/PF>0.9	158	270
OL-T1150-01-140W	140	14000	2700-6500	>80	PF>0.5/PF>0.9	158	286

UFO Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-UFO-01-30W	30	2700	2700-6500	>80	PF>0.5	130	145
OL-UFO-01-50W	50	4500	2700-6500	>80	PF>0.5	150	160
OL-UFO-01-70W	70	6300	2700-6500	>80	PF>0.5	170	180

ED Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	Base	D (mm)	H (mm)
OL-ED90-37	37	4000	2700-6500	>80	>0.9	E27/E40	90	219/230
OL-ED110-51	51	5500	2700-6500	>80	>0.9	E27/E40	110	258/269
OL-ED120-64	64	7000	2700-6500	>80	>0.9	E27/E40	120	283/294

Fanlight





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	Base	D ₁ (mm)	D ₂ (mm)	H (mm)
OL-FL-25	25	2600	2700-6500	>80	>0.5	E27	52	76	234
OL-FL-36	36	3900	2700-6500	>80	>0.9	E27	73	80	234
OL-FL-48	48	5200	2700-6500	>80	>0.9	E27	90	90	234
OL-FL-73	73	8000	2700-6500	>80	>0.9	E27/E40	109	124	234/247
OL-FL-109	109	12000	2700-6500	>80	>0.9	E27/E40	115	133	297/315

Candle Bulb

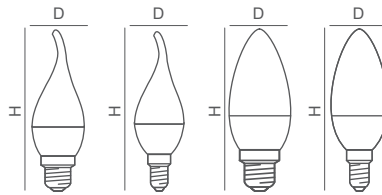



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-C37/C37T-3	3	270	2700-6500	>80	>0.4	37	100/125
OL-C37/C37T-4	4	360	2700-6500	>80	>0.4	37	100/125
OL-C37/C37T-5	5	450	2700-6500	>80	>0.4	37	100/125
OL-C37/C37T-6	6	540	2700-6500	>80	>0.5	37	100/125
OL-C37/C37T-7	7	630	2700-6500	>80	>0.5	37	100/125
OL-C37/C37T-8	8	720	2700-6500	>80	>0.5	37	100/125

Mini T Bulb

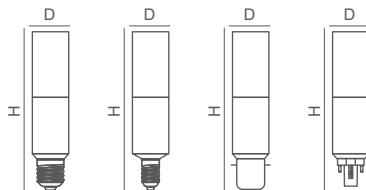



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	Base	D (mm)	H (mm)
OL-T30-6	6	585	2700-6500	>80	>0.5	E14/E27/B22	30	100
OL-T37-7	7	630	2700-6500	>80	>0.5	E27/E14/B22/G24	37	113
OL-T37-9	9	850	2700-6500	>80	>0.5	E27/E14/B22/G24	37	113
OL-T45-12	12	1200	2700-6500	>80	>0.5	E27/B22/G24	45	132
OL-T45-14	14	1400	2700-6500	>80	>0.5	E27/B22/G24	45	132
OL-T50-15	15	1500	2700-6500	>80	>0.5	E14/B22/G24	50	145

G45 Bulb





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-G45-3	3	270	2700-6500	>80	>0.4	45	78
OL-G45-4	4	360	2700-6500	>80	>0.4	45	78
OL-G45-5	5	450	2700-6500	>80	>0.4	45	78
OL-G45-6	6	540	2700-6500	>80	>0.5	45	78
OL-G45-7	7	630	2700-6500	>80	>0.5	45	78
OL-G45-8	8	720	2700-6500	>80	>0.5	45	78

Global Bulb





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-G95-12	12	1160	2700-6500	>80	>0.7	95	140
OL-G95-15	15	1490	2700-6500	>80	>0.7	95	140
OL-G120-16	16	1620	2700-6500	>80	>0.7	120	159
OL-G120-17	17	1800	2700-6500	>80	>0.7	120	159

GU10 Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-GU10-3-100°	3	270	2700-6500	>80	>0.4	50	55
OL-GU10-4-100°	4	360	2700-6500	>80	>0.4	50	55
OL-GU10-5-100°	5	500	2700-6500	>80	>0.4	50	55
OL-GU10-6-100°	6	540	2700-6500	>80	>0.5	50	55
OL-GU10-7-100°	7	600	2700-6500	>80	>0.5	50	55
OL-GU10-8-100°	8	720	2700-6500	>80	>0.5	50	55

GU10 Bulb





Item No.	Power (W)	Useful Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-GU10-3-38°	3	220	2700-6500	>80	>0.4	50	55
OL-GU10-4-38°	4	290	2700-6500	>80	>0.4	50	55
OL-GU10-5-38°	5	400	2700-6500	>80	>0.4	50	55
OL-GU10-6-38°	6	450	2700-6500	>80	>0.5	50	55
OL-GU10-7-38°	7	510	2700-6500	>80	>0.5	50	55
OL-GU10-8-38°	8	570	2700-6500	>80	>0.5	50	55

R Bulb



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	Base	D (mm)	H (mm)
OL-R39-3	3	270	2700-6500	>80	>0.4	E14	39	68.5
OL-R50-5	5	430	2700-6500	>80	>0.4	E14/E27	50	85
OL-R63-7	7	630	2700-6500	>80	>0.5	E27	63	100
OL-R63-9	9	830	2700-6500	>80	>0.5	E27	63	100
OL-R80-10	10	990	2700-6500	>80	>0.5	E27	80	115
OL-R90-12	12	1160	2700-6500	>80	>0.5	E27	90	116

GX53 Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-GX53-4	4	320	2700-6500	>80	>0.4	75	26
OL-GX53-6	6	500	2700-6500	>80	>0.5	75	26
OL-GX53-7	7	600	2700-6500	>80	>0.5	75	28
OL-GX53-10	10	960	2700-6500	>80	>0.5	75	28

S14




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-S14s-4.8	4.8	520	2700-6500	>80	>0.4	30	300
OL-S14s-8	8	780	2700-6500	>80	>0.5	30	500
OL-S14s-15	15	1520	2700-6500	>80	>0.5	30	1000
OL-S14d-4.8	4.8	520	2700-6500	>80	>0.4	30	300
OL-S14d-8	8	780	2700-6500	>80	>0.5	30	500

S15 S19



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-S15-4	4	420	2700-6500	>80	>0.4	26	284
OL-S15-6.5	6.5	620	2700-6500	>80	>0.5	26	284
OL-S15s-6.5	6.5	620	2700-6500	>80	>0.5	26	284
OL-S19-7	7	620	2700-6500	>80	>0.5	38	310

T8 Tube




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-T8-9-Glass	9	900	2700-6500	>80	>0.5	26	590
OL-T8-12-Glass	12	1200	2700-6500	>80	>0.5	26	895
OL-T8-18-Glass	18	1850	2700-6500	>80	>0.5	26	1199
OL-T8-22-Glass	22	2300	2700-6500	>80	>0.5	26	1500

Glass Series




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-G9-2.2	2.2	250	2700-6500	>80	>0.4	14.5	58
OL-G9-4.2	4.2	470	2700-6500	>80	>0.4	16	63

Plastic Series




Item No.	Power (W)	Input Voltage (V)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-G4-1.2	1.2	12	100	2700-6500	>80	1	11	38
OL-G9-2.5	2.5	220-240	200	2700-6500	>80	>0.4	16	47

Ceramic Series



Item No.	Power (W)	Input Voltage (V)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-G4-3	3	12	350	2700-6500	>80	>0.4	16	47
OL-G9-3	3	220-240	350	2700-6500	>80	>0.4	15	48

T26 Bulb



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-T26-1.5	1.5	130	2700-6500	>80	>0.4	18	48

R7S Bulb



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-R7S-4.5	4.5	450	2700-6500	>80	>0.4	20	78
OL-R7S-8	8	850	2700-6500	>80	>0.5	20	118

R7S Bulb



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-R7S-4.2	4.2	470	2700-6500	>80	>0.4	16	78
OL-R7S-7.6	7.6	850	2700-6500	>80	>0.5	16	118

oneLIGHT



www.onelightchina.com

Filament Bulb

Clear



Amber





Milky



Smoky





Filament A Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-F-A60-2.5	2.5	250	2700-6500	>80	>0.4	60	105
OL-F-A60-4	4	470	2700-6500	>80	>0.4	60	105
OL-F-A60-6.5	6.5	806	2700-6500	>80	>0.5	60	105
OL-F-A60-7.5	7.5	1055	2700-6500	>80	>0.5	60	105
OL-F-A60-11	11	1521	2700-6500	>80	>0.5	60	105

Filament Candle Bulb

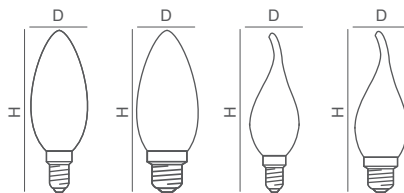



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-F-C35-2.5	2.5	250	2700-6500	>80	>0.4	35	92/100
OL-F-C35-4	4	470	2700-6500	>80	>0.4	35	92/100
OL-F-C35-5.5	5.5	806	2700-6500	>80	>0.5	35	92/100
OL-F-CL35-2.5	2.5	250	2700-6500	>80	>0.4	35	112/121
OL-F-CL35-4	4	470	2700-6500	>80	>0.4	35	112/121
OL-F-CL35-5.5	5.5	806	2700-6500	>80	>0.5	35	112/121

Filament Global Bulb





Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-F-G45-2.5	2.5	250	2700-6500	>80	>0.4	45	77
OL-F-G45-4	4	470	2700-6500	>80	>0.4	45	77
OL-F-G45-5.5	5.5	806	2700-6500	>80	>0.5	45	77

Filament Global Bulb




Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-F-G80-4	4	470	2700-6500	>80	>0.4	80	115
OL-F-G80-6.5	6.5	806	2700-6500	>80	>0.5	80	115
OL-F-G80-7.5	7.5	1055	2700-6500	>80	>0.5	80	115
OL-F-G80-11	11	1521	2700-6500	>80	>0.5	80	115
OL-F-G95-4	4	470	2700-6500	>80	>0.4	95	135
OL-F-G95-6.5	6.5	806	2700-6500	>80	>0.5	95	135
OL-F-G95-7.5	7.5	1055	2700-6500	>80	>0.5	95	135
OL-F-G95-11	11	1521	2700-6500	>80	>0.5	95	135
OL-F-G125-4	4	470	2700-6500	>80	>0.4	125	168
OL-F-G125-6.5	6.5	806	2700-6500	>80	>0.5	125	168
OL-F-G125-7.5	7.5	1055	2700-6500	>80	>0.5	125	168
OL-F-G125-11	11	1521	2700-6500	>80	>0.5	125	168



Filament ST64 Bulb



Item No.	Power (W)	Lumen (lm)	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-F-ST64-4	4	470	2700-6500	>80	>0.4	64	143
OL-F-ST64-6.5	6.5	806	2700-6500	>80	>0.5	64	143
OL-F-ST64-7.5	7.5	1055	2700-6500	>80	>0.5	64	143
OL-F-ST64-11	11	1521	2700-6500	>80	>0.7	64	143

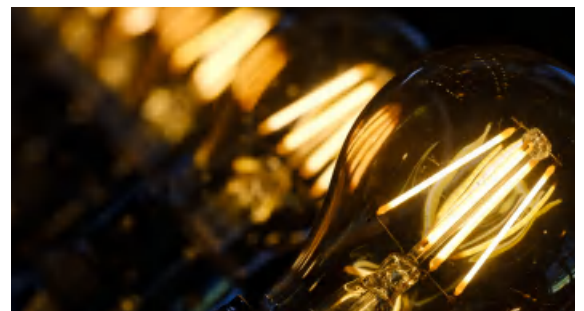

A Class Filament Bulb

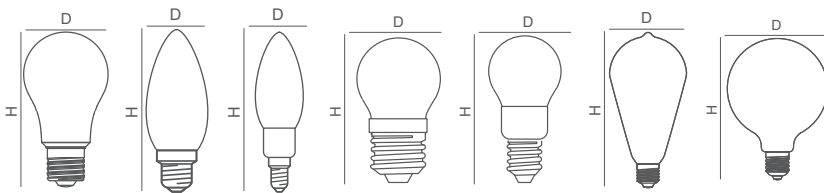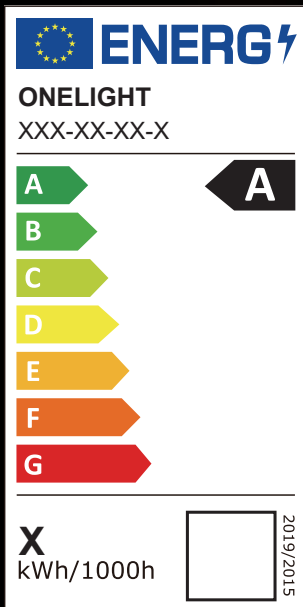

Item No.	Power (W)	Lumen (lm)	Lm/W	CCT (K)	CRI	PF	D (mm)	H (mm)
OL-FA-A60-2.5	2.5	525	210	2700-6500	>80	>0.4	60	105
OL-FA-A60-4	4	840	210	2700-6500	>80	>0.4	60	105
OL-FA-A60-5	5	1055	211	2700-6500	>80	>0.4	60	105
OL-FA-C35-2.5	2.5	525	210	2700-6500	>80	>0.4	35	92
OL-FA-C35-PC-2.5	2.5	525	210	2700-6500	>80	>0.4	35	115
OL-FA-G45-2.5	2.5	525	210	2700-6500	>80	>0.4	45	77
OL-FA-G45-PC-2.5	2.5	525	210	2700-6500	>80	>0.4	45	107
OL-FA-ST64-2.5	2.5	525	210	2700-6500	>80	>0.4	64	143
OL-FA-ST64-4	4	840	210	2700-6500	>80	>0.4	64	143
OL-FA-ST64-5	5	1055	211	2700-6500	>80	>0.4	64	143
OL-FA-G95-2.5	2.5	525	210	2700-6500	>80	>0.4	95	135
OL-FA-G95-4	4	840	210	2700-6500	>80	>0.4	95	135
OL-FA-G95-5	5	1055	211	2700-6500	>80	>0.4	95	135



HANGZHOU YIDENG LIGHTING CO., LTD.

Address: Room 901-9, Building 4, NO.859, West Shixiang Road,
Hangzhou, Zhejiang, China

Tel: +86 571-8813-8056 Fax: +86 571-8813-8056

E-mail: info@onelightchina.com

www.onelightchina.com