




LED Stadium Light

Hipower LED Stadium Light can be widely used in football fields, basketball courts, rugby fields, tennis courts, racetracks, cricket pitches, baseball fields, hockey courts, etc., with its Long lifespan, energy efficiency, dimmable, and instant switches functions, etc.

The power can reach 1500W.

The product adopts a modular design and is easy to maintain.

High brightness and high light efficiency, low glare.



Stadium Light


FL31, FL33-A, FL33-B, FL34,
FL35, FL36, FL37

FL31 Series

5
YEAR
GUARANTEE



- Each module can be adjusted
- Available with 7 different types of changeable lens
- Beam angle 10°/20°/40°/P50°/60X60°/90X90°/30X70°
- Up to 140lm/W
- kit combination and splicing for easier assembly
- Rotary angle adjustment
- 5 years warranty

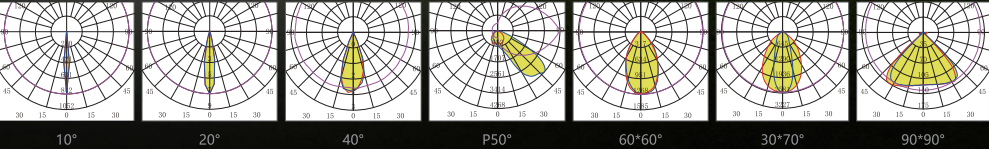

Product Parameters

Model	SPS300-FL31	SPS600-FL31	SPS900-FL31	SPS1200-FL31	SPS1800-FL31
Wattage	300W	600W	900W	1200W	1800W
Lumen Output	42,000lm	84,000lm	126,000lm	168,000lm	252,000lm
Luminous Efficacy	140lm/W				
CRI	>Ra70(>Ra80, 90 optional)				
IP Rating	IP65				
Working Temperature	-30°C to +45°C				
Lens Optional	5050: 10°/20°/40°/P50°/60X60°/90X90°/30X70°				


5 kinds of power



FL33-A Series



- Available with 8 different types of changeable lens
- Beam angle 8°/20°/40°/60°/90°/120°/140X100°/P50°
- Up to 150lm/W
- Pure aluminum plate material
- IP65 & IK08 double protection
- 5 years warranty

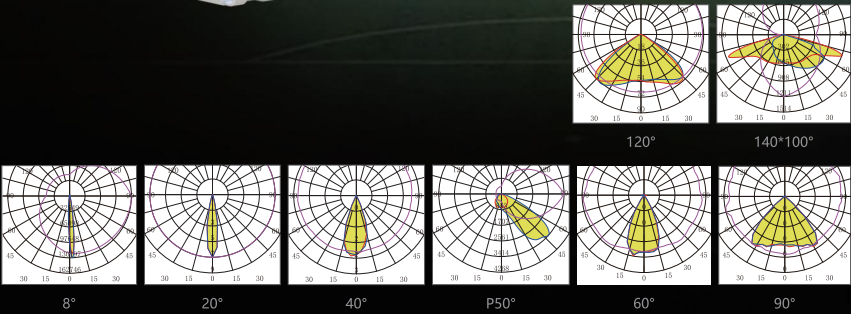


Product Parameters

Model	SPS240-FL33A	SPS360-FL33A	SPS480-FL33A	SPS600-FL33A	SPS720-FL33A
Wattage	240W	360W	480W	600W	720W
Lumen Output	36,000lm	54,000lm	72,000lm	90,000lm	108,000lm
Luminous Efficacy	150lm/W				
CRI	>Ra70(>Ra80, 90 optional)				
IP Rating	IP65				
Working Temperature	-30°C to +45°C				
Lens Optional	3030: 60°/90°/140X100°/120° 3535: 8° 5050: 20°/40°/60°/90°/120°/140X100°/P50				

Product display



Light shield (optional)

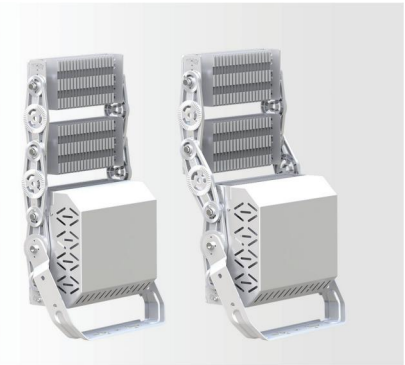


5 kinds of power

240W/360W/480W/600W/720W

FL33-B Series





- Available with 8 different types of changeable lens
- Beam angle 8°/20°/40°/60°/90°/P50°/P50H
- Up to 150lm/W
- Pure aluminum plate material
- IP65 & IK08 double protection
- 5 years warranty

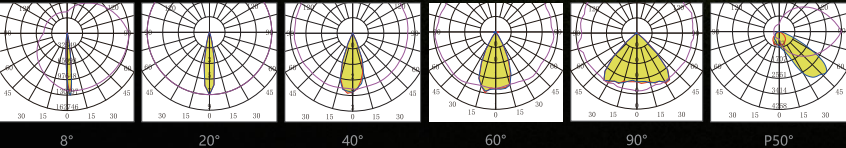

Product Parameters

Model	SPS240-FL33B	SPS480-FL33B	SPS720-FL33B	SPS960-FL33B	SPS1200-FL33B	SPS1500-FL33B
Wattage	240W	480W	720W	960W	1200W	1500W
Lumen Output	36,000lm	72,000lm	108,000lm	144,000lm	180,000lm	225,000lm
Luminous Efficacy	150lm/W					
CRI	>Ra70(>Ra80, 90 optional)					
IP Rating	IP65					
Working Temperature	-30°C to +45°C					
Lens Optional	3535: 8°/P50°/P50H 5050: 20°/40°/60°/90°					

Mounting Options

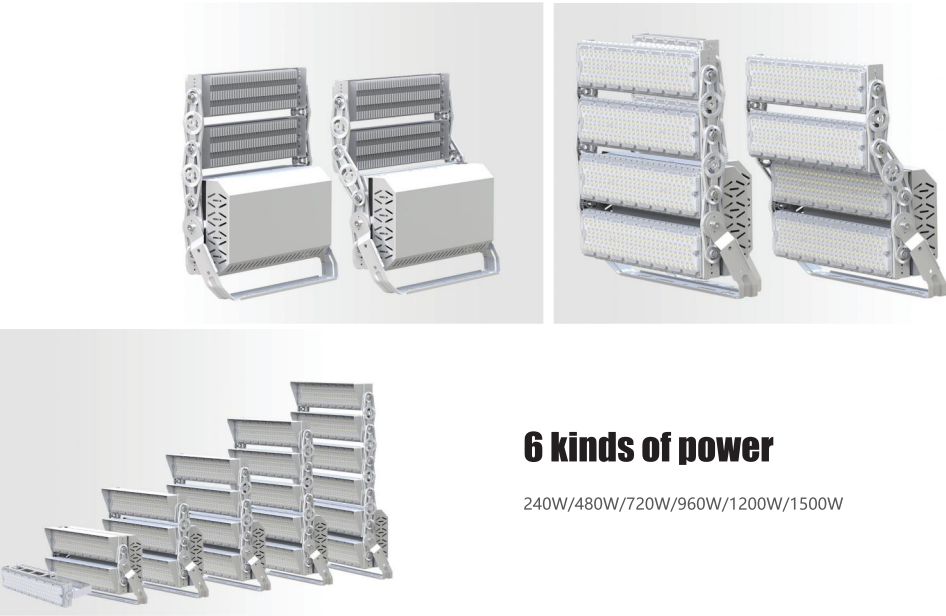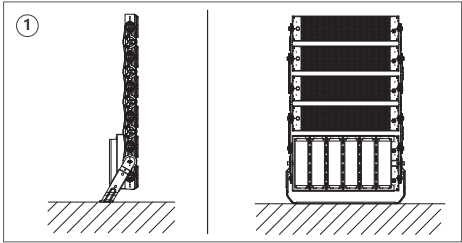


6 kinds of power



240W/480W/720W/960W/1200W/1500W

FL34 Series

5
YEAR
GUARANTEE

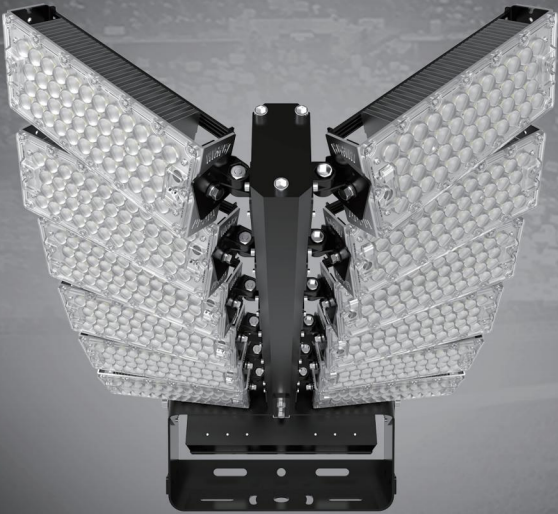




- Available with 8 different types of changeable lens
- Beam angle 8°/20°/40°/60°/90°/120°/140X100°/P50
- Up to 160lm/W
- Pure aluminum plate material
- IP65 & IK08 double protection
- 5 years warranty

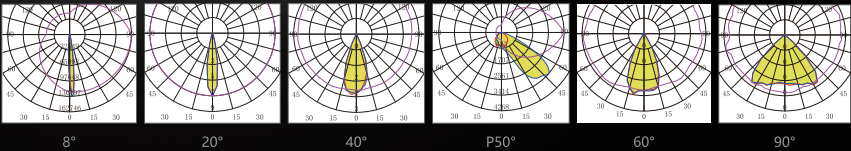

Product Parameters

Model	SPS720-FL34	SPS960-FL34	SPS1200-FL34	SPS1500-FL34
Wattage	720W	960W	1200W	1500W
Lumen Output	115,200lm	153,600lm	192,000lm	240,000lm
Luminous Efficacy	3030(150lm/W) 3535(130lm/W) 5050(160lm/W)			
CRI	>Ra70(>Ra80, 90 optional)			
IP Rating	IP65			
Working Temperature	-30°C to +45°C			
Lens Optional	3030: 60°/90°/140X100° 120° 3535: 8° 5050: 20°/40°/60°/90°/120°/140X100°/P50°			

Mounting Options

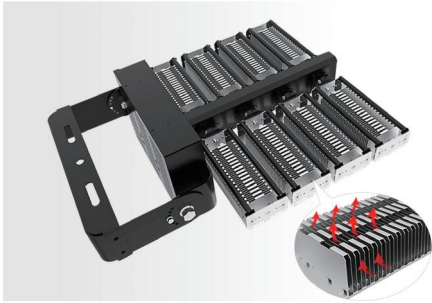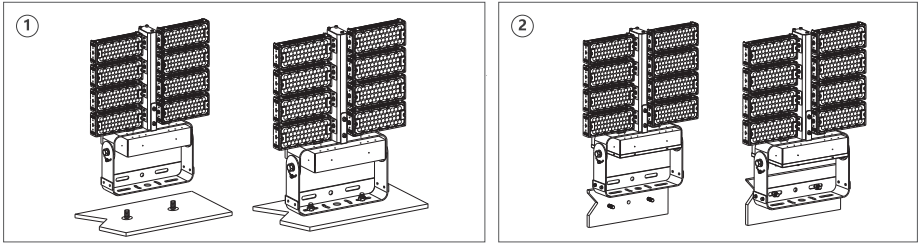


4 kinds of power

720W/960W/1200W/1500W

FL35 Series

5
YEAR
GUARANTEE


- Available with 3 different types of changeable lens
- Beam angle 10°/25°/60°
- Up to 150lm/W
- Pure aluminum plate material
- IP65 & IK08 double protection
- 5 years warranty

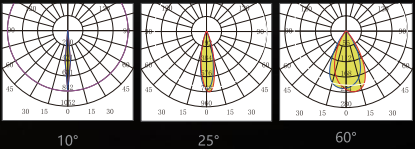

Product Parameters

Model	SPS300-FL35	SPS400-FL35	SP500-FL35	SPS600-FL35	SPS1000-FL35	SPS1200-FL35
Wattage	300W	400W	500W	600W	1000W	1200W
Lumen Output	45,000lm	60,000lm	75,000lm	90,000lm	150,000lm	180,000lm
Luminous Efficacy	150lm/W					
CRI	>Ra70(>Ra80, 90 optional)					
IP Rating	IP65					
Working Temperature	-30°C to +45°C					
Lens Optional	10°/25°/60°					


Mounting Options

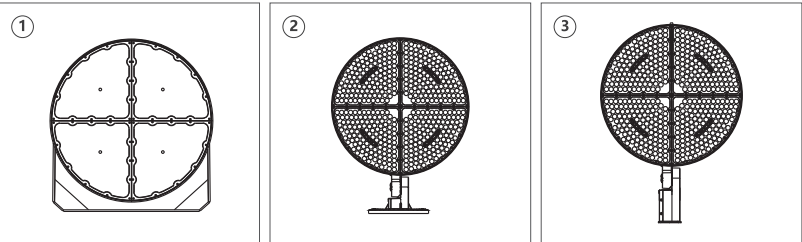

FL36 Series





- Available with 5 different types of changeable lens
- Beam angle 10°/20°/40°/P50°/60°
- Up to 150lm/W
- Pure aluminum plate material
- IP65 & IK08 double protection
- 5 years warranty

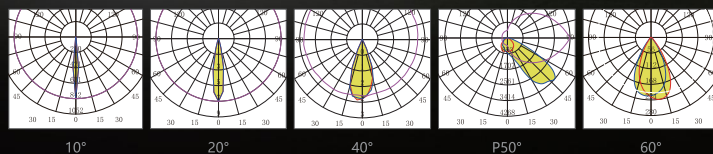

Product Parameters

Model	SPS240-FL36	SPS480-FL36	SPS720-FL36	SPS960-FL36	SPS1200-FL36	SPS1440-FL36
Wattage	240W	480W	720W	960W	1200W	1440W
Lumen Output	36,000lm	72,000lm	108,000lm	144,000lm	180,000lm	216,000lm
Luminous Efficacy	150lm/W					
CRI	> Ra70(> Ra80, 90 optional)					
IP Rating	IP65					
Working Temperature	-30°C to +45°C					
Lens Optional	10°/20°/40°/P50°/60°					

Mounting Options

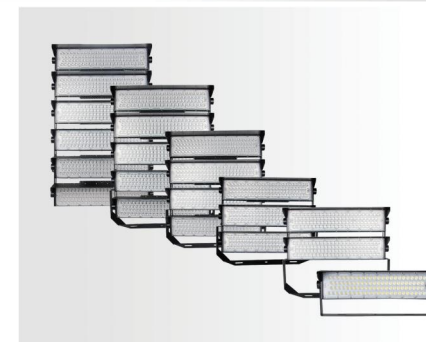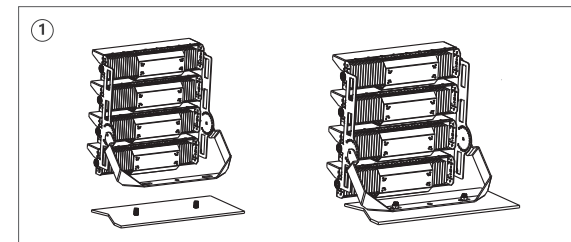


6 kinds of power

240W/480W/720W/960W/1200W/1440W

FL37 Series

5
YEAR
GUARANTEE



- Available with 3 different types of changeable lens
- Beam angle 3030: 30°/60°/90° 5050: 30°/60°/90°/120°
- Up to 150lm/W
- Pure aluminum plate material
- IP65 & IK08 double protection
- 5 years warranty

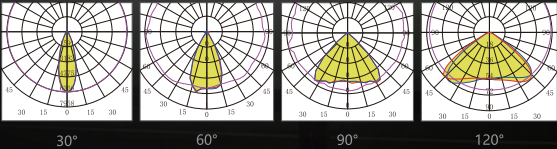

Product Parameters

Model	SPS250-FL37	SPS500-FL37	SPS750-FL37	SPS1000-FL37	SPS1250-FL37
Wattage	240W	500W	720W	1000W	1200W
Lumen Output	37,500lm	75,000lm	112,500lm	150,000lm	187,500lm
Luminous Efficacy	150lm/W				
CRI	>Ra70(>Ra80, 90 optional)				
IP Rating	IP65				
Working Temperature	-30°C to +45°C				
Lens Optional	3030: 30°/60°/90° 5050: 30°/60°/90°/120°				

Mounting Options

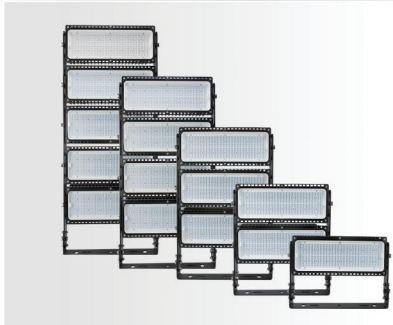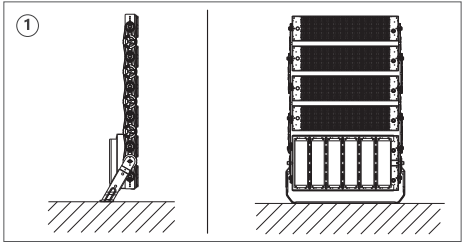

5 kinds of power

250W/500W/750W/1000W/1250W