



LED GARDEN Light


Power from 30W to 150W, meeting most usage needs

Different arms for optional

Up to 180lm/w


DIY arms' sizes

With 5yrs warranty



Various installation methods

YL01, YL02, YL04




Classic

YL03, YL05, YL06

YL01 Series

5
YEAR
GUARANTEE


- Available from 30W-150W
- Die-cast aluminum body with pure polyester
- Electrostatic spray
- Good thermal management
- Easy to install and maintain
- Vertical installation and installed horizontally, adjustable angle
- IP66 & 5 years warranty

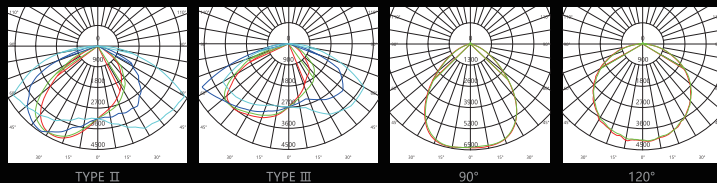

Product Parameters

Model	SPS20-YL01	SPS30-YL01	SPS40-YL01	SPS50-YL01	SPS60-YL01	SPS70-YL01	SPS80-YL01	SPS90-YL01	SPS100-YL01	SPS120-YL01	SPS150-YL01
Wattage	20W	30W	40W	50W	60W	70W	80W	90W	100W	120W	150W
Lumen Output	2,600lm	3,900lm	5,000lm	6,500lm	7,800lm	9,100lm	10,400lm	11,250lm	11,250lm	15,600lm	19,500lm
Luminous Efficacy	130~150lm/W										
Lens	Type II, Type III, 90X90°, 120X120°, More than twenty lenses can be selected										
CRI	>Ra70(>Ra80 optional)										
IP Rating	IP66										
Working Temperature	-30°C to +45°C										
Lens Optional	TYPE II/TYPE III/90°/120°										

YL01-A
(20W~150W)

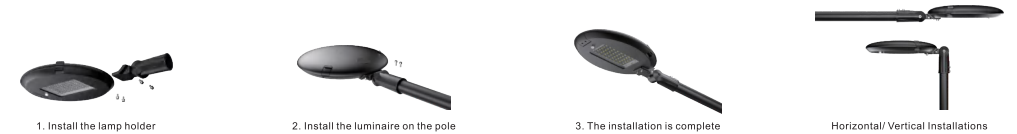

YL01-B
(20W~150W)



YL01-C
(20W~150W)



YL01-D
(20W~150W)



YL01-E
(20W~150W)



YL02 Series

Decorative light (Optional)
Dual Light Sources

5
YEAR
GUARANTEE


- Available from 40W-150W
- Die-cast aluminum kit, excellent heat dissipation performance
- Rotating shaft + snap shrapnel fixing method, convenient maintenance in the later stage
- Good thermal management.
- Easy to install and maintain
- IP65 & IK08
- 5 years warranty



Product Parameters

Model	SPS40-YL02	SPS50-YL02	SPS60-YL02	SPS80-YL02	SPS100-YL02	SPS120-YL02	SPS150-YL02
Wattage	40W	50W	60W	80W	100W	120W	150W
Auxiliary light source wattage	10W				-		
Lumen Output	6,000lm	7,500lm	9,000lm	12,000lm	13,000lm	15,600lm	19,500lm
Luminous Efficacy	150lm/W				130lm/W		
Installation height	3~4m		4~5m		6~10m		
CRI	>Ra70(>Ra80 optional)						
IP Rating	IP65						
Working Temperature	-35°C to +50°C						
Lens Optional	TYPE II/TYPE III						

Model

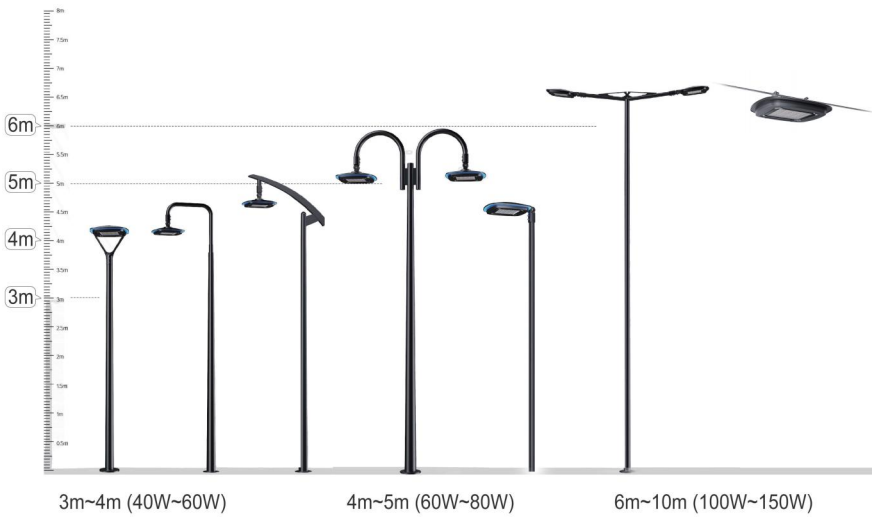

YL03 Series

5
YEAR
GUARANTEE


- Available from 30W-150W
- Energy saving, environmental friendly, No UV or IR radiation
- Anti-shock, anti-moisture, no glare, no strobe light
- Good thermal management
- High intensity and stability
- Using high quality LED chips
- Available with Photocell sensor or Microwave motion sensor
- IP65 & 5 years warranty



Product Parameters

Model	SPS30-YL03	SPS50-YL03	SPS75-YL03	SPS100-YL03	SPS120-YL03	SPS150-YL03
Wattage	30W	50W	75W	100W	120W	150W
Lumen Output	3,900lm	6,500lm	9,750lm	13,000lm	15,600lm	19,500lm
Luminous Efficacy	130lm/W					
CRI	> Ra70					
IP Rating	IP65					
Working Temperature	-35°C to +55°C					
Lens Optional	120°					

Dimensions

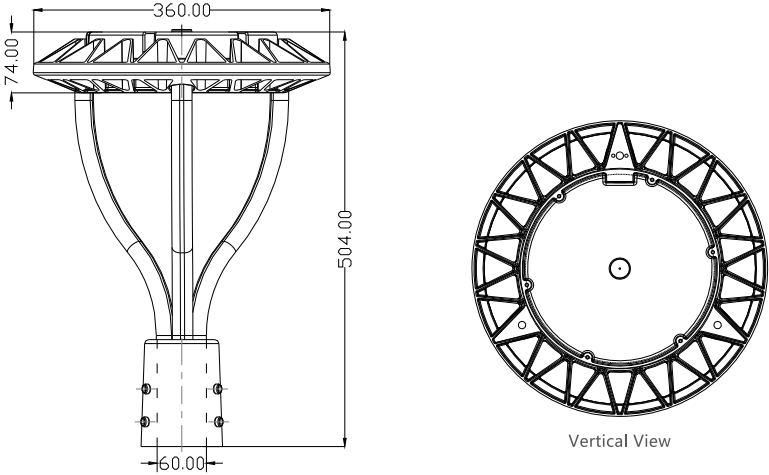

Multi Angle



YL04 Series

5
YEAR
GUARANTEE

- Available from 30W-150W
- Energy saving, environmental friendly, No UV or IR radiation
- Anti-shock, anti-moisture, no glare, no strobe light
- Good thermal management
- High intensity and stability
- Using high quality LED chips
- Available with Photocell sensor or Microwave motion sensor
- IP65 & 5 years warranty




Product Parameters

Model	SPS30-YL04	SPS50-YL04	SPS80-YL04	SPS100-YL04	SPS120-YL04	SPS150-YL04
Wattage	30W	50W	80W	100W	120W	150W
Lumen Output	4,500lm	7,500lm	12,000lm	15,000lm	18,000lm	22,500lm
Luminous Efficacy	150lm/W					
CRI	>Ra70					
IP Rating	IP65					
Working Temperature	-35°C to +55°C					
Lens Optional	Type II / Type III / Type IV					

Multi Angle



Multiple installation methods

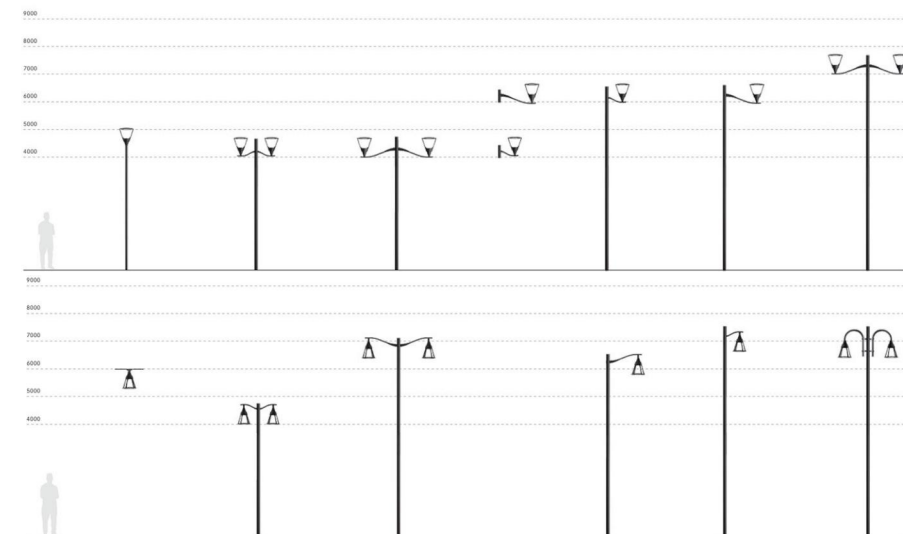

YL05 Series




- Available from 30W-100W
- Energy saving, environmental friendly
- Anti-shock, anti-moisture, no strobe light
- Good thermal management
- High intensity and stability
- Using high quality LED chips
- Multiple options such as Type II, Type III, Type V, 60°, 90°
- IP65 & 5 years warranty



Product Parameters

Model	SPS30-YL05	SPS50-YL05	SPS60-YL05	SPS80-YL05	SPS100-YL05
Wattage	30W	50W	60W	80W	100W
Lumen Output	4,500lm	7,500lm	9,000lm	12,000lm	15,000lm
Luminous Efficacy	150lm/W (170lm/W optional)				
CRI	>Ra70				
IP Rating	IP65				
Working Temperature	-35°C to +55°C				
Lens Optional	Multiple options such as Type II, Type III, Type V, 60°, 90°				


Dimensions

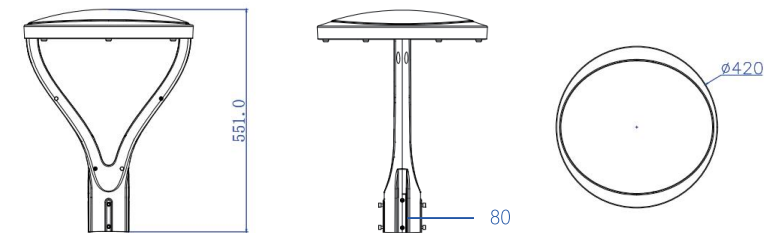

Multi Angle



Light Distribution Optional

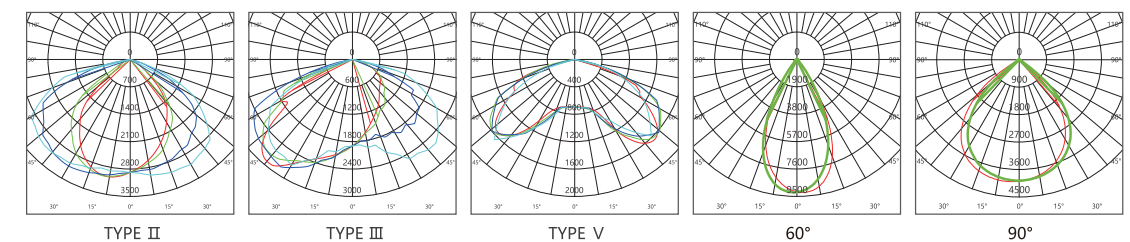

YL06 Series

5
YEAR
GUARANTEE


- Available from 30W-100W
- Energy saving, environmental friendly
- Anti-shock, anti-moisture, no strobe light
- Good thermal management
- High intensity and stability
- Using high quality LED chips
- IP65 & 5 years warranty



Product Parameters

Model	SPS30-YL06	SPS50-YL06	SPS60-YL06	SPS80-YL06	SPS100-YL06
Wattage	30W	50W	60W	80W	100W
Lumen Output	4,500lm	7,500lm	9,000lm	12,000lm	15,000lm
Luminous Efficacy	150lm/W (170lm/W optional)				
CRI	>Ra70				
IP Rating	IP65				
Working Temperature	-35°C to +55°C				
Lens Optional	120°				

Dimensions

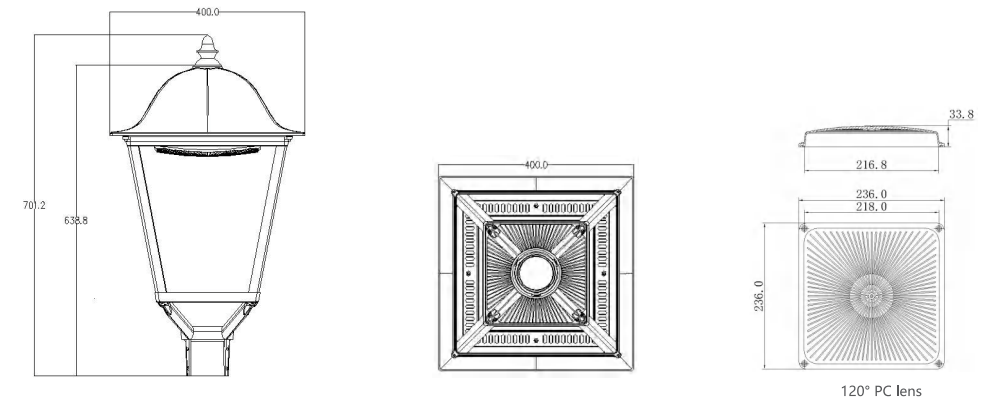

Multi Angle

