
Smart Laffey



V8-Z8

Aurora LED Circle Metal Tact Switch A Fashionable Masterpiece



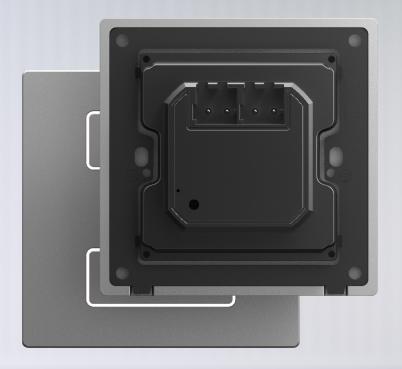

V8-Z8

Imported KNX Chips ·Born for KNX

Metallic Material with Exceptional Texture



V8-Z8

Configured Exclusive Thermostat, Enjoy Smart Living with Ease



V8-Z8

Vibrant Colors Tailored to Your Desires

Spray White Spray Grey Spray Black Frosted Silver















Multi-Module Press Styles



Conjoined Structure



Tact Switch



Sensor-activated Backlight Function



Customized Button Graphics and Text





Multiple Material Options

Series	Types of Switches	Surface Material	Modular Color	Surface Color	Product Dimensions (mm)	Input Voltage (V)	Installation Method (mm)	Conjoined	Protocol
V8-Z8	Metal Switch	Aluminum	Spray White Spray Grey Spray Black Frosted Silver Brushed Black Brushed Grey	Spray White Spray Grey Spray Black Frosted Silver Brushed Black Brushed Grey	86x86mm	DC12V	86mm Wall Box	1/2/3/4 Conjoined	KNX



EU STANDARD

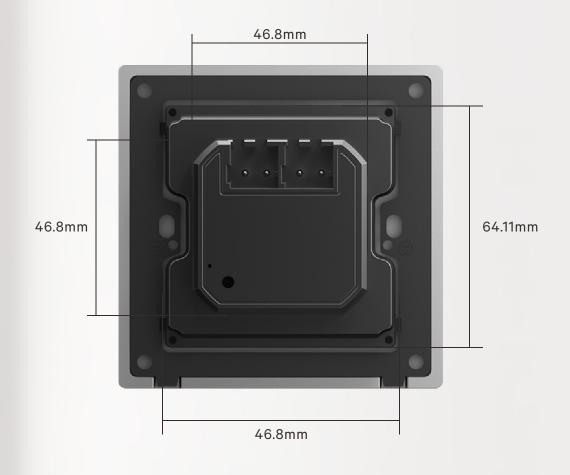

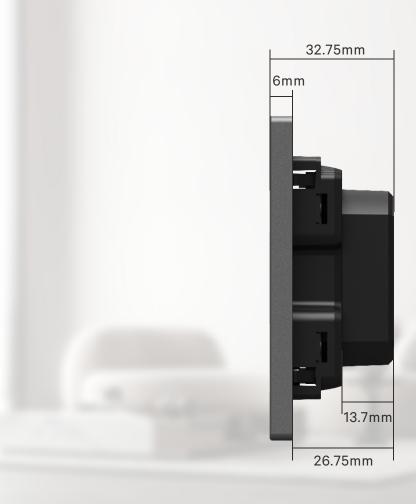

Moster

KNX

Exterior Color





Aluminum Material:



G05 oray Grey



H13 Spray Blac





H12 G08 Brushed Black Brushed Grey



General Information

Wiring Method:

1 Gang Switch

Types of Switches:	Metal Tact Switch	
Series:	V8-Z8	
Input Voltage:	24V DC	
Terminal Port:	KNX	
Installation Method:	86mm Wall Box	
Changeable Backlight Function:	•	
Touch Lifespan:	100,000 times	
Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥15mm	
Cojoined:	1/2/3/4/5 Conjoined	



- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Down Light Light Bult

Exterior Color



B04 Spray White

Aluminum Material:



G05 Sprav Grev



H13 Spray Black



H12 Brushed Black



G08 ck Brushed Grey

General Information

2 Gang Switch

Wiring Method:	KNX	
Types of Switches:	Metal Tact Switch	
Series:	V8-Z8	
Input Voltage:	24V DC	
Terminal Port:	KNX	
Installation Method:	86mm Wall Box	
Changeable Backlight Function:	•	
Touch Lifespan:	100,000 times	
Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥15mm	
Cojoined:	1/2/3/4/5 Conjoined	



- Must be installed or disassembled by a professional electrician;
- $\bullet\hspace{0.4cm}$ Do not operate with wet hands to prevent electric shock;
- $\bullet\,$ Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Soft Lonvo

KNX

Exterior Color





Aluminum Material:



G05 Spray Grey



H13 Spray Blac



H12 Brushed Black



G08 Brushed Grey

General Information

Wiring Method:

3 Gang Switch

Types of Switches:	Metal Tact Switch	
Series:	V8-Z8	
Input Voltage:	24V DC	
Terminal Port:	KNX	
Installation Method:	86mm Wall Box	
Changeable Backlight Function:	•	
Touch Lifespan:	100,000 times	
Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥15mm	
Cojoined:	1/2/3/4/5 Conjoined	



- Must be installed or disassembled by a professional electrician;
- $\bullet\hspace{0.1cm}$ Do not operate with wet hands to prevent electric shock;
- $\bullet\,$ Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

DownLight Light Bott Bright Soft

KNX

Exterior Color





Aluminum Material:



G05 orav Grev



H13 Spray Black



H12 Brushed Black



G08 Brushed Grey

General Information

Wiring Method:

2 Gang 4 Key Switch

wiring Method:	KNX	
Types of Switches:	Metal Tact Switch	
Series:	V8-Z8	
Input Voltage:	24V DC	
Terminal Port:	KNX	
Installation Method:	86mm Wall Box	
Changeable Backlight Function:	•	
Touch Lifespan:	100,000 times	
Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥15mm	
Cojoined:	1/2/3/4/5 Conjoined	



- Must be installed or disassembled by a professional electrician;
- $\bullet\hspace{0.1cm}$ Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Bright Soft

Down Light Light Roll

Come Luave

Exterior Color





Aluminum Material:



G05 oray Grey



H13 Spray Blac



H12 Brushed Black



G08 lack Brushed Grey

General Information

3 Gang 6 Key Switch

Wiring Method:	KNX	
Types of Switches:	Metal Tact Switch	
Series:	V8-Z8	
Input Voltage:	24V DC	
Terminal Port:	KNX	
Installation Method:	86mm Wall Box	
Changeable Backlight Function:	•	
Touch Lifespan:	100,000 times	
Product Features:	Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥15mm	
Cojoined: 1/2/3/4/5 Conjoined		



- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- $\bullet \;\;$ Installation while powered on is strictly prohibited.

3 Pin Universal Socket (Medium-Large Panel)



220V High Voltage

Exterior Color



B04 Spray White

Aluminum Material:



G05 Spray Grey



H13 Spray Black



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Gre

General Information

Wiring Method:

Types of Switches:	High Voltage Socket	
Series:	V8-Z8	
Input Voltage:	AC220V	
Rated Voltage:	250V	
Rated Current:	13A	
USB Input Voltage:	×	
USB Output Voltage:	×	
USB Output Current:	×	
Neutral Line / Live Line:	•	
Relay:	×	
Changeable Backlight Function:	×	
Installation Method:	86mm Wall Box	
Touch Lifespan:	100,000 times	
Product Features:	Metal Surface Craftsmanship Multiple Color Options	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	



- $\bullet \ \ \text{Must be installed or disassembled by a professional electrician};$
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- $\bullet \;$ Installation while powered on is strictly prohibited.

3 Pin Universal Socket with Switch



Exterior Color





Aluminum Material:



G05 Spray Grey



H13



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey


General Information

220V High Voltage	Wiring Method:
High Voltage Socket	Types of Switches:
V8-Z8	Series:
AC220V	Input Voltage:
250V	Rated Voltage:
13A	Rated Current:
×	USB Input Voltage:
×	USB Output Voltage:
×	USB Output Current:
•	Neutral Line / Live Line:
×	Relay:
×	Changeable Backlight Function:
86mm Wall Box	Installation Method:
100,000 times	Touch Lifespan:
Metal Surface Craftsmanship Multiple Color Options	Product Features:
	Materials
Aluminum	Surface Materials:
Spray/Brushed	Surface Treatment:
	Dimensions
W:86 H:86 D:7mm (Excluding Base)	Product Dimensions :
≥45mm	Embedded Depth:



- Must be installed or disassembled by a professional electrician;
- $\bullet\hspace{0.1cm}$ Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- $\bullet \;\;$ Installation while powered on is strictly prohibited.

British Socket



220V High Voltage

Exterior Color



B04 Spray White

Aluminum Material:



G05 Spray Grey



H13 Spray Blac



Y03 ted Silver



GO8 ack Brushed

General Information

Wiring Method:

willing Method.	220 V Filgii Voltage	
Types of Switches:	High Voltage Socket	
Series:	V8-Z8	
Input Voltage:	AC220V	
Rated Voltage:	250V	
Rated Current:	13A	
USB Input Voltage:	×	
USB Output Voltage:	×	
USB Output Current:	×	
Neutral Line / Live Line:	•	
Relay:	×	
Changeable Backlight Function:	×	
Installation Method:	86mm Wall Box	
Touch Lifespan:	100,000 times	
Product Features:	Metal Surface Craftsmanship Multiple Color Options	
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	



- $\bullet \ \ \text{Must be installed or disassembled by a professional electrician};$
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- $\bullet \;\;$ Installation while powered on is strictly prohibited.

Schuko Socket



Exterior Color



B04 Spray White

Aluminum Material:



G05 Spray Grey



H13



03 d Silver Bri



H12 Brushed Black



G08 Brushed Grey

General Information

Wiring Method:	220V High Voltage	
Types of Switches:	High Voltage Socket	
Series:	V8-Z8	
Input Voltage:	AC220V	
Rated Voltage:	250V	
Rated Current:	16A	
USB Input Voltage:	×	
USB Output Voltage:	×	
USB Output Current:	×	
Neutral Line / Live Line:	•	
Relay:	×	
Changeable Backlight Function:	×	
Installation Method:	86mm Wall Box	
Touch Lifespan:	100,000 times	Р
Product Features:	Metal Surface Craftsmanship Multiple Color Options	• M
Materials		• Do
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	



- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

3 Pin Universal Socket with Dual USB (No Button & Neon) (Medium-Large Panel)



Exterior Color





Aluminum Material:



G05 Spray Grey



H13 Spray Black



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:	
Types of Switches:	High Voltage Socket	The socket with a USB charging port not only meets users' power supply needs but also provides USB interfaces for charging electron devices.	
Series:	V8-Z8	devices.	
Input Voltage:	AC220V		
Rated Voltage:	250V		
Rated Current:	10A		
USB Input Voltage:	×		
USB Output Voltage:	×		
USB Output Current:	×		
Neutral Line / Live Line:	•		
Relay:	×		
Changeable Backlight Function:	×		
Installation Method:	86mm Wall Box		
Touch Lifespan:	100,000 times	Precautions:	
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; 	
Materials		Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.	
Surface Materials:	Aluminum		
Surface Treatment:	Spray/Brushed		
Dimensions			
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)		
Embedded Depth:	≥45mm		
Cojoined:	1/2/3/4/5 Conjoined		

2 Pin & 3 Pin Universal Socket with Dual USB (No Button & Neon) (Medium-Large Panel)



Exterior Color





Aluminum Material:



G05 Spray Grey



H13 Spray Black



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	High Voltage Socket	The socket with a USB charging port not only meets users' power supply needs but also provides USB interfaces for charging electronic devices.
Series:	V8-Z8	
Input Voltage:	AC220V	
Rated Voltage:	250V	
Rated Current:	10A	
USB Input Voltage:	×	
USB Output Voltage:	×	
USB Output Current:	×	
Neutral Line / Live Line:	•	
Relay:	×	
Changeable Backlight Function:	×	
Installation Method:	86mm Wall Box	
Touch Lifespan:	100,000 times	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Materials		Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

TV Socket (Medium-Large Panel)



Exterior Color







Aluminum Material:

B04 Spray White







Y03 Frosted Silver

H12 Brushed Black

G08 Brushed Grey

General Information

	Wiring Method:	TV Cable	Pro
	Types of Switches:	Information Socket	The cab
	Series:	V8-Z8	
Signal	Attenuation Degree:	≤1dB Single TV Socket ≤ 1dB, ≤8db One-Branched TV Socket ≤ 8dB, ≤10db Two-Branched TV Socket ≤ 10dB.	
	Insertion and unplugging life:	5000 times	
Оре	erating Temperature:	-20°C-+40°C	
	Operating Humidity:	≥95%	
	Installation Method:	86mm Wall Box	ſ
	Product Features:	Metal Surface Craftsmanship Multiple Color Options	• N • D
	Materials		
	Surface Materials:	Aluminum	
	Surface Treatment:	Spray/Brushed	
	Dimensions		
F	Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
	Embedded Depth:	≥45mm	
	Cojoined:	1/2/3/4/5 Conjoined	

Product Application:

he TV socket is suitable for RF signal output from able TV systems in hotels, homes, and public places.



- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Data Socket (CAT 6) (Medium-Large Panel)



Exterior Color





Aluminum Material:



G05 Spray Grey



H13 Spray Blac



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	CAT 5 Ethernet Cable	Product Application:
Types of Switches:	Information Socket	This socket is assembled from an eight-core data socket module, featuring a compact size and superior performance. The connectors use QuickPort embedded modules, providing outstanding performance and meeting the requirements of ELA/TLA568B for CAT 5 connection hardware performance. It supports a high transmission rate of up to 115MHz.
Series:	V8-Z8	
Number of Cores:	8 Cores	
Connector:	QuickPort Embedded Module	
Insertion and unplugging life:	5000 times	
Operating Temperature:	-20°C-+40°C	
Operating Humidity:	≥95%	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Materials		• installation while powered on a serietly promoted.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

Data Socket (CAT 6) (Medium-Large Panel)



Exterior Color







G05 Spray Grey



H13



Aluminum Material:

Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	CAT 6 Ethernet Cable	Product Application:
Types of Switches:	Information Socket	This socket is assembled from an eight-core data socket module, featuring a compact size and superior performance. The connectors use QuickPort embedded modules, providing outstanding performance and meeting the requirements of ELA/TLA568B for CAT 6 connection hardware performance. It supports a high transmission rate of up to 115MHz.
Series:	V8-Z8	
Number of Cores:	8 Cores	
Connector:	QuickPort Embedded Module	
Insertion and unplugging life:	5000 times	
Operating Temperature:	-20°C-+40°C	
Operating Humidity:	≥95%	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

Tel Socket (Medium-Large Panel)



Exterior Color







G05 Spray Grey



H13 Spray Black



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	Telephone Cable	Product Application:
Types of Switches:	Information Socket	The telephone socket is suitable for RF signal output from telephone systems in hotels, homes, and public places.
Series:	V8-Z8	
Number of Cores:	8 Cores	
Connector:	QuickPort Embedded Module	
Insertion and unplugging life:	5000 times	
Operating Temperature:	-20°C-+40°C	
Operating Humidity:	≥95%	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Materials		
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

600W Dimmer (Medium-Large Panel)



Exterior Color







G05 Spray Grey



H13 Spray Black



Aluminum Material:

Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:	
Types of Switches:	Dimmer Switch	1.The dimmer switch can meet people's different brightness requirements at different times, and the brightness can be adjusted by the knob. It is suitable for use in homes, apartments, hotels, hospitals, and other places.	
Series:	V8-Z8	2.The brightness and color temperature of the lighting can be adjusted according to the environmental needs.	
Operating Temperature and Humidity:	-10°C~+45°C,≤95%RH(Non-condensing)		
Storage Temperature and Humidity:	-25°C~+70°C, ≤95%RH (Non-condensing)		
Maximum Supply Voltage:	90V-264VAC,50/60Hz		
Rated Operating Voltage:	100-220-242V		
Input Frequency Variation Range:	47-50/60-63Hz		
Maximum Output Power Load:	LED:100W Incandescent Lamp:300W		
Standby Power:	1W		
Neutral Line / Live Line:	•		
Installation Method:	86mm Wall Box	Precautions:	
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; 	
Materials		Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.	
Surface Materials:	Aluminum		
Surface Treatment:	Spray/Brushed		
Dimensions			
Product Dimensions:	W:86 H:86 D:7mm (Excluding Base)		
Embedded Depth:	≥45mm		
Cojoined:	1/2/3/4/5 Conjoined		
		l	

300W Speed Controller (Medium-Large Panel)



Exterior Color



B04 Spray White

Aluminum Material:



G05 Spray Grey



H13 Spray Black



Y03 Frosted Silver




H12 Brushed Black



G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	Speed Switch	Infinite rotary speed controller: Achieves speed control by adjusting the size of the inductance and capacitance in the circuit through resistance selection.
Series:	V8-Z8	
Operating Temperature and Humidity:	-10°C~+45°C,≤95%RH(Non-condensing)	
Storage Temperature and Humidity:	-25°C~+70°C, ≤95%RH (Non-condensing)	
Maximum Supply Voltage:	90V-264VAC,50/60Hz	
Rated Operating Voltage:	100-220-242V	
Input Frequency Variation Range:	47-50/60-63Hz	
Maximum Output Power Load:	LED:100W Incandescent Lamp:300W	
Standby Power:	1W	
Neutral Line / Live Line:	•	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Product Features: Materials	Metal Surface Craftsmanship Multiple Color Options	
	Metal Surface Craftsmanship Multiple Color Options Aluminum	 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;
Materials	Multiple Color Options	 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;
Materials Surface Materials:	Multiple Color Options Aluminum	 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;
Materials Surface Materials: Surface Treatment:	Multiple Color Options Aluminum	 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;
Materials Surface Materials: Surface Treatment: Dimensions	Aluminum Spray/Brushed W:86 H:86 D:7mm	 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;

2 Pin & 3 Pin Universal Socket (Medium-Large Panel)



Exterior Color



B04 Spray White

Aluminum Material:



G05 Spray Grey



H13



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

General Information

Types of Switches: Series: V8-Z8 Input Voltage: AC220V Rated Voltage: 250V Rated Current: 10A USB Input Voltage: ×	
Input Voltage: AC220V Rated Voltage: 250V Rated Current: 10A	
Rated Voltage: 250V Rated Current: 10A	
Rated Current: 10A	
USB Input Voltage: ×	
USB Output Voltage: ×	
USB Output Current: ×	
Neutral Line / Live Line:	
Relay: ×	
Changeable Backlight × Function:	
Installation Method: 86mm Wall Box	
Touch Lifespan: 100,000 times	
Product Features: Metal Surface Craftsmanship Multiple Color Options	
Materials	
Surface Materials: Aluminum	
Surface Treatment: Spray/Brushed	
Dimensions	
Product Dimensions : W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth: ≥45mm	
Cojoined: 1/2/3/4/5 Conjoined	



- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

LED Mechanic Footlight (Sensor Version)



Exterior Color







H13 Spray Blad



Aluminum Material:





Y03 Frosted Silver

H12 Brushed Black

G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:	
Types of Switches:	Function Modular	Full Automatic Sensing: It turns on when someone approaches and turns off automatically after they leave. Automatic Light Measurement: Utilizes photosensitive control to	
Series:	V8-Z8	keep the lights off during the day or in strong light conditions. 3. Automatic Delay: When there is human activity, the switch will rem ain on until the person leaves and it will automatically delay off.	
Input Voltage:	AC220V	4.Lightning Protection Function: Equipped with lightning protection components to effectively prevent damage to the switch caused by momentary high voltage from lightning strikes 5. Low power consumption, no need for high electricity costs; Lights	
Rated Voltage:	220VAC±10%	tilted at 45 degrees, not dazzling.	
Power Frequency:	50/60Hz	Application Scope:	
Product Power:	0.65W	Home Series: Bedroom, balcony, kitchen, bathroom. Commercial Lighting: Schools, hospitals, factories, offices, shopping malls, office buildings, banks, sports arenas, airpor	
Operating Temperature and Humidity: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}, \leqslant 95\%$		cinemas, restaurants, hotels, supermarkets, bars, coffee shops.	
Light Control Range:	2Lux-10Lux		
Delay Time:	30±10 seconds		
Sensing Range:	2-4 meters (front) 1-2 meters (70 degrees on both left and right sides)		
Neutral Line / Live Line:	•	Precautions:	
Installation Method:	86mm Wall Box		
Product Features:	Multiple Color Options	Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;	
Materials		Installation while powered on is strictly prohibited.	
Surface Materials:	Aluminum		
Surface Treatment:	Spray/Brushed		
Dimensions			
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)		
Installation Height:	0.3-1 Meter		
Embedded Depth:	≥45mm		
Cojoined:		-	

LED Mechanic Footlight

Exterior Color







H13 rey Spray Bla







Y03 Frosted Silver

H12 Brushed Black

G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	Function Modular	The LED mechanical footlight does not have a built-in switch function, it controlled by the regular switch.
Series:	V8-Z8	Application Scope:
Input Voltage:	AC220V	Home Series: Bedroom, balcony, kitchen, bathroom. Commercial Lighting: Schools, hospitals, factories, offices, shopping malls, office buildings, banks, sports arenas, airports,
Rated Voltage:	220VAC±10%	cinemas, restaurants, hotels, supermarkets, bars, coffee shops.
Power Frequency:	50/60Hz	
Product Power:	0.65W	
Operating Temperature and Humidity:	-20°C~+40°C,≤95%	
Light Control Range:	2Lux-10Lux	
Delay Time:	30±10 seconds	
Sensing Range:	2-4 meters (front) 1-2 meters (70 degrees on both left and right sides)	
Neutral Line / Live Line:	•	Precautions:
Installation Method:	86mm Wall Box	
Product Features:	Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;
Materials		 Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Installation Height:	0.3-1 Meter	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

Card Holder



Exterior Color



Aluminum Material:





G05 Spray Grey H13 Spray Black





Y03 Frosted Silver

H12 Brushed Black

G08 Brushed Grey

General Information

Wir	ing Method:	220V High Voltage	Prod
Types	of Switches:	Function Modular	When h card int conditi the roo
	Series:	V8-Z8	automa conser It supp can be
In	put Voltage:	AC220V	
Ra	ted Voltage:	220VAC±10%	
Power-off	Delay Time:	15s	
	emperature d Humidity:	-25°C~+70°C,≤95%	
Maximum Re for a Si	sistive Load ngle Circuit:	2Lux-10Lux	
Light Co	ntrol Range:	2Lux-10Lux	
Star	ndby Power:	1W	Pro
Installat	ion Method:	86mm Wall Box	Mus Dor
	Materials		● Do n ● Insta
Surfac	ce Materials:	Aluminum	
Surface	e Treatment:	Spray/Brushed	
Di	imensions		
Product [Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embe	dded Depth:	≥45mm	
	Cojoined:	1/2/3/4/5 Conjoined	

duct Application:

n hotel guests enter their rooms, they can insert their room key into the power switch to activate the lighting, television, air litioning, and other devices inside the room. When guests leave room and remove the key card, the room's main power supply will matically shut off after a 15-second delay, allowing for energy rervation and enhancing electrical safety.

poprts M1 cards (high-frequency), TF cards (low-frequency), and be customized with identity recognition (different identities) types.



- ust be installed or disassembled by a professional electrician;
- o not operate with wet hands to prevent electric shock;
- not use it with short circuit or overload:
- stallation while powered on is strictly prohibited.

GT Background Music



Exterior Color





Aluminum Material:



G05 Spray Grey



H13 Spray Black



Y03 Frosted Silver





G08 Brushed Grey

General Information

Wiring Method:	220V High Voltage	Low Voltage	Product Application:
Types of Switches:	Function Modular	•	Capacitive Touch Screen; Five-stage Timer Play / Stop Function; Supports Four Types of Loop Playback.
Series:	Series: V8-Z8		
Input Voltage:	AC220V	DC12V 3A	
Frequency Response:	20Hz20KHz±3DB	•	
Output Power:	Recommended Speaker Power 10-30W 6W + 6W (MAX) Recommended Speaker Power 3-10W	•	
Signal-to-Noise Ratio:	90DB	•	
Operating Temperature and Humidity:	-10°C~+45°C,≤95%RH(Non-condensing)	•	
Storage Temperature and Humidity:	-25°C~+70°C,≤95%RH(Non-condensing)	•	
Control Method:	Physical Buttons	•	Precautions:
Screen Display:	•	•	Must be installed or disassembled by a professional electrician;
Supported Audio Sources:	Bluetooth, AUX, SD Card	•	Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Materials			
Surface Materials:	Aluminum	•	
Surface Treatment:	Spray/Brushed	•	
Dimensions			
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	•	
Embedded Depth:	≥45mm	•	
Cojoined:	1/2/3/4/5 Conjoined	•	

Knob Dimmer



Exterior Color







G05 Spray Grey



H13



Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	Dimmer Switch	The switch can directly dim the lights through the panel, enabling dimming functionality.
Series:	V8-Z8	
Input Voltage:	AC220V	
Operating Temperature and Humidity:	-10°C~+45°C,≤95%RH(Non-condensing)	
Storage Temperature and Humidity:	-25°C~+70°C, ≤95%RH (Non-condensing)	
Maximum Supply Voltage:	90V-264VAC,50/60Hz	
Rated Operating Voltage:	100-220-242V	
Input Frequency:	50/60Hz	
Maximum Load:	100W	
Standby Power:	1W	
Neutral Line / Live Line:	•	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Materials		 Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

BV WAX 2.1A

Exterior Color



Aluminum Material:





G05 Spray Grey



H13 Spray Black



Y03 H12 Frosted Silver Brushed Black



G08 Brushed Grey

General Information

Dual USB Socket

Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	High Voltage Socket	The socket with a USB charging port not only meets users' power supply needs but also provides USB interfaces for charging electronic devices.
Series:	V8-Z8	
Input Voltage:	AC220V	
Rated Voltage:	250V	
Rated Current:	10A	
USB Input Voltage:	80-260VAC	
USB Output Voltage:	5±0.2VDC	
USB Output Current:	2.1A	
Neutral Line / Live Line:	•	
Relay:	×	
Changeable Backlight Function:	×	
Installation Method:	86mm Wall Box	
Touch Lifespan:	100,000 times	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Materials		Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

(DT) Shaver Socket (Built-in 10W Transformer) (Medium-Large Panel)



Exterior Color







H13 Spray Black



G05 Spray Grey



G08 Brushed Grey

Aluminum Material:	., .,
	116V (1)

Y03 Frosted Silver

H12 Brushed Black

Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	High Voltage Socket	It is used for charging electric shaver and provides two voltage options: 110V and 220V, suitable for various countries with different voltage
Series:	V8-Z8	standards. Additionally, it limits the current to prevent the use of high-power appliances such as hairdryers.
Input Voltage:	AC220V	
Rated Voltage:	250V	
Maximum Power:	2000W	
USB Input Voltage:	×	
USB Output Voltage:	×	
USB Output Current:	×	
Neutral Line / Live Line:	•	
Relay:	×	
Changeable Backlight Function:	×	
Installation Method:	86mm Wall Box	
Touch Lifespan:	100,000 times	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Materials		 Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

Emergency Call Button (Medium-Large Panel)



Exterior Color









H13 Spray Black



Aluminum Material:

H12 Brushed Black



G08 Brushed Grey

Wiring Method:	Telephone Cable	Product Application:
Types of Switches:	Information Socket	1.The emergency call button can be installed bedside and bathroom. 2.This switch automatically locks after being pressed (requires a dedicated key from the security department to reset). When the switch is pressed, the security department, room control center, and the area service center will receive this information and be alerted with an audible signal.
Series:	V8-Z8	
Operating Temperature:	-20°C-+40°C	
Operating Humidity:	≥95%	
Installation Method:	86mm Wall Box	
Product Features:	Metal Surface Craftsmanship Multiple Color Options	Precautions: Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Materials		 Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	



Exterior Color



Aluminum Material:

B04 G05 Spray White Spray Grey



H13 Spray Black



H12 Brushed Black



G08 Brushed Grey

General Information

Data & USB Socket

Wiring Method:	CAT 5 Ethernet Cable	Product Application:
Types of Switches:	Information Socket	This socket is assembled from an eight-core data socket module, featuri a compact size and superior performance. The connectors use QuickPor embedded modules, providing outstanding performance and meeting th requirements of ELA/TLA568B for CAT 5 connection hardware performa
Series:	V8-Z8	It supports a high transmission rate of up to 115MHz. The socket with a USB charging port not only meets users' power supply needs but also provides USB interfaces for charging electronic devices.
Number of Cores:	8 Cores	
Connector:	QuickPort Embedded Module	
Insertion and unplugging life:	100-200MHZ	
USB Output Voltage:	5±0.2VDC	
USB Output Current:	2.1A	
Neutral Line / Live Line:	•	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	 Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload;
Materials		 Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

Exterior Color



Aluminum Material:





H13 Spray Black



. .

Y03 Frosted Silver

H12 Brushed Black

G08 Brushed Grey

General	Informa	ation
---------	---------	-------

86-Type Multimedia Socket

General Information		
Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	Information Socket	The 86-type multimedia information socket product can provide high-definition HDMI input, audio, USB, Bluetooth control and other interfaces. It is easy to switch modes and has a variety of modular interface options to meet the personalized needs of users.
Series:	V8-Z8	
Input Voltage:	AC220V	
Rated Voltage:	250V	
Maximum Power:	2000W	
Neutral Line / Live Line:	•	
Installation Method:	86mm Wall Box	
Product Features:	Multiple Color Options Meets Users' Power Supply Needs	Precautions: Must be installed or disassembled by a professional electrician;
Materials		 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

Mechanic Doorbell Outdoor Display



Exterior Color







G05 Spray Grey



H13 Spray Black



3 Silver Brus



G08 Black Brushed Grey

General	Inform	ation
---------	--------	-------

Octional information		
Wiring Method:	220V High Voltage	Product Application:
Types of Switches:	Information Socket	The interactive component of the hotel's RCU allows hotel staff to identify information both inside and outside the hotel rooms, enabling functions such as doorbell, do not disturb, please wait, and please clear
Series:	V8-Z8	
Input Voltage:	AC220V	
Neutral Line / Live Line:	•	
Installation Method:	86mm Wall Box	
Product Features:	Multiple Color Options Meets Users' Power Supply Needs	Precautions: Must be installed or disassembled by a professional electrician;
Materials		 Do not operate with wet hands to prevent electric shock; Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	

GT Knob Thermostat (Air Conditioner)



Exterior Color







G05



H13 Spray Black



Aluminum Material:

Y03 Frosted Silver



H12 Brushed Black



G08 Brushed Grey

General	Infor	mation

Air Conditioner Type:	Fan Coil	Product Application:
Wiring Method:	KNX	Indoor temperature setting/indoor temperature measurement; Adjustable fan speed in three levels: high, medium, low, with cooling,
Series:	V8-Z8 Knob Thermostat	heating, and ventilation modes. 2.The communication protocol can be customized to realize remote control and monitoring of air conditioner terminal status and indoor temperature. 3.It can remotely set the thermostat on and off, mode selection, fan status, and temperature set value. 4.It can realize the unified management of indoor temperature remotely by thermostat, such as: sleep mode, daily mode, away mode.
Types of Switches:	Knob Thermostat	
Low Voltage:	•	
Fan Speed:	3 Gears	
Rated Input Voltage:	24V	
Standby Power:	1.2W	
Set Temperature Range:	16∼30°CTemperature Control Accuracy:1°C	
Temperature Correction Range:	-6°C∼6°C, Resolution1°C	
Temperature Sensor:	NTC Sensor	
Adjustment Methods:	Twist Knob	
Function Expansion:	Two-in-One: Floor Heating + Air Conditioning/Fresh Air; Three-in-One: Floor Heating + Air Conditioning + Fresh Air	
Installation Method:	86mm Wall Box	Precautions:
Product Features:	Metal Surface Craftsmanship Multiple Color Options	Must be installed or disassembled by a professional electrician; Do not operate with wet hands to prevent electric shock;
Materials		Do not use it with short circuit or overload; Installation while powered on is strictly prohibited.
Surface Materials:	Aluminum Frame + Acrylic Display	
Surface Treatment:	Spray/Brushed	
Dimensions		
Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)	
Embedded Depth:	≥45mm	
Cojoined:	1/2/3/4/5 Conjoined	