



Diffuser

Anti-Glare Film

Prismatic Lens

ORDERING INFORMATION


LUMINAIRE	ACOUSTIC COLOR (Quick Shipping)	LENS	LENGTH	COLOR QUALITY	COLOR TEMP	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
EN- Luz-PC	AC01- Cloudy Black	D- Diffuser	2- 628mm	3 3-Step MacAdam Ellipse	27- 2700K	90	P Aircraft cable pendant	22 IP22	D1- DALI
	AC02- Moon Grey	A- Anti-Glare Film	4- 1228mm	5 5-Step MacAdam Ellips	30- 3000K	95			D2- 0-10V
	AC03- Concrete Grey		5- 1528mm		35- 3500K	95+ CRI			D3- On/off
	AC04- Silver Grey				40- 4000K				
	AC05- Indigo Blue	P- Prismatic Lens	xx- custom		50- 5000K	60- 6000K 65- 6500K			
	AC06- Ocean Blue								
	AC07- Navy Blue								
	AC08- Stone Blue								
	AC09- China Red								
	AC10- Camel Brown etc.								

1. 3-Step MacAdam


2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.

SPECIFICATIONS

Voltage	220V-240 VAC / 110-240VAC		
Width / Height	68mm x 102mm	68mm x 254mm	68mm x 381mm
Length	628mm	1228mm	1528mm
Power	15.6W/pc	31.1W/pc	37.8 W/pc
Efficacy Up to	90lm/w	90lm/w	90lm/w
Control	Dali , 0-10V, on/off		




QUICK SHIPPING COLOR ITEMS



AC01 Cloudy Black AC02 Moon Grey AC03 Concrete Grey AC04 Silver Grey AC05 Indigo Blue AC06 Ocean Blue AC07 Navy Blue AC08 Stone Blue AC09 China Red AC10 Camel Brown

OTHER COLOR OPTIONS




AC11 Cocoa Brown AC12 Maroon AC13 Beaver AC14 Bistre AC15 Dark Green AC16 Forest Green AC17 Yellow Green AC18 Wheat AC19 Bisque AC20 White Smoke



AC21 Slate Grey AC22 Blue Violet AC23 Light Coral AC24 Gold AC25 Orange Red

DIMENSIONS (customize size is preferred)

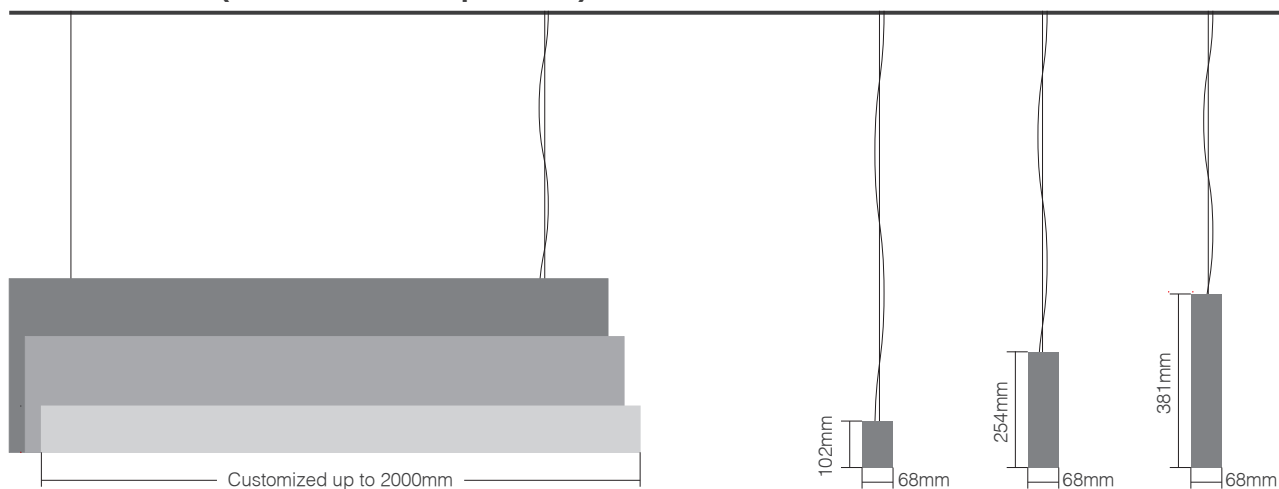

SPECIFICATIONS


	Color Temperature	Lumen / Length		
RA 90	2700K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm
	3000K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm
	3500K	1334lm / 600mm	2659lm / 1200mm	3232lm / 1500mm
	4000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm
	5000K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm
	5500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm
	6500K	1404lm / 600mm	2799lm / 1200mm	3402lm / 1500mm
RA 95	2700K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm
	3000K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm
	3500K	1200lm / 600mm	2393lm / 1200mm	2909lm / 1500mm
	4000K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm
	6500K	1264lm / 600mm	2519lm / 1200mm	3062lm / 1500mm

Note:

- The given data are typical values in PC Diffuser. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.
- LM-80, IES TM-30-15 testing report available for led.


LUMINAIRE DIMENSION

LED CHIPS AND DRIVER OPTIONS

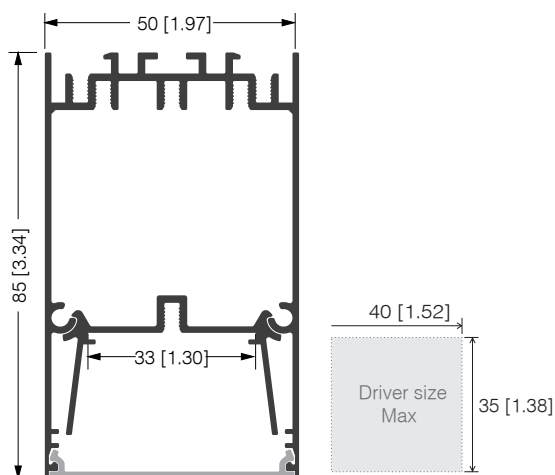

Unit:mm[in]

 **NICHIA**
 **EPISTAR**
 **SAMSUNG**
 **TRIDONIC**
 **OSRAM**
 **LiFUD**

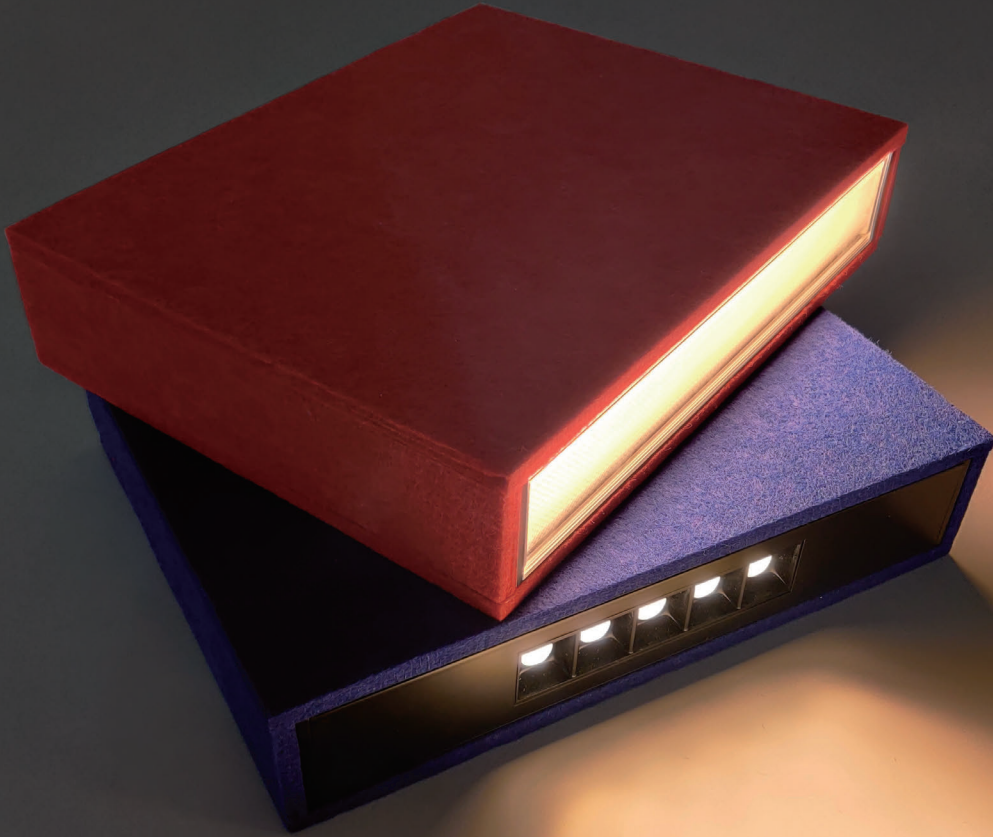

BETTER LIGHTING LESS DISTRACTIONS. GREATER PRODUCTIVITY.

EN-LUZ Series is a Engineering desing Acoustic Lighting, which is revolutionizing the way people experience work, worship, entertainment, and their home through a suite of sound absorption and soundproofing solutions. It's providing functional illumination source as well as excellent sound management.

- ▶ High Sound Absorption Performance in NRC = 0.7 panels
- ▶ Excellent illumination performance
- ▶ Up to CRI>95 & R9>90
- ▶ 100% recyclable and odorless material
- ▶ Class A Fire retardant
- ▶ Various customized design in 4x8ft/ 1.22x2.44m acoustic panels

RANGE OF APPLICATIONS

General or local lighting in Office, Educational Instituions, Healthcare, Theater & Museums, etc.

ELECTRIC GEAR

Constant current 0-10V / DALI / Non-dim dirvers, Setable white, Dual white / Dime2Warm, DMX, PWM lighting solution available.