



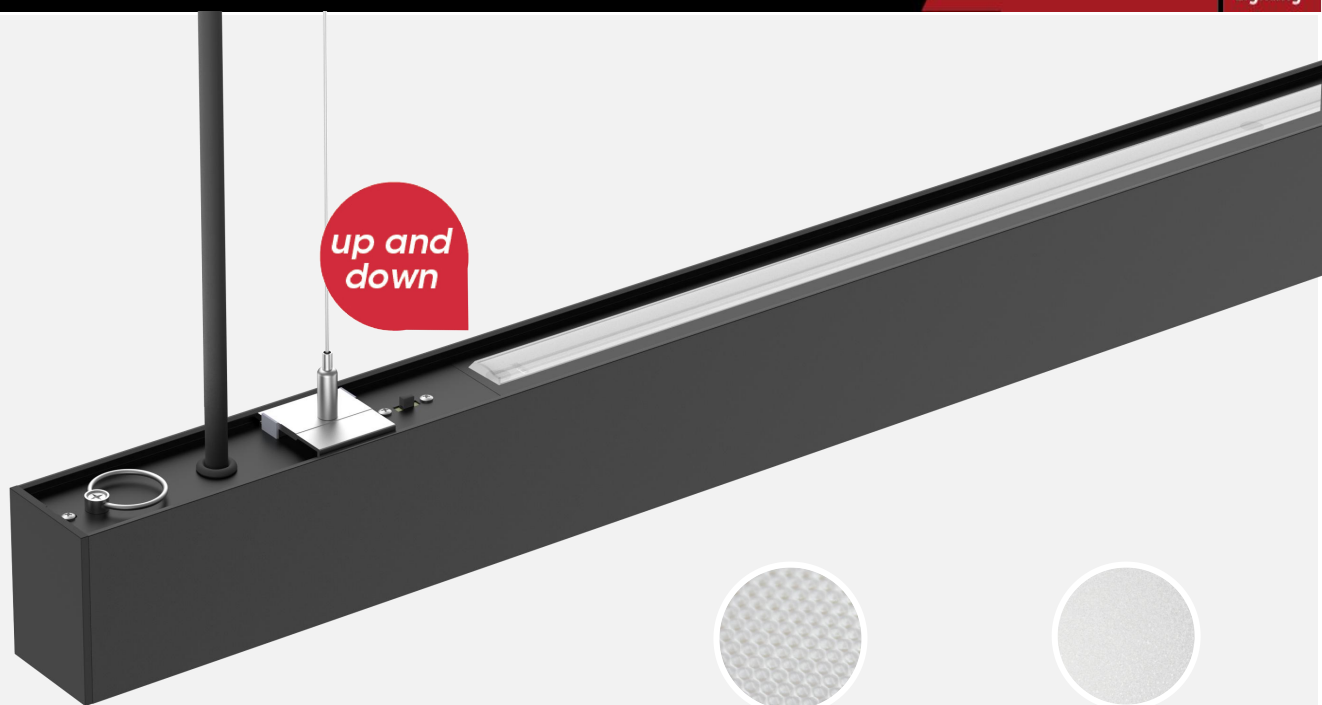


Microprism



Opal

Features

- URANIA pendant luminaires 5IN-1, functional option.
- 1" UP&DOWN installation
Module-replaceable up lighting by Magntic connection
- Different diffuser changeable
-PC prism diffuser type offers nice glare-control, protecting people's eye perfectly;
-Opal diffuser and Rolling diffuser optional
- 10" Fast Connection
-No Screws; Gapeless; Inner electrical connection
- 4-in-1 Installations
-Suspension;
-Surface Mounting;
-Wall Mounting;
-Deep Recessed Mounting.
- 3CCT By Switch dips,
stock saving and much economic

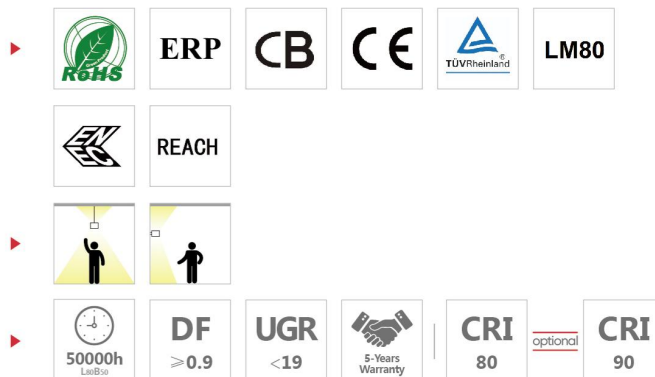

| PRODUCT DESCRIPTION

CCT change




**UP lighting
By Magnetic Model**





Features:


- $105^{\circ} \pm 5^{\circ}$ beam angle, making light more comfortable
- $75^{\circ} \pm 5^{\circ}$ beam angle, offering nice glare-control, protecting people's eye perfectly
- Long lifetime @L80B10 up to 50000h, 5 years warranty
- Modern and fashion design have more competitive

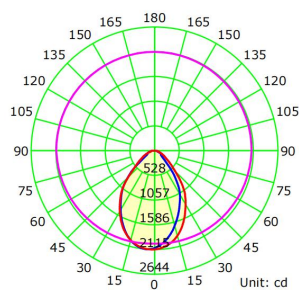


Microprism
Beam Angle

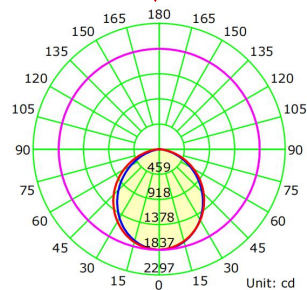


Opal
Beam Angle




| PRODUCT DESCRIPTION

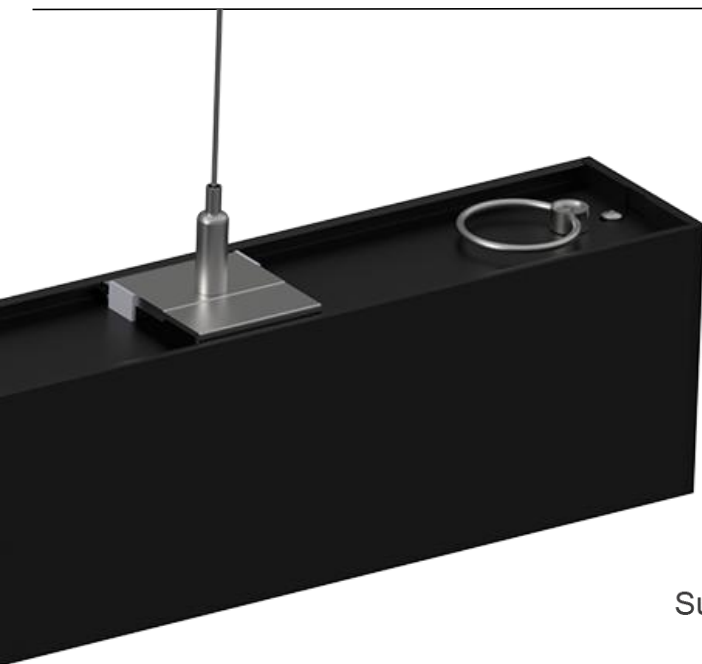

Suspension

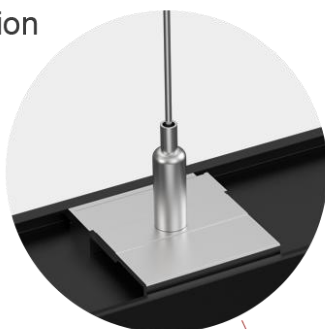


Surface Mounting

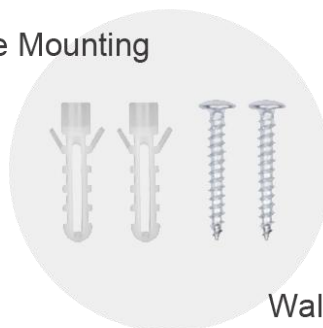

Wall Mounting




Deep Recessed Mounting

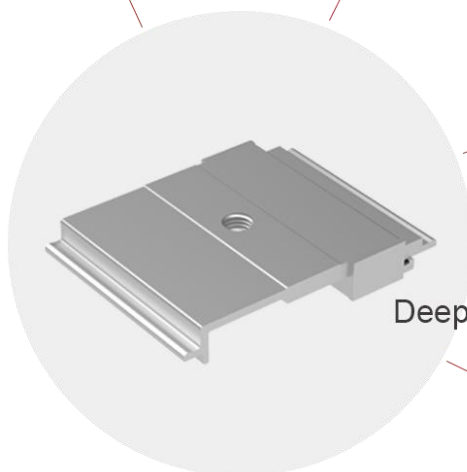

4-in-1 Installations



| PRODUCT DESCRIPTION

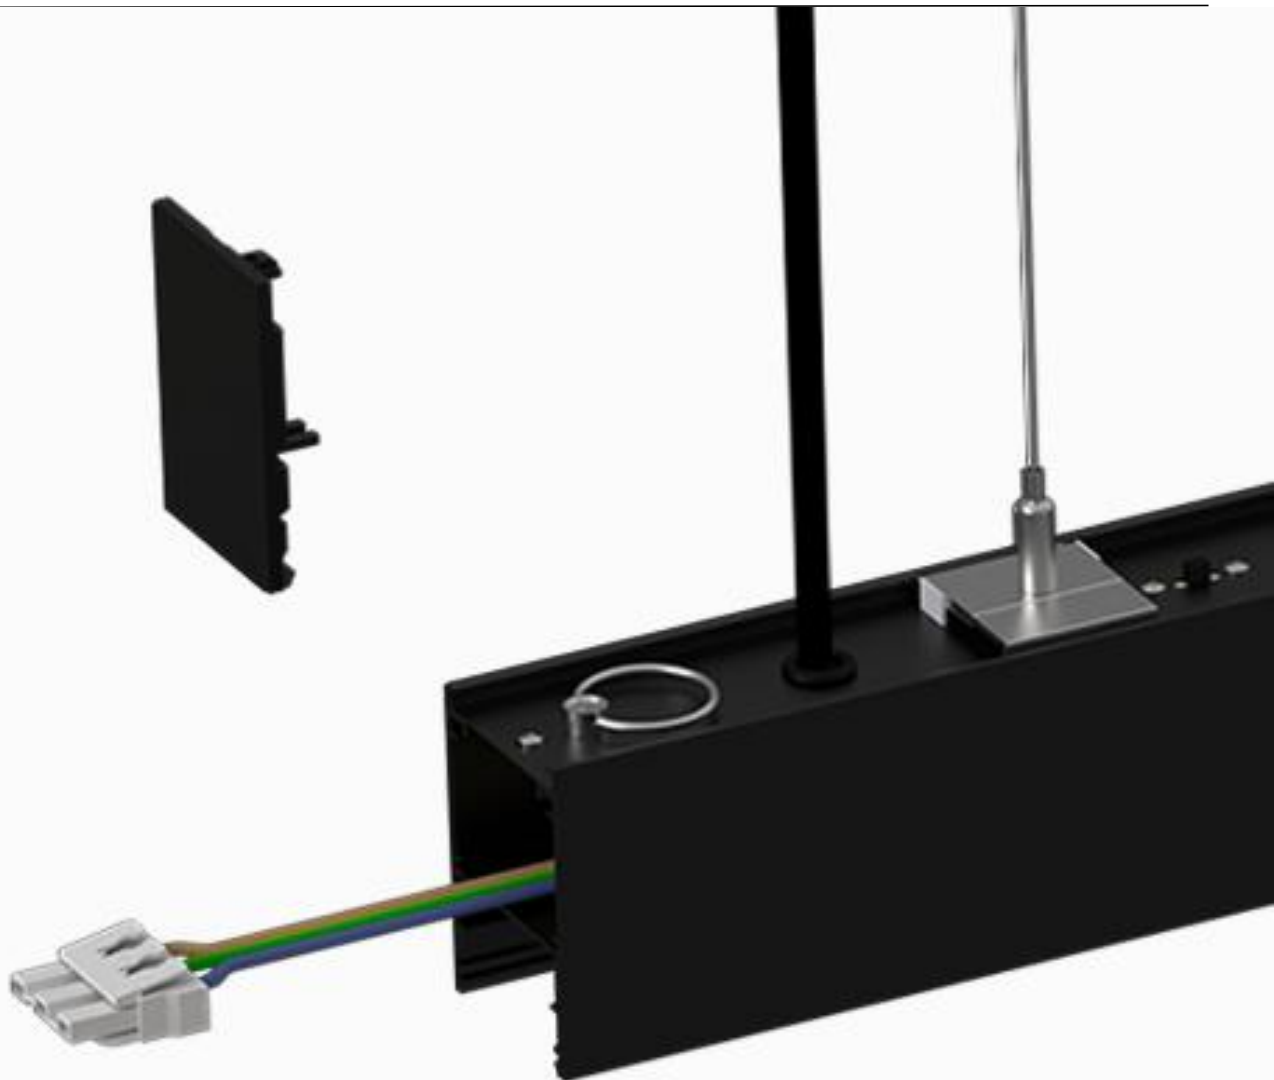


- 10" Fast Connection
 - No Screws
 - Gapless
 - Inner electrical connection




| PRODUCT DESCRIPTION



- Suspension hanging installation

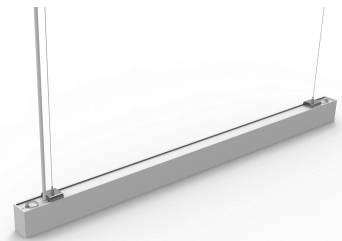

- Surface mounted installation

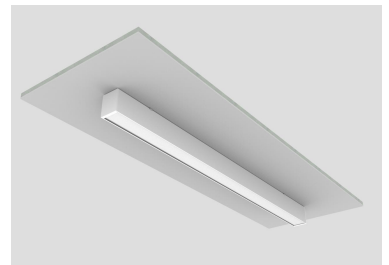

- Straight connection

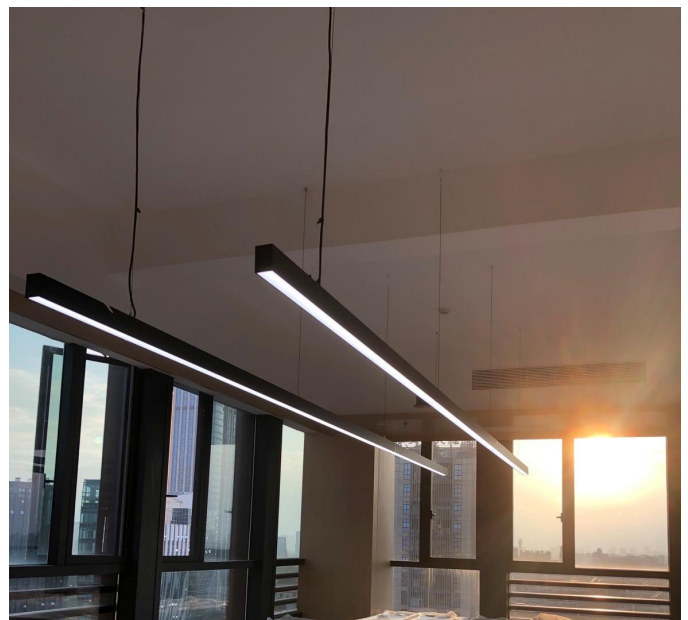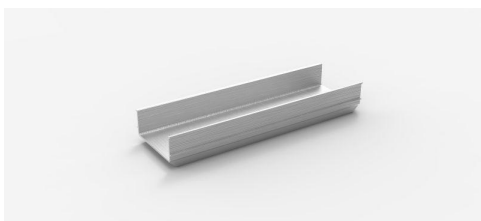


Accessories:

- used in different application area



| PRODUCT DESCRIPTION



- L-shape
- With lighting

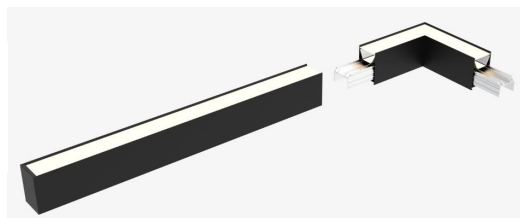

- T-shape
- With lighting



- X-shape
- With lighting

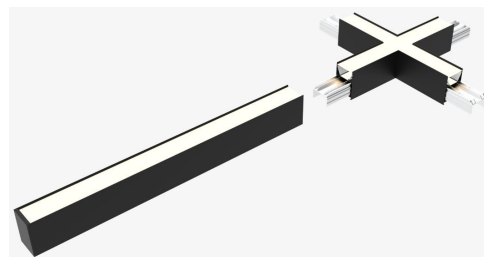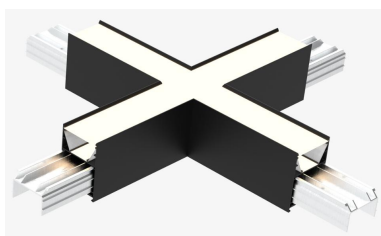



Accessories:

- With LED Aluminum connector





| PRODUCT DESCRIPTION



- L-shape
unilluminous

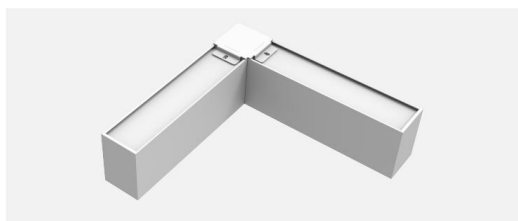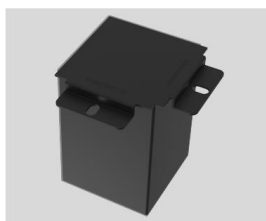

- T-shape
unilluminous

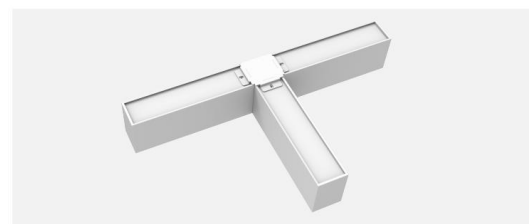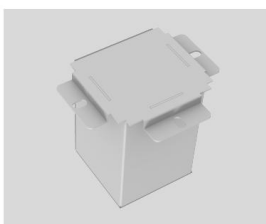

- X-shape
unilluminous

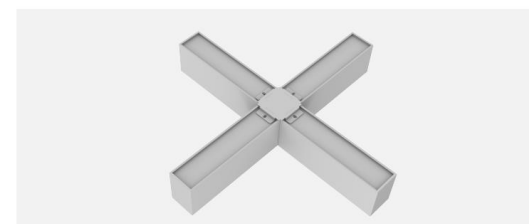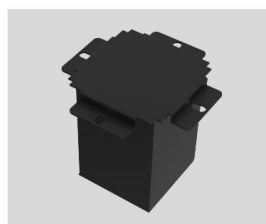

Accessories:


- Without LED SPCC connector



| LEDS -Brand optional

Standard 2835 package to address retrofit applications

2835 Series is a complementary portfolio with optimized performance and bin construction for the retrofit space. With an industry standard footprint, it provides the perfect balance between performance and cost efficiency for a variety of applications.

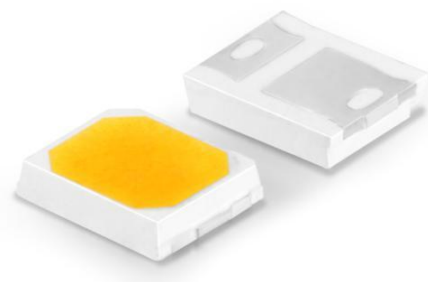

| DRIVER-Brand optional




Product description:



- Constant current LED driver
- Luminaires of protection class I
- Up to 88% % efficiency
- Nominal lifetime up to 50,000h
- 5 years guarantee



Approval marks



Product Information

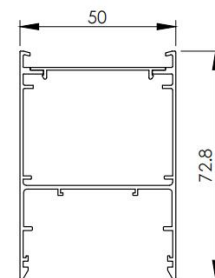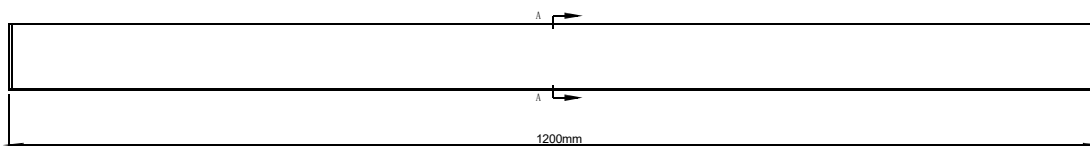

Specifications--Opal & Prism Diffuser


Item	Size(mm)	Power(W)	Lumen (lm/w)	Beam Angel	DF	UGR	Housing Color	Colour Temperature
ESLL-UR20-OP	600x50x72.8 mm	20	100/120	105°	>0.9	<26	White/Black	3000K/4000K/6500K
ESLL-UR30-OP	1200x50x72.8 mm	30	100/120	105°	>0.9	<26	White/Black	3000K/4000K/6500K
ESLL-UR40-OP	1500x50x72.8 mm	40	100/120	105°	>0.9	<26	White/Black	3000K/4000K/6500K
ESLL-UR20-PR	600x50x72.8 mm	20	100/120	75°	>0.9	<22	White/Black	3000K/4000K/6500K
ESLL-UR30-PR	1200x50x72.8 mm	30	100/120	75°	>0.9	<22	White/Black	3000K/4000K/6500K
ESLL-UR40-PR	1500x50x72.8 mm	40	100/120	75°	>0.9	<22	White/Black	3000K/4000K/6500K

Important:

1. Micro Prism(UGR <22) cover 's L/W will be 10% lower than Opal;
2. BLACK HOUSING COLOR panel 's L/W will be 10% lower than White.



|Areas of application

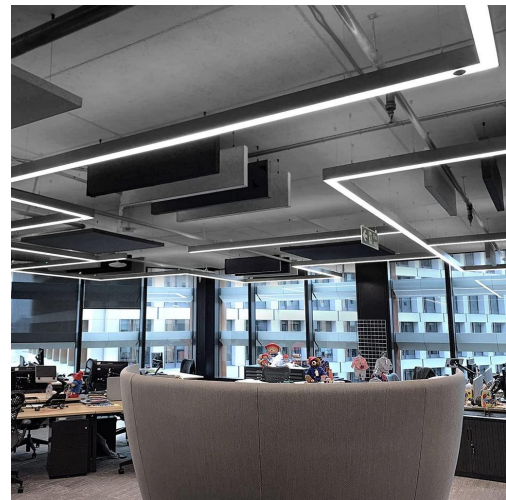

Used in different application area

- Office buildings / Schools
- High-end supermarkets / Shopping malls
- Hotels and other public buildings

